



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 354 816 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
22.10.2003 Bulletin 2003/43

(51) Int Cl.7: **B65D 77/06**

(21) Application number: **03076172.0**

(22) Date of filing: **22.04.2003**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**
Designated Extension States:
AL LT LV MK

(72) Inventor: **Decroix, Claude**
76160 La Vieux-Rue (FR)

(74) Representative: **Jorritsma, Ruurd et al**
Nederlandsch Octrooibureau
Scheveningseweg 82
P.O. Box 29720
2502 LS Den Haag (NL)

(30) Priority: **19.04.2002 NL 1020438**


(71) Applicant: **Royal Packaging Industries van Leer
B.V.**
1181 KK Amstelveen (NL)

(54) **IBC for combustible products**

(57) IBC (1) in which the container (2) is made of plastic and at least the outer surface (12) is made electrically conducting. This IBC stands on a base (3) and

is surrounded by a jacket (5). Base and jacket consist of electrically conducting material and the jacket is constructed as a grid.

Fig 1

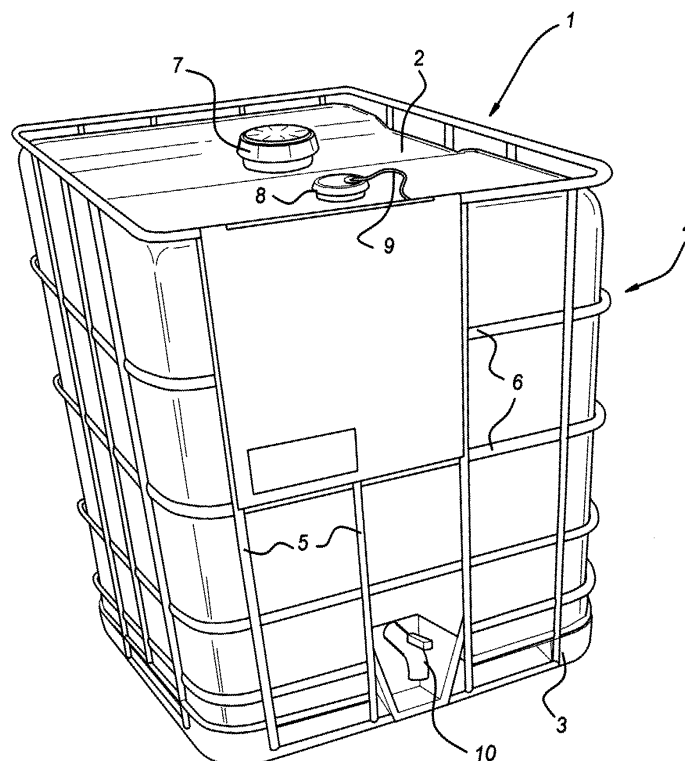

EP 1 354 816 A1

Description

[0001] The present invention relates to an IBC comprising a plastic container, a base that supports the container and is constructed to accommodate the forks of a fork lift truck and a protective jacket that is joined to the base and supports the container.

[0002] IBCs of this type have found general acceptance and are used, inter alia, for moving combustible products. Particularly when filling and emptying, but also under other conditions, there is a risk that, as a result of static electricity, sparks arc to the combustible contents, which can consist of liquids or flowable powders. Moreover, it is possible that such sparks give rise to explosion of solid material, gases or liquids present in the surroundings. In particular there is a high risk with non-conducting liquids such as fuels and apolar solvents. A distinction must be made between spark discharge and brush discharge. In the case of spark discharge a spark arcs from an insulated conductor. All of the static energy is discharged by a single spark arc. Brush discharge arises at electrostatically charged, non-conducting plastic surfaces and if these are approached by an earthed (conducting) electrode discharge takes place. Brush discharge must be avoided in particular in the case of the IBCs described above.

[0003] It is for this reason that there are IBCs that are provided with anti-electrostatic properties. In the state of the art the container (bottle) is produced from a metallic material and the jacket is likewise produced from a metallic material, or the container also serves as supporting construction and no jacket is present. If a plastic container is used, it is necessary to fit a jacket. The base of the pallet is preferably likewise made of metallic material and in this way it is possible to prevent a charge building up on the container that can result in a spark discharge.

[0004] Recently, containers for IBCs consisting of plastic with an electrically conducting exterior have been proposed. A wide range of liquids, flowable powders can be packed at a lower cost price by this means. However, if plastic containers are used it is necessary to fit a jacket.

[0005] In the state of the art both jackets produced from sheet material and nettings are proposed for this purpose. It is assumed that the container of the IBC bears against the jacket or netting and, because the exterior of the container of the IBC conducts current and is in contact with the jacket netting respectively, which likewise consists of metallic material, it is possible to provide for discharge of any electrostatic charge that may build up. From US 6050437 a container is known around which a wire netting of lattice-like sheeting of electrically conductive material is applied onto the liquid container. A special production facility to obtain such containers or bottles is required.

[0006] The aim of the present invention is to provide an IBC which has anti-electrostatic properties and which

is less expensive to produce, that is to say as far as possible can be produced in existing production facilities where IBCs that do not have anti-electrostatic properties are produced.

[0007] This aim is realised with an IBC comprising a container, a base that supports the container and is constructed to accommodate the forks of a fork lift truck and a protective jacket that is joined to the base and supports the container, wherein the container is made of a plastic material, at least the outer surface of which is made electrically conducting and wherein said jacket is made of a metallic material and the jacket is in electrical contact with said container, wherein said base provides an electrical contact between the container/jacket and the support (ground) on which said base is placed, and wherein the jacket comprises a grid of metal rod.

[0008] Such rod can be hollow (tube) or solid (wire) and can have geometry according to a requirement.

[0009] It has been found that when a plastic container which has an outer surface that has electrically conducting properties is used it is not necessary to use a jacket of sheet material but it is possible to suffice with a jacket in grid form customary in the state of the art. Such grids are produced on a large scale for IBCs without anti-electrostatic properties. These grids can consist of hollow or solid profile of various geometry, such as metallic rod or metallic tube, so that no special measures are needed for the production of the grid when used in an IBC having anti-electrostatic properties. It has been found that the container of the IBC has such good electrical contact with the grid that special measures are not needed.

[0010] Because of the presence of possible electrical charge in the contents of the container, the discharge closure or tap for the IBC needs to be electrically conductive, and is always in electrical contact with the container under all conditions. Grounding over the discharge tap to earth (cage) is not necessary. However, if the discharge tap is not conductive, it can be necessary to provide an electrical conductor, such as using a wire, between a cover lid on the container at the top and grid. The cover lid is connected to an immersion device, such as a wire or tube that should be electrical conductive, and reach to the bottom of the container.

[0011] When the base is made of electrical conducting material the base will provide an electrical contact between the container/jacket and the support (ground). When the base is made of a non-conductive material, it can be necessary to provide an electrical conductor, such as using a wire, between the jacket or container and the underside of the base. Such a lead is not necessary when the jacket/container is electrically conducted through an external lead, which in turn is electrically connected to earth.

[0012] The grid can be constructed in some way known in the state of the art. For instance, it is possible that metal tubes crossing one another are joined to one another by welding. However, it is preferred to produce this joint by making use of tubes of different diameter.

The tubes having the largest diameter are provided with holes a regular distance apart, through which the tubes of small diameter are inserted. Details of such a construction can be found in European applications 97119263.8 and 97 119 264.0.

[0013] The container having an electrically conducting exterior can be formed in various ways. Plastic can be made electrically conducting by adding electrically conducting fillers thereto. It is possible to produce the container entirely from a single layer of plastic material. However, it is also possible to produce the container from various layers, the inner layer preferably being free from fillers and, because of the sealing/mechanical properties, preferably consisting of a pure plastic. A plastic in which electrically conducting fillers are present can be used as the outer layer. The outer layer can optionally consist of recycled or regrind plastic. Of course, it is possible to work with more than two layers. What is achieved by not using fillers in the inner layer is that such electrically conducting fillers or other foreign matter are prevented from being released into the contents of the container.

[0014] It has been found that if the electrical resistance of the outer layer of the container is less than 10^7 ohm and more particular less than 10^6 Ohm it can be adequately guaranteed that an electrostatic charge is not able to build up on the container.

[0015] The invention will be explained in more detail below with reference to an illustrative embodiment shown in the drawing. In the drawing:

Fig. 1 shows a perspective view of an IBC according to the invention;

Fig. 2 shows the cross-section in detail through the wall of the container of the IBC;

Fig. 3 shows a first embodiment of the "crossings" of two tubes; and

Fig. 4 shows a second embodiment of a joint between two tubes.

[0016] In Fig. 1 an IBC (intermediate bulk container) is indicated by 1. This consists of a container or bottle 2 that is supported by a base 3 and surrounded by a jacket 4. In the example shown the jacket 4 consists of vertical tubes 5 and horizontal tubes 6. In this example these tubes extend (partially) to the base, which likewise is constructed from metallic tubes. The jacket and base are joined to one another by welding or screws such that they are electrically conducting. The container is provided with one or more openings 7, 8 at the top and with a discharge tap 10 at the bottom. There is an earth lead 9 between cap 8 and jacket 4 (an earth lead between cap 7 and jacket is also possible). The discharge tap 10 is made of an electrically conducting material that is in (electrical) contact with the exterior of the container 2. If the discharge tap is not electrically conductive, opening 8 becomes effective. An immersion device such as a tube will be entered in the container (bottle) through

the opening (7 or 8). This immersion device should be electrical conductive, to remove static charges from the contents of the container.

[0017] Part of the wall of container 2 is shown highly diagrammatically in section in Fig. 2. This wall consists of an outer layer 12 and an inner layer 13. The inner layer 13 consists of a "pure" plastic. The outer layer 12 consists of a plastic to which electrically conducting fillers have been added so that an outer layer resistance of less than 10^7 ohm is obtained. The wall thickness of the layers 12 and 13 can be chosen in the conventional manner. In this illustrative embodiment the wall can have a total thickness of less than 3 mm. As a result of the use of pure plastic for wall layer 13 the good mechanical properties of the container are ensured and the release of constituents from the wall into the contents of the container is also prevented.

[0018] When the base is made of electrical conducting material the base will provide an electrical contact between the container 2 or jacket 4 and the support (ground). When the base is made of a non-conductive material, it can be necessary to provide an electrical conductor, such as using a wire, between the jacket or container and the underside of the base. Such a lead is not necessary when the jacket/container is electrically conducted through an external lead, which in turn is electrically connected to earth (not the support).

[0019] According to the present invention jacket 4 is constructed as a grid. This grid consists of tubes 5 and 6 crossing one another. The way in which such a "crossing" is constructed is shown in detail in Fig. 3. Tube 5 has a relatively large diameter and is provided at regular intervals with openings 15. The latter are such that tubes 6 can extend through them. Optionally a weld can be present at the location of said joint.

[0020] Another embodiment of the joint between vertical and horizontal tubes is shown in Fig. 4. The vertical tubes are indicated by 25, whilst the horizontal tubes are indicated by 26. Here again there is an opening in the tubes having the largest diameter: tubes 25. This opening is indicated by 27. In addition tube 25 is provided with indentations 28, located opposite one another to promote the contact between tubes 25 and 26 and increase the mechanical strength of the connection. A contact weld can optionally be provided at the location where the indentation 28 comes into contact with tube 26.

[0021] It has been found that with such a grid adequate electrical contact is provided between the jacket and the container. Because the outer layer of the container itself consists of electrically conducting material, it has been found that it is not necessary to shield the entire surface around the walls of the container with a metallic material. The use of the grid as shown in the figures is found to be adequate.

[0022] Variants of the IBC will be immediately apparent to those skilled in the art on reading the above description. These variants are considered to fall within the

scope of the appended claims.

Claims

1. IBC (1) comprising a plastic container (2), a base (3) that supports the container and is constructed to accommodate the forks of a fork lift truck and a protective jacket (5) that is joined to the base and supports the container, wherein the container is made of a plastic material, at least the outer surface (12) of which is electrically conducting and comprises electrically conducting filler and wherein said jacket is made of a metallic material and the jacket is in electrical contact with said container, wherein said base provides an electrical contact between the container/jacket and the support (ground) on which said base is placed, and wherein the jacket comprises a grid of metal rods (5, 6; 25, 26). 5 10 15 20
2. IBC according to claim 1, wherein **said metal rods comprise hollow rods** and said container comprises a plastic inner layer of a pure plastic material.
3. IBC according to one of the preceding claims, wherein said metal rods comprise solid rods. 25
4. IBC according to one of the preceding claims, wherein the discharge tap is made of electrical conductive material, which provides an electrical contact between the contents in the container and the outer surface (12) of the container. 30
5. IBC according to one of the preceding claims 1-4, wherein the discharge valve is made of non-electrical conductive material, and an opening (7 or 8) is provided in the container with an electrical conductive immersion device and connected by an earth wire (9) to the jacket. 35 40
6. IBC according to one of the preceding claims, wherein said base consists of electrically conducting material.
7. IBC according to one of the preceding claims, wherein said base consists of electrically non-conducting material and there is a strip of conducting material between said jacket and/or container and the underside (in the use position) of said base. 45 50
8. IBC according to one of the preceding claims, wherein the walls of the container are layered, containing an inner layer (13) of electrically non-conducting material. 55
9. IBC according to one of the preceding claims, wherein in the use position said metal rods cross one another and comprise horizontal and vertical

rods.

10. IBC according to one of the preceding claims, wherein the rods are welded to one another at the points where said rods cross.
11. IBC according to claim 9, wherein the vertical rods are of a different size to the horizontal rods and, at the point where the rods cross, the rod of the largest size is provided with an opening (15, 27) for accommodating the rod of the smallest size.
12. IBC according to claim 11, wherein the tube of the largest size is provided with a central longitudinal indentation (28).

Fig 1

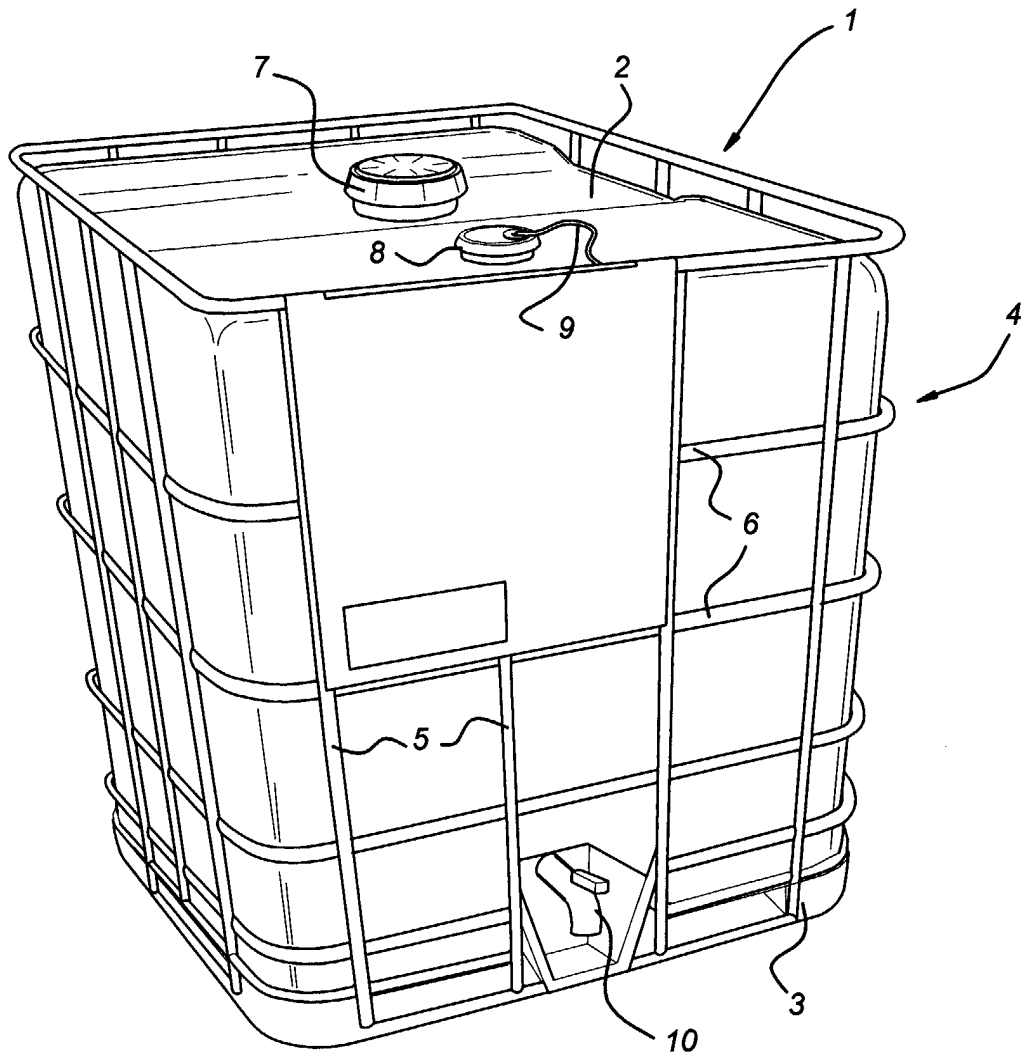


Fig 2

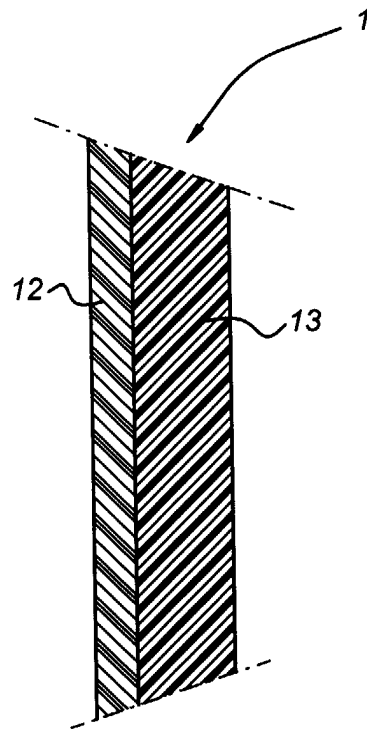


Fig 3


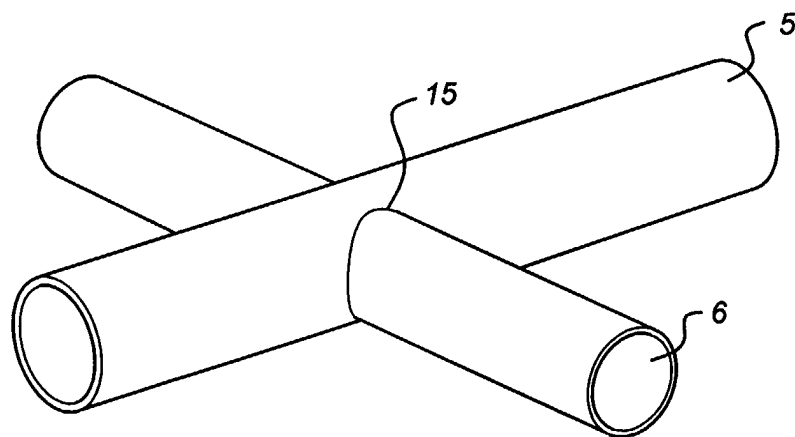


Fig 4



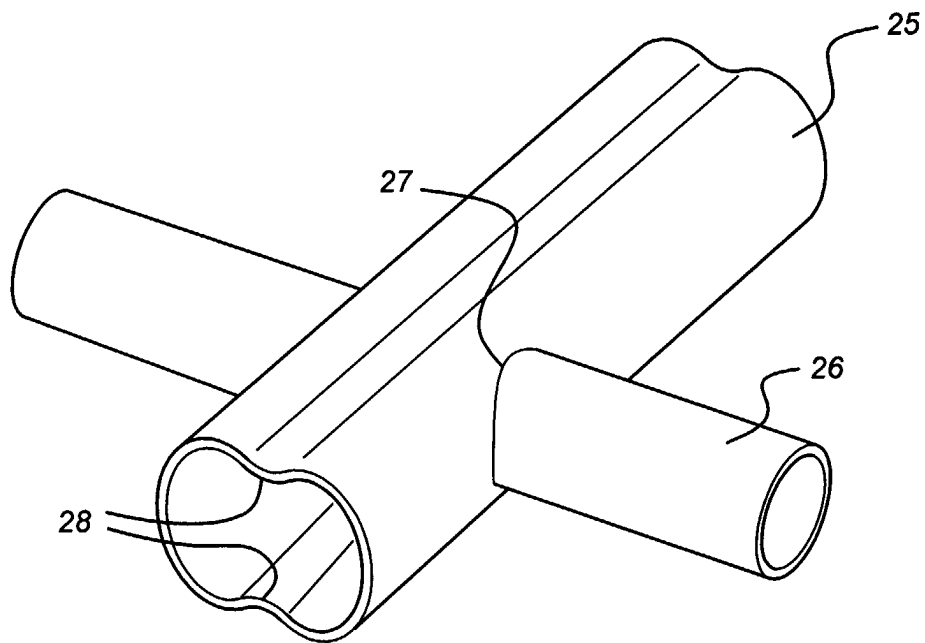

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 07 6172

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X,D	US 6 050 437 A (SCHUETZ UDO) 18 April 2000 (2000-04-18)	1,6,8,9	B65D77/06
Y	* claim 1; figure 1 *	3,5, 10-12	
Y	US 2002/008108 A1 (MARTENS PAUL ET AL) 24 January 2002 (2002-01-24) * abstract; figures *	10-12	
Y	US 5 405 006 A (BURGDORF MAERTEN ET AL) 11 April 1995 (1995-04-11) * abstract; figure 4 *	3	
Y	US 6 156 969 A (SCHUETZ UDO) 5 December 2000 (2000-12-05) * abstract; figures *	5	
A		4	
A	DE 29 14 478 A (ZEIGMEISTER HANS JOACHIM ING G) 16 October 1980 (1980-10-16) * page 8, line 21 - page 9, line 3; figure 1 *	2	
A	GB 262 613 A (ANGLO AMERICAN OIL COMPANY LTD;EUGENE GUY EUSTON BEAUMONT) 16 December 1926 (1926-12-16) * page 3, line 17 - line 30; figure 2 *	4	B65D B67D
A	DE 100 42 296 A (ROTH WERKE GMBH) 14 March 2002 (2002-03-14) * abstract; figures *	1	
D,A	EP 0 916 777 A (LEER KONINKLIJKE EMBALLAGE) 19 May 1999 (1999-05-19)		
D,A	EP 0 916 592 A (LEER KONINKLIJKE EMBALLAGE) 19 May 1999 (1999-05-19) * the whole document *	1	
		-/--	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 4 July 2003	Examiner Zanghi, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/02 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 07 6172

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.CI.7)
P, A	US 2002/144925 A1 (BUSCH RAINER) 10 October 2002 (2002-10-10) * the whole document * -----	1	
			TECHNICAL FIELDS SEARCHED (Int.CI.7)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 4 July 2003	Examiner Zanghi, A
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 07 6172

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-07-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6050437 A	18-04-2000	DE 19731518 A1	04-02-1999
		BR 9802547 A	19-10-1999
		CN 1221699 A , B	07-07-1999
		DE 29724198 U1	13-04-2000
		DE 59806792 D1	06-02-2003
		DK 893362 T3	22-04-2003
		EP 0893362 A1	27-01-1999
		ES 2186056 T3	01-05-2003
		JP 11105871 A	20-04-1999
		NO 983380 A	25-01-1999
		PL 327488 A1	01-02-1999
		RU 2139827 C1	20-10-1999
US 2002008108 A1	24-01-2002	US 6290082 B1	18-09-2001
		AT 206380 T	15-10-2001
		DE 69707135 D1	08-11-2001
		EP 0916592 A1	19-05-1999
US 5405006 A	11-04-1995	DE 9214708 U1	02-12-1993
		AT 134578 T	15-03-1996
		AU 670151 B2	04-07-1996
		AU 5371494 A	24-05-1994
		BR 9307324 A	01-06-1999
		CA 2147969 A1	11-05-1994
		DE 59301752 D1	04-04-1996
		WO 9410050 A1	11-05-1994
		EP 0665805 A1	09-08-1995
		ES 2085174 T3	16-05-1996
		HU 70702 A2	30-10-1995
		IL 107404 A	14-05-1996
		JP 8505107 T	04-06-1996
		NO 951088 A	22-03-1995
		PL 308755 A1	21-08-1995
		TR 27742 A	07-07-1995
US 6156969 A	05-12-2000	DE 19815082 A1	14-10-1999
		AU 737773 B2	30-08-2001
		AU 2136699 A	14-10-1999
		BR 9902030 A	11-01-2000
		CN 1231261 A	13-10-1999
		DE 29824096 U1	20-04-2000
		EP 0949159 A2	13-10-1999
		JP 11301787 A	02-11-1999
DE 2914478 A	16-10-1980	DE 2914478 A1	16-10-1980

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 07 6172

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-07-2003

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
GB 262613	A	16-12-1926	NONE		
DE 10042296	A	14-03-2002	DE	10042296 A1	14-03-2002
EP 0916777	A	19-05-1999	EP	0916777 A1	19-05-1999
			AT	232569 T	15-02-2003
			DE	69719036 D1	20-03-2003
			DK	916777 T3	10-06-2003
EP 0916592	A	19-05-1999	US	6290082 B1	18-09-2001
			EP	0916592 A1	19-05-1999
			AT	206380 T	15-10-2001
			DE	69707135 D1	08-11-2001
			DE	69707135 T2	20-06-2002
			DK	916592 T3	28-01-2002
			ES	2167665 T3	16-05-2002
			PT	916592 T	28-03-2002
			US	2002008108 A1	24-01-2002
US 2002144925	A1	10-10-2002	NONE		