



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
03.12.2003 Bulletin 2003/49

(51) Int Cl.7: **B41J 2/175**

(21) Application number: **02100552.5**

(22) Date of filing: **23.05.2002**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Wouters, Paul**
2640, Mortsel (BE)
• **Verhoest, Bart**
2640, Mortsel (BE)

(71) Applicant: **AGFA-GEVAERT N.V.**
2640 Mortsel (BE)

(54) **Ink tank for feeding a shuttling inkjet printing head**

(57) The header ink tank (6) mounted on the shuttling carriage supplies ink to a shuttling inkjet print head (5). Different functional elements are symmetrical in regard to the centre plane (P) perpendicular to the shuttling direction (B).

- ink feed outlet (8) to the print head (5)

- supply inlet (10) to the ink chamber (5)
- ink level sensor comprising a float (13)

A stable negative pressure is supplied to the ink tank (6) using a controlled vacuum source having a volume.

A combination of two ink tanks (6) having a common sidewalls (18) is described.

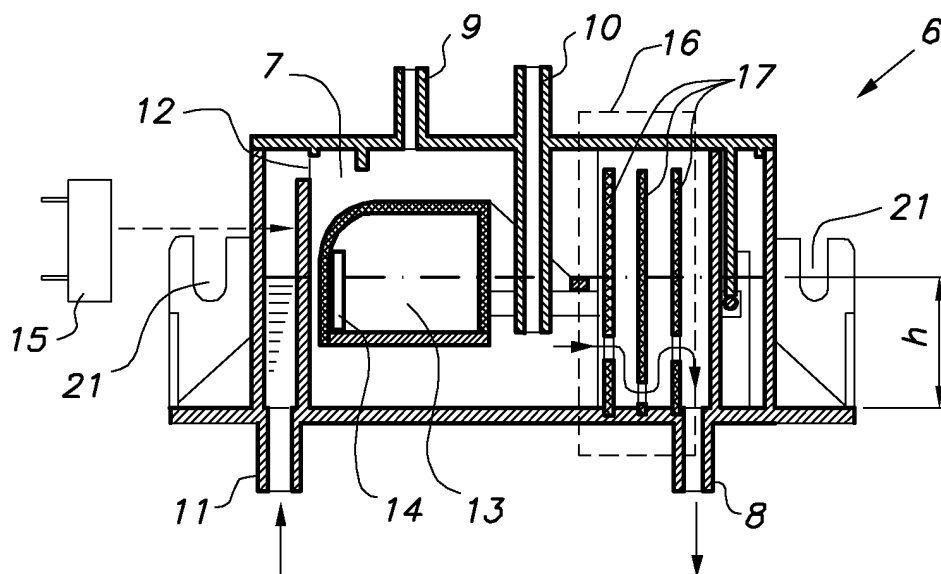


FIG. 3A

Description

FIELD OF THE INVENTION

[0001] The present invention relates to an apparatus having improved recording quality in inkjet printing systems having a shuttling print head and more specifically an ink tank for such an apparatus having a stable pressure in the supply chamber to such a print head.

BACKGROUND OF THE INVENTION

Inkjet printing

[0002] Nowadays a lot of printed matter is produced carrying a reproduction of a colour image. A large part of these colour prints are produced using offset printing but in office and home environment a lot of colour prints are made using relatively small printing apparatuses. One of the possible printers used is an inkjet printer. In an inkjet printer drops of ink are jetted out of nozzle toward a receiving layer which may be e.g. specially coated paper.

Usually an inkjet print head has an array of nozzles, each nozzle jetting ink to different locations at the same time.

The ink is jetted out of the nozzles by use of e.g. a thermal or piezoelectric actuators creating a pressure wave. It is normally the intention that the size of the droplets can be kept constant or that there is a good control of the droplet size in printers capable of recording variable droplet sizes.

Print head

[0003] In Fig. 1 an inkjet print head is depicted with capillary tubes 1 having a nozzle end and a inlet end. For each tube 1 an actuator 2 is provided for causing a pressure wave expelling the ink out of the nozzle at the end. At the other end ink is fed to the print head from an ink tank.

In normal rest condition the ink forming a meniscus 3 at the nozzle end in the capillary tubes 1 is influenced by surface tension forces. Another force acting upon the ink is the "hydrostatic" pressure caused by gravity due to the height of the ink above the meniscus 3. Because the inkjet print head is fully filled with ink and it is connected to the ink tank, the level of the ink in the ink tank determines the pressure of the ink in the print head. When placing the ink tank above the print head, a positive ink pressure will arise due to the vertical height difference between ink level and nozzles.

[0004] Some types of print heads need a stable negative ink pressure at the nozzle area for good printing. To reach finally a negative pressure at the nozzles, this positive pressure can be neutralised by applying a negative pressure above the ink in the header tank. A problem is that in order to obtain constant or control-

lable recording quality the negative pressure in the head and tank is to be kept constant or within a small range.

Shuttling print head with header tank

[0005] In recent time inkjet printing technology is also used in large format, high volume printers

[0006] Inkjet print heads can be as large as the transversal size of an image or text to be printed but usually the size of the print head is smaller. Page wide print heads are still expensive and less reliable than smaller types.

Fig. 2 gives a view of how an inkjet printer composes a whole image. A receiving sheet 4, e.g. a sheet of paper is transported in one direction (transport direction indicated by arrow A) and passed gradually underneath the printing station.

The print head 5 which has a size smaller than the receiving sheet 4 shuttles transversal (indicated by arrow B) over it and consecutively records one or more lines when shutting over the sheet 4 paper. The image is composed gradually.

[0007] It is possible that several print heads are used to record different colours and a colour image is recorded by superposition of the different colour images.

[0008] In order to enable continuous operation of a print head 5, an ink tank containing an ink supply is coupled to the print head 5.

Small printers usually have a small cartridge, optionally with integrated print head nozzles, containing only a limited amount of ink.

When empty these cartridges have to be replaced.

High end inkjet printers having a high throughput or large formats however consume a large amount of ink.

The inkjet print head of a high end printer is coupled an ink tank mounted on the shuttling carriage carrying the print head.

This ink tank is called a header tank and can be refilled out of a large capacity ink tank which is stationary.

Refilling of the header tank

[0009] Possible refill arrangements can be found in EP-A-1 097 814.

When the level of ink in the header tank is to low the shuttling carriage is transported to a refilling station outside the printing area where the header tank is refilled.

[0010] An considerable problem in this method is the difficulty to maintain a constant ink pressure in the print head. The height of the level of ink in the header tank diminishes constantly giving rise to less pressure due to gravity and causing variations in recording quality. The level can be kept relatively constant by refilling very often but no recording can be done during refilling giving rise to lower throughput rates as the carriage has to be stopped each time.

[0011] In EP-A-1 142 713 a system for refilling a header tank is described wherein refilling can be done during

printing. The header tank on the shuttling carriage is connected by flexible tubes to a feeder tank. The main tank is pressurised and when a replenishing valve is opened ink is pressed by the air pressure from the feeder tank to the header tank during printing operation. A supplementary valve is placed between the header tank and the print head.

[0012] It is an overall problem to keep the pressure in the print head at a constant level :

- the "hydrostatic" pressure has to be counteracted during printing, even during refilling the header tank with large amounts of ink.
- the "hydrostatic" pressure may vary due to acceleration forces during shuttling. It is clear that during acceleration the ink surface will not be horizontal and that accelerations produce pressure gradients within the header tank.
- A reliable method for measuring the ink level in the header tank is necessary to ensure accurate refilling of the header tank. Due to the movement of the ink within the header tank the measurement of a float may not be reliable.

[0013] It is desirable that a system is provided capable of exactly metering the amount of ink that is fed to the header tank.

[0014] Another problem is that during shuttling of the carriage carrying the header tank, the ink is whipped up and bubbles of trapped air are likely formed within the ink. As these bubbles can be transported to the print head with the flow of ink, they may give rise to defects in the printed image. No extra measures have been taken in the prior art in order to avoid or counteract the effect of the air bubbles.

When shuttling the ink tank simultaneously with the print head, mechanisms should be implemented for damping the pressure fluctuations in the ink connection to the print head, due to the movement of the carriage. Pressure variations can have negative influence on print quality.

[0015] A further problem is that to allow a compact staggering of print heads, the ink tank dimensions should be smaller than the print head itself.

SUMMARY OF THE INVENTION

[0016] The above-mentioned drawbacks are counteracted by an apparatus having the specific features set out in claim 1. Specific features for preferred embodiments of the invention are set out in the dependent claims.

Further advantages and embodiments of the present invention will become apparent from the following description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017]

Fig. 1 depicts a cross-section of an inkjet print head. Fig. 2 illustrates the overall printing principle of a inkjet printer with a shuttling print head.

Fig. 3A shows a cross section of an ink tank according to the invention.

Fig. 3B gives an isometric view of a dual ink tank assembly

Fig. 4A to 4C show the ink level in a tank during acceleration and during rest or continuous motion.

Fig. 5 shows a horizontal cross-section of a dual ink tank assembly.

DETAILED DESCRIPTION OF THE INVENTION

[0018] The present invention solves above mentioned drawbacks by providing an header tank having functional elements arranged symmetrical to the centre plane perpendicular to the direction of movement of the shuttling carriage of the printer.

[0019] Next a preferred embodiment of an ink tank according to the present invention is described.

Fig. 3A depicts a cross section perpendicular to the shuttling direction of a header tank 6 according to the present invention.

[0020] Fig. 3B shows a combination of 2 tanks having further features which will be described later on.

Fig. 5 gives a horizontal section of the dual tank combination.

The double pointed arrow B indicates the shuttling direction of the print carriage containing the print head and the header tank.

Plane P is the centre plane perpendicular to this direction.

[0021] The ink tank 6 has an ink chamber 7 and contains or is in connection with several functional elements.

As functional elements are considered all features which have an influence upon the working of the ink tank 6.

Several functional features can be seen in this view.

- Ink is fed via ink feed outlet 8 from the bottom of the ink chamber 7 to the inkjet print head 5. The height difference between the ink level and print head is defining the gravimetric pressure in the print head and height differences should be minimised. Placement of outlet 8 should be kept constant to avoid pressure fluctuations. The pressure in the print head 5 is directly determined by the pressure at the feed outlet 8 of the header tank 6.

- The supply inlet 10 of the header tank 6 enables replenishment of the ink in the ink chamber 7 using ink from the main tank to the header tank during re-

plenishment. The inlet is formed by a tube reaching below the ink level in the header tank 6 in order to allow smooth refilling. Care has to be taken that during replenishment no pressure variations are generated due to the inflow of fresh ink.

- At the vacuum inlet 9 on top of the ink chamber 7 a stable negative pressure is applied to the ink chamber 7 of the header tank 6 to compensate the positive "hydrostatic" pressure due to gravity. This is realised by air extraction on the top of the ink chamber 7, above the ink level. A system for providing the vacuum or negative pressure to the ink chamber 7 will be described later.
- re-flow inlet 11 is connected to the print head 5 in order to allow re-flow of air bubbles originating from the print head 5 to the ink chamber 7. A small channel 12 provides connection with the ink chamber above the ink level.

[0022] Fig. 4A to 4C depict the ink level in an ink tank 6 during three stages.

- acceleration to the left,
- acceleration to the right,
- without acceleration (e.g. shuttling stopped)

In the three cases the ink amount in the header tank 6 is identical.

[0023] As is illustrated the ink surface in the ink chamber during state L in Fig. 4A and R in Fig. 4C is inclined due to the acceleration of the ink tank and the inertia of the ink in the ink chamber. A gradient of the hydrostatic pressure is created within the body of the ink. Because the feed outlet 8 is situated in the centre plane perpendicular to the direction of movement of the carriage, the height of the ink level h at the position of the outlet 8 in the ink chamber 7 is not influenced as can be seen in Fig. 4A to Fig. 4C. The inclination of the ink level (due to acceleration and deceleration of the carriage) is pivoting symmetrically and the level height h in the middle of each tank stays stable. By placing the ink outlet 8 to the print head along the centre plane pressure variations due to shuttling of the head can be minimised.

[0024] When considering the location of the inlet 10 for ink replenishment into the chamber 7 it is to be avoided that inflow of the ink causes pressure changes. The most neutral placement of the inlet 10 is also in the centre plane of the ink chamber 7. The inlet 10 is constructed to ensure that ink is supplied under the ink level in order to avoid drops falling into the tank causing e.g. trapping of air in bubbles etc.

[0025] A further functional feature is the system regulating the ink level in the ink chamber. 7

- A constant ink level is realised by an ink level sensor. Inside the ink chamber 7 a float 13 is provided

having an integrated magnet 14. In combination with a reed contact 15 which is fixed at the outside of the ink chamber 7 a level detection system is provided. The ink tank 6 is suited for inks with different specific gravity, by choosing a big volume of the float 13 it is dimensioned for low specific density (i.e. oil based) inks.

By choosing the dimensions of the float 13 big in relation to the dimensions of the ink tank 6, a certain dampening of ink movement is obtained.

The float 13 can be mounted in the ink chamber 7 using a hinge having low tolerance in order to ensure that the position remains central inside the ink chamber 7 during shuttling movement.

Preferably the float 13 itself is also symmetrical.

The ink level h can be kept constant, independent of the ink type, by adjusting the fixing height of the reed contact 15.

By constructing the float 13 symmetrical regarding to the centre plane perpendicular to the shuttling direction B the reading of the ink level sensor system it is not influenced by the position of the ink level surfaces as shown in Fig. 4A AND 4C.

The reed contact 15 commands a pump for pumping ink from the main tank to the header tank 6 during replenishment of the header tank 6.

[0026] Further a ink movement damper 16 for dampening further pressure variations, due to the shuttling, is integrated in the ink tank 6. This ink movement damper 16 is located between the ink chamber 7 and the ink outlet 8 to the print head 5. To restrict ink movement inside the damper 16, the dimensions are chosen smaller than the width of the ink chamber 7. Preferably the size in the shuttling direction B is less than half the size of the ink chamber 7.

The damper 16 can be executed in the form of a labyrinth, a mesh or a porous member restricting movement of the ink near the outlet opening 8 of the ink chamber 7. In Fig. 3 a labyrinth is shown in the right side of the ink chamber 7. Several partitions 17 having perforations at different heights are provided so the ink can not travel in a straight path to the outlet opening 8. In order to avoid pressure and flow variations due to the shuttling movement the damper 16 is constructed symmetrically regarding the centre plane of the ink tank 6.

[0027] This damper 16 has also an important degassing function of ink flowing from ink chamber 7 into the print head.

As ink is fed from the ink chamber 7 to the outlet 8. A flow of ink is induced through the damper 16. The ink is forced to take several turns through the labyrinth formed by partitions 17. Air bubbles trapped in the ink have the tendency to rise to the top, where they can join with the air above the ink level in the tank 6. The air outlet of the ink damper 16 preferably has to reach above the ink level.

[0028] Because of the application of a constant neg-

ative pressure an amount of trapped air tends to form a greater bubble than at atmospheric pressure and therefore can be more easily separated because large bubbles tend to rise more quickly.

[0029] The ink feed system for the print head 5 is realised by two ink connections between ink tank 6 and print head 5.

A first connection from the ink outlet 8 to the print head 5 is on the bottom of the ink tank 6, behind the damper 16. This opening is feeding ink into the print head 5.

A second connection coupled to the re-flow inlet 11 will allow air-bubbles to return from the print head 5 into the ink tank 6. This is especially important if a new (empty) print head 5 is to be filled with ink. The height of the connection of the opening with the tank 6 is located above the ink level in the ink tank 6.

Via this connection the negative pressure is also supplied to the inkjet print head 5 directly.

[0030] In order to provide a constant vacuum source the ink tank 6 is connected to a large volume vacuum container in which vacuum is sustained by a small capacity extraction pump under control of a precise pressure regulator. By choosing a large vacuum reserve, pressure will not vary easily even during a replenishment step in which a large amount of ink is added to the header tank 6. The pressure of a large vacuum holder will vary only with a small amount when a relatively small volume of ink is added to the system. The volume of the vacuum reservoir preferably is at least 5 times larger than the volume of the ink chamber 7. More preferably the volume of the vacuum reservoir is 50 to 100 times larger than the volume of the ink chamber 7.

[0031] The ink tank 6 can for the greater part be produced using known processes like injection moulding. To the inner sides of the ink chamber 7 a special coating can be applied in order to obtain oleophobic characteristics.

In order to lower production costs it is possible to produce assemblies of coupled ink tanks 6 having common side-walls. A combination of two ink tanks is shown in Fig 5.

As for each colour a separate tank is to be provided the use of combinations of ink tanks 6 having a common side-wall 18 has a cost advantage.

[0032] Another possibility is that in the common side-walls 18 of the tanks 6 special break-away seals 19 is provided which can be removed so that out of the multiple tanks 6 a single tank can be made. E.g. for use in a high-end black and white printer. The connection of the ink tanks 6 can also be made in other ways, e.g. special ink channel 20 can be provided with breakable seals 19.

In order to prevent ink level variations during shuttling, the dimensions of the unsealed opening have to be small so only a small amount of ink can pass through the opening between the tanks 6 during shuttling.

The combination of several tanks 6 has a further advantage.

As can be seen in Figures 3A, 3B and 5, the ink tanks 6 are equipped with several mounting holes/slits 21 in order to allow easy replacement of the ink tank 6 using screws or other fastening means in the printer. Preferably mounting means having quick release systems are used. This can be necessary when changing ink type or colour in the inkjet printing apparatus. When several tanks 6 are mounted together on the shuttling carriage, replacement can be done quicker than when each tank 6 is mounted separately.

[0033] Having described in detail preferred embodiments of the current invention, it will now be apparent to those skilled in the art that numerous modifications can be made therein without departing from the scope of the invention as defined in the appending claims.

[Part List]

[0034]

1. capillary tubes
2. actuators
3. meniscus
4. receiving sheet
5. print head
6. header tank
7. ink chamber
8. ink feed outlet
9. vacuum inlet
10. supply inlet
11. re-flow inlet
12. channel
13. float
14. magnet
15. reed contact
16. damper
17. partitions
18. common sidewall
19. break-away seal
20. ink channel
21. mounting hole/slit

Claims

1. Ink tank (6) containing an ink supply chamber (7), said ink tank (6) for being mounted on a shuttling carriage for supplying ink to an inkjet print head (5) mounted on the same carriage **characterised in that** functional elements of said ink tank (6) are arranged symmetrical to the centre plane for being mounted perpendicularly to the direction of movement of said shuttling carriage.
2. Ink tank (6) according to claim 1 wherein the functional elements comprise an outlet opening (8) for feeding ink to the print head (5).

3. Ink tank (6) according to any one of the preceding claims wherein the functional elements further comprise a ink level sensor having a float (13) with integrated magnet (14) coupled to a reed relay (15).
5
4. Ink tank (6) according to any one of the preceding claims further comprising an ink movement damper (16) between the ink supply chamber (7) and the outlet opening (8).
10
5. Ink tank (6) according to claim 4 wherein the damper (16) comprises a labyrinth for restricting sideways movement of the ink.
6. Ink tank (6) according to claim 4 or 5 wherein the damper (16) further comprises means for degassing supplied ink.
15
7. Ink tank (6) according to any one of the preceding claims further comprising a vacuum connection (9) for connecting the ink tank (6) to a vacuum source for extracting air from the tank (6).
20
8. Ink tank (6) according to any one of the preceding claims further comprising a re-flow inlet (11) above the ink level (h) for accepting degassed air from the print head (5).
25
9. Dual ink tank assembly comprising at least two ink tanks (6) according to any one of the preceding claims wherein the ink tanks (6) have a common side-wall (18) and wherein the ink tanks (6) can be interconnected by breaking away a seal (19).
30
10. Ink supply system for a shuttling print head (5) comprising an ink tank (6) according to any one of claims 1 to 8 and a vacuum source for providing a stable negative pressure by using a managed vacuum source having a large volume.
35
40
11. Inkjet printer comprising an ink tank (6) according to any of the preceding claims wherein the ink tank (6) is preferably replaceable.
45

45

50

55

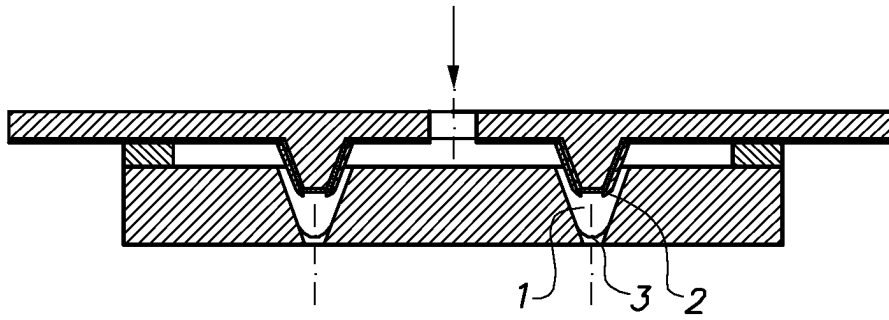


FIG. 1

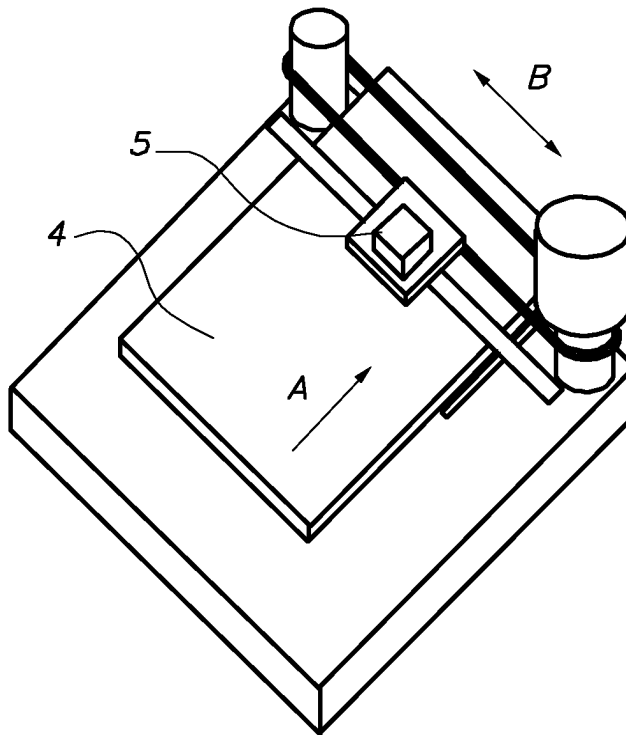


FIG. 2

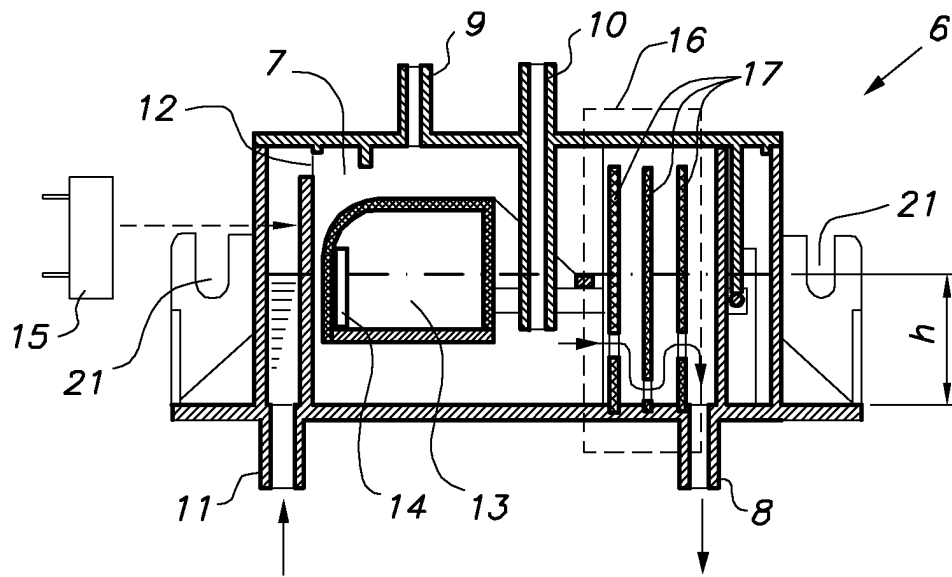


FIG. 3A

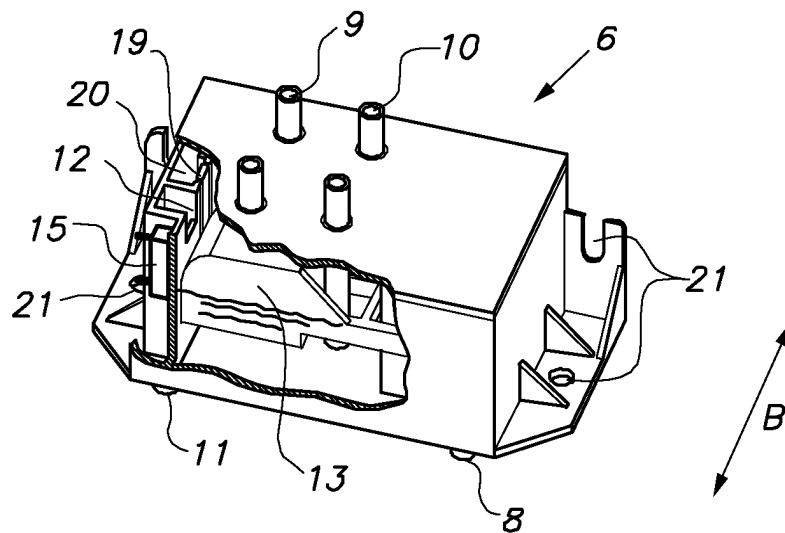


FIG. 3B

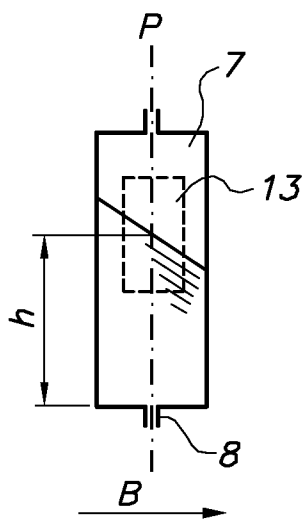


FIG. 4A

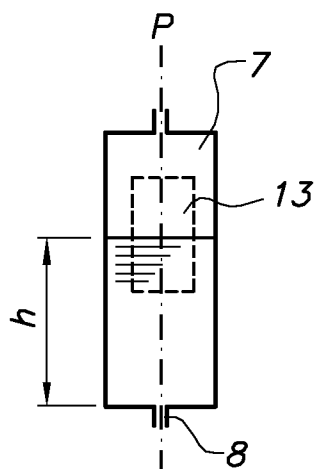


FIG. 4B

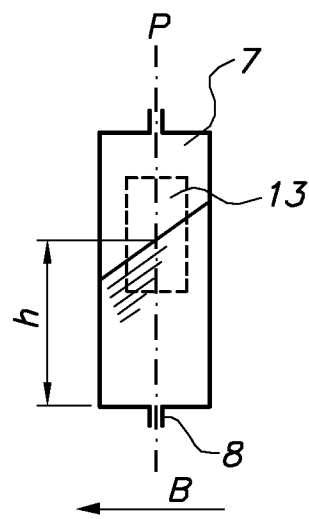


FIG. 4C

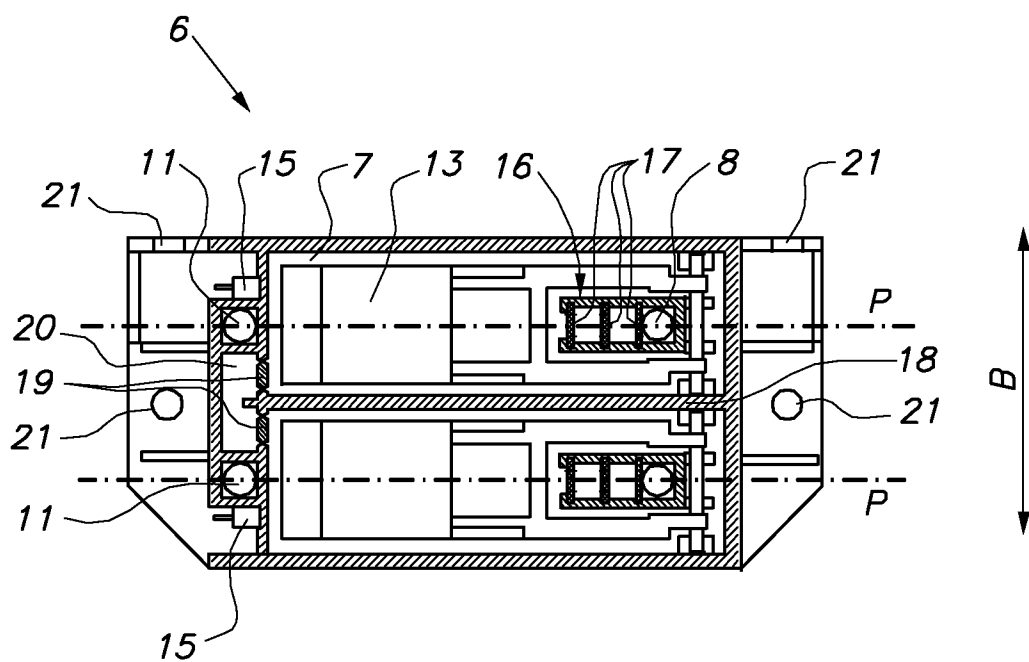


FIG. 5



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 10 0552

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X,D A	EP 1 097 814 A (SEIKO EPSON CORP) 9 May 2001 (2001-05-09) * paragraph '0010! - paragraph '0016!; figures 1-4 * ---	1-3,7, 9-11 4-6,8	B41J2/175
X,D A	EP 1 199 178 A (SEIKO EPSON CORP) 24 April 2002 (2002-04-24) * paragraph '0018! - paragraph '0037!; figures 1-3A * ---	1-3,7 4-6,9-12	
X A	EP 1 055 520 A (SEIKO EPSON CORP) 29 November 2000 (2000-11-29) * paragraph '0018! - paragraph '0046!; figures 1-8 * ---	1-3,10, 11 7	
X A	EP 0 812 693 A (SEIKO EPSON CORP) 17 December 1997 (1997-12-17) * column 4, line 22 - column 6, line 7; figures 3A-4A * -----	1,2,7,9, 11 3,8,10	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7) B41J
Place of search MUNICH		Date of completion of the search 5 September 2002	Examiner Zacchini, D
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 10 0552

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-09-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1097814	A	09-05-2001	JP 2001199084 A	24-07-2001
			JP 2002046292 A	12-02-2002
			JP 2002103640 A	09-04-2002
			JP 2001191548 A	17-07-2001
			JP 2001287380 A	16-10-2001
			EP 1097814 A2	09-05-2001
			EP 1142713 A2	10-10-2001
			WO 0132424 A2	10-05-2001
			US 6378971 B1	30-04-2002
			US 2002024543 A1	28-02-2002
			AU 2708301 A	31-07-2001
			CN 1358137 T	10-07-2002
			EP 1120258 A2	01-08-2001
			EP 1164025 A1	19-12-2001
			WO 0153104 A1	26-07-2001
			US 2002089576 A1	11-07-2002
			US 2002093556 A1	18-07-2002
			US 2001024225 A1	27-09-2001
EP 1199178	A	24-04-2002	CN 1349894 A	22-05-2002
			EP 1199178 A1	24-04-2002
			EP 1199179 A1	24-04-2002
			JP 2002192744 A	10-07-2002
			US 2002109760 A1	15-08-2002
EP 1055520	A	29-11-2000	JP 11227220 A	24-08-1999
			JP 11240180 A	07-09-1999
			JP 11348315 A	21-12-1999
			JP 2000037879 A	08-02-2000
			JP 2000203049 A	25-07-2000
			JP 3053017 B2	19-06-2000
			JP 2000211151 A	02-08-2000
			JP 3233215 B2	26-11-2001
			JP 2000211152 A	02-08-2000
			JP 3307601 B2	24-07-2002
			JP 2000218812 A	08-08-2000
			EP 1055520 A1	29-11-2000
			US 6390611 B1	21-05-2002
			WO 9941083 A1	19-08-1999
			EP 1016533 A1	05-07-2000
			WO 0003877 A1	27-01-2000
EP 0812693	A	17-12-1997	EP 0812693 A1	17-12-1997
			US 6102517 A	15-08-2000
			WO 9723352 A1	03-07-1997

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82