



(11) **EP 1 367 243 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
13.04.2011 Bulletin 2011/15

(51) Int Cl.:
F02D 9/10 (2006.01)

(21) Application number: **03012447.3**

(22) Date of filing: **30.05.2003**

(54) **Intake apparatus for internal-combustion engine**

Ansaugvorrichtung für eine Brennkraftmaschine

Dispositif d'admission d'air pour moteur à combustion interne

(84) Designated Contracting States:
DE FR

(30) Priority: **30.05.2002 JP 2002195258**

(43) Date of publication of application:
03.12.2003 Bulletin 2003/49

(73) Proprietor: **AISAN KOGYO KABUSHIKI KAISHA**
Obu-shi,
Aichi 474-8588 (JP)

(72) Inventor: **Kawai, Shinji**
Obu-shi,
Aichi 474-8588 (JP)

(74) Representative: **Grünecker, Kinkeldey,**
Stockmair & Schwanhäusser
Anwaltssozietät
Leopoldstrasse 4
80802 München (DE)

(56) References cited:
WO-A-02/14721 US-A- 5 275 375
US-B1- 6 352 241

- **PATENT ABSTRACTS OF JAPAN** vol. 2002, no. 05, 3 May 2002 (2002-05-03) -& JP 2002 004895 A (MIKUNI CORP), 9 January 2002 (2002-01-09)
- **PATENT ABSTRACTS OF JAPAN** vol. 2000, no. 25, 12 April 2001 (2001-04-12) -& JP 2001 234759 A (MIKUNI CORP), 31 August 2001 (2001-08-31)
- **PATENT ABSTRACTS OF JAPAN** vol. 017, no. 612 (M-1509), 11 November 1993 (1993-11-11) -& JP 05 187276 A (HITACHI LTD), 27 July 1993 (1993-07-27)
- **PATENT ABSTRACTS OF JAPAN** vol. 1998, no. 05, 30 April 1998 (1998-04-30) -& JP 10 026033 A (DENSO CORP), 27 January 1998 (1998-01-27)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 367 243 B1

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates to an intake apparatus for an internal-combustion engine. More particularly, the present invention relates to an intake apparatus having a throttle body capable of preventing deformation of an intake air measuring portion during mounting.

2. Discussion of Related Art

[0002] In a fuel injection type internal-combustion engine, as shown in Figs. 4 and 5, a throttle body 31 is molded from a synthetic resin material and has an intake air measuring portion for controlling the amount of intake air. The throttle body 31 is mounted to an intake manifold 32 molded from a synthetic resin material by passing a plurality of bolts 35 through respective mounting holes 34 provided in a flange 33 of the throttle body 31, with a gasket 42 interposed between the flange 33 and the mating flange 37 of the intake manifold 32. Hollow annular fittings 36 capable of withstanding the fastening force of the bolts 35 are inserted into the flange 33 of the throttle body 31 during or after the molding process. Similarly, threaded fittings 38 having internal threads engageable with the bolts 35 are inserted into the flange 37 of the intake manifold 32 during or after the molding process.

[0003] The throttle body 31 has an intake passage 39 with a circular sectional configuration. The intake passage 39 extends through the throttle body 31. A throttle shaft 40 is rotatably fitted across the intake passage 39. A throttle valve 41 is secured to the throttle shaft 40. The throttle valve 41 is opened or closed by pivoting of a throttle lever (not shown) secured to one end of the throttle shaft 40, thereby changing the area of the gap between the outer peripheral portion of the throttle valve 41 and the inner wall of the intake passage 39 in the throttle body 31, and thus controlling the amount of intake air. In this way, the intake air is introduced into the internal-combustion engine.

SUMMARY OF THE INVENTION

[0004] The above-described structure suffers, however, from the following problems. When the throttle body and the intake manifold are formed from a synthetic resin material by injection molding, the flanges may be curved by shrinkage after the molding process, resulting in degradation of the flatness of the mounting surfaces thereof. In a case where the annular fittings are inserted into the flange of the throttle body after the injection molding process, the end surfaces of the annular fittings may tilt undesirably. If the flanges are fastened together with the bolts under these circumstances, a problem occurs as

shown in Fig. 5. That is, when the second and subsequent bolts are tightened, the applied tightening force corrects forcibly the disagreement in flatness between the intake manifold mounting surface of the throttle body and the throttle body mounting surface of the intake manifold. Consequently, stress-induced strain occurs in the two mounting parts. The stress-induced strain may extend as far as the intake air measuring portion for measuring the amount of intake air admitted by the throttle valve in the throttle body (hereinafter referred to simply as "measuring portion"), causing the circular sectional configuration of the measuring portion to be deformed to an elliptical shape. In such a case, it may be impossible to accurately measure a small amount of intake air during idling, for example. In the worst case, the throttle valve may fail to operate.

[0005] The above-described phenomenon becomes particularly remarkable when the rigidity of the flange of the intake manifold is higher than the rigidity of the flange of the throttle body.

[0006] Under these circumstances, an object of the present invention is to provide an intake apparatus so structured that when a throttle body made of a synthetic resin material is mounted to an intake manifold or the like, no excessive stress-induced strain occurs in the measuring portion of the throttle body, thereby allowing accurate intake air control to be performed when the amount of intake air is small.

[0007] The document JP 2002004895 discloses a throttle body avoiding this problem by fixing the device through a fixing stud in each side supporting the whole structure.

[0008] The present invention made to attain the above-described object is applied to an intake apparatus for an internal-combustion engine that has a throttle body formed with a measuring portion for controlling the amount of intake air. The throttle body is further formed with an air duct hose-side engagement portion for leading intake air to the measuring portion and an intake manifold-side engagement portion for leading the intake air measured at the measuring portion to a combustion chamber. According to the present invention, the air duct hose-side engagement portion and the intake manifold-side engagement portion are provided with enlarged-diameter portions, respectively, which have an inner diameter larger than the inner diameter of the measuring portion. Moreover, the enlarged-diameter portions have a wall thickness smaller than the wall thickness of the measuring portion, whereby at least a portion of one or both of outer diameters of the enlarged-diameter portions is larger than the outer diameter of the measuring portion.

[0009] Preferably, an upstream enlarged portion is formed between the air duct hose-side engagement portion and the measuring portion, and a downstream enlarged portion is formed between the intake manifold-side engagement portion and the measuring portion. Both the upstream and downstream enlarged portions have a wall thickness smaller than the wall thickness of

the measuring portion.

[0010] The throttle body of the intake apparatus may be made of a synthetic resin material.

[0011] The present invention offers the following advantageous effects. According to the present invention, the air duct hose-side engagement portion and the intake manifold-side engagement portion of the throttle body are provided with enlarged-diameter portions, respectively, which have an inner diameter larger than the inner diameter of the intake air measuring portion. Moreover, the enlarged-diameter portions and the enlarged portions between the engagement portions and the enlarged-diameter portions each have a wall thickness smaller than the wall thickness of the measuring portion. Accordingly, strain is absorbed by the enlarged-diameter portions and the enlarged portions and cannot reach the measuring portion. Therefore, no excessive stress-induced strain occurs in the measuring portion, and accurate intake air control can be performed when the amount of intake air is small.

[0012] Still other objects and advantages of the invention will in part be obvious and will in part be apparent from the specification.

[0013] The invention accordingly comprises the features of construction, combinations of elements, and arrangement of parts which will be exemplified in the construction hereinafter set forth, and the scope of the invention will be indicated in the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014]

Fig. 1 is a longitudinal sectional view of an intake apparatus according to an embodiment of the present invention.

Fig. 2 is a longitudinal sectional view showing exaggeratedly the intake apparatus in a state where a throttle body arranged according to the present invention has been secured to an intake manifold.

Fig. 3 is a longitudinal sectional view showing the intake apparatus in a state where an air duct hose has been secured to the throttle body.

Fig. 4 is a longitudinal sectional view showing an intake apparatus according to the prior art before the constituent parts thereof are assembled together.

Fig. 5 is a longitudinal sectional view showing exaggeratedly the state of the prior art intake apparatus after the constituent parts have been assembled together.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0015] A preferred embodiment of the present invention will be described below with reference to the accompanying drawings. In Fig. 1, an intake apparatus 1 comprises a throttle body 2 having an intake passage 2a. A throttle shaft 3 is rotatably fitted across the intake pas-

sage 2a. A throttle valve 4 is secured to the throttle shaft 3. The throttle valve 4 rotates together with the throttle shaft 3 to control the amount of intake air in cooperation with a measuring portion 2b of the inner surface of the intake passage 2a. A flange 2c is formed at the downstream opening of the throttle body 2. The flange 2c constitutes an intake manifold-side engagement portion 6 that is to be secured to an intake manifold 5 (see Fig. 2). The flange 2c is provided with a plurality of screw holes 2d for insertion of screws 7 (see Fig. 2). The intake manifold-side engagement portion 6 of the throttle body 2 has an enlarged-diameter portion 2f with an inner diameter A larger than the inner diameter B of the measuring portion 2b. A downstream enlarged portion (varied-diameter portion) 2g is formed between the measuring portion 2b and the enlarged-diameter portion 2f. The wall thickness a of the enlarged-diameter portion 2f and the wall thickness of the downstream enlarged portion 2g are smaller than the wall thickness b of the measuring portion 2b.

[0016] An air duct hose-side engagement portion 9 is formed at the upstream opening of the throttle body 2. An air duct hose 8 (see Fig. 3) is fitted and secured to the engagement portion 9. The air duct hose-side engagement portion 9 of the throttle body 2 has an enlarged-diameter portion 2h with an inner diameter C larger than the inner diameter B of the measuring portion 2b. An upstream enlarged portion (varied-diameter portion) 2i is formed between the measuring portion 2b and the enlarged-diameter portion 2h. The wall thickness c of the enlarged-diameter portion 2h and the wall thickness of the upstream enlarged portion 2i are smaller than the wall thickness b of the measuring portion 2b. A rib 2e is formed on the outer periphery of the engagement portion 9 to prevent the air duct hose 8 from coming off. After the air duct hose 8 has been fitted to the engagement portion 9, a metallic band 10 (see Fig. 3) is fastened to the outer periphery of the air duct hose 8 to prevent the hose 8 from becoming dislodged.

[0017] Next, the operation of this embodiment will be described. As shown in Fig. 2, if the mounting surface of the throttle body 2 or the intake manifold 5 is strained, the flange 2c is distorted by an amount corresponding to the strain (shown by the chain double-dashed line). However, because the inner diameter A of the enlarged-diameter portion 2f is larger than the inner diameter B of the measuring portion 2b and the wall thickness a of the enlarged-diameter portion 2f and the wall thickness of the downstream enlarged portion 2g are smaller than the wall thickness b of the measuring portion 2b, the enlarged-diameter portion 2f and the downstream enlarged portion 2g are distorted more easily than the measuring portion 2b. Therefore, the strain is absorbed by the enlarged-diameter portion 2f and the downstream enlarged portion 2g and cannot reach the measuring portion 2b. It should be noted that the chain double-dashed line shows the state of the throttle body 2 before it is secured to the intake manifold 5.

[0018] In Fig. 3, when the band 10 for preventing dis-

lodging is fastened to the outer periphery of the air duct hose 8 fitted to the engagement portion 9, the enlarged-diameter portion 2h is strained (shown by the chain double-dashed line) by the fastening force. However, because the inner diameter C of the enlarged-diameter portion 2h is larger than the inner diameter B of the measuring portion 2b and the wall thickness c of the enlarged-diameter portion 2h and the wall thickness of the upstream enlarged portion 2i are smaller than the wall thickness b of the measuring portion 2b, the enlarged-diameter portion 2h and the upstream enlarged portion 2i are distorted more easily than the measuring portion 2b. Therefore, the strain is absorbed by the enlarged-diameter portion 2h and the upstream enlarged portion 2i and cannot reach the measuring portion 2b. It should be noted that the chain double-dashed line shows the state of the enlarged-diameter portion 2h before the air duct hose 8 and the band 10 are attached thereto.

[0019] It should be noted that the present invention is not necessarily limited to the foregoing embodiment but can be modified in a variety of ways without departing from the scope of the present invention as defined by the claims.

Claims

1. An intake apparatus for an internal-combustion engine having a throttle body (2), said throttle body (2) being formed with:

a measuring portion (2b) for controlling an amount of intake air;
 an air duct hose-side engagement portion (9) for leading intake air to said measuring portion (2b); and
 an intake manifold-side engagement portion (6) for leading the intake air measured at said measuring portion (2b) to a combustion chamber;
 wherein said air duct hose-side engagement portion (9) and said intake manifold-side engagement portion (6) are provided with enlarged-diameter portions (2h, 2f), respectively, which have an inner diameter (C, A) larger than an inner diameter (A) of said measuring portion (2b), said enlarged-diameter portions (2h, 2f) having a wall thickness (c, a) smaller than a wall thickness (b) of said measuring portion (2b), whereby at least a portion of one or both of outer diameters of said enlarged-diameter portions (2h, 2f) is larger than the outer diameter of said measuring portion (2b), **characterized in that** the inner diameters (C, A) of the enlarged-diameter portions (2h, 2f) are larger than the outer diameter of said measuring portion (2b).

2. An intake apparatus for an internal-combustion engine according to claim 1,

wherein an upstream conical portion (2i) is formed between said air duct hose-side engagement portion (9) and said measuring portion (2b), and a downstream conical portion (2g) is formed between said intake manifold-side engagement portion (6) and said measuring portion (2b), both of said upstream conical portion (2i) and downstream conical portion (2g) having a wall thickness smaller than the wall thickness (b) of said measuring portion (2b).

3. An intake apparatus for an internal-combustion engine according to claim 1 or 2, wherein said throttle body (2) is made of a synthetic resin material.

Patentansprüche

1. Ansaugvorrichtung für einen Verbrennungsmotor mit einem Drosselklappengehäuse (2), wobei das Drosselklappengehäuse (2) versehen ist mit:

einem Messabschnitt (2b) zum Steuern einer Menge an Ansaugluft;
 einen Abschnitt (9), der in Eingriff mit einer Luftleitungsschlauch-Seite ist, um Ansaugluft zu dem Messabschnitt (2b) zu leiten; und
 einem Abschnitt (6), der in Eingriff mit einer Ansaugkammer-Seite ist, um die an dem Messabschnitt (2b) gemessene Ansaugluft zu einer Brennkammer zu leiten;
 wobei der Abschnitt (9), der in Eingriff mit der Luftleitungsschlauch-Seite ist, und der Abschnitt (6), der in Eingriff mit der Ansaugkammer-Seite ist, jeweils mit Abschnitten (2h, 2f) mit vergrößertem Durchmesser versehen sind, die einen Innendurchmesser (C, A) haben, der größer ist als ein Innendurchmesser (A) des Messabschnitts (2b), wobei die Abschnitte (2h, 2f) mit vergrößertem Durchmesser eine Wanddicke (c, a) haben, die kleiner ist als eine Wanddicke (b) des Messabschnitts (2b), so dass wenigstens ein Abschnitt einer oder beider Außendurchmesser der Abschnitte (2h, 2f) mit vergrößertem Durchmesser größer ist als der Außendurchmesser des Messabschnitts (2b), **dadurch gekennzeichnet, dass** die Innendurchmesser (C, A) der Abschnitte (2h, 2f) mit vergrößertem Durchmesser größer sind als der Außendurchmesser des Messabschnitts (2b).

2. Ansaugvorrichtung für einen Verbrennungsmotor nach Anspruch 1, wobei ein stromauf liegender konischer Abschnitt (2i) zwischen dem Abschnitt (9), der in Eingriff mit der Luftleitungsschlauch-Seite ist, und dem Messabschnitt (2b) ausgebildet ist und ein stromab liegender konischer Abschnitt (2g) zwischen dem Abschnitt (6), der in Eingriff mit der Ansaugkammer-Seite ist, und dem Messabschnitt (2b)

ausgebildet ist und sowohl der stromauf liegende konische Abschnitt (2i) als auch der stromab liegende konische Abschnitt (2g) eine Wanddicke haben, die kleiner ist als die Wanddicke (b) des Messabschnitts (2b).

5

3. Ansaugvorrichtung für einen Verbrennungsmotor nach Anspruch 1 oder 2, wobei das Drosselklappengehäuse (2) aus einem Kunststoffmaterial besteht.

10

Revendications

1. Appareil d'admission pour un moteur à combustion interne comprenant un corps de papillon (2), ledit corps de papillon (2) étant formé :

15

d'une partie de mesure (2b) pour régler une quantité d'air d'admission ;

d'une partie d'engagement côté tuyau d'arrivée d'air (9) pour conduire de l'air d'admission vers ladite partie de mesure (2b) ; et

20

d'une partie d'engagement côté collecteur d'admission (6) pour conduire l'air d'admission mesuré au niveau de ladite partie de mesure (2b) vers une chambre de combustion ;

25

dans lequel ladite partie d'engagement côté tuyau d'arrivée d'air (9) et ladite partie d'engagement côté collecteur d'admission (6) sont dotées de parties de diamètre élargi (2h, 2f), respectivement, comportant un diamètre interne (C, A) plus grand qu'un diamètre interne (A) de ladite partie de mesure (2b), lesdites parties de diamètre élargi (2h, 2f) ayant une épaisseur de paroi (c, a) plus petite qu'une épaisseur de paroi (b) de ladite partie de mesure (2b), de sorte qu'au moins une partie d'un des diamètres externes ou des deux diamètres externes desdites parties de diamètre élargi (2h, 2f) est plus grande que le diamètre externe de ladite partie de mesure (2b), **caractérisé en ce que** les diamètres internes (C, A) des parties de diamètre élargi (2h, 2f) sont plus grands que le diamètre externe de ladite partie de mesure (2b).

30

35

40

45

2. Appareil d'admission pour un moteur à combustion interne conformément à la revendication 1, dans lequel une partie conique située en amont (2i) est formée entre ladite partie d'engagement côté tuyau d'arrivée d'air (9) et ladite partie de mesure (2b), et une partie conique située en aval (2g) est formée entre ladite partie d'engagement côté collecteur d'admission (6) et ladite partie de mesure (2b), tant la partie conique située en amont (2i) que la partie conique située en aval (2g) ayant une épaisseur de mur plus petite que l'épaisseur de paroi (b) de ladite partie de mesure (2b).

50

55

3. Appareil d'admission pour un moteur à combustion interne conformément à la revendication 1 ou 2, dans lequel ledit corps de papillon (2) est constitué d'un matériau de résine synthétique.

FIG.1

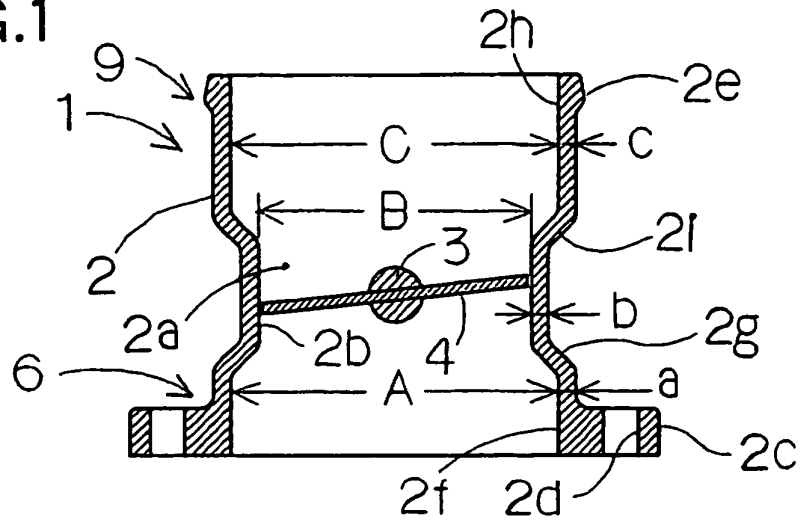


FIG.2

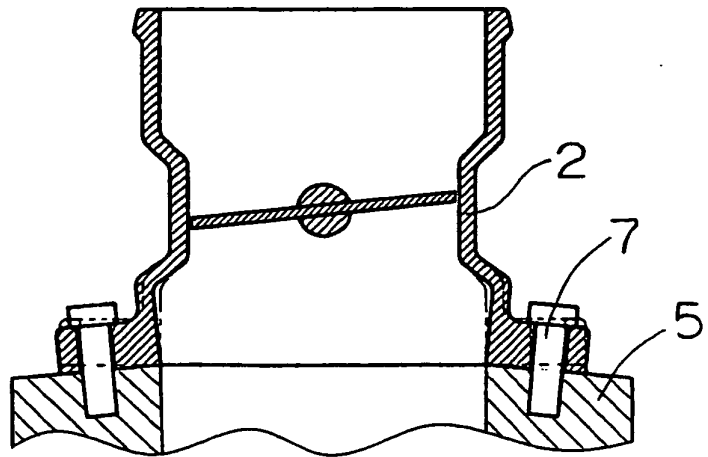


FIG.3

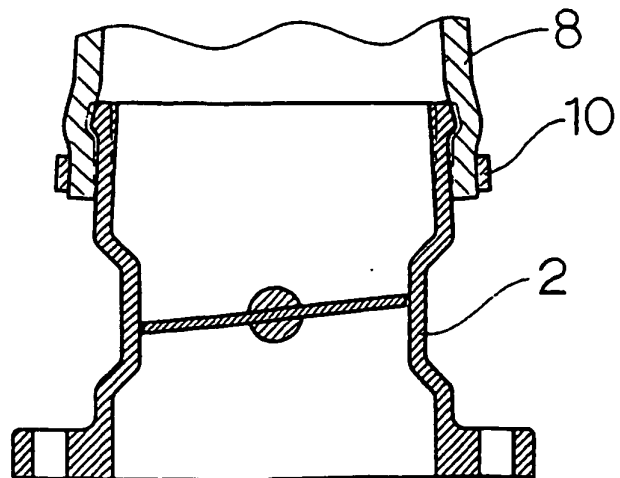


FIG.4


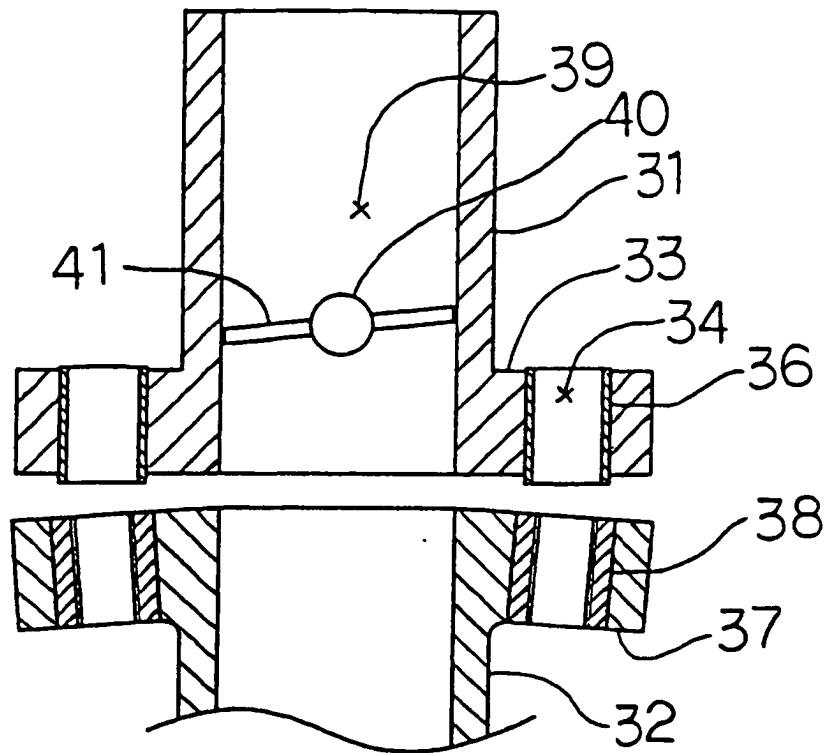


FIG.5

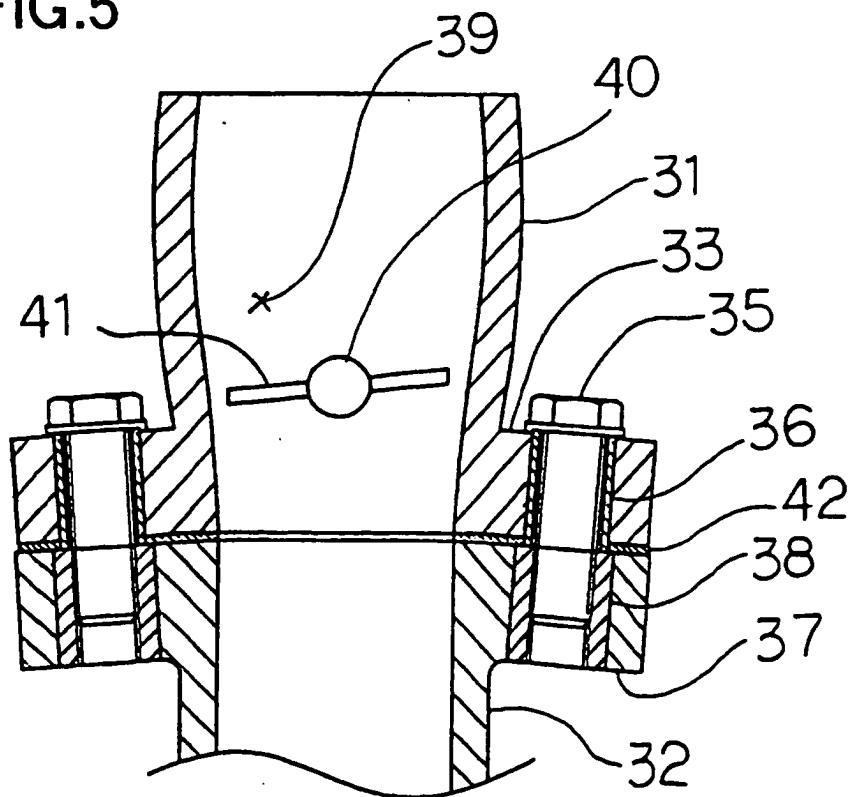

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2002004895 B [0007]