



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 367 336 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**

published in accordance with Art. 158(3) EPC

Note: Bibliography reflects the latest situation

(15) Correction information:
Corrected version no 1 (W1 A1)
INID code(s) 30

(51) Int Cl.7: **F24F 11/04**, F24F 11/02,
F24F 1/00

(48) Corrigendum issued on:
25.02.2004 Bulletin 2004/09

(86) International application number:
PCT/JP2001/011344

(43) Date of publication:
03.12.2003 Bulletin 2003/49

(87) International publication number:
WO 2002/061345 (08.08.2002 Gazette 2002/32)

(21) Application number: **01273571.8**

(22) Date of filing: **25.12.2001**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR

(72) Inventors:
• **YABU, Tomohiro**
Sakai-shi, Osaka 591-8022 (JP)
• **YAMANAKA, Mikayo**
Osaka (JP)

(30) Priority: **01.02.2001 JP 2001025875**


(71) Applicant: **Daikin Industries, Ltd.**
Osaka-shi, Osaka 530-8323 (JP)

(74) Representative: **HOFFMANN - EITLE**
Patent- und Rechtsanwälte
Arabellastrasse 4
81925 München (DE)

(54) **INDOOR AIR CONDITIONER**

(57) An indoor air conditioner (1) has an upward outlet (22) and side outlets (23, 24) and capable of providing a cozy air-conditioned space by improving nonuniformity in an indoor temperature distribution, wherein, in cooling operation, the ratio of a left-side blown-off air volume (SC_1) to an upward blown-off air volume (UC) and to a right-side blown-off air volume (SC_2) is set to $SC_1:UC:SC_2 = 1:2:1$ to $1:4:1$, and in a heating operation, the ratio of a left-side blown-off air volume (SW_1) to an upward blown-off air volume (UW) and to a right-side blown-off air volume (SW_2) is set to $SW_1:UW:SW_2 = 2:1:2$ to $1:1:1$.

Fig. 1

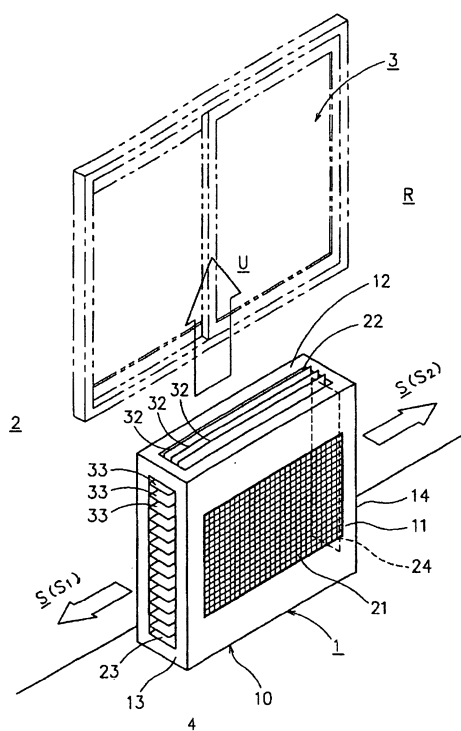

EP 1 367 336 A8