



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 367 457 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
03.12.2003 Bulletin 2003/49

(51) Int Cl.7: **G03G 15/08**

(21) Application number: **02253713.8**

(22) Date of filing: **27.05.2002**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: **Xerox Corporation**
Rochester, New York 14644 (US)

(72) Inventors:
• **Odell, Peter G.**
Mississauga, Ontario L5J 1L3 (CA)
• **Hunt, Richard D.**
Rochester, New York 14610 (US)

- **Thomson, Thomas**
Fairport, New York 14450 (US)
- **Groot, Yvonne**
5962 NW Norst (NL)
- **Dhillon, J. Paul S.**
Pittsford, New York 14534 (US)
- **Zona, Michael F.**
Holley, New York 14470 (US)


(74) Representative: **Rackham, Stephen Neil**
GILL JENNINGS & EVERY,
Broadgate House,
7 Eldon Street
London EC2M 7LH (GB)

(54) **Method of coating a donor member**

(57) The present invention relates to improved methods of coating donor members with waterborne coatings, wherein a resin, a pigment, and water are combined in proportions effective to provide a donor member precursor composition; the donor member precursor composition is subjected to high pressure comminution to provide a donor member conductive coating composition; and the donor member coating composition

is coated onto a substrate. The present method advantageously provides a donor member coating which is substantially free of air pockets or defects. In preferred embodiments the resin is a phenolic resin, preferably a waterborne phenolic resin, such as a phenol-formaldehyde resin, and in other preferred embodiments the pigment is selected from the group consisting of carbon black, graphite, magnetite, nigrosine, and combinations thereof.

FIG. 1

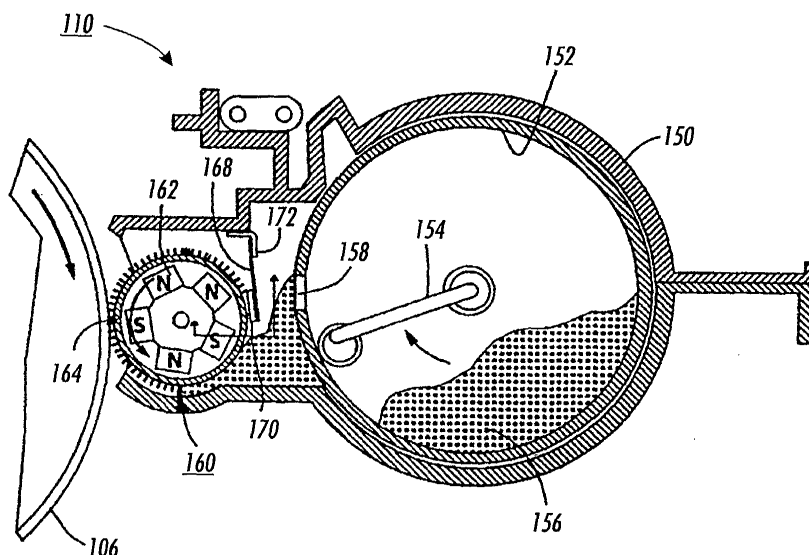

EP 1 367 457 A1

Description

[0001] The present invention relates to polymeric coatings for developer, or "donor" members used in electrophotographic image development systems. In xerography, or electrophotographic printing, a charge retentive surface called a photoreceptor is electrostatically charged, then exposed to a light pattern of an original image to selectively discharge the surface in accordance with the image, i.e., "imagewise". The resulting pattern of charged and discharged areas on the photoreceptor form an electrostatic charge pattern ("latent image") conforming to the original. The latent image is developed by contacting it with a finely divided electrostatically attractable powder called "toner." Toner is held on the image areas by the electrostatic charge on the photoreceptor surface. Thus, a toner image is produced in conformity with a light image of the original being reproduced. The toner image may then be transferred to a substrate or support member such as paper, and the image is affixed to the paper to form a the desired permanent image on the substrate. After development, excess toner left on the charge retentive surface is cleaned from the surface. The step of conveying toner to the latent image on the photoreceptor is known as "development". The object of effective development of a latent image on the photoreceptor is to convey toner particles to the latent image at a controlled rate so that the toner particles effectively adhere electrostatically to the appropriately-charged areas on the latent image.

[0002] A commonly used development technique involves a single-component developer material. In a typical single-component development system, each toner particle has both magnetic properties, to allow the particles to be magnetically conveyed to the photoreceptor, and an electrostatic charge, to enable the particles to adhere to the photoreceptor. In such a system, the developer, or "donor" member is a cylindrical sleeve ("donor roll") which rotates about a stationary magnet assembly. The magnetized toner particles adhere to the rotating sleeve by the force of the stationary magnets within the sleeve. As the sleeve rotates around the magnets, particles adhering to the sleeve are exposed to an alternating series of magnetic polarities. The developer roll has a conductive coating which facilitates the adherence of toner to its surface. The coating typically includes a conductive pigment and a binder composition.

[0003] The option of eliminating organic solvents from coating procedures has many benefits. It eliminates the need to build a coating plant to the stringent and costly Class I Division I or II ("explosion proof") specification for the use of flammable liquids. Since engineering controls, such as classified rooms and fume hoods, can only reduce the risk, there is a health and safety benefit to the plant operators in replacing organic solvents with water. The need to reclaim, destroy or account for the volatile organic compound (VOC) emissions is removed, which also provides cost savings. Also, by re-

ducing or even eliminating VOC emissions, the plant design can be consistent in many locations, despite any variations in local regulations.

[0004] The present invention relates to improved donor members having coatings thereupon which are made via an environmentally friendly process and without the drawbacks of prior attempts at water-based donor member coatings. Before the present invention, grinding of pigment into water-based phenolic resins, unlike organic-based coatings, was very likely to result in dispersion thickening and foaming. In extreme cases this foam is very stiff (meringue-like) and unsuitable for coating. Even small amounts of air entrainment can result in coating defects.

[0005] The present invention relates to improved methods of coating donor members with waterborne coatings, wherein a resin, a pigment, and water are combined in proportions effective to provide a donor member precursor composition; the donor member precursor composition is subjected to high pressure comminution to provide a donor member conductive coating composition; and the donor member coating composition is coated onto a substrate. The present method advantageously provides a donor member coating which is substantially free of air pockets or other defects. The resin may be a phenolic resin, preferably a waterborne phenolic resin, such as Durez 33304 (Oxychem Chemical Corporation) or BB 317 (Neste Chemical), and in other preferred embodiments the pigment may be, e.g., carbon black, graphite, magnetite, nigrosine, or a combination of these pigments.

[0006] The high pressure comminution step may be carried out using a high pressure comminution device such as a piston homogenizer. One or two stage homogenizers may be used. In another embodiment, the invention defines an image forming apparatus which has a charge-retentive surface to receive an electrostatic latent image, and a donor member for applying a developer material to develop the electrostatic latent image to form a developed image. The donor member is coated with a waterborne donor member coating composition prepared as described herein.

[0007] In yet another embodiment, the invention relates to coated donor rolls having a core with a coating composition thereupon, the donor member coating composition prepared by combining a resin, a pigment, and water in proportions effective to provide a donor member coating precursor composition; and subjecting the donor member coating precursor composition to high pressure comminution.

[0008] Also included in this invention is an image forming apparatus including a charge-retentive surface for receiving an electrostatic latent image, and a donor roll having a core and a donor member coating prepared by a combining a resin, a conductive pigment, and water in proportions effective to provide a donor member conductive coating precursor composition, and subjecting the donor member conductive coating precursor com-

position to high pressure communitation; and a transfuse component for transferring and fusing the developed image from the charge retentive surface to a copy substrate.

[0009] In another embodiment the invention encompasses an image forming apparatus having a charge-retentive surface for receiving an electrostatic latent image; and a donor roll to apply a developer material to the charge-retentive surface to develop the electrostatic latent image and form a developed image on the charge retentive surface. The donor roll is coated with a waterborne donor member coating composition of the invention. The image forming apparatus further includes a transfer component to transfer the developed image from the charge retentive surface to a copy substrate; and a fixing component to fuse the transferred developed image to the copy substrate.

[0010] In an even further embodiment, the invention includes an image forming apparatus for forming images on a recording medium, which has a charge-retentive surface for receiving an electrostatic latent image; and a donor roll with a core and a coating of the present invention for applying a developer material to the charge-retentive surface to develop the electrostatic latent image to form a developed image on the charge retentive surface. The apparatus also includes a transfuse component for transferring the developed image from the charge retentive surface to a copy substrate, and for fusing the developed image to the copy substrate.

[0011] A particular embodiment and examples will now be described with reference to the accompanying drawings; in which:-

FIG. 1 is a sectional, elevational view showing a detail of the development apparatus of an electrophotographic printer;

FIG. 2 is a sectional view through line 2--2 in FIG. 1, showing the configuration of a metering blade relative to a donor roll when the metering blade is separated from the donor roll and there is no toner in the system; and

FIG. 3 is an elevational view showing the basic elements of a typical electrophotographic printer.

[0012] The present invention provides for water-based coating materials which allow for preparing donor members, advantageously avoiding thickening and foaming, i.e., undesirable air entrainment, which almost inevitably results in coating defects, the coatings obtained are suitable for high quality images with solid area development greater than 1.3 and the absence of ghosting.

[0013] The present invention encompasses improved methods of coating donor members with waterborne coatings. A resin, a pigment, and water are combined in proportions effective to provide a donor member coating precursor composition, and the donor member coating precursor composition is subjected to high pressure

communitation to thoroughly disperse the ingredients. A conductive donor member coating results which can then be coated onto a substrate, i.e., a donor roll core. The present method advantageously provides a donor member coating which is substantially free of air pockets or other defects.

[0014] "Waterborne coatings" in accordance with the present invention have water as a substantial part of the carrier portion of the coating composition, e.g., greater than 75%, 80%, 85%, 90%, or 95% of the carrier. While other solvents may be included it is more desirable that the composition be mostly water to preserve the benefits of little or no VOC emission.

[0015] "Donor member coating precursor composition" includes compositions of the invention which are prepared prior to high pressure communitation, i.e., compositions including resin, a conductive pigment, and water in effective proportions for donor members. The precursor composition ingredients may be mixed together, or, more desirably, simple homogenization, e.g., with a rotor stator mixer.

[0016] In preferred embodiments the resin is a phenolic resin, preferably a waterborne phenolic resin, such as Durez 33304 (Oxychem Chemical Corporation) or BB 317 (Neste Chemical). "Phenolic resin" includes art-recognized compositions falling under this classification, e.g., phenol-formaldehyde resoles. Resoles are phenolic resins made by combining an excess of formaldehyde with phenolic compounds and are typically alkaline, imparting the potential for such resins to be waterborne. Typical novolac resins, by contrast, does not have an excess of formaldehyde and is acidic, making it difficult to be carried in a water based vehicle. The solids loading of the present coating dispersion is from about 25% to 30% (% by weight) in water. The solids component preferably contains about 50% to 75% waterborne phenolic resin, preferably about 55%-65%; about 20% to 40% graphite particles, preferably about 26%-30%; and about 5% to 20% of conductive carbon black, preferably about 9%-13%.

[0017] The pigment may be, e.g., carbon black, graphite, magnetite, nigrosine, or combinations of pigments. Preferably both carbon black and graphite are used. The solids loading of the coating dispersion is from about 25% to 30% in water, with the solids component containing about 20% to 40 % of graphite particles, preferably 26-30 wt%; and about 5% to 20% conductive carbon black such as Conductex 975 (Columbia Chemical Corp.), preferably 9%-13%. Exemplary graphite particles include Rollit DS-1010 (Timcal), CSPE (Nippon Graphite), and M890 (Asbury Graphite)

[0018] The high pressure communitation may be carried out using a device such as a piston homogenizer, e.g., one or two stage homogenizers. High pressure communitation devices such as piston homogenizers or a Microfluidizer® share a similar mechanism of particle breakdown. Both drive a fluid at high pressure through a small orifice, the homogenizer valve in the former, and

the interaction chamber in the latter. The resulting shear and cavitation breaks down agglomerates and disperses particles in the fluid. With a piston homogenizer, a second stage valve can also be employed to reduce the fluid viscosity that often increases after the first stage disperses the colloidal pigments. While both types of devices are applicable, a piston homogenizer is more readily operated and serviced. These devices also offer much faster throughput than media mills.

[0019] Various process options are available with a piston homogenizer; the principle parameters are pressure, number of passes through the homogenizer valve, and the valve configuration itself. The most important variable is pressure, good results may be obtained with a pressure of about 1000 to 1500 bar, preferably 1100 to 1200 bar. Near equivalent results may be achieved by two passes through the homogenizer at 800 bar, but this appears to be less efficient.

[0020] The coating compositions of the invention may be used to provide improved toner donor member coatings as well as overcoatings for electrophotographic development sub-system donor members, and may also be used to protect electrodes on a donor member from wear, and/or to prevent electrical shorting with a developer material's conductive carrier beads. Specific examples of coatings of the invention, and their application to developer members, are detailed below in the Examples.

[0021] One aspect of the present invention includes apparatus for applying toner particles on a charge-retentive surface to develop an electrostatic latent image on the charge-retentive surface. A donor member such as a roll and rotatable in a process direction, conveys toner particles on a surface thereof from a supply of toner particles to a development zone close to the charge-retentive surface.

[0022] Another embodiment of the present invention includes an electrostatographic printing apparatus featuring a charge-retentive surface which is adapted to retain an electrostatic latent image, and a supply of toner particles. A donor member such as a roll rotates and conveys toner particles on its surface from the toner supply to a development zone close to the charge-retentive surface.

[0023] Since the art of electrophotographic printing is well known, the various processing stations employed in a printing machine will be shown schematically and their operation described briefly.

[0024] FIG. 3 shows the basic elements of a typical electrophotographic printer 100. A document to be reproduced is placed on a platen 102 where it is illuminated by light source 104. The exposed document is imaged onto the photoreceptor 106 by a system of mirrors as shown. The optical image selectively discharges the surface of photoreceptor 106 in an image configuration, resulting in an electrostatic latent image of the original document recorded on the drum 106 at imaging station 108. The photoreceptor drum 106 rotates so that the la-

tent image is moved towards development unit 110, where the electrostatic latent image is developed, by the application of toner particles.

[0025] The main body of development unit 110 is encased in a developer housing 150, which accommodates a cylindrical toner cartridge 152. Toner cartridge 152 typically includes a rotatable agitator 154, which engages a rotating driver to keep the toner well-mixed and aerated so that toner 156 will flow easily and not coagulate. Opening 158 allows for removal of toner. Developer roll 160 comprises a stationary magnet assembly 162 enclosed within a rotating cylindrical sleeve 164. Stationary magnet assembly 162 includes a plurality of permanent magnets, with each magnet extending substantially the length of the developer roll 160, and arranged as known in the art such that the toner particles adhere to the surface of outer sleeve 164. The rotation of outer sleeve 164 causes the toner particles to move around the developer roll 160 to a development zone adjacent the surface of the photoreceptor 106.

[0026] Although developer roll 160 is shown as having a rigid sleeve 164, the "donor member" can be any member for conveying the toner particles to the development zone, such as a flexible belt. The ends of the developer roll 160 are intended to be ends of the cylinder formed by a rigid developer roll 160; if the donor member is in the form of a flexible belt, the ends are intended to be the lateral edges of the belt. Metering blade 168 smooths out the layer of toner particles on sleeve 164 so that the layer will be uniform when it is brought into contact with photoreceptor 106, and also to charge the toner. Metering blade 168 features a compressible pad 170 is anchored in position by a blade holder 172.

[0027] The developed image is transferred at the transfer station 114 from photoreceptor 106 to a sheet of paper delivered from a paper supply system into contact with the drum 106 in synchronous relation to the image thereon. A transfer corotron 118 provides an electric field to assist in the transfer of the toner particles to the copy sheet. Individual sheets are introduced into the system from a stack of supply paper 126 by a friction feeder 128. A separated sheet is fed, in the embodiment shown, by further sets of nip roll pairs through a path indicated by the broken line. The image is subsequently fused onto the paper at fusing station 120 and the finished copy is deposited in hopper 122. Residual toner is removed from the photoreceptor drum 106 by cleaning blade 130, and then the surface is recharged by charging corotron 132, for imagewise discharging of the photoreceptor in a subsequent cycle.

[0028] When a thin layer of uniformly-charged particles is obtained, the developer roll advances the toner particles to a development zone adjacent the surface of the photoreceptor. In the development zone, the toner particles adhering magnetically to the developer roll are attracted electrostatically to the latent image recorded on the photoreceptor. AC and DC biases may be applied to the donor roll to enhance and control this process.

[0029] The invention is further illustrated by the following examples, which should not be construed as further limiting the subject invention.

EXAMPLE 1

[0030] In a 1L polyethylene container 27.9g of graphite (Nippon graphite CSPE), 14.2g carbon black (Columbia, Conductex 975), 106g Durez 33304 phenolic resin (Occidental Chemical Corp.) and 140ml DI water were combined to make a donor member precursor composition. The precursor composition was homogenized with a 2" rotor stator mixer at about 12000 rpm for one minute, stopped for five minutes, processed for two minutes, stopped for five, and then processed for another two minutes, while maintaining the vessel in an ice bath.

EXAMPLE 2

[0031] The mixture of Example 1 was passed through a single stage piston homogenizer (Niro Soavi Panda) at a pressure of greater than 800 bar. The coating mixture was then placed in a Tsukiagi cup coater and coated onto an 18mm diameter aluminum sleeve at a withdrawal rate of about 380 mm/min. The coated rod was allowed to air dry for about 40 minutes and then placed in an oven at 80°C for 30 min. to speed the removal of the water. The temperature was then slowly raised to about 140°C for 40 minutes and then raised to 150°C for another 30 minutes to cure the resin. The coating of the sleeve was complete and fairly uniform with some number of surface defects such as pinholes. Pinholes arise from some air entrainment in the coating dispersion and they will cause print defects; however these can be eliminated by one or a combination of two approaches: use of a recirculating reservoir for the diptank (rather than the static cup coating technique), or the optimization of the resin, e.g., substitution with other resins which are less prone to producing this type of defect, e.g., Neste BB317 resin.

EXAMPLE 3

[0032] To illustrate the differences in the coating compositions of the present invention in light of prior art methods, e.g., to illustrate that media mills entrain too much air in these formulations to provide a useful coating dispersion, 16g of the mixture of Example 1 was combined with 140g of 0.125" diameter steel shot in a 120ml glass bottle. The bottle was tightly sealed and then milled for 18h at 300rpm. The thick meringue-like product was removed from the milling vessel and placed in the Tsukiagi cup coater. An attempt to coat the 31cm long aluminum sleeve at 380 mm/min resulted in a very poor streaky coating on the first 3-4cm no deposition of material at all on the remaining length of the sleeve.

Claims

1. A method of coating a donor member with a water-borne coating, comprising
 - (a) combining a resin, a pigment, and water in proportions effective to provide a donor member coating precursor composition;
 - (b) subjecting said donor member coating precursor composition to high pressure comminution to provide a donor member conductive coating composition; and
 - (c) coating said donor member coating composition onto a substrate.
2. A method according to claim 1, wherein said coating step comprises coating said donor member conductive coating composition onto said substrate to a thickness of from about 3 to about 50μ.
3. A method of preparing a donor member coating, comprising:
 - (a) combining a resin, a pigment, and water in proportions effective to provide a donor member precursor composition; and
 - (b) subjecting said donor member coating precursor composition to high pressure comminution to provide a donor member conductive coating composition.
4. A method according to claim 1, 2 or 3, wherein said combining step comprises dispersing said pigment into said donor member coating composition without resulting in substantial foaming or air entrainment.
5. A method according to any one of the preceding claims, wherein said resin is a phenolic resin.
6. A method according to claim 4, wherein said phenolic resin is a waterborne phenolic resin.
7. A method according to any one of the preceding claims, wherein said pigment is a conductive pigment.
8. A method according to any one of the preceding claims, wherein said pigment is carbon black or graphite or magnetite or nigrosine or combinations thereof.

FIG. 1

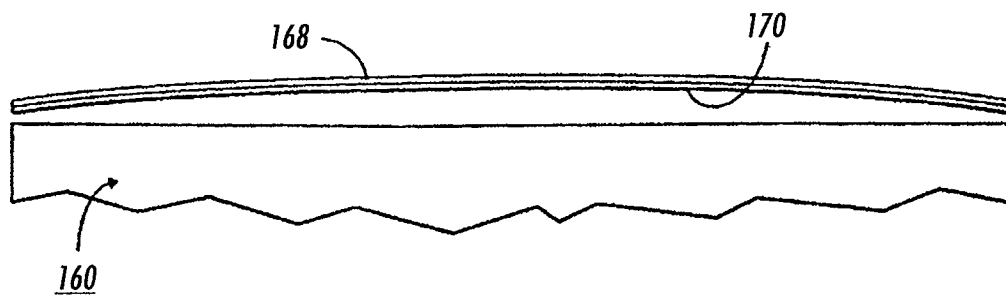
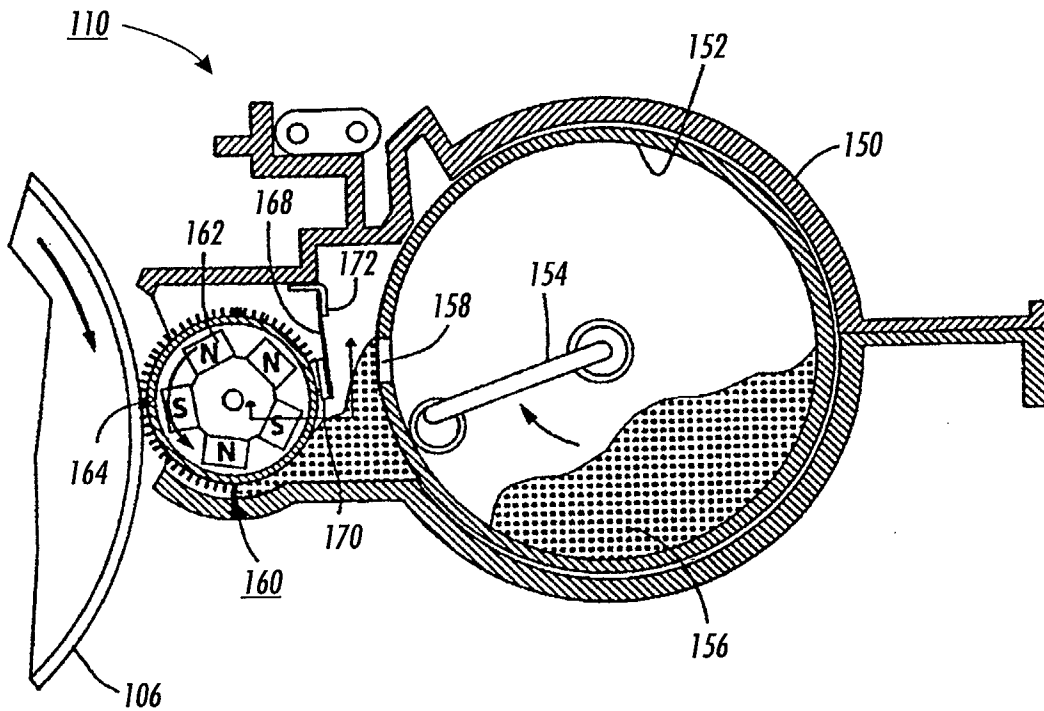


FIG. 2

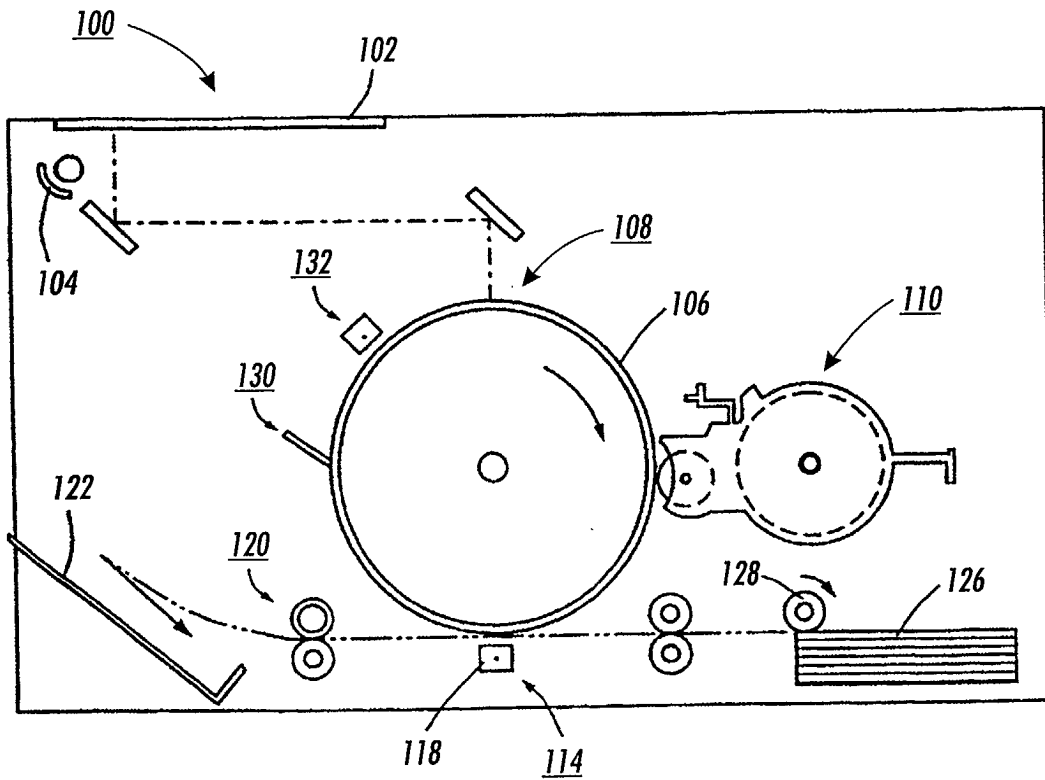


FIG. 3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 25 3713

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 24, 11 May 2001 (2001-05-11) -& JP 2001 201934 A (FUJI XEROX CO LTD), 27 July 2001 (2001-07-27) * abstract, paragraphs 15,20,33,34 *	1,2	G03G15/08
X	EP 0 933 384 A (NAT STARCH CHEM INVEST) 4 August 1999 (1999-08-04)	3-8	
Y	* paragraphs '0006!', '0014!', '0015!', '0022! *	1,2	
X	US 5 071 904 A (MARTIN ROXALANA L ET AL) 10 December 1991 (1991-12-10) * column 2-6 * * column 10, line 18-36 *	3-8	
X	GB 385 344 A (CHEMISCHE UND SEIFENFABRIK R 3 B) 29 December 1932 (1932-12-29) * page 1, line 12-41 *		
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			G03G
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 18 November 2002	Examiner de Vries, A.
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 25 3713

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-11-2002

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2001201934 A	27-07-2001	NONE	
EP 0933384 A	04-08-1999	EP 0933384 A1	04-08-1999
		JP 11286504 A	19-10-1999
US 5071904 A	10-12-1991	AT 117709 T	15-02-1995
		AU 612933 B2	18-07-1991
		AU 5479990 A	24-01-1991
		BR 9002495 A	12-11-1991
		CA 2016097 A1	30-11-1990
		CN 1047685 A	12-12-1990
		DE 69016264 D1	09-03-1995
		DE 69016264 T2	10-08-1995
		DK 401565 T3	27-02-1995
		EP 0401565 A1	12-12-1990
		ES 2070204 T3	01-06-1995
		JP 2620058 B2	11-06-1997
		JP 8048913 A	20-02-1996
		JP 2634481 B2	23-07-1997
		JP 3012461 A	21-01-1991
		KR 9310435 B1	25-10-1993
		NZ 233481 A	28-04-1992
		ZA 9003370 A	29-01-1992
GB 385344 A	29-12-1932	DE 647477 C	05-07-1937
		GB 386018 A	12-01-1933
		US 1997366 A	09-04-1935