



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
17.12.2003 Bulletin 2003/51

(51) Int Cl.7: **D01G 15/46**

(21) Application number: **03012991.0**

(22) Date of filing: **09.06.2003**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**
Designated Extension States:
AL LT LV MK

(72) Inventor: **Bacchio, Giovanni**
13053 Mongrando (Biella) (IT)

(74) Representative: **Quinterno, Giuseppe et al**
Jacobacci & Partners S.p.A.,
Corso Regio Parco, 27
10152 Torino (IT)

(30) Priority: **10.06.2002 IT TO20020485**

(71) Applicant: **Fincarde S.p.A.**
13900 Biella (IT)

(54) **A carding machine for preparing randomized webs for non-woven fabric**

(57) A carding machine for preparing randomized webs for non-woven fabrics includes a final swift (1), at least two combing cylinders (2a, 2b), a randomiser cylinder (3) which releases by condensing a web of randomized fibres coming from each combing cylinder (2a, 2b), a doffer cylinder (4) which takes a randomized web from each randomiser cylinder (3), a final, perforated conveyor belt (6) which supplies a homogenization unit with randomized webs arranged one on top of the other coming from each doffer cylinder (4). Intermediate conveyor means (8, 9) are provided for conveying to the final conveyor (6) the web leaving the doffer cylinder or cylinders (4) which act on the webs coming from the combing cylinders (2b) arranged at greater heights than

the lowest combing cylinder (2a). A plurality of finned cylinders, each driven by a variable-speed motor, control the web along its path between each doffer cylinder (4) and the final conveyor (6). The intermediate conveyor means include a pair of continuous conveyor belts (8, 9), the active portions of which are arranged one above the other and adhering to each other, the lower belt (8) being perforated. The cylinder (8a), on which the lower, perforated belt (8) is wound upstream, is arranged adjacent the respective doffer cylinder (4), whereby the randomized web leaving the doffer cylinder (4) is delivered directly between the two conveyor belts (8, 9). An oblique-finned cylinder (10) acts on the upper surface of the web along its path between the doffer cylinder (4) and the conveyor belts (8, 9).

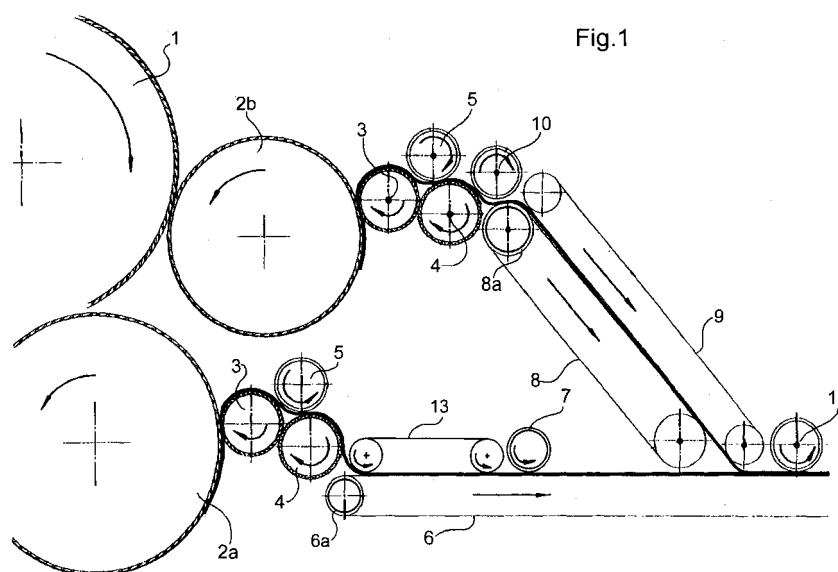


Fig. 1

Description

[0001] The present invention relates to a carding machine for preparing randomized webs for non-woven fabric.

[0002] In particular, the invention relates to a carding machine of a type used in the wool industry and which includes:

- a final swift,
- at least two combing cylinders arranged at different heights, each operable to take from the said final swift a web of fibres predominantly orientated along a direction parallel to the direction of advance of the web,
- a randomiser cylinder which releases by condensing a thicker web of randomized fibres taken from each combing cylinder,
- a doffer cylinder which takes a randomized web from each randomiser cylinder,
- a final, perforated conveyor belt which supplies a homogenization unit with randomized webs coming from each doffer cylinder and arranged one on top of the other,
- intermediate conveyor means for conveying to the final conveyor belt the web leaving the doffer cylinder or cylinders which process the webs coming from the combing cylinders positioned at greater heights than the lowest combing cylinder,
- a plurality of finned cylinder, each driven by a variable-speed motor, which control the web along its path between a doffer cylinder and the final conveyor belt.

[0003] A carding machine of the type described above is known from the European Patent Application 1 046 731 by the same applicant.

[0004] In the carding machine with two combing cylinders, described with reference to Figure 2 of the aforesaid document, as far as the upper combing cylinder (2) is concerned, the aforesaid intermediate conveyor means include:

- a main conveyor belt (5) with a horizontal active portion (5a) and an inclined active portion (5b),
- an auxiliary conveyor belt (12) having an active portion of which only the central section is adjacent to the inclined portion (5b) of the main conveyor belt (5) under the action of an adjustable cylinder (13).

[0005] The upper randomized web is released by the doffer cylinder (4) onto the active portion (5a) of the main conveyor belt and passes in succession through the two adjacent portions, which are inclined to each other, of the main and auxiliary conveyor belts before being deposited on the final conveyor belt (15).

[0006] The web carried by the horizontal active portion (5a) of the main conveyor belt (5) is controlled, at

the beginning and at the end of this horizontal portion; by two finned control cylinders (6, 11), the first of which (6) is adjacent the doffer (4) and is associated with a flap (9) intended to control the abrupt difference in pressure which occurs when the web is released by the doffer (4)

[0007] Although the known arrangement described above constitutes substantial progress compared to the prior art, it does not fully solve the problem of maintaining at high speed the high degree of randomization of the web released by the doffer cylinder, while the web is being conveyed from the doffer cylinder to the final conveyor belt which leads to a cohesion-inducing station.

[0008] In fact, the randomized web has no cohesion and so, in those sections where the surface is free and in those sections where it changes in inclination, it tends to return from the randomized configuration back to the initial configuration it had when leaving the combing cylinder, in which configuration the fibres were all parallel to the direction of advance.

[0009] This phenomenon of loss of randomization also occurs, though to a small extent, with the carding machine according to the aforementioned document, in which the surface of the web is free between the two finned control cylinders 4, 11 arranged at either end of the horizontal active portion and undergoes a considerable change in inclination when passing from this horizontal active portion to the inclined active portion of the main conveyor belt.

[0010] In order to eliminate the above problem, the present invention provides a carding machine for preparing randomized webs for non-woven fabrics having the characteristics stated in Claim 1.

[0011] Further characteristics are claimed in the subsequent Claims.

[0012] The invention will now be described with reference to the appended drawings, provided purely by way of non-limitative example, in which:

Figure 1 illustrates a carding machine with two combing cylinders according to the invention, Figure 2 shows a variant of the machine of Figure 1, and

Figure 3 shows a carding machine with three combing cylinders.

[0013] With reference to Figure 1, the final swift of a carding machine, indicated 1, is rotatable clockwise, while two output combing cylinders, indicated 2a and 2b, are arranged at different heights and are both rotatable anti-clockwise.

[0014] The lower combing cylinder 2a takes a lower web, constituted by fibres orientated parallel to the direction of advance, from the cylinder 1 in a known manner.

[0015] In a known manner, a randomiser cylinder 3 rotating clockwise takes a first web of randomized fibres, that is, fibres distributed according to a statistically ran-

dom pattern, from the combing cylinder 2a.

[0016] The cylinder 3 is doffed, in a known manner, by a doffer cylinder 4 rotating clockwise.

[0017] The conveying of the randomized fibres from the randomiser cylinder 3 to the doffer cylinder 4 is controlled by a control cylinder 5 which rotates anti-clockwise and is provided with oblique circumferential fins, like the cylinder indicated B in Figures 7 and 8 and described with reference to these figures in the aforementioned European Patent Application 1 046 731.

[0018] This set of oblique fins has proved to be particularly effective in conveying and controlling the web of randomized fibres and in conducting the air flows produced by the cylinders 3 and 4.

[0019] The restraining and compressing action exerted on the fibres by the cylinder 5 prevents the web from being deformed and stretched.

[0020] The web leaving the doffer 4 is deposited on a perforated conveyor belt 6 which conveys it to a web homogenization unit, which is not shown.

[0021] The active portion of the final perforated conveyor belt 6 has an initial section over which is arranged the adjacent active portion of a conveyor belt 13, which moves at the same speed as the belt 6. A support cylinder 6a upstream of the perforated belt 6 has radial fins and the doffer 4 delivers the lower randomized web between the belts 6 and 13.

[0022] An oblique-finned cylinder 7 acts on the active portion of the conveyor belt 6 immediately downstream of the conveyor belt 13.

[0023] This arrangement ensures the stability of the randomization of the lower web during the initial path thereof on the belt 6.

[0024] In the same way as described above with respect to the lower combing cylinder 2a, an upper randomiser cylinder 3 takes a web of randomized fibres from the upper combing cylinder 2b and is doffed by an upper doffer cylinder 4. The conveying of the randomized web from the cylinder 3 to the cylinder 4 is controlled by an oblique-finned cylinder 5, driven by an independent, adjustable-speed motor.

[0025] The upper doffer cylinder 4 delivers the upper web between the adjacent portions of two conveyor belts 8, 9 arranged the one above the other and inclined downwards. The advance speed of these two belts 8 and 9, which clamp the web between them throughout their length, is the same as the peripheral speed of the doffer cylinder 4.

[0026] The upper belt 9 is airtight, while the lower belt 8 is perforated. The cylinder 8a, which supports the perforated belt 8 upstream, that is, adjacent to the doffer cylinder 4, is provided with radial circumferential fins like the cylinder indicated A in Figures 3 and 4 of the aforementioned European Patent Application 1 046 731.

[0027] An oblique-finned control cylinder 10 acts on the top surface of the web along the path thereof from the doffer cylinder 4 to the conveyor belts 8, 9, thereby facilitating the insertion of the web between these belts.

[0028] The upper randomized web is conveyed by the two conveyor belts 8 and 9 without any loss of randomization, thanks to the perforation of the lower belt 8 and to the set of radial fins of the cylinder 8a, which enable discharge of the air turbulence produced by the cylinders rotating at high speed.

[0029] On leaving the conveyor belts 8 and 9, the upper randomized web is deposited on the lower randomized web carried by the final conveyor belt 6 downstream of the oblique-finned cylinder 7, after which an oblique-finned cylinder 11 acts on the two webs arranged one on top of the other in order to prevent any loss of randomization of the two webs before these enter the homogenization unit.

[0030] It has been experimentally confirmed that a carding machine having the characteristics described above enables to produce a non-woven fabric which is isotropic once it has been homogenized, that is, a fabric having a longitudinal strength (that is to say, in the direction of advance of the final conveyor 6) is equal or close to the transverse strength thereof.

[0031] The carding machine according to the variant illustrated in Figure 2 differs from that of Figure 1 in that two randomiser cylinders 3 and 3a are arranged in series between the upper combing cylinder 2b and the upper doffer cylinder 4 instead of the single randomiser cylinder 3 shown in Figure 1.

[0032] In this case, the randomization of the upper web is performed in two successive stages instead of in one stage only.

[0033] Since the second randomiser 3a rotates in the opposite sense to that of the first randomiser 3, the web is dragged on its top surface by the first randomiser cylinder 3 and on its bottom surface by the second randomiser cylinder 3a, whereby it moves along a sinusoidal path over these cylinders. Therefore, an upper oblique-finned control cylinder 5a is used to control the path of the web over the cylinder 3 and a second oblique-finned control cylinder 12 is used to control the path of the web over the randomiser cylinder 3a.

[0034] The perforated lower conveyor belt 8 has a free first active section, that is, a section which is not affected by the active portion of the belt 9, and the doffer cylinder 4 is arranged over this free section.

[0035] In the carding machine according to the variant illustrated in Figure 3, three combing cylinders 2a, 2b and 2c are used.

[0036] The intermediate combing cylinder 2b cooperates with a randomiser cylinder 3 and the intermediate randomized web leaving the randomiser 3 is delivered by a doffer cylinder 4, with the assistance of an oblique-finned control cylinder 10, between two inclined conveyor belts 8 and 9 which deposit it on the lower randomized web carried by the final conveyor belt 6.

[0037] The upper combing cylinder 2c cooperates with a randomiser cylinder 3 and the randomized web leaving the randomiser 3 is fed to a doffer cylinder 4. An oblique-finned control cylinder 5 controls the passage

of the web from the cylinder 3 to the cylinder 4. The doffer cylinder 4 delivers the upper randomized web between two conveyor belts 14, 15 having the same characteristics as the conveyor belts 8 and 9 described above with reference to Figure 2.

[0038] The two conveyor belts 14 and 15 convey the upper randomized web to the doffer 4 associated with the intermediate web, produced by the randomiser cylinder 3 in cooperation with the intermediate combing cylinder 2b. The doffer cylinder 4 associated with the intermediate combing cylinder 2b therefore delivers two webs arranged one on top of the other between the conveyor belts 8 and 9, the webs being deposited by the belts on the lower randomized web conveyed by the final conveyor belt 6.

[0039] The assembly constituted by the upper combing cylinder 2b and the elements 3, 4, 5, 10, 15 associated therewith is advantageously carried by a support structure which can be moved between the active position shown in Figure 3 and a rest position in which only the combing cylinder 2a and 2b are operational.

Claims

1. A carding machine for preparing randomized webs for non-woven fabrics, which includes:

- a final swift (1),
- at least two combing cylinders (2a, 2b) arranged at different heights, each operable to take from the final swift (1) a web of fibres which are predominantly orientated in a direction parallel to the direction of advance of the web,
- a randomiser cylinder (3) which releases by condensing a thicker web of randomized fibres taken from each combing cylinder (2a, 2b),
- a doffer cylinder (4) which takes a randomized web from each randomiser cylinder (3),
- a final perforated conveyor belt (6) which supplies a homogenization unit with the webs coming from each doffer cylinder (4) to,
- intermediate conveyor means (8, 9) for conveying to the final conveyer (6) the webs leaving the doffer cylinder or cylinders (4) which act on the webs coming from the combing cylinders (2a, 2b) which are arranged at greater heights than the lowest combing cylinder (2a),
- a plurality of finned cylinders (7, 10, 11), which are driven each by a variable-speed motor and control the web along its path between each doffer cylinder (4) and the final conveyor belt (6),

characterised in that:

- the intermediate conveyor means include a pair of continuous conveyor belts (8, 9) the active

portions of which are one above the other and adjacent,

- the upper belt (9) is airtight while the lower belt (8) is perforated,
- the cylinder (8a) on which the lower, perforated belt (8) is wound upstream is arranged adjacent the respective doffer cylinder (4), whereby the randomized web leaving this doffer (4) is delivered directly between the two conveyor belts (8, 9).

2. A carding machine according to Claim 1, **characterised in that** it also includes an oblique-finned cylinder (10) which acts on the upper surface of the web travelling from the doffer cylinder (4) to the two conveyor belts (8, 9).

3. A carding machine according to Claims 1 or 2, **characterised in that** the cylinder (8a) over which the lower, perforated belt (8) is wound is a finned cylinder, the fins of which extend radially with respect to its axis of rotation.

4. A carding machine according to any of the preceding Claims, **characterised in that** it includes two combing cylinders (2a, 2b) and **in that** the pair of continuous conveyor belts (8, 9) take the randomized web from the doffer cylinder (4) associated with the upper combing cylinder (2b) and deposit it directly on the final conveyor belt (6).

5. A carding machine according to Claims 1 and 4, **characterised in that** a second randomiser cylinder (3a) is arranged between the randomiser cylinder (3) cooperating with the upper combing cylinder (2b) and the doffer cylinder (4).

6. A carding machine according to Claim 1, **characterised in that:**

- the carding machine includes three combing cylinders (2a, 2b, 2c),
- the intermediate conveyor means include two pairs (14, 15; 8, 9) of continuous conveyor belts,
- a first pair of continuous conveyor belts (14, 15) convey a first randomized web leaving the doffer cylinder (4) associated with the upper combing cylinder (2c) to the doffer cylinder (4) associated with the intermediate combing cylinder (2b), whereby this first randomized web is deposited on top of the second randomized web coming from the intermediate combing cylinder (2b),
- a second pair of conveyor belts (8, 9) convey the aforesaid randomized webs arranged one on top of the other from the doffer cylinder (4) associated with the intermediate combing cyl-

inder (2b) to the final perforated conveyor belt (6), where these randomized webs are deposited on top of the randomized web coming from the lower combing cylinder (2a).

5

7. A carding machine according to any of the preceding Claims, **characterised in that** an oblique-finned cylinder (5) controls the web along its path from a randomiser cylinder (3) to a doffer cylinder (4). 10
8. A carding machine according to any of the preceding Claims, **characterised in that** an oblique-finned cylinder (7, 11) controls each web once this latter has been deposited on the final conveyor belt (6). 15
9. A carding machine according to Claim 5, **characterised in that** two oblique-finned cylinder (5a, 12) control the web along its path over the randomiser cylinders (3, 3a). 20
10. A carding machine according to any of the preceding Claims, **characterised in that:** 25
- the final, perforated conveyor belt (6) is supported at the end facing the carding machine by a cylinder (6a) with radial fins,
 - a continuous conveyor belt (13) is arranged over the initial section of the perforated final conveyor belt (6), the active portion of the conveyor belt (13) being arranged over the active portion of the final conveyor belt (6), 30
 - the web leaving the doffer cylinder (4) associated with the lower combing cylinder (2a) is delivered between the active portions of the aforesaid two conveyor belts (6, 13) and is controlled, once it leaves these two belts, by an oblique-finned cylinder (7). 35


40


45


50

55

Fig.1

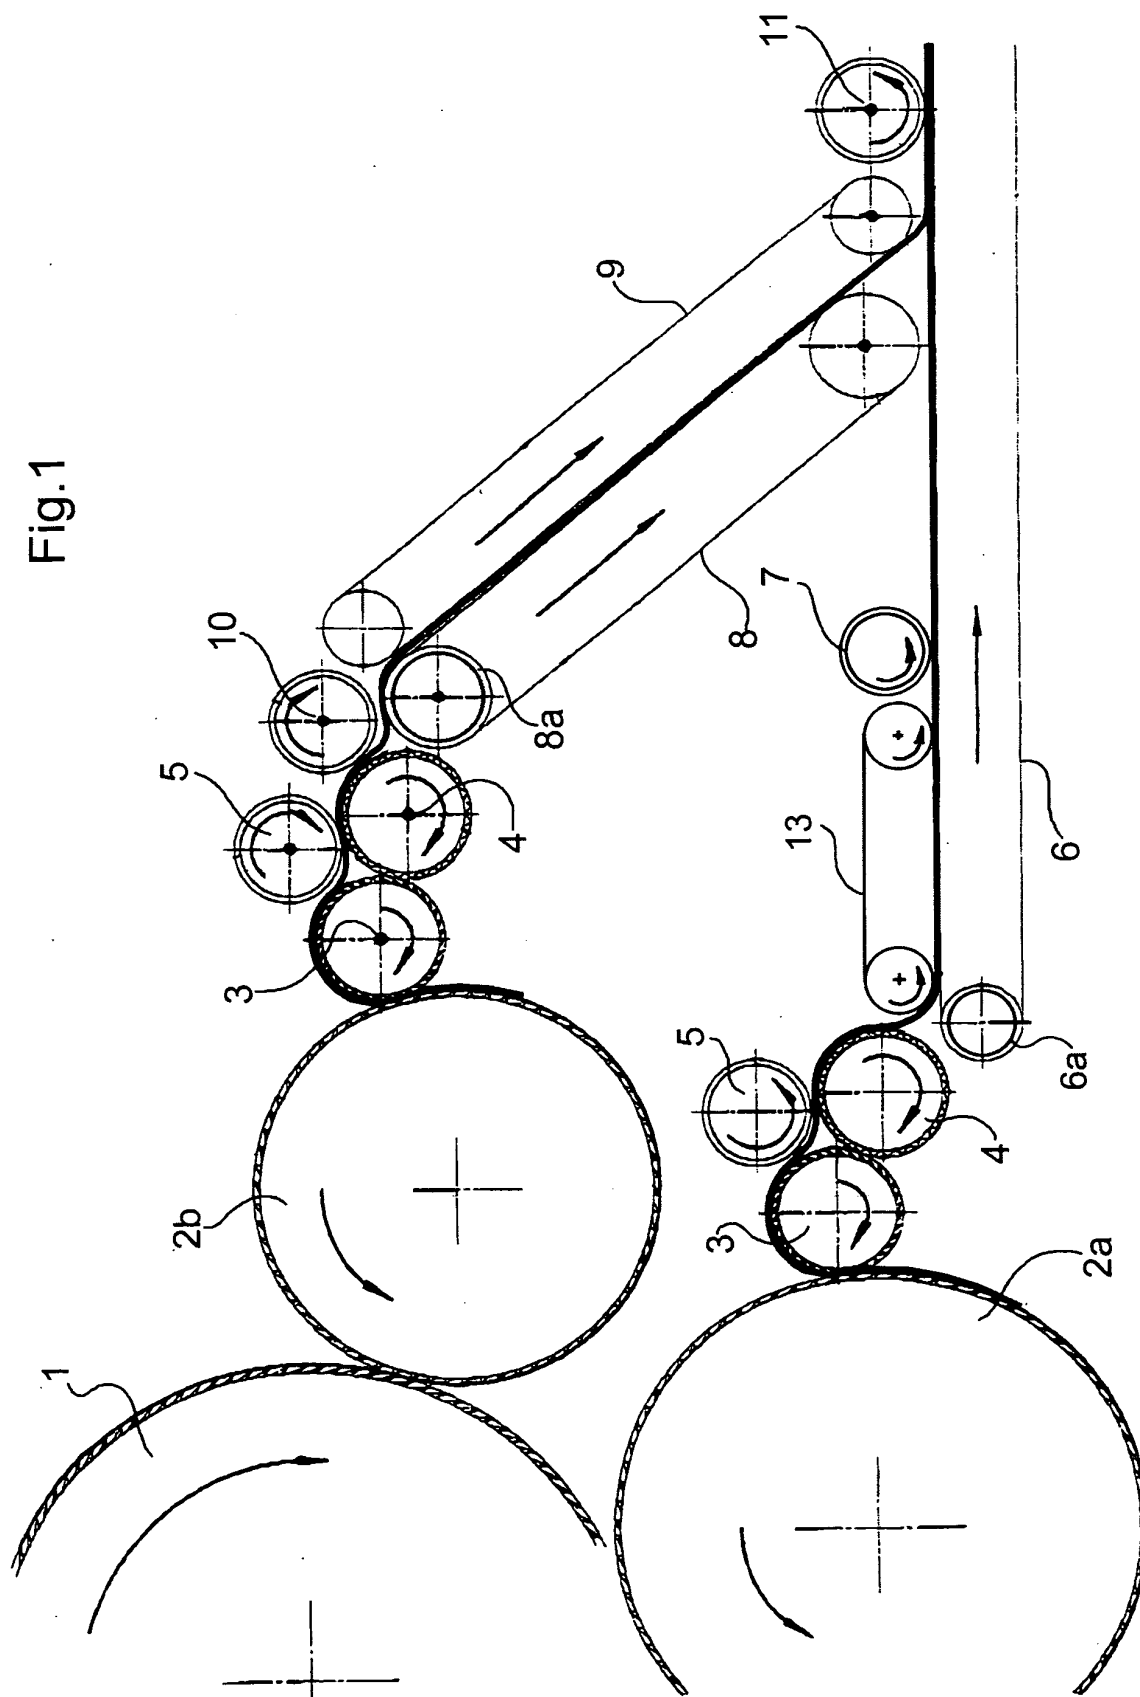

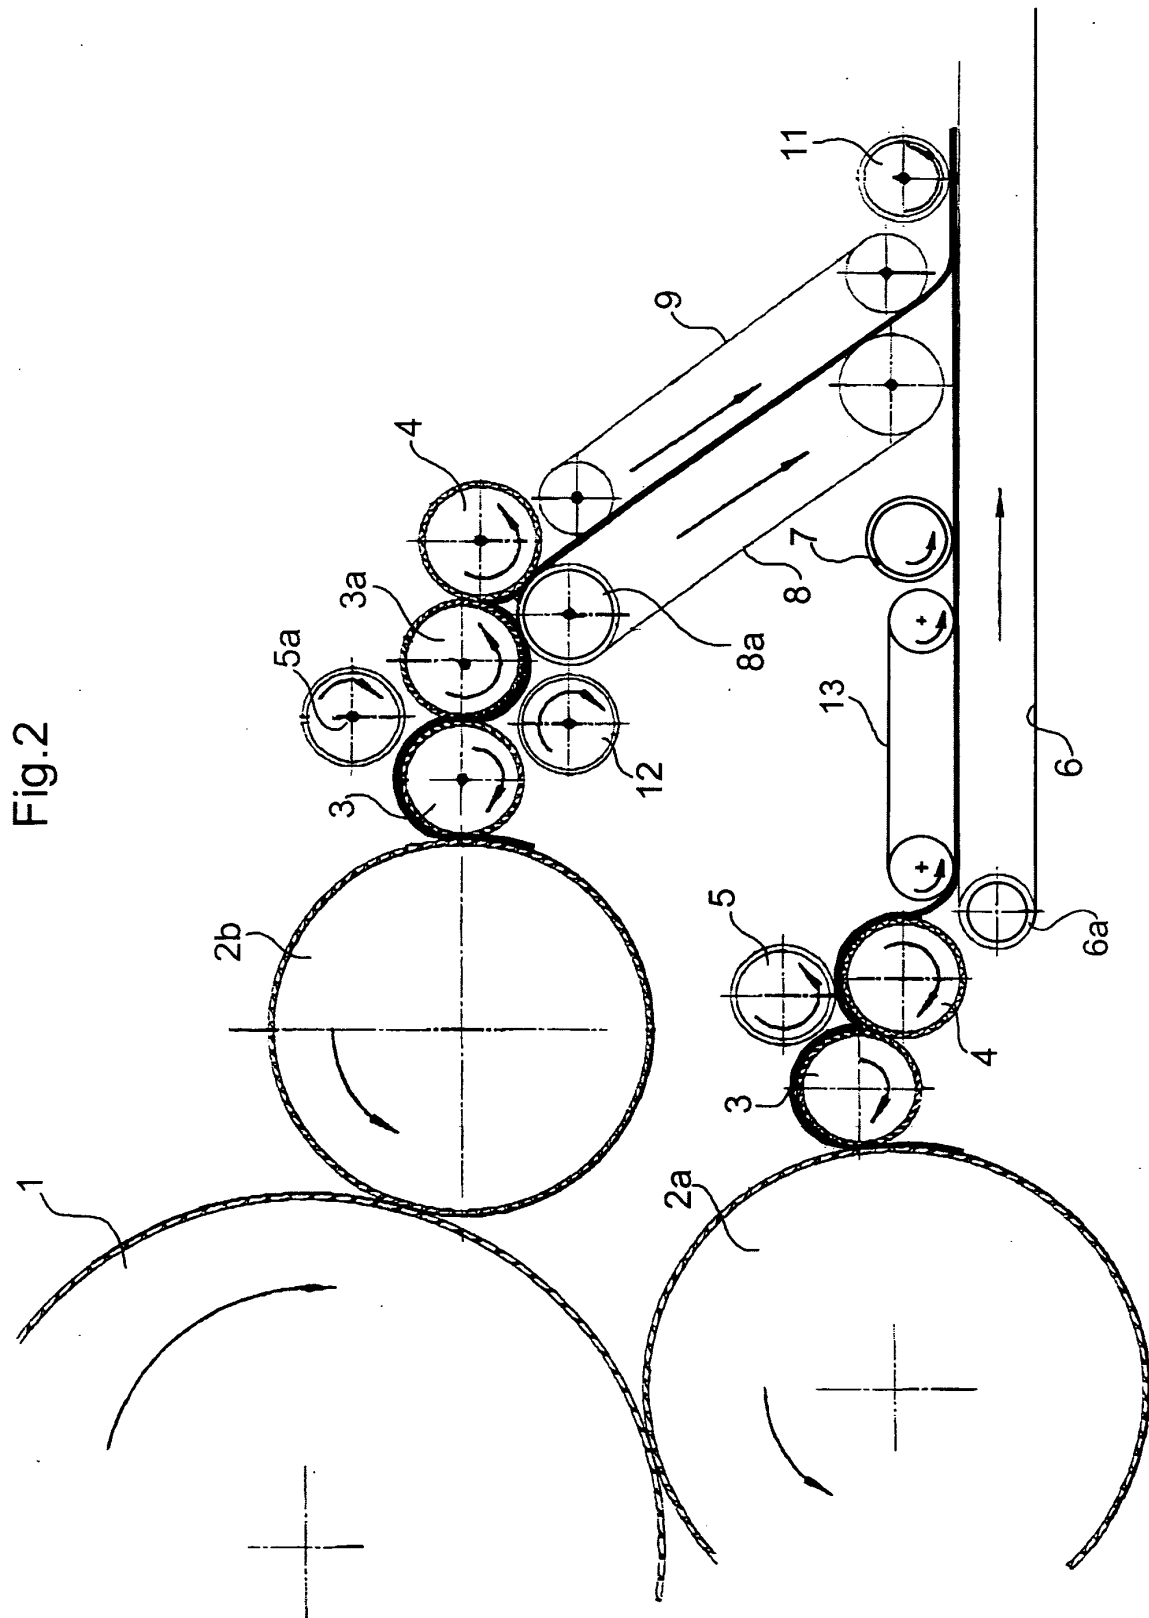

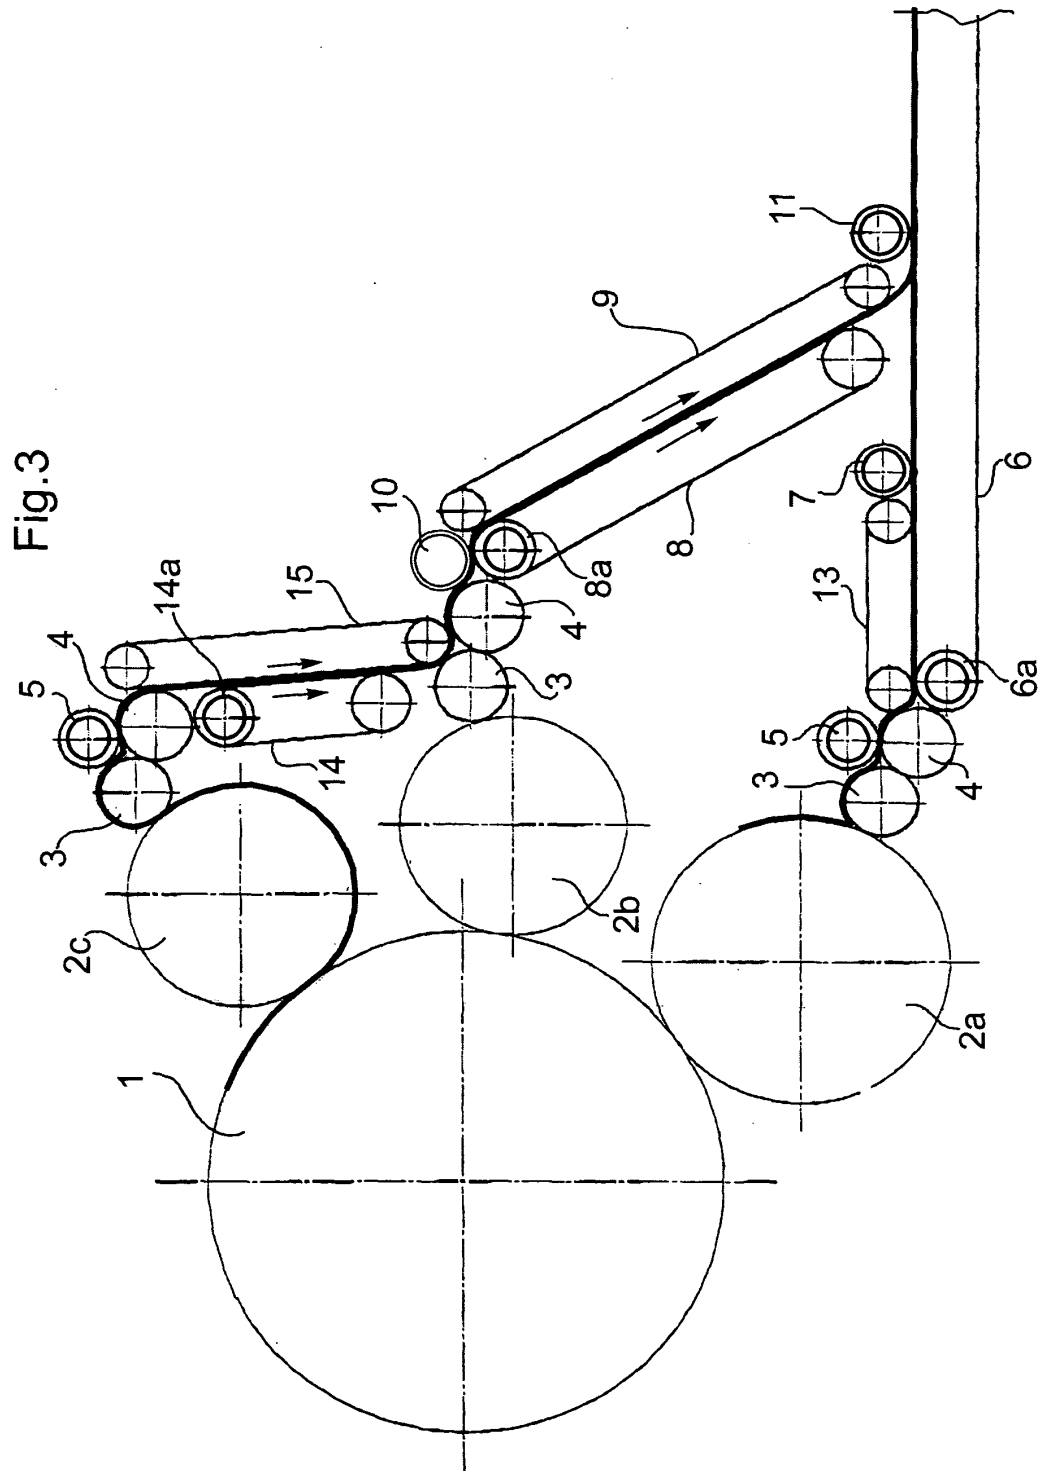



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 01 2991

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
D,A	EP 1 046 731 A (F O R I N G G R A Z I A N O S P A) 25 October 2000 (2000-10-25) * claim 1; figure 1 *	1-3	D01G15/46
A	EP 1 076 122 A (OCTIR IND) 14 February 2001 (2001-02-14) * claim 1; figure 1 *	1	
A	EP 0 484 812 A (MA JERSEY S P A FA) 13 May 1992 (1992-05-13) * claim 1; figure 3 *	1,5	
A	US 6 050 469 A (DUPONT JEAN-LOUIS ET AL) 18 April 2000 (2000-04-18) * claim 1; figure 1 *	1	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			D01G D04H
Place of search	Date of completion of the search	Examiner	
THE HAGUE	5 September 2003	D'Souza, J	
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.02 (PdACon)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 01 2991

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-09-2003

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 1046731	A	25-10-2000	IT	T0990311 A1	20-10-2000
			EP	1046731 A1	25-10-2000
EP 1076122	A	14-02-2001	IT	MI991620 A1	22-01-2001
			EP	1076122 A2	14-02-2001
EP 0484812	A	13-05-1992	IT	1241899 B	01-02-1994
			AT	135758 T	15-04-1996
			DE	69118110 D1	25-04-1996
			EP	0484812 A1	13-05-1992
US 6050469	A	18-04-2000	FR	2732042 A1	27-09-1996
			AT	161591 T	15-01-1998
			DE	69600129 D1	05-02-1998
			DE	69600129 T2	04-06-1998
			DE	733729 T1	05-06-1997
			DK	733729 T3	19-01-1998
			EP	0733729 A1	25-09-1996
			JP	8260375 A	08-10-1996