

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 375 636 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

02.01.2004 Bulletin 2004/01

(51) Int Cl.7: **C11D 17/00**, C11D 3/20,
C11D 3/32, C11D 3/22

(21) Application number: **03076738.8**

(22) Date of filing: **04.06.2003**

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**

Designated Extension States:

AL LT LV MK

(30) Priority: **14.06.2002 EP 02077444**

(71) Applicants:

- **UNILEVER N.V.**

3013 AL Rotterdam (NL)

Designated Contracting States:

**AT BE BG CH LI CZ DE DK EE ES FI FR GR HU
IT LU MC NL PT RO SE SK TR**

- **UNILEVER PLC**

London EC4P 4BQ (GB)

Designated Contracting States:

GB IE

(72) Inventors:

- **Appel, Peter William,**
c/o Unilever R&D Vlaardingen
3133 AT Vlaardingen (NL)
- **Van Doorn, Daniel A.,**
c/o Unilever R&D Vlaardingen
3133 AT Vlaardingen (NL)
- **Nauta, Lammert, c/o Unilever R&D Vlaardingen**
3133 AT Vlaardingen (NL)

(54) **Detergent tablets**

(57) A cleaning tablet comprising a smooth phase
wherein the smooth phase comprises:

- (a) from 25 to 90 wt% of surfactants; and
- (b) from 10 to 90 wt% of organic material having a
molecular weight of less than 500; and
- (c) from 0 to 20 wt% of water

EP 1 375 636 A1

Description

[0001] This invention relates to cleaning compositions in the form of tablets for example, for use in fabric washing or machine dishwashing.

[0002] Detergent compositions in tablet form have advantages over powdered products in that they do not require measuring and are thus easier to handle and dispense into the washload.

[0003] Tablets of a cleaning composition are generally made by compressing or compacting a quantity of the composition in particulate form.

[0004] Tablets comprising two or more separate regions have also been described. For example WO 01/42416 describes the production of multi-phase moulded bodies comprising a combination of core moulded bodies and a particulate premix. WO 00/61717 describes a detergent tablet which is characterised in that at least part of its outer surface is semi-solid. WO 00/04129 describes a multi-phase detergent tablet comprising a first phase in the form of a shaped body having at least one mould therein and a second phase in the form of a particulate solid compressed within said mould.

[0005] It is an object of the present invention to provide a cleaning tablet comprising a smooth phase, wherein said smooth phase comprises high level of surfactants and wherein said cleaning tablet has good dispersing properties of the smooth phase and wherein the smooth phase has a suitable texture (preferably between soft and hard).

[0006] Although the invention can relate to a single phase smooth tablet, according to a preferred embodiment of the present invention there is provided a cleaning tablet which has a plurality of discrete regions with differing compositions, characterised in that at least one first region of the tablet is a smooth region and at least one second region of the tablet is a solid region of compacted particulate material.

[0007] In a first aspect the invention relates to a cleaning tablet comprising a smooth phase wherein the smooth phase comprises:

- (a) from 25 to 90 wt% of surfactants; and
- (b) from 10 to 75 wt% of organic material having a molecular weight of less than 500; and
- (c) from 0 to 20 wt% of water.

[0008] Preferably the organic material is water-soluble and/or solid at ambient temperature. The organic material can for example be selected from the group of sugars or citrates, more preferably the material has a molecular weight from 50 to 150, most preferably the organic material is selected from the group of urea or water-soluble lactates and acetates.

[0009] Preferably tablets of the invention are of cylindrical shape wherein the two main surfaces (upper side and bottom side) are substantially flat.

[0010] As indicated above, tablets of the invention can be single phase tablets, which are predominantly constituted by the smooth phase as described above. However a preferred embodiment of the invention relates to a multiphase tablet wherein the smooth phase is present and additionally one or more other phases are present. Suitably these additional phases can be smooth or semi-solid or solid. Particularly suitable are solid phases composed of compacted particulate solids.

[0011] The regions of a multi-phase tablet are possibly separate layers within a tablet. However, a discrete region of a tablet could also have other forms for example one or more core(s) or insert(s). In a preferred embodiment the first region is a smooth layer and the second region is a layer of compacted particulate material. In a further advantageous embodiment the first region is a core or insert of smooth or semi-solid material embedded in the second region which is a layer of compacted particulate material.

[0012] Preferably the smooth region is a semi-solid region as defined below.

[0013] If the tablet is a single phase smooth or semi-solid tablet, then preferably the weight of this tablet will be from 5 to 100 g, more preferably from 10 to 40 g, most preferably from 15 to 35 g.

[0014] If the tablet is a multi-phase tablet comprising the smooth or semi-solid phase of the invention then preferably the smooth or semi-solid phase is present as a distinctive region preferably having a weight of from 2 to 20 grammes, more preferred from 3 to 10 grammes. Preferably the other phases together have a weight of 10 to 50 grammes, more preferred 15 to 40 grammes.

[0015] The first region of the tablet is a smooth region. For the purpose of this invention the term smooth phase refers to compositions which are on the one hand solid enough to retain their shape at ambient temperature and on the other hand smooth in appearance. Smooth textures are generally of low or no porosity and have -at normal viewing distance- the appearance of a continuous phase for example as opposed to porous and particulate appearance of a compacted particulate material.

[0016] WO99/24549 describes the use of non-compressed gelatinous portions mounted in a mold as a smooth phase. These tablets must be made with specific equipment to ensure the appropriate mold formation. Furthermore the compositions for the smooth phase as disclosed in this document contain very high levels of ingredients with a limited

functionality in the wash such as dipropylennglycolbutylether or glyceroltriacetate.

[0017] WO 00/61717 describes (in the example) the preparation of a compressed particulate tablet on top of which a (non-compressed) layer was made by pouring a mixture of nonionic and PEG followed by hardening. This formulation and its method of preparation is disadvantageous because it requires a very long hardening step in the tablet mould, during which the tablet mould cannot be used for further production, therewith significantly increasing the cost of production.

[0018] Preferably the smooth region of the tablet is a semi-solid region.

[0019] For the purpose of this invention the term semi-solid refers to compositions which are one the one hand solid enough to retain their shape at ambient temperature but which are neither completely solid.

[0020] A suitable test to check if a composition can be considered as semi-solid can be described with reference to the accompanying drawings which diagrammatically illustrate the testing of a cylindrical tablet:

Fig 1a shows a tablet when first contacted by the platens of an Instron testing machine,

Fig 1b shows the tablet at the point of failure,

Fig 2 diagrammatically illustrates the form of a graph obtained during testing.

[0021] A cylindrical tablet 10 with a diameter of 45 mm and a height of 20 mm is compressed radially between the plates 12,14 of a material testing machine until the tablet fractures. At the starting position shown in Fig 1a, the plates 12, 14 contact the tablet but do not apply force to it. Force is applied, as indicated by the arrows 16 to compress the tablet, the vertical speed of the upper plate is 25 mm/minute. The testing machine measures the applied force (F), and also the displacement (x) of the plates towards each other as the tablet is compressed. The distance (y) between the plates before force is applied, which is the diameter of the tablet, is also known. At failure, illustrated in Fig 1b the tablet cracks (eg as shown at 18) and the applied force needed to maintain the displacement drops. Measurement is discontinued when the applied force needed to maintain the displacement has dropped by 25% from its maximum value as indicated 19 in Fig 2. The displacement at failure (x_f) is indicated between Figs. 1a and 1b.

[0022] A graph of force (F) against displacement (x) has the form illustrated by Fig 2. The maximum force is the force at failure (F_f). The break energy is the area under the graph of force against displacement, up to the point of break. It is shown shaded in Fig 2 and is given by the equation:

$$E_b = \int_0^{x_f} F(x) \, dx$$

wherein E_b is the break energy in mJoules, x is the displacement in metres and F is the applied force in Newtons at displacement x and x_f is the displacement at failure.

[0023] Semi-solid compositions are characterised by a ratio of F_f to E_b of less than 1.0, more preferred from 0.1 to 0.9, most preferred from 0.2 to 0.6, while traditional tablets of compacted particulate materials are generally characterised by a ratio of F_f to E_b of more than 1, more generally more than 1.25 or even more than 1.5 up to say 6.

[0024] In an advantageous embodiment of the invention the smooth or semi-solid phase comprises from 25-80 wt% of surfactants (based on the total weight of said smooth or semi-solid phase), more preferred from 25 to 75 wt%, most preferred 30 to 70 wt%. It has been found that the combination of a separate smooth semi-) solid first region and these high surfactant levels provide very good dispersing and cleaning properties to the tablet.

[0025] Preferably the surfactants in the smooth or semi-solid first region comprise a combination of anionic surfactants (preferably non-soap anionic surfactants) and non-ionic surfactants in a weight ratio of from 5 : 1 to 1 : 5, more preferred 3 : 1 to 1 : 3, more preferred 2 : 1 to 1 : 2. Further surfactants, for example cationic surfactants may equally be present for example at a level of 0.1 to 10 wt% based on the weight of the smooth or semi-solid part. Also advantageously the smooth or semi-solid region may comprise soap for example at a level of 0.1 to 10 wt% based on the weight of the smooth or semi-solid part.

[0026] The smooth or semi-solid region also comprises organic materials having a molecular weight of less than 500. Suitably organic materials are for example composed of combinations of one or more of O-H-C-N atoms, optionally the organic materials are organic salts with one or more cations. Preferably the organic material is water-soluble (e.g. having a solubility of more than 10 g/l, more preferred more than 100 g/l at 20°C). Also preferably the organic material is solid at ambient temperature. Epecially preferably the organic material is meltable e.g. having a melting point of less than 100 C.

[0027] The organic material can for example be selected from the group of sugars for example glucose, fructose,

lactose etc and citrates, more preferably the organic material has a molecular weight from 50 to 150, most preferably the organic material is selected from the group of urea, lactates and acetates or combinations thereof. Most preferred is the use of urea or acetates. Suitably water-soluble acetates will be used for example sodium acetate or potassium acetate. For the purpose of the invention molecular weight of materials is calculated excluding any crystal water that may be present.

[0028] Preferably the smooth or semi-solid phase comprises 20-75 wt% of these materials (based on the total weight of said smooth or semi-solid phase), more preferred from 25 to 75 wt%, most preferred 30 to 70 wt%. It has been found that low molecular weight organic materials such as mentioned above, urea or acetate or combinations thereof provide good structuring properties to the smooth or semi-solid phase, especially if this phase comprises relatively high levels of surfactants.

[0029] This structuring leads on the one hand to a desired firm consistency of the smooth or semi-solid phase but on the other hand retains the smooth or semi-solid nature of the phase. Furthermore the organic materials such as urea and acetate are capable of reducing the bleeding of the smooth or semi-solid phase.

[0030] If the organic materials are present in the smooth or semi-solid phase then it is generally no longer needed to incorporate diluent materials in said phase/ Therefore advantageously the smooth or semi-solid region of the tablet comprises no or only low levels of diluent materials for example polyethyleneglycol or (mono-)propyleneglycol. Preferable the level of these diluents is from 0 to 10 wt%, more preferred 0 to 5, most preferred less than 2 wt% based on the weight of the smooth or semi-solid phase.

[0031] The smooth or semi-solid phase comprises no or only low levels of water. Preferably the level of water is less than 20 wt % based on the weight of the smooth or semi-solid phase, more preferred less than 10 wt%, most preferred from 0 to 5 wt%. Most preferably the smooth or semi-solid phases are substantially free from water, which means that apart from low levels of moisture (e.g. for neutralisation or as crystal water) the total level of water in the smooth or semi-solid phase is less than 1 wt%, more preferred less than 0.5 wt%.

[0032] Preferably the total weight of surfactants in the smooth or semi-solid phase is from 2 to 20 grammes, more preferred from 3 to 10 grammes.

[0033] In a preferred embodiment of the invention the tablet may be a multi-phase tablet wherein the phases other than the smooth or semi-solid phase as described above comprise no or only low levels of surfactants. Preferably the level of surfactants in the the other phases is less than 10 wt%(based on the total weight of said phases), more preferred from 0 to 9 wt%, most preferred from 1 to 8 wt%.

[0034] In an advantageous embodiment of the invention the cleaning tablets comprise a first smooth or semi-solid region (as described above) in combination with a second region of the tablet which is a solid region, for example prepared by compression of a particulate composition.

[0035] Although the second region may comprise surfactant materials, this region preferably comprises ingredients of the tablet other than surfactants. Examples of these ingredients are for example builders, bleach system, enzymes etc. Preferably the builders in the tablet are predominantly present in the second region. Preferably the bleach system is predominantly present in the second region. Preferably the enzymes are predominantly present in the second region. For the purpose of this invention, unless stated otherwise, the term "predominantly present" refers to a situation wherein at least 90 wt% of an ingredient is present in the second region, more preferred more than 98 wt%, most preferred substantially 100 wt%.

[0036] The above description of the tablet has been given with reference to a tablet constituted by two regions. It will however be understood that each of the regions may be composed of a limited number of discrete regions. For example the first smooth or semi-solid region may be a single discrete part of the tablet but may also be a limited number (say 1-5) discrete smooth or semi-solid parts. Preferably each of these smooth or semi-solid parts are at least 1 gramme, also preferably each of these smooth or semi-solid parts is substantially of the same composition. If reference is made to the composition or weight of the first region it is understood that this concerns the total weight and composition of these smooth or semi-solid parts.

[0037] Similarly the solid second region may be composed a limited number (say 1-5) of solid parts e.g. separate layers in the tablet. Preferably each of these parts has a weight of at least 10 grammes, also preferably each of the solid parts are substantially of the same composition. If reference is made to the composition or weight of the second region it is understood that this concerns the total weight and composition of these solid parts.

[0038] In addition to the smooth or semi-solid first region and the solid second region the cleaning tablets of the invention may optionally comprise further regions, for example the tablet may be partly or wholly coated.

[0039] Cleaning tablets according to the invention are preferably manufactured by a process comprising the steps of:

- (a) inserting a particulate composition into a tablet mould
- (b) inserting one or more smooth or semi-solid parts into said tablet mould
- (c) co-compression of the particulate composition and the smooth or semi-solid parts to form a compressed tablet comprising discrete regions, wherein the first region is formed by said compressed smooth or semi-solid parts and

the second region is formed by said compressed particulate composition.

[0040] Preferably step (a) takes place before step (b).

[0041] In a preferred embodiment of the invention the particulate composition is pre-compressed at a force of 0.1 to 20 kN/cm² between steps (a) and (b) In another preferred embodiment the particulate composition is flattened between steps (a) and (b).

[0042] Preferably the (co-)compression of the combination of the smooth or semi-solid and the solid region(s) takes place at a force of from 0.1 to 20 kN/cm². Especially if the solid region has been pre-compressed the co-compression in step (c) can advantageously be at a force of 0.1- 10 kN/cm², more preferred 0.5 to 5 kN/cm². If the solid region has not been pre-compressed, the co-compression preferably takes place at a force of 1- 100 kN/cm²., more preferred 2-50 kN/cm²., most preferred 2-10 kN/cm².

[0043] One advantage of the method of the present invention is that . the co-compression step of (c) leads to good adherence of the first region to the second region and avoids the need of applying an adhesive material between the smooth or semi-solid and solid region. Another advantage of the method of the invention is that it can be carried out in a normal tablet press without the need of adaptation of the shape of the pressing surfaces.

[0044] A tablet of this invention may be intended for use in machine dishwashing. Such a tablet is likely to contain surfactant in a low concentration such as 0.5 to 2 wt% based on the whole tablet, although higher concentrations ranging up to 10 wt% may be used. Such will typically contain salts, such as over 60 wt%, often over 85 wt% of the tablet.

[0045] Water soluble salts typically used in machine dishwashing compositions are phosphates (including condensed phosphates) carbonates and silicates, generally as alkali metal salts. Water soluble alkali metal salts selected from phosphates, carbonates and silicates may provide 60 wt% or more of a dishwashing composition.

[0046] Another preferred possibility is that a tablet of this invention will be intended for fabric washing. In this event the tablet will be likely to contain at least 2 wt%, probably at least 5 wt%, up to 40 or 50 wt% surfactant based on the whole tablet, and from 5 to 80 wt% detergency builder, based on the whole tablet.

[0047] Materials which may be used in tablets of this invention will now be discussed in more detail.


Surfactant Compounds

[0048] Compositions which are used in tablets of the invention will contain one or more detergent surfactants. In a fabric washing composition, these preferably provide from 5 to 50% by weight of the overall tablet composition, more preferably from 8 or 9% by weight of the overall composition up to 40% or 50% by weight. Surfactant may be anionic (soap or non-soap), cationic, zwitterionic, amphoteric, nonionic or a combination of these.


[0049] Anionic surfactant may be present in an amount from 0.5 to 50% by weight, preferably from 2% or 4% up to 30% or 40% by weight of the tablet composition.

[0050] Synthetic (i.e. non-soap) anionic surfactants are well known to those skilled in the art. Examples include alkylbenzene sulphonates, particularly sodium linear alkylbenzene sulphonates having an alkyl chain length of C₈-C₁₅; olefin sulphonates; alkane sulphonates; dialkyl sulphosuccinates; and fatty acid ester sulphonates.

[0051] Primary alkyl sulphate having the formula



in which R is an alkyl or alkenyl chain of 8 to 18 carbon atoms especially 10 to 14 carbon atoms and M⁺ is a solubilising cation, is commercially significant as an anionic surfactant.



Linear alkyl benzene sulphonate of the formula

where R is linear alkyl of 8 to 15 carbon atoms and M⁺ is a solubilising cation, especially sodium, is also a commercially significant anionic surfactant.

[0052] Frequently, such linear alkyl benzene sulphonate or primary alkyl sulphate of the formula above, or a mixture thereof will be the desired anionic surfactant and may provide 75 to 100 wt% of any anionic non-soap surfactant in the composition.

[0053] In some forms of this invention the amount of non-soap anionic surfactant lies in a range from 5 to 20 wt% of the tablet composition.

[0054] It may also be desirable to include one or more soaps of fatty acids. These are preferably sodium soaps derived from naturally occurring fatty acids, for example, the fatty acids from coconut oil, beef tallow, sunflower or hardened rapeseed oil.

[0055] Suitable nonionic surfactant compounds which may be used include in particular the reaction products of compounds having a hydrophobic group and a reactive hydrogen atom, for example, aliphatic alcohols, acids, amides or alkyl phenols with alkylene oxides, especially ethylene oxide.

[0056] Specific nonionic surfactant compounds are alkyl (C_{8-22}) phenol-ethylene oxide condensates, the condensation products of linear or branched aliphatic C_{8-20} primary or secondary alcohols with ethylene oxide, and products made by condensation of ethylene oxide with the reaction products of propylene oxide and ethylene-diamine.

[0057] Especially preferred are the primary and secondary alcohol ethoxylates, especially the C_{9-11} and C_{12-15} primary and secondary alcohols ethoxylated with an average of from 5 to 20 moles of ethylene oxide per mole of alcohol.

[0058] In some fabric washing tablets of this invention, the amount of nonionic surfactant lies in a range from 4 to 40%, better 4 or 5 to 30% by weight of the whole tablet.


[0059] Many nonionic surfactants are liquids. These may be absorbed onto particles of the composition.

[0060] In a machine dishwashing tablet the surfactant may be wholly nonionic, in an amount below 5 wt% of the whole tablet although it is known to include some anionic surfactant and to use up to 10 wt% surfactant in total.

Detergency Builder

[0061] A composition which is used in tablets of the invention will contain from 5 to 80%, more usually 15 to 60% by weight of detergency builder. This may be provided wholly by water soluble materials, or may be provided in large part or even entirely by water-insoluble material with water-softening properties. Water-insoluble detergency builder may be present as 5 to 80 wt%, better 5 to 60 wt% of the composition.

[0062] Alkali metal aluminosilicates are strongly favoured as environmentally acceptable water-insoluble builders for fabric washing. Alkali metal (preferably sodium) aluminosilicates may be either crystalline or amorphous or mixtures thereof, having the general formula:



[0063] These materials contain some bound water (indicated as "xH₂O" and are required to have a calcium ion exchange capacity of at least 50 mg CaO/g. The preferred sodium aluminosilicates contain 1.5-3.5 SiO₂ units (in the formula above). Both the amorphous and the crystalline materials can be prepared readily by reaction between sodium silicate and sodium aluminate, as amply described in the literature.

[0064] Suitable crystalline sodium aluminosilicate ion-exchange detergency builders are described, for example, in GB 1429143 (Procter & Gamble). The preferred sodium aluminosilicates of this type are the well known commercially available zeolites A and X, the novel zeolite P described and claimed in EP 384070 (Unilever) and mixtures thereof.

[0065] Conceivably a water-insoluble detergency builder could be a layered sodium silicate as described in US 4664839.

NaSKS-6 is the trademark for a crystalline layered silicate marketed by Hoechst (commonly abbreviated as "SKS-6"). NaSKS-6 has the delta- Na_2SiO_5 morphology form of layered silicate. It can be prepared by methods such as described in DE-A-3,417,649 and DE-A-3,742,043. Other such layered silicates, such as those having the general formula $\text{NaMSi}_x\text{O}_{2x+1} \cdot y\text{H}_2\text{O}$ wherein M is sodium or hydrogen, x is a number from 1.9 to 4, preferably 2, and y is a number from 0 to 20, preferably 0 can be used.

[0066] Water-soluble phosphorous-containing inorganic detergency builders, include the alkali-metal orthophosphates, metaphosphates, pyrophosphates and polyphosphates. Specific examples of inorganic phosphate builders include sodium and potassium tripolyphosphates, orthophosphates and hexametaphosphates.

[0067] Non-phosphorous water-soluble builders may be organic or inorganic. Inorganic builders that may be present include alkali metal (generally sodium) carbonate; while organic builders include polycarboxylate polymers, such as polyacrylates, acrylic/maleic copolymers, and acrylic phosphonates, monomeric polycarboxylates such as citrates, gluconates, oxydisuccinates, glycerol mono- di- and trisuccinates, carboxymethyloxysuccinates, carboxymethyloxymalonates, dipicolinates and hydroxyethyliminodiacetates.

[0068] At least one region (preferably the second region) of a fabric washing tablet preferably include polycarboxylate polymers, more especially polyacrylates and acrylic/maleic copolymers which can function as builders and also inhibit unwanted deposition onto fabric from the wash liquor.

Bleach System

[0069] Tablets according to the invention may contain a bleach system in at least one region of a tablet, preferably in the second region. This preferably comprises one or more peroxy bleach compounds, for example, inorganic persalts or organic peroxyacids, which may be employed in conjunction with activators to improve bleaching action at low wash temperatures. If any peroxygen compound is present, the amount is likely to lie in a range from 10 to 25% by weight of the composition.

[0070] Preferred inorganic persalts are sodium perborate monohydrate and tetrahydrate, and sodium percarbonate, advantageously employed together with an activator. Bleach activators, also referred to as bleach precursors, have been widely disclosed in the art. Preferred examples include peracetic acid precursors, for example, tetraacetylethylene diamine (TAED), now in widespread commercial use in conjunction with sodium perborate; and perbenzoic acid precursors. The quaternary ammonium and phosphonium bleach activators disclosed in US 4751015 and US 4818426 (Lever Brothers Company) are also of interest. Another type of bleach activator which may be used, but which is not a bleach precursor, is a transition metal catalyst as disclosed in EP-A-458397, EP-A-458398 and EP-A-549272. A bleach system may also include a bleach stabiliser (heavy metal sequestrant) such as ethylenediamine tetramethylene phosphonate and diethylenetriamine pentamethylene phosphonate.

[0071] As indicated above, if a bleach is present and is a water-soluble inorganic peroxygen bleach, the amount may well be from 10% to 25% by weight of the composition.

Other Detergent Ingredients

[0072] The detergent tablets of the invention may also contain (preferably in the second region) one of the detergency enzymes well known in the art for their ability to degrade and aid in the removal of various soils and stains. Suitable enzymes include the various proteases, cellulases, lipases, amylases, and mixtures thereof, which are designed to remove a variety of soils and stains from fabrics. Examples of suitable proteases are Maxatase (Trade Mark), as supplied by Gist-Brocades N.V., Delft, Holland, and Alcalase (Trade Mark), and Savinase (Trade Mark), as supplied by Novo Industri A/S, Copenhagen, Denmark. Detergency enzymes are commonly employed in the form of granules or marumes, optionally with a protective coating, in amount of from about 0.1% to about 3.0% by weight of the composition; and these granules or marumes present no problems with respect to compaction to form a tablet.

[0073] The detergent tablets of the invention may also contain (preferably in the second region) a fluoescer (optical brightener), for example, Tinopal (Trade Mark) DMS or Tinopal CBS available from Ciba-Geigy AG, Basel, Switzerland. Tinopal DMS is disodium 4,4'-bis-(2-morpholino-4-anilino-s-triazin-6-ylamino) stilbene disulphonate; and Tinopal CBS is disodium 2,2'-bis-(phenyl-styryl) disulphonate.

[0074] An antifoam material is advantageously included (preferably in the second region), especially if a detergent tablet is primarily intended for use in front-loading drum-type automatic washing machines. Suitable antifoam materials are usually in granular form, such as those described in EP 266863A (Unilever). Such antifoam granules typically comprise a mixture of silicone oil, petroleum jelly, hydrophobic silica and alkyl phosphate as antifoam active material, absorbed onto a porous absorbed water-soluble carbonate-based inorganic carrier material. Antifoam granules may be present in an amount up to 5% by weight of the composition.

[0075] It may also be desirable that a detergent tablet of the invention includes an amount of an alkali metal silicate, particularly sodium ortho-, meta- or disilicate. The presence of such alkali metal silicates at levels, for example, of 0.1 to 10 wt%, may be advantageous in providing protection against the corrosion of metal parts in washing machines, besides providing some measure of building and giving processing benefits in manufacture of the particulate material which is compacted into tablets.

[0076] A tablet for fabric washing will generally not contain more than 15 wt% silicate. A tablet for machine dish-washing will often contain more than 20 wt% silicate. Preferably the silicate is present in the second region of the tablet.

[0077] Further ingredients which can optionally be employed in a region of a fabric washing detergent of the invention tablet (preferably the second region) include anti-redeposition agents such as sodium carboxymethylcellulose, straight-chain polyvinyl pyrrolidone and the cellulose ethers such as methyl cellulose and ethyl hydroxyethyl cellulose, fabric-softening agents; heavy metal sequestrants such as EDTA; perfumes; and colorants or coloured speckles.

[0078] Further ingredients which can optionally be used in tablets of the invention, preferably in the second region are dispersing aids. Examples of suitable dispersing aids are water-swellaable polymers (e.g. SCMC) highly soluble materials (e.g. sodium citrate, potassium carbonate or sodium acetate) or sodium tripolyphosphate with preferably at least 40% of the anhydrous phase I form.

Particle Size and Distribution

[0079] The second region of a detergent tablet of this invention, is a preferably a matrix of compacted particles.

[0080] Preferably the particulate composition has an average particle size in the range from 200 to 2000 μm , more preferably from 250 to 1400 μm . Fine particles, smaller than 180 μm or 200 μm may be eliminated by sieving before tableting, if desired, although we have observed that this is not always essential.

[0081] While the starting particulate composition may in principle have any bulk density, the present invention is especially relevant to tablets made by compacting powders of relatively high bulk density, because of their greater tendency to exhibit disintegration and dispersion problems. Such tablets have the advantage that, as compared with a tablet derived from a low bulk density powder, a given dose of composition can be presented as a smaller tablet.

[0082] Thus the starting particulate composition may suitably have a bulk density of at least 400 g/litre, preferably at least 500 g/litre, and perhaps at least 600 g/litre.

[0083] Tableting machinery able to carry out the manufacture of tablets of the invention is known, for example suitable tablet presses are available from Fette and from Korch.

[0084] Tableting may be carried out at ambient temperature or at a temperature above ambient which may allow adequate strength to be achieved with less applied pressure during compaction. In order to carry out the tableting at a temperature which is above ambient, the particulate composition is preferably supplied to the tableting machinery at an elevated temperature. This will of course supply heat to the tableting machinery, but the machinery may be heated in some other way also.

[0085] The size of a tablet will suitably range from 10 to 160 grams, preferably from 15 to 60 g, depending on the conditions of intended use, and whether it represents a dose for an average load in a fabric washing or dishwashing machine or a fractional part of such a dose. The tablets may be of any shape. However, for ease of packaging they are preferably blocks of substantially uniform cross-section, such as cylinders or cuboids. The overall density of a tablet preferably lies in a range from 1040 or 1050gm/litre up to 1600gm/litre.

Example 1

[0086] A mixture was prepared by mixing an anionic surfactant (LAS, dobanic acid 103 ex Chemproha) with a nonionic surfactant (Iutensol 7EO ex BASF) at a temperature of 75 to 80 C in the ratios as indicated below. The mixtures are subsequently neutralised to a pH of 6 using a 50 % NaOH solution in water.

[0087] The mixture was manually mixed with milled urea prills (ex Kemira) in the amounts as indicated below.

[0088] As a comparison a mixture was prepared by mixing 7 weight parts of an anionic surfactant (LAS, dobanic acid 103 ex Chemproha) with 6 weight parts of a nonionic surfactant (Iutensol 7EO ex BASF) at a temperature of 75 to 80 C. The mixture is subsequently neutralised to a pH of 6 using a 50 % NaOH solution in water and 5% soap (pristerene C4916 ex Uniqema) is added.

[0089] Cleaning tablets of 5 g each were prepared by extruding tablets with a diameter of 20 mm and a height of about 15 mm.

[0090] The dissolution properties of the samples was measured in a 600 ml container containing 500 ml water at 20 C. One cleaning tablet was added to the water and stirred at a rate of 200 per minute. The residual weight of the samples was measured at 5 minute intervals and the P90 (time at which 90 wt% of the samples was solubilised) was determined by plotting a graph of weight of the sample versus time.

[0091] The following results were obtained:

Weight ratio anionic: nonionic	Weight ratio of surfactants to urea	P90 (in minutes)
7 : 6	1 : 1	9 to 10
7 : 6	3 : 5	6 to 7
4 : 9	1 : 1	10 to 11
4 : 9	3 : 5	10 to 11
7 : 6	1 : 2	4 to 5
7 : 6	Comparison: 5 % soap	21 to 22

Example II: multi-phase tablets

[0092] A detergent powder was made of the following composition by pregranulating the granule ingredients, followed by post-dosing the rest of the ingredients

EP 1 375 636 A1

<i>Ingredient</i>	<i>Parts by weight</i>
Granules	
Na-las	1.1
Nonionic 7EO	0.5
C12 soap	0.1
NaAc.3aq	0.3
Zeolite A24	2.4
Light soda ash	0.4
Moisture/minors	0.4
Post-dose	
EAG (17% silicone)	3.0
Fluorescer (15%)	2.2
STP	62.4
Na-disilicate (80%)	3.8
TAED (83%)	4.3
Percarbonate	16.9
Dequest 2047	1.9
Minors/ enzymes/colour	to 100

[0093] Smooth and semi-solid parts of 5 gramme each were prepared of the following composition by moulding the composition at 80 C into moulds followed by cooling to 20 C to form smooth, semi-solid parts of about 32 diameter and 6 mm high :

<i>Ingredient</i>	<i>II A; weight parts</i>	<i>II B; weight parts</i>
Na las	7	7
Nonionic	6	6
Urea	13	-
Na-acetate3aq	-	13

[0094] Na LAS is dobanic acid 103 ex Chemproha, nonionic surfactant is lutensol 7EO ex BASF.

Na-acetate 3 aq has a molecular weight of 82 (excluding the crystal water) urea has a molecular weight of 60.

[0095] The tablets were made in 2 different ways:

(I) 20 grammes of the powder are inserted into a 45 mm die of a tableting machine, optionally followed by a flattening step, followed by addition of a single smooth, semi-solid part on top of the powder bed. After addition of the smooth semi-solid onto the powder bed or flattened powder, the whole material is compressed at 30kN into a single tablet, followed by ejection of the tablet. This results in a tablet with a smooth, semi-solid part embedded in the cleaning tablet. The density of the powdered region is 1.5 kg/litre, the density of the smooth, semi-solid part is 1.0 kg/litre. The height of the smooth, semi-solid part after compression is 3.4 mm, of the powdered part 11 mm.

(II) Another way of making a tablet with a smooth, semi-solid part is to put a single smooth, semi-solid part as above onto 20 grammes of the (optionally pre-compressed at 4 kN) powdered composition in a die of 45 mm diameter followed by a final compression step at 30 kN. During the final compression step, the smooth, semi-solid part flows by the compaction forces to form a 3.4 mm smooth, semi-solid layer adhered on top of the particulate layer. The density of the powdered region is 1.5 kg/litre, the density of the smooth, semi-solid part is 1.0 kg/litre. The height of the powdered part after compression is 11 mm.

Claims

1. A cleaning tablet comprising a smooth phase wherein the smooth phase comprises:

EP 1 375 636 A1

- (a) from 25 to 90 wt% of surfactants; and
- (b) from 10 to 90 wt% of organic material having a molecular weight of less than 500; and
- (c) from 0 to 20 wt% of water.

- 5 **2.** A cleaning tablet according to claim 1, wherein the organic material is water soluble, for example having a solubility in water at 20 C of more than 10 g/l, more preferred more than 100 g/l.
- 3.** A cleaning tablet according to claim 1, wherein the organic material is solid at ambient temperature.
- 10 **4.** A cleaning tablet according to claim 1, wherein the organic material has a molecular weight of from 50 to 150.
- 5.** A cleaning tablet according to claim 1, wherein the organic material comprises one or more sugars or citrates.
- 15 **6.** A cleaning tablet according to claim 4, wherein the organic material is selected from urea or water-soluble lactates or acetates or combinations thereof.
- 7.** A cleaning tablet according to claim 1, wherein the organic material is urea or sodium acetate or potassium acetate.
- 20 **8.** A cleaning tablet according to claim 1, wherein the smooth phase comprises 30 to 70 wt% of surfactants.
- 9.** A cleaning tablet according to claim 1, being a multi-phase tablet wherein at least one of the phases is a smooth phase according to claim 1.
- 25 **10.** Use of a cleaning tablet according to one or more of the preceding claims for fabric washing.

Fig.1a.

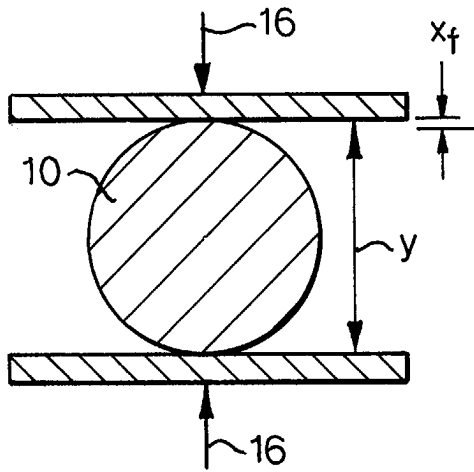


Fig.1b.


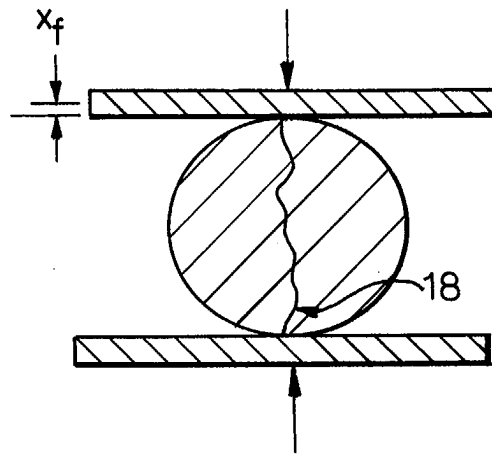


Fig.2.



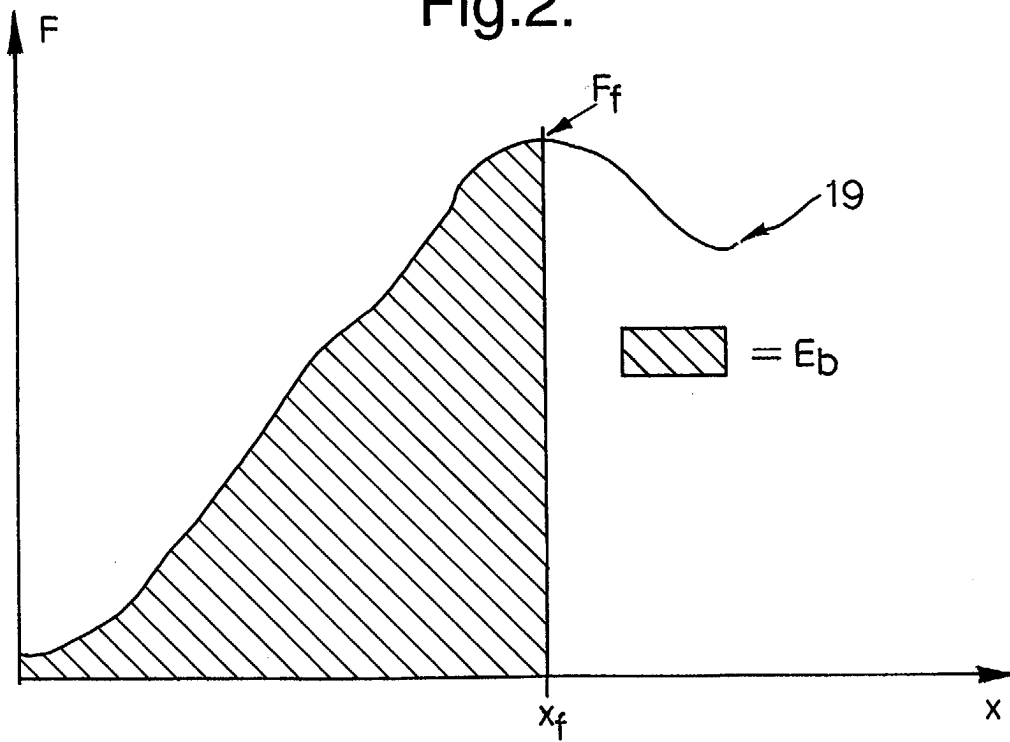

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 07 6738

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 99 27064 A (PROCTER & GAMBLE) 3 June 1999 (1999-06-03)	1-3,5, 8-10	C11D17/00 C11D3/20
Y	* examples 4,0-P * * claims * * page 5, line 13 - line 21 * * page 13, line 3,4 * * page 14, line 20,21 * ---	4,6,7	C11D3/32 C11D3/22
X	WO 99 24548 A (PROCTER&GAMBLE) 20 May 1999 (1999-05-20)	1-3,5, 8-10	
Y	* examples 4,0-P * * claims * * page 12, line 13-15 * * page 13, line 31,32 * ---	4,6,7	
Y	GB 2 155 031 A (UNILEVER PLC) 18 September 1985 (1985-09-18)	4,6,7	
	* page 1, line 24-28 * * page 4, line 10-47 * * examples *		
A	GB 2 223 028 A (UNILEVER PLC) 28 March 1990 (1990-03-28)	1-10	TECHNICAL FIELDS SEARCHED (Int.Cl.7) C11D
	* claims; examples *		
D,A	WO 00 61717 A (PROCTER & GAMBLE (US)) 19 October 2000 (2000-10-19)	1	
	* claims; examples * -----		
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 18 September 2003	Examiner Loloiu, C
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03 02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 07 6738

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-09-2003

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
WO 9927064	A	03-06-1999	BR	9815064 A	20-11-2001
			CA	2311503 A1	03-06-1999
			EP	1034247 A1	13-09-2000
			JP	2001524590 T	04-12-2001
			WO	9927064 A1	03-06-1999
			US	6391845 B1	21-05-2002

WO 9924548	A	20-05-1999	AT	244296 T	15-07-2003
			AT	241003 T	15-06-2003
			AT	234913 T	15-04-2003
			BR	9813201 A	29-08-2000
			BR	9814021 A	26-09-2000
			BR	9814022 A	26-09-2000
			CA	2296354 C	27-05-2003
			CA	2309251 A1	20-05-1999
			CA	2309252 A1	20-05-1999
			CA	2309614 A1	20-05-1999
			DE	69812403 D1	24-04-2003
			DE	69814911 D1	26-06-2003
			DE	69816112 D1	07-08-2003
			EP	1032642 A1	06-09-2000
			EP	1032643 A1	06-09-2000
			EP	1032644 A1	06-09-2000
			ES	2190120 T3	16-07-2003
			JP	2001522933 T	20-11-2001
			JP	2001522934 T	20-11-2001
			JP	2001524552 T	04-12-2001
			WO	9924547 A1	20-05-1999
			WO	9924548 A1	20-05-1999
			WO	9924549 A1	20-05-1999
			WO	9924550 A1	20-05-1999
			US	6274538 B1	14-08-2001
			US	6413928 B1	02-07-2002
			US	6440927 B1	27-08-2002
			US	6486117 B1	26-11-2002

GB 2155031	A	18-09-1985	AR	240958 A1	27-03-1991
			AT	37392 T	15-10-1988
			AU	559957 B2	26-03-1987
			AU	3912085 A	05-09-1985
			BR	8500872 A	03-12-1985
			CA	1232178 A1	02-02-1988
			DE	3565120 D1	27-10-1988
			EP	0153857 A2	04-09-1985
			ES	8706802 A1	16-09-1987
			GR	850510 A1	13-05-1985

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 07 6738

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-09-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2155031 A		HK 24588 A	15-04-1988
		IN 166996 A1	18-08-1990
		IN 162412 A1	21-05-1988
		JP 1869897 C	06-09-1994
		JP 3060880 B	18-09-1991
		JP 60210700 A	23-10-1985
		KE 3787 A	08-01-1988
		KR 9000898 B1	17-02-1990
		NO 850794 A	30-08-1985
		PH 20387 A	08-12-1986
		PT 80028 A ,B	01-03-1985
		SG 102887 G	23-09-1988
		TR 22431 A	02-06-1987
		US 4615819 A	07-10-1986
		ZA 8501533 A	29-10-1986
		ZW 2585 A1	11-09-1985
GB 2223028 A	28-03-1990	BR 8903144 A	06-02-1990
		PH 26196 A	18-03-1992
WO 0061717 A	19-10-2000	EP 1043390 A1	11-10-2000
		AU 3571400 A	14-11-2000
		EP 1169426 A1	09-01-2002
		WO 0061717 A1	19-10-2000