



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 375 637 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
02.01.2004 Bulletin 2004/01

(51) Int Cl.7: **C11D 17/04, B65D 65/46**

(21) Application number: **03076741.2**

(22) Date of filing: **04.06.2003**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**
Designated Extension States:
AL LT LV MK

(30) Priority: **17.06.2002 EP 02254225**

(71) Applicants:
• **UNILEVER N.V.**
3013 AL Rotterdam (NL)
Designated Contracting States:
**AT BE BG CH CZ DE DK EE ES FI FR GR HU IT
LI LU MC NL PT RO SE SK TR**
• **UNILEVER PLC**
London EC4P 4BQ (GB)
Designated Contracting States:
GB IE


(72) Inventors:
• **Van Gink, Johan Augustus Theodorus**
3133 AT Vlaardingen (NL)
• **Hoeve, Robert Bartus Johan**
3133 AT Vlaardingen (NL)
• **Naylor, Paul**
3133 AT Vlaardingen (NL)
• **Verschelling, Gilbert Martin**
3133 AT Vlaardingen (NL)

(74) Representative: **Joppe, Hermina L. P. et al**
Unilever N.V.,
Patent Department,
P.O. Box 137
3130 AC Vlaardingen (NL)

(54) **Detergent compositions**

(57) A multi-compartment package comprising from 2 to 5 compartments obtained by thermoforming a water-soluble film, said package containing at least two dif-

ferent cleaning compositions and wherein said compartments are connected to each other and separated by at least one flat seal area.

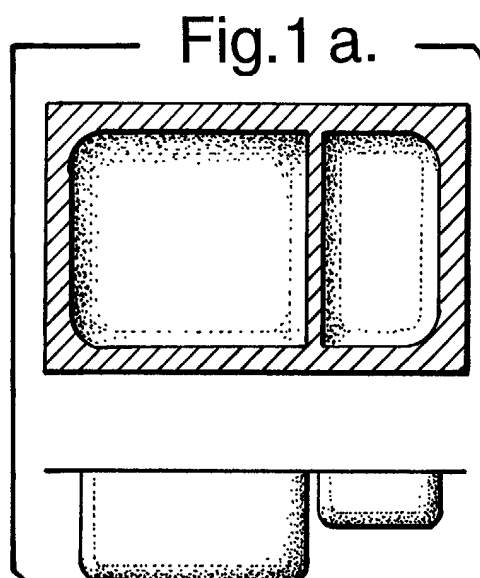

EP 1 375 637 A1

Description

[0001] This invention relates to water soluble detergent sachets comprising a detergent composition, in particular a laundry detergent or machine dishwashing composition.

[0002] For many years detergent compositions, especially laundry detergent compositions, have been provided commercially in forms such as free-flowing powders and liquids. For these products the consumer is required to determine and provide the correct dosage of the product at the point of use. This may lead to over dosing of the product and/or to an increased risk of spillage or wastage.

[0003] More recently, detergent products have been commercially available in a form, which provides a single dose of the detergent product for the consumer to add directly to the cleaning operation. Two examples of these single-dose products are laundry detergent tablets of compressed powder and water-soluble sachets of detergent composition, which may contain the detergent product in liquid, paste or particulate form.

[0004] These single-dosage products are advantageous in that they obviate the need for the consumer to determine and measure the correct dosage and allow for more accurate dosing of the detergent product. They are also easier to handle and dispense, for example into the wash load, so reducing the risk of spillage and/or wastage.

[0005] Water-soluble sachets generally comprise a detergent composition encapsulated with water-soluble film, such as polyvinyl alcohol. Encapsulation allows for handling of the product without direct contact with the detergent composition. This is especially advantageous when the detergent composition comprises aggressive cleaning components, which could irritate the skin on direct contact.

[0006] This invention relates to water-soluble sachets a detergent composition wherein the sachets comprise from 2 to 5 compartments.

[0007] In the production of multi-compartment sachets there is the risk that detergent ingredients leak from one compartment into the other. This problem is especially apparent where the compartments contain different compositions.

[0008] WO 01/85898 describes a multi-compartment pouch obtained by closing an open compartment with a pre-sealed second compartment. However the process as proposed requires a complicated process and may incur the risk that the pre-sealed compartment is damaged during the handling and secondary sealing.

[0009] WO 00/55045, WO 00/55046, WO 00/55068, WO 00/55069, WO 00/55415 and WO 01/83668 describe processes for the preparation of water-soluble detergent capsules or pouches by thermoforming.

[0010] The present invention aims at providing alternative multi-compartment pouches of water-soluble material, which can be easily prepared at low costs.

[0011] Accordingly in a first aspect the invention relates to a process for the producing a water-soluble multi-compartment package comprising two to five closed compartments, said package containing at least two different cleaning compositions, comprising the steps of:

- (a) placing a first sheet of water-soluble film over a forming die having at least two cavities;
- (b) heating the film to mould the film into said cavities thereby forming at least two recesses in the film;
- (c) placing at least two different cleaning compositions in at least two different adjacent recesses;
- (d) sealing a second sheet of film across the formed recesses to produce at least two closed adjacent compartments comprising at least two different cleaning compositions;
- (e) Cutting in such manner that a package is formed having two to five compartments said package containing at least two different cleaning compositions and wherein said compartments are connected to each other by at least one seal area.

[0012] Sealing can be done by any suitable method for example heat-sealing, solvent sealing or UV sealing. Particularly preferred is water sealing.

[0013] In another aspect the present invention provides a multi-compartment package comprising from 2 to 5 compartments obtained by thermoforming a water-soluble film, said package containing at least two different cleaning compositions and wherein said compartments are connected to each other and separated by at least one seal area.

Detailed description of the invention

[0014] The present invention providing multi-compartment pouches of water-soluble material containing at least two different cleaning compositions, which can be easily prepared at low costs. The invention involves the specific use of a thermoform process whereby two or more recesses are formed. Two to five adjacent recesses will form the multi-compartment package of the invention. Subsequent to thermoforming, the recesses are filled with cleaning compositions. At least two different cleaning compositions will be used; whereby each of said different cleaning compositions is present in a separate compartment of the multi-compartment package. After dosing the cleaning compositions the

compartments will be sealed. Subsequently the packages will be cut to detach from the remaining of the film and from the other multi-compartment packages. The cutting will be carried out such that the two to five compartments of the package will remain connected to each other while being separated by a seal area.

[0015] The invention and preferred embodiments thereof will now be illustrated by means of the following figures:

Figure 1 shows several examples of multi-compartment packages of the invention.

Figure 1A shows the top view and the side view of a two-compartment package of the invention wherein both compartments are rectangular.

Figure 1B shows the top view and the side view of a two-compartment package of the invention comprising one larger and one smaller compartment together forming a rectangular package.

Figure 1C shows a circular package of the invention composed of a relatively large and deeper compartment and one smaller less deep compartment.

Figure 1d shows a rectangular two-compartment package of the invention comprising a relatively small inner compartment substantially surrounded by a second larger compartment.

Figure 1e shows a rectangular two-compartment package according to the invention.

Figure 1e shows a rectangular two-compartment package according to the invention.

Figure 1f shows a two-compartment package according to the invention comprising two rectangular compartments.

Figure 1g shows a two-compartment package according to the invention.

Figure 2 shows a three-compartment package according to the invention.

[0016] A suitable device for carrying out the method of the invention may comprise a moulding plate comprises a plurality of recesses, said recesses being divided in groups of 2-5 each group of recesses is separated by distance b (not shown), which is preferably at least 10 mm, more preferred from 10 to 25 mm, most preferred from 11 to 15 mm. The recesses in each group are separated by distance c (not shown) which can advantageously be less than distance b. Preferably distance c is less than 10 mm, more preferred from 1 to 9 mm, most preferred from 3 to 7 mm. In this area a flat separating seal will be formed having a size of less than 10 mm, preferably 1 to 9 mm, most preferred 3 to 7 mm.

[0017] Typically each recess will have a top surface area of from 0.5 to 50 cm², more preferred from 1 to 40 cm², most preferred from 1.5 to 35 cm².

[0018] Furthermore each recess can have various shapes composed of curved or straight lines or combinations thereof for example triangle, hexagonal, round, square, ellipsal, rectangular. Preferred are rectangular, square or round forms.

[0019] Equally the perimeter of the entire multi-compartment package can have any form. For example Figure 1 illustrates a rectangular or circular form, but other forms may equally be applied for example various shapes composed of curved or straight lines or combinations thereof for example triangle, hexagonal, round, square or ellipsal.

[0020] Preferably each compartment has a maximum depth of from 1 to 40 mm, more preferred from 2 to 35 mm, most preferred from 5 to 30 mm.

[0021] Also preferably the sides of the compartments are relatively steep e.g. the angle between the top surface area of the package and the sides of the package can advantageously be from 90 to 30 degrees, more preferably from 90 to 45 degrees, most preferred from 90 to 60 degrees.

[0022] Also if desired the release time of product from each compartment can be adapted by changing the steepness of the sides of the pack and or the curvature between the sides and the bottom of the pack. For example a compartment made in cavity with a continuously curved side/bottom area which only involves rounded corners (for example with an internal radius of more than 20 mm, for example from 30 to 100, more preferred from 40 to 80 mm will have a more even film thickness distribution and will therefore release its contents relatively slower than a compartment with more steep and square sides. Typically a compartment with relatively steep and square sides is characterised by a relatively small internal radius of curvature in the corner, said radius being from 0 to 20 mm, more preferred from 1 to 15 mm, most preferred from 3 to 10 mm.

[0023] A preferred embodiment of the invention relates to multi-packs composed of compartments of different size and/or different depth.

[0024] For example the ratio of top surface areas of the largest and the smallest compartment may be from 20: 1 to 1: 1, most preferred from 10: 1 to 1.2: 1, most preferred from 5: 1 to 1.3: 1.

[0025] Also preferably the ratio of the depth of the deepest compartment and the least deep compartment may be from 10: 1 to 1: 1, more preferred 5: 1 to 1.1: 1, most preferred from 3: 1 to 1.3: 1.

[0026] Especially preferably compartments are shaped in such manner that the average film-thickness in one of the compartments differs from the average film-thickness in one of the other compartments. For example one of the compartment may have an average film thickness which is at least 10 %, more preferred at least 20 %, most preferred at least 25 % more than the film thickness of the compartment with the least average film thickness.

[0027] For this purpose the average film thickness is determined by the following methods:

Method 1: average film thickness is original film thickness divided by the stretch factor, whereby the ratio of internal surface area to top surface area of a compartment (or recess) is defined as the stretch factor.

Method 2: average film thickness is determined by measuring the film thickness at various points in the recessed area for example at the middle of each side and at the bottom of the recess. The average film thickness can then be calculated by adding up the measured thicknesses and dividing by the number of measuring points. Preferably at least 4 measuring points are taken and also preferably none of the measuring points is in or very near a steep corner area.

[0028] Suitable methods to reduce the average film thickness generally stem from a high ratio of the top-surface area of the recess to the total internal surface of the recess. For example for a square recess having a top surface area of $p \cdot p$ and a depth d resulting in an internal surface area of $(p \cdot p + 4p \cdot d)$. The ratio of internal surface area to top surface area is defined as the stretch factor. Preferably each recess has a stretch factor of from 1.2 to 20, more preferred from 1.5 to 15, most preferred from 2 to 12.

[0029] Also preferably in a package according to the invention the ratio of the highest stretch factor to the lowest stretch factor is from 1.0 to 5.0, more preferred from 1.1 to 4.5, most preferred from 1.2 to 4.0.

[0030] Again the difference in stretch factor leading to a difference in average film thickness between the various compartments can be used to manipulate the release times of the ingredients in the different compartment. For example, a compartment with a high stretch factor could be used to effect fast release of components, for example most of the builder material -which is advantageously released fast- is contained in a compartment with a relatively high stretch factor, whereas a compartment with low stretch factor could be used to release ingredients in a more delayed fashion (e.g. advantageously perfume or softener ingredients). It will be understood that by changing the stretch factor per compartment a wide flexibility can be obtained to tailor the release profile of the various ingredients.

[0031] Preferably the film thickness to form the recessed compartments (before use, hence in un-stretched form) is from 30 to 150 micrometer, more preferred from 40 to 100 micrometer, most preferred from 60 to 90 micrometer. After stretching generally the average thickness will be from 10 to 150 micrometers, more preferred from 20 to 100 micrometers, most preferred from 30 to 80 micrometers. It will be appreciated that the film thickness used for preparing the recessed compartments -especially if they have a relatively high stretch factor- may advantageously be higher than the film thickness used for preparing the top surface area. In an advantageous embodiment of the invention the ratio of thickness of the first film to the thickness of the second film is therefore from 1: 1 to 2: 1. Typical advantageous thickness for the top film may be from 20 to 100 micrometers, more preferred from 25 to 80 micrometers, most preferred from 30 to 60 micrometers.

Cleaning composition

[0032] The cleaning composition may be any type of cleaning composition for which it is desirable to provide a dose thereof in a water-soluble sachet. For example the detergent composition may be in the form of tablets or briquettes. Preferably the each cleaning composition is a particulate composition, a semi-solid or liquid composition.

[0033] The multi-compartment packages of the invention comprise at least two different cleaning compositions. It will be appreciated that each of these cleaning compositions may be independently selected from the above mentioned product forms e.g. each of the compositions may be particulate, semi-solid or liquid or the multi-compartment product according to the invention may comprise a combination of solid, semi-solid and liquid compositions.

[0034] For example, the detergent compositions may be a laundry (fabric cleaning, softening and/or treatment) compositions or machine dishwashing detergent compositions.

[0035] Each of the compositions is a cleaning composition, with this is meant that each composition has at least one functionality which is usually present in a cleaning composition. Examples of such functionalities are building, bleaching, perfuming, softening, cleaning, enzymes etc.

[0036] The multi-compartment packages of the invention comprise at least two different cleaning compositions, with that is meant that the formulation of the cleaning compositions is different either in its physical form, its composition or its colour. Sometimes it will be sufficient to only have minor differences between the cleaning compositions e.g. colour, perfume etc. Often however it will be advantageous to have clear differences for example a clearly different physical form of the cleaning composition. In this context suitably one of the cleaning composition may for example be a solid (e.g. a particulate or powdered formulation) while the other cleaning composition may be a liquid or a semi-solid.

[0037] Other advantageous combinations of cleaning compositions may involve the pre-dominant presence of at least one of the functionalities in one of the compositions. For example one of the cleaning compositions may comprises more than 75 % of the builder or bleach ingredients, while the other may for example comprise more than 75% of the surfactants or bleach activator ingredients. It will be within the ability of the skilled person to determine a suitable

division of ingredients of the different cleaning compositions.

[0038] The multi-compartment packages according to the invention may be suitable for use in (fabric) washing machines and in dishwashing machines amongst other applications. They can also be used in the manual laundry and dishwashing operations.

[0039] The detergent composition may contain particles which have been prepared by spray drying or granulation and which contain a mixture of ingredients. Such particles may contain organic detergent surfactant and some, or all, of any water-softening agent (detergency builder) present in the composition.

Suitable granulation and spray drying methods are well known in the art. The spray dried or granulated particles may be optionally mixed with other materials to form the particulate detergent composition.

[0040] Preferably the particulate detergent composition may have a bulk density of at least 400 g/litre, preferably at least 500 g/litre, and most preferably at least 600 g/litre.

a) Surfactant Compounds

[0041] The detergent compositions typically comprise one or more organic surfactants. Many suitable detergent-active compounds are available and are fully described in the literature, for example, in "Surface-Active Agents and Detergents", Volumes I and II, by Schwartz, Perry and Berch.

[0042] The surfactant may be anionic (soap or non-soap), cationic, zwitterionic, amphoteric, nonionic or a combination of these. The preferred detergent-active compounds that can be used are soaps and synthetic non-soap anionic and nonionic compounds.

[0043] Anionic surfactant may be present in an amount from 0.5 to 50% by weight, preferably from 2% or 4% up to 30% or 40% by weight of the composition. Suitable examples include alkyl benzene sulphonates, particularly sodium linear alkyl benzene sulphonates having an alkyl chain length of C₈-C₁₅; olefin sulphonates; alkane sulphonates; dialkyl sulposuccinates; and fatty acid ester sulphonates.

[0044] Suitable nonionic surfactant compounds include in particular the reaction products of compounds having a hydrophobic group and a reactive hydrogen atom, for example, aliphatic alcohols, acids, amides or alkyl phenols with alkylene oxides, especially ethylene oxide.

[0045] Specific nonionic surfactant compounds are alkyl (C₈₋₂₂) phenol-ethylene oxide condensates, the condensation products of linear or branched aliphatic C₈₋₂₀ primary or secondary alcohols with ethylene oxide, and products made by condensation of ethylene oxide with the reaction products of propylene oxide and ethylene-diamine.

[0046] In a fabric washing composition, these organic surfactants preferably provide from 5 to 50% by weight of the overall composition. In a machine dishwashing composition, organic surfactant is likely to constitute from 0.5 to 8% by weight of the overall composition and is likely to consist of nonionic surfactant, either alone or in a mixture with anionic surfactant.

b) Water-softening agent

[0047] The detergent compositions may contain a so-called water-softening agent, which serves to remove or sequester calcium and/or magnesium ions in the water. In the context of a detergent composition containing organic surfactant, a water-softening agent is more usually referred to as a detergency builder.

[0048] When a water-softening agent (detergency builder) is present, the amount of it is likely to lie in a broad range from 5%, preferably 15 wt% up to 98% by weight of the composition. The amount is likely to be from 15 to 80% by weight, more usually 15 to 60% of the composition.

[0049] Water-softening agents may be provided wholly by water-soluble materials, or may be provided in large part or even entirely by water-insoluble material with water-softening properties.

[0050] Alkali metal aluminosilicates are strongly favored as environmentally acceptable detergency builders for fabric washing. Suitable crystalline sodium aluminosilicate ionexchange materials are described, for example, in GB 1 429 143 (Procter & Gamble). The preferred sodium aluminosilicates of this type are the well known commercially available zeolites A and X, the newer zeolite P described and claimed in EP 384 070 (Unilever) and mixtures thereof. This form of zeolite P is also referred to as "zeolite MAP". One commercial form of it is denoted "zeolite A24" (ex Ineos Silicas, UK).

[0051] The builder may also be a water-soluble phosphorus-containing inorganic softener for example alkali-metal orthophosphates, metaphosphates, pyrophosphates and polyphosphates. Specific examples of inorganic phosphate detergency builders include sodium and potassium tripolyphosphates, orthophosphates and hexametaphosphates.

[0052] Non-phosphorus water-soluble detergency builders may be organic or inorganic. Inorganics that may be present include alkali metal (generally sodium) carbonate; while organics include polycarboxylate polymers, such as polyacrylates, acrylic/maleic copolymers, and acrylic phosphonates, monomeric polycarboxylates such as citrates, gluconates, oxydisuccinates, glycerol mono- di- and trisuccinates, carboxymethyloxysuccinates, carboxymethyloxymalonates, dipicolinates and hydroxyethyliminodiacetates.

c) Bleach System

[0053] The detergent compositions according to the invention may contain a bleach system. This preferably comprises one or more peroxy bleach compounds, for example, inorganic persalts or organic peroxyacids, which may be employed in conjunction with activators to improve bleaching action at low wash temperatures. If any peroxygen compound is present, the amount is likely to lie in a range from 10 to 85% by weight of the composition. If the composition contains surfactant and detergency builder, the amount of peroxygen compound bleach is unlikely to exceed 25%wt of the composition.

[0054] Preferred inorganic persalts are sodium perborate monohydrate and tetrahydrate, and sodium percarbonate, advantageously employed together with an activator. Bleach activators, also referred to as bleach precursors, have been widely disclosed in the art.

d) Further optional ingredients

[0055] Detergency enzymes may be employed in the compositions and are commonly employed in the form of granules or marumes, optionally with a protective coating, in amount of from about 0.1% to about 3.0% by weight of the composition.

[0056] The compositions may also contain a fluorescer (optical brightener), for example, Tinopal (Trade Mark) DMS or Tinopal CBS available from Ciba-Geigy AG, Basel, Switzerland. Tinopal DMS is disodium 4,4'-bis-(2-morpholino-4-anilino-s-triazin-6-ylamino) stilbene disulphonate; and Tinopal CBS is disodium 2,2'-bis-(phenyl-styryl) disulphonate.

[0057] An antifoam material is advantageously included if organic surfactant is present; especially if the detergent composition is primarily intended for use in front-loading drum-type automatic washing machines.

[0058] It may also be desirable that the composition comprises an amount of an alkali metal silicate. A composition for machine dishwashing will frequently contain at least 20 wt% silicate.

[0059] Further ingredients, which can optionally be employed in laundry detergent compositions of the invention, include anti-re-deposition agents such as sodium carboxymethylcellulose, straight-chain polyvinyl pyrrolidone and the cellulose ethers such as methylcellulose and ethyl hydroxyethyl cellulose, fabric-softening agents; heavy metal sequestrants such as EDTA; perfumes; and colorants or coloured speckles.

Sachet material

[0060] The sachet may be produced from a water-soluble film material, i.e. a substantially uniform material. Such film materials can for example be produced by a process of blowing or casting.

[0061] Water soluble materials which may be used to form the water soluble films are widely disclosed in the literature and include, for example, polyester amides, polyvinyl alcohol, copolymers of vinyl alcohol and methacrylate, polyethylene oxide, alginates, cellulose ethers such as carboxymethyl cellulose and methylcellulose, starches and starch derivatives, gelatin and any combination of these. Especially preferred is the use of polyvinyl alcohol

[0062] The desired degree of solubilisation and sachet strength can be achieved by matching the type of packaging material and its thickness such that the desired solubilisation time is achieved while still maintaining the desired strength.

[0063] The water-soluble sachet is preferably mainly composed of poly vinyl alcohol (PVA) or of a co-polymer of poly vinyl alcohol and poly methyl acrylate (PVA-PMA). The term poly vinyl alcohol as used herein also includes partially hydrolysed poly vinyl acetates. The water-soluble film can also contain minor quantities of plasticizers, antifoams, anti-oxidants, surfactants, perfumes and the like.

[0064] In use the sachets according to the invention are preferably, and conveniently, placed directly into the liquid, which will form the wash liquor, or into the area where this liquid will be introduced. The sachet dissolves on contact with the liquid, thereby releasing the particulate detergent composition.

EXAMPLES

[0065] The invention will be further described by reference to the following example. Further examples within the scope of the invention will be apparent to the skilled Person.

[0066] Figure 1A shows a first embodiment of the invention showing a rectangular two-compartment package of water-soluble film produced by thermoforming two recesses followed filling and sealing the top with a second film. The first compartment is a rectangular compartment having a length of about 33mm and a breadth of about 29-mm and maximum depth of about 15 mm. The angle between the top and the sides is approximately 90 degrees. The stretch factor is about 2.9 and the internal radius of curvature in the corners between the sides and the bottom is about 2 mm. The second compartment is a smaller rectangular compartment having a length of about 29-mm, a breadth of about

16-mm and a maximum depth of about 7-mm. The angle between top and sides and the radius of curvature are substantially the same as for the first compartment. The stretch factor is about 2.3. The seal between the two compartments is 3 mm.

Example 2

[0067] This example illustrates a number of suitable dimensions for multi-compartment packages of the invention. The sachets were composed of 80 micrometer PVA film and consisted of two rectangular compartment separated by a seal area of 2.5 mm.

Sachet 1 dimensions							
Overall length	5 cm						
Width	4 cm						
Depth of both compartments	2 cm						
Multicompartment sachets							
Length compartment 1 (in cm)	0.5	1	1.5	2	2.5		
Length compartment 2 (in cm)	4.5	4	3.5	3	2.5		
Stretch factor for compartment 1	10.0	6.0	4.7	4.0	3.6		
Stretch factor for compartment 2	2.9	3.0	3.1	3.3	3.6		
Stretch factor ratio (1 over 2)	3.5	2.0	1.5	1.2	1.0		
Sachet 2 dimensions							
Overall length	5 cm						
Width	4 cm						
Depth compartment 1	2 cm						
Depth compartment 2	1 cm						
Multicompartment sachets							
Length compartment 1 (in cm)	0.5	1	1.5	2	2.5	4.5	5
Length compartment 2 (in cm)	4.5	4	3.5	3	2.5	0.5	0
Stretch factor for compartment 1	10.0	6.0	4.7	4.0	3.6	2.9	2.8
Stretch factor for compartment 2	1.9	2.0	2.1	2.2	2.3	5.5	
Stretch factor ratio (1 over 2)	5.1	3.0	2.3	1.8	1.6	0.5	

Example 3

[0068] In this example a thermoforming process is described for preparing a package according to Figure 1A. In this process a number of recesses are formed in a single sheet using a forming die having a plurality of cavities with dimensions corresponding generally to the dimensions of the packages to be produced. Each package will be produced from a set of two substantially rectangular recesses as shown in figure 1A. Further, a single heating plate is used for molding the film for all the cavities, and in the same way a single sealing plate is described.

[0069] A first sheet of polyvinyl alcohol film (85-micrometer thickness) is drawn over a forming die so that the film is placed over the plurality of forming cavities in the die. Each cavity is generally rectangular shape.

[0070] Each group of 2 cavities further includes a surrounding flange. In order to maximise package strength, the film is delivered to the forming die in a crease free form and with minimum tension. In the forming step, the film is heated to 100 to 120 degrees C, preferably approximately 110 degrees C, for up to 5 seconds preferably approximately 700 micro seconds. A heating plate is used to heat the film, which plate is positioned to superpose the forming die. The plate includes a plurality of depressions, which correspond to the recesses on the forming die. During this pre-heating step, a vacuum is pulled through the pre-heating plate to ensure intimate contact between the film and the pre-heating plate, this intimate contact ensuring that the film is heated evenly and uniformly (the extent of the vacuum is dependant of the thermoforming conditions and the type of film used, however in the present context a vacuum of less than 0.6 bar was found to be suitable). Non-uniform heating results in a formed package having weak spots. In addition to the vacuum, it is possible to blow air against the film to force it into intimate contact with the preheating plate.

[0071] The thermoformed film is thus molded into the cavities forming a plurality of recesses which, once formed, are retained in their thermoformed orientation by the application of a vacuum through the walls of the cavities. This

EP 1 375 637 A1

vacuum is maintained at least until the packages are sealed. Further, the cavities are cooled to 8 degrees C by the circulation of liquid coolant through the forming die. Once the recesses are formed and held in position by the vacuum, the compositions, in this case a liquid and a powdered detergent, are added to each of the recesses, where in each group of 2 recesses results in one recess filled with liquid detergent and one with powdered detergent. The fact that formed recesses are retained in their formed orientation by the vacuum substantially prevents the formed film shrinking, which if not prevented could result in some of the composition in the recesses spilling or splashing out of the recess and onto that portion of film which overlies the sealing flange resulting in poor sealing. A second sheet of polyvinyl alcohol film (65-micrometer thickness) is then superposed on the first sheet covering the filled recesses and heat-sealed thereto using a heating plate. In this case the heat sealing plate, which is flat, operates at a temperature of about 140 to 160 degrees centigrade, and contacts the films for 1 to 2 seconds and with a force of 8 to 30 kg/cm², preferably 10 to 20 kg/cm².

[0072] The flanges surrounding each cavity ensure that the films are sealed together along the flange to form a continuous closed flat seal.

[0073] Once sealed, the packages formed are separated from the web of sheet film using cutting means, whereby the cutting is done such that the two compartments of one single package remain connected to each other by a flat seal area. At this stage it is possible to release the vacuum on the die, and eject the formed packages from the forming die. In this way the packages are formed, filled and sealed while nesting in the forming die. In addition they may be cut while in the forming die as well.

[0074] During the forming, filling and sealing steps of the process, the relative humidity of the atmosphere is controlled at ca. 50%. This is done to maintain the heat sealing characteristics of the film. When handling thinner films, it may be necessary to reduce the relative humidity to ensure that the films have a relatively low degree of plasticisation and as such tend to be stiffer resulting in easier handling.

Example 4

[0075] A detergent powder (solid formulation 1) was made of the following composition by pre-granulating the granule ingredients, followed by post-dosing the rest of the ingredients

<i>Ingredient</i>	Parts by weight
Granules	
Na-las	1.1
Nonionic 7EO	0.5
Soap (C16-C18)	0.1
Zeolite A24	2.4
NaAc3aq	0.3
Light soda ash	0.4
SCMC (68%)	0.1
Moisture/minors	0.4
Post-dose	
EAG (17% silicone)	3.0
Fluorescer (15%)	2.2
STP HPA	28.3
STP LV	34.0
Na-disilicate (80%)	3.8
TAED (83%)	4.3
Percarbonate	16.9
Dequest 2047	1.9
Minors/ enzymes/colour	to 100

[0076] Solid formulation 2 was prepared by post dosing the following components

Antifoam granule (17 % active)	3.2
Fluorescer granule (15 % active)	2.5

EP 1 375 637 A1

(continued)

TAED (83% active)	8.8
Coated Percarbonate	40.6
Blue speckles	1.4
Granular sodiumdisilicate (80% active)	6.5
Trisodiumcitrate 2aq.	32.5
Enzymes, sequestrants, perfume	4.5

[0077] A semi-solid formulation was prepared of the following composition:

<i>Ingredient</i>	<i>Parts by weight</i>
Na-las	39.1
Nonionic 7EO	33.5
C12 soap	7.3
Monopropyleenglycol	to 100

[0078] A liquid formulation was prepared of the following compositions

LAS, monoethanolamine salt	24.0
Nonionic 7EO	20.3
Soap	22.4
Monopropylene glycol	23.7
Moisture, salts, NDOM	6.9
Minors (enzymes, polymers, perfume)	2.7

[0079] The above product formulations were dosed into the packages of figure 1 as follows:

Figure 1A: the larger compartment contained 40 grammes of solid formulation 1, the smaller compartment 15 grammes of the semi-solid formulation.

Figure 1A: the larger compartment contained 40 grammes of solid formulation 2, the smaller compartment 15 grammes of the semi-solid formulation.

Figure 1B: the larger compartment contained 50 mls of the liquid formulation, the smaller compartment 7 grammes of solid formulation 1.

Figure 1C: the larger compartment contained 35 grammes of solid formulation 2 the smaller department 15 mls of liquid formulation.

Figure 1d: the larger compartment contained 50 ml of the liquid formulation the small compartment 7 grammes of the semi-solid formulation.

Figure 1e: the left compartment contained 25 grammes of the solid formulation, the right department contained 25 grammes of a solid formulation which in addition to the ingredients as listed above contained 5 parts by weight of blue speckles.

Figure 1f: the large compartment contained 40 grammes of semi-solid formulation, the small compartment 8 grammes of solid formulation 2.

Claims

1. A process for the producing a water-soluble multi-compartment package comprising two to five closed compartments, said package containing at least two different cleaning compositions, comprising the steps of:

- (a) placing a first sheet of water-soluble film over a forming die having at least two cavities;
- (b) heating the film to mould the film into said cavities thereby forming at least two recesses in the film;
- (c) placing at least two different cleaning compositions in at least two different adjacent recesses;
- (d) sealing a second sheet of film across the formed recesses to produce at least two closed adjacent compartments comprising at least two different cleaning compositions;
- (e) Cutting in such manner that a package is formed having two to five compartments said package containing at least two different cleaning compositions and wherein said compartments are connected to each other by at least one seal area.

2. A process according to claim 1 wherein the compartments are separated by a flat seal.

3. A multi-compartment package comprising from 2 to 5 compartments obtained by a process comprising the thermoforming of a water-soluble film, said package containing at least two different cleaning compositions and wherein said compartments are connected to each other and separated by at least one flat seal area.

4. A package according to claim 3, wherein the compartments are connected to each other by flat seals having a size of less than 10 mm, more preferred 1 to 9 mm, most preferred 3 to 7 mm.

5. A package according to claim 3, wherein the stretch factor of each of the compartments is from 1.5 to 20, more preferred from 1.5 to 15, most preferred from 2 to 12.

6. A package according to claim 5, wherein the ratio of the highest stretch factor to the lowest stretch factor is from 1 to 5, more preferred from 1.1 to 4.5, most preferred from 1.2 to 4.0.

7. A package according claim 5 wherein the compartment with the highest stretch factor comprises a solid cleaning composition and the compartment with the lowest stretch factor comprises a semi-solid or liquid cleaning composition.

8. A package according to claim 5 wherein the average film thickness is from 20 to 100 micrometer.

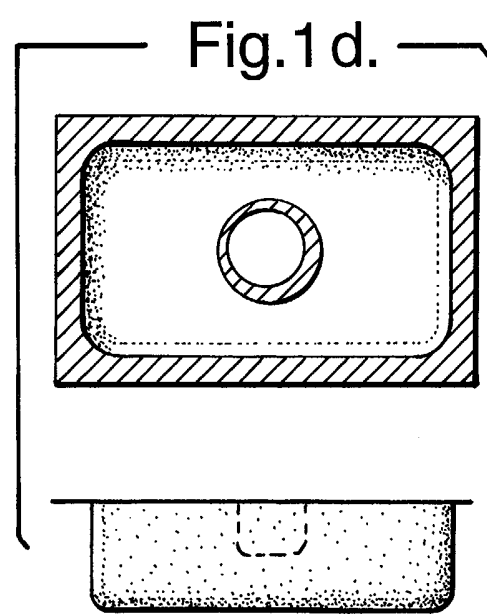
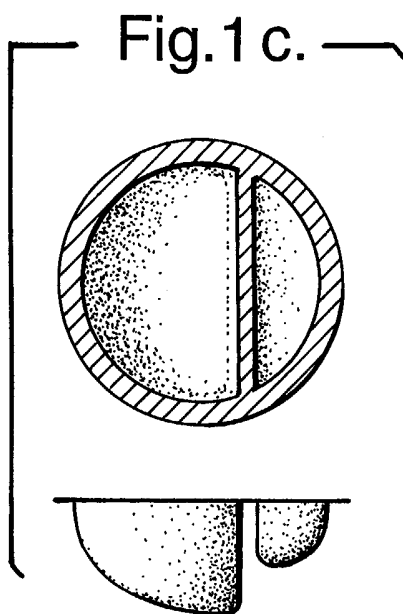
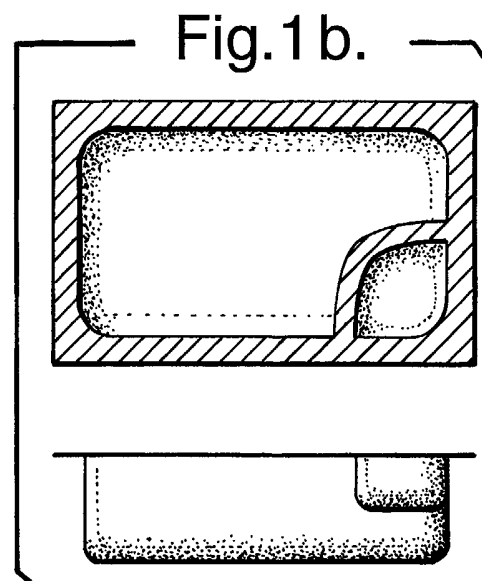
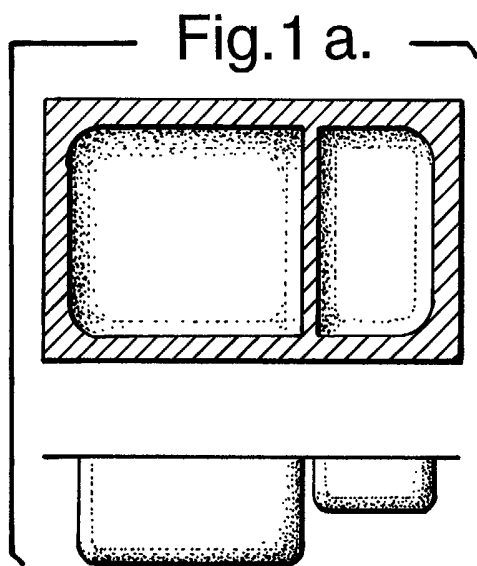


Fig.1 e. —

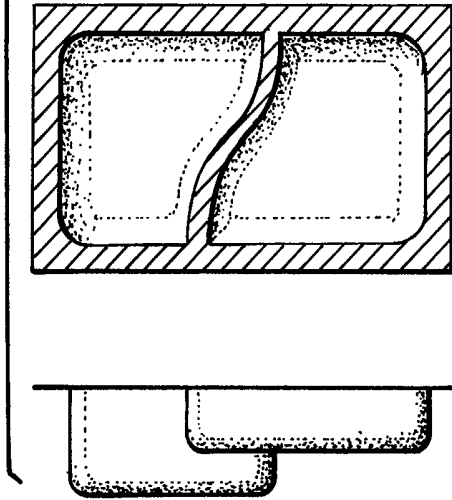


Fig.1 f. —

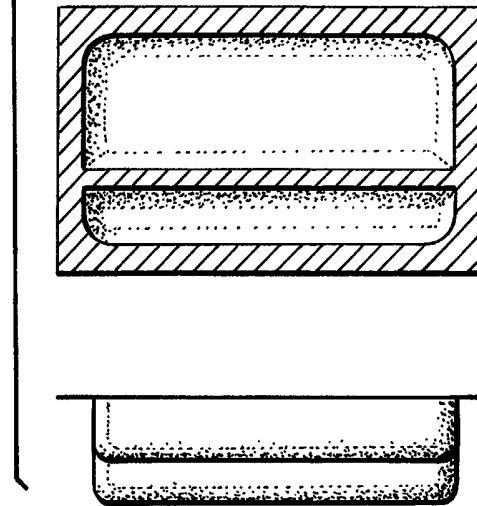


Fig.1 g. —


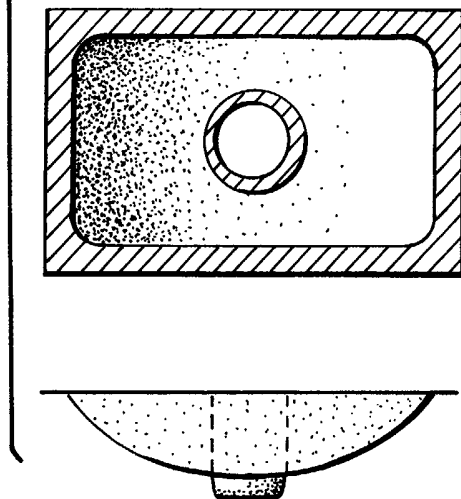


Fig.2. —



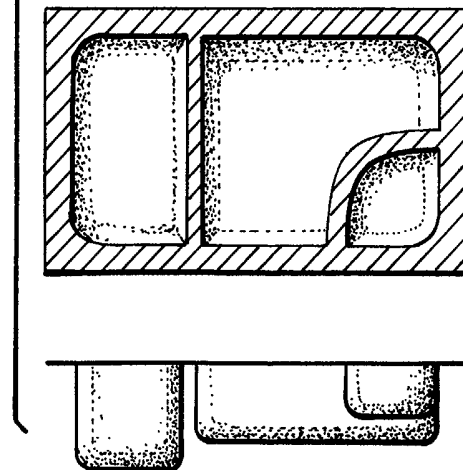

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 07 6741

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	WO 02 16205 A (DUFFIELD PAUL JOHN ; RECKITT BENCKISER UK LTD (GB)) 28 February 2002 (2002-02-28) * page 3, line 22 - line 30 * * page 8, line 25 - page 9, line 11 * * page 23, line 28 - page 24, line 20 * ---	1-4	C11D17/04 B65D65/46
Y	DE 200 22 487 U (AQUASOL LTD ; RECKITT BENCKISER UK LTD (GB)) 13 December 2001 (2001-12-13) * page 17, paragraph 2 - page 18, paragraph 1 * * page 61, paragraph 1 - page 62, paragraph 2; figures 1-7 * * page 15, paragraph 3 * ---	1-4	
A	---	8	
A	WO 02 42408 A (PROCTER & GAMBLE) 30 May 2002 (2002-05-30) * page 5, line 14 - line 25 * * page 11, line 19 - page 12, line 20 * * page 14, line 4 - line 25 * ---	1-8	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	EP 0 414 462 A (UNILEVER PLC ; UNILEVER NV (NL)) 27 February 1991 (1991-02-27) * page 11, line 50 - page 14, line 40 * ---	1-8	B65D C11D B65B
A	WO 01 00781 A (HENKEL KGAA) 4 January 2001 (2001-01-04) * page 8, paragraph 3 - page 10, paragraph 3 * ---	1-8	
A	FR 2 682 932 A (ACP STE NOUVELLE) 30 April 1993 (1993-04-30) * page 2, line 1 - line 19; figure 1 * ---	1-8	
	-/--		
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 19 September 2003	Examiner Bevilacqua, V
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 07 6741

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 5 845 463 A (HENAUX CLAUDE HENRI) 8 December 1998 (1998-12-08) * column 1, line 43 - line 48; claim 1; figure 1 *	1-8	
A	WO 02 40370 A (PROCTER & GAMBLE) 23 May 2002 (2002-05-23) * page 7, paragraph 3 *	5-7	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Place of search MUNICH		Date of completion of the search 19 September 2003	Examiner Bevilacqua, V
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 07 6741

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

19-09-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0216205	A	28-02-2002	AU 8232201 A	04-03-2002
			AU 8234101 A	04-03-2002
			AU 8417501 A	04-03-2002
			BR 0113489 A	15-07-2003
			CA 2419280 A1	28-02-2002
			CA 2420121 A1	28-02-2002
			CA 2420372 A1	28-02-2002
			EP 1311429 A1	21-05-2003
			EP 1311654 A1	21-05-2003
			EP 1311440 A1	21-05-2003
			WO 0216205 A1	28-02-2002
			WO 0216541 A1	28-02-2002
			WO 0216222 A1	28-02-2002
			GB 2368587 A	08-05-2002
			GB 2371552 A	31-07-2002
			GB 2368588 A ,B	08-05-2002
DE 20022487	U	13-12-2001	GB 2357488 A	27-06-2001
			GB 2361010 A	10-10-2001
			AU 1647001 A	30-05-2001
			BR 0015617 A	10-09-2002
			CA 2391613 A1	25-05-2001
			CA 2414395 A1	25-05-2001
			CN 1409682 T	09-04-2003
			DE 20022487 U1	13-12-2001
			EP 1232100 A1	21-08-2002
			GB 2356842 A	06-06-2001
			WO 0136290 A1	25-05-2001
			GB 2358382 A ,B	25-07-2001
			GB 2370552 A ,B	03-07-2002
			GB 2370553 A	03-07-2002
			GB 2370554 A ,B	03-07-2002
			GB 2376676 A ,B	24-12-2002
			US 2003108705 A1	12-06-2003
WO 0242408	A	30-05-2002	AU 3049802 A	03-06-2002
			AU 3934902 A	03-06-2002
			AU 8060601 A	30-01-2002
			CA 2415304 A1	24-01-2002
			CA 2426023 A1	30-05-2002
			CA 2426645 A1	30-05-2002
			DE 1337620 T1	26-06-2003
			EP 1305394 A1	02-05-2003
			EP 1337619 A2	27-08-2003
			EP 1337620 A2	27-08-2003
			WO 0206438 A1	24-01-2002

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 07 6741

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

19-09-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0242408 A		WO 0242408 A2	30-05-2002
		WO 0242400 A2	30-05-2002
		US 2002142931 A1	03-10-2002
		US 2002169092 A1	14-11-2002
		US 2002142930 A1	03-10-2002
		AU 3243502 A	03-06-2002
		CA 2425641 A1	30-05-2002
		EP 1337621 A2	27-08-2003
		WO 0242401 A2	30-05-2002
		US 2002137648 A1	26-09-2002
		CA 2430979 A1	08-08-2002
		CA 2430982 A1	08-08-2002
		WO 02060757 A2	08-08-2002
		WO 02060758 A1	08-08-2002
EP 0414462 A	27-02-1991	AU 628627 B2	17-09-1992
		AU 6115990 A	28-02-1991
		AU 625911 B2	16-07-1992
		AU 6116290 A	28-02-1991
		BR 9004151 A	03-09-1991
		BR 9004152 A	03-09-1991
		CA 2023613 A1	24-02-1991
		CA 2023614 A1	24-02-1991
		DE 69024561 D1	15-02-1996
		DE 69024561 T2	15-05-1996
		DE 69025012 D1	07-03-1996
		DE 69025012 T2	20-06-1996
		EP 0414462 A2	27-02-1991
		EP 0414463 A2	27-02-1991
		ES 2082829 T3	01-04-1996
		ES 2081937 T3	16-03-1996
		JP 3119174 A	21-05-1991
		JP 1855859 C	07-07-1994
		JP 3119175 A	21-05-1991
		JP 5071699 B	07-10-1993
		KR 9308484 B1	07-09-1993
		KR 9308479 B1	07-09-1993
		TR 24867 A	01-07-1992
		US 5160654 A	03-11-1992
		US 5132036 A	21-07-1992
		ZA 9006715 A	29-04-1992
		ZA 9006717 A	29-04-1992
WO 0100781 A	04-01-2001	DE 19934983 A1	01-02-2001
		DE 19961661 A1	28-12-2000
		AU 5405300 A	31-01-2001

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 07 6741

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

19-09-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0100781	A		CA 2312157 A1	25-12-2000
			WO 0100781 A1	04-01-2001
			AU 5815000 A	13-02-2001
			CA 2312154 A1	26-01-2001
			WO 0107551 A1	01-02-2001

FR 2682932	A	30-04-1993	FR 2682932 A1	30-04-1993

US 5845463	A	08-12-1998	FR 2748989 A1	28-11-1997
			EP 0808770 A1	26-11-1997
			DE 69701057 D1	10-02-2000
			DE 69701057 T2	06-07-2000
			ES 2142139 T3	01-04-2000

WO 0240370	A	23-05-2002	GB 2369094 A	22-05-2002
			AU 2695702 A	27-05-2002
			WO 0240370 A1	23-05-2002
			US 2002123444 A1	05-09-2002

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82