



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 376 115 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**

Note: Bibliography reflects the latest situation

(15) Correction information:
Corrected version no 1 (W1 A2)
INID code(s) 30

(51) Int Cl.7: **G01N 27/403**, G01N 33/487

(48) Corrigendum issued on:
26.05.2004 Bulletin 2004/22

(43) Date of publication:
02.01.2004 Bulletin 2004/01

(21) Application number: **03253940.5**

(22) Date of filing: **23.06.2003**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR
Designated Extension States:
AL LT LV MK

(71) Applicant: **Apex Biotechnology Corporation**
Hsinchu, Tawain (CN)

(72) Inventors:
• **Yang, Mark, 3F, No. 86, Alley 27, Lane 372**
Taipei 105, Taiwan (CN)
• **Huang, River, 4F, No. 6, Innovation Road II**
Hsinchu, Tawain (CN)
• **Huang, Bin, 4F, No. 6, Innovation Road II**
Hsinchu, Tawain (CN)

- **Chu, Shame, 4F, No. 6, Innovation Road II**
Hsinchu, Tawain (CN)
- **Lin, Yueh-Hui, 4F, No. 6, Innovation Road II**
Hsinchu, Tawain (CN)
- **Shen, Benjamin Cheng-Yu,**
4F No.6, Innovation Rd II
Hsinchu, Tawain (CN)
- **Shen, Thomas Y.S., 4F, No. 6, Innovation Road II**
Hsinchu, Tawain (CN)

(74) Representative: **Senior, Alan Murray**
J.A. KEMP & CO.,
14 South Square,
Gray's Inn
London WC1R 5JJ (GB)

(54) **Portable multi-functional electrochemical sensor**

(57) A portable multi-functional electrochemical biosensor system comprises a plurality of sample cells, pluggable information memories and a multi-functional signal analysis processor. The biosensor system uses a set of sample cell and pluggable information memory to detect the concentration of a corresponding selected analyte. Each sample cell has a reaction zone on which a chemical substance is placed to react with the corresponding analyte and has at least two independent electrodes. During detection, each corresponding pluggable information memory can provide parameters used for analysis. The multi-functional signal analysis processor has a microprocessor, an electrically erasable programmable read/write memory and an environmental temperature sensor. The concentration of the selected analyte is calculated by using the electrochemical reaction signal output from the sample cell and the parameters with cooperation of the environmental temperature sensor, and then an analysis result is output.

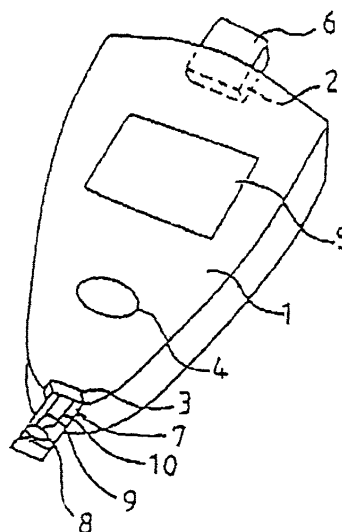


Fig. 2