



(11) **EP 1 387 434 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
24.10.2007 Bulletin 2007/43

(51) Int Cl.:
H01Q 1/48 ^(2006.01) **H01Q 1/24** ^(2006.01)

(21) Application number: **02018940.3**

(22) Date of filing: **26.08.2002**

(54) **Wideband antenna device with extended ground plane in a portable device**

Breitbandige Antenne mit erweiterter Massefläche in einem tragbaren Gerät

Antenne large bande à plan de masse étendu dans un dispositif portable

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR**

(30) Priority: **13.06.2002 EP 02013085**

(43) Date of publication of application:
04.02.2004 Bulletin 2004/06

(73) Proprietor: **Sony Ericsson Mobile
Communications AB
221 88 Lund (SE)**

(72) Inventors:
• **Rosenberg, Johan Anton Eduard
7991 Ed Dwingeloo (NL)**

• **Schreuder, Johan
9531 Ae Borger (NL)**
• **Uildriks, Tjapko
9465 Tr Anderen (NL)**

(74) Representative: **Karlsson, Leif Karl Gunnar et al
Ström & Gulliksson AB
P O Box 793
220 07 Lund (SE)**

(56) References cited:
**WO-A-01/76006 US-A- 5 020 136
US-B1- 6 266 019**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 387 434 B1

Description

Technical Field

[0001] The present invention relates to an antenna device for use in a small portable device. More specifically, the invention relates to a wideband antenna having sufficient efficiency for meeting the requirements of different communications protocols. Also, the antenna reduces the power consumption of the small portable device so it can operate longer on a small battery.

Known Prior Art

[0002] Examples of a small portable device is e.g. a headset for wireless communication through an antenna with a mobile communication apparatus, such as a mobile telephone, a Bluetooth device, or any portable or stationary electronic device. A small portable device is, as indicated, characterized in that it is small and light. Therefore, it is preferred if the antenna used in such a device is small, light, and efficient. The small portable device may communicate using a communication protocol, such as the Bluetooth, the WLAN (Wireless Local Area Network), the UMTS (Universal Mobile Telecommunications System), or the GSM (Global System for Mobile communications) protocol.

[0003] One example of an antenna for a small portable device is a monopole antenna, which extends out of the product. Another solution is a PIFA (Planar Inverted F Antenna) antenna. However, there are several drawbacks of these antennas. To achieve sufficient bandwidth to meet the requirements of known communication protocols, e.g. according to above, the known antennas all need ground planes, which are too big to fit in a small portable device.

[0004] There are a number of problems with the known prior art antennas, which make them unsuitable for use in a small portable device.

[0005] Firstly, the size of the small portable device causes problems for the antenna design, as it entails limited battery capacity. This means that the antenna should have a high efficiency in order not to waste battery power. Small antennas have lower efficiency than big antennas. As the device is small, the ground plane will also be small. An antenna requires a certain ground plane size to achieve a certain bandwidth, which is necessary for the antenna to be able to operate under a specific communications protocol, which always requires a certain bandwidth.

[0006] Secondly, since cost is often important for a small portable device it is important that the antenna can be made cheaply, which is not always the case with the antennas known in the art.

[0007] Document US-5,020,136 describes a combination battery pack and low profile antenna arrangement for use in conjunction with a two-way portable transceiver.

[0008] Thirdly, because of the small nature of the small portable device, other parts of the device will be very close to the antenna, which can have a negative influence on the antenna performance. Especially conducting materials like batteries, knobs or ESD (electrostatic discharge) means can have a very negative influence on the antenna performance. Therefore, the antenna has to work well in this environment, which is also not possible with the antennas according to the known prior art.

Summary of the Invention

[0009] Therefore, the object of the present invention is to provide an antenna device, which is sufficiently small to fit in small portable devices and which has efficiency and bandwidth to meet requirements of known and future communications protocols.

[0010] The above objects are achieved by an antenna device for a portable device, which comprises a folded antenna loop of conducting material having first and second ends to be connected to radio frequency (RF) circuitry and a ground plane of a PCB, respectively. Further, the antenna device comprises a ground plane extender positioned in the extension of a first side of the PCB. In one embodiment of the invention, the antenna extender is at least one battery casing of a battery cell having a position to serve as an extension of the ground plane of the PCB.

[0011] The antenna loop comprises first and second connectors provided at a second side of the PCB for connecting the antenna loop to the RF circuitry and the ground plane of the PCB, respectively.

[0012] Further, the antenna loop comprises:

a first portion having a first and a second end, said portion extending in a first direction along a third side of the PCB, the first end being connected to the RF circuitry of the PCB;

a second portion having a first and a second end, the first end of the second portion being connected to the second end of the first portion, said second portion extending in a second direction from the third side of the PCB towards a fourth side of the PCB, which is opposite the said third side; and

a third portion having a first and a second end, the first end of the third portion being connected to the second end of the second portion and the second end of the third portion being connected to the ground plane of the PCB, said third portion extending in the direction opposite to said first direction along said fourth side of the PCB.

[0013] In one embodiment, the PCB of the antenna device is a multi layer PCB having one layer used as a dedicated RF ground plane, which also serves as the ground plane of the antenna device. The antenna loop is positioned opposite a first or a second surface of the PCB.

[0014] The material of the antenna loop is any well conducting material, such as metal. In an alternative embodiment, the antenna loop is provided as a U-shaped dielectric having the antenna shape etched into the dielectric. Still another embodiment is to provide the antenna loop inside the PCB as an element thereof.

[0015] Additionally, the antenna device may be provided with a bezel, which is connected to the PCB, for fending off ESD (Electrostatic Discharges) discharges. The bezel extends from the third side of the PCB towards the fourth side of the PCB. Also, to improve ESD robustness, the antenna device may be provided with bezel flanges connected to the ground plane of the PCB, which extends along the third and fourth sides of said PCB.

[0016] A further object of the invention is to provide an PCB comprising an antenna device, which is sufficiently small to fit in small portable devices, and which has good performance to meet requirements of communications protocols.

[0017] The above objects are achieved by a multi-layer printed circuit board (PCB) comprising an antenna device according to the above.

[0018] Finally, it is an object of the invention to provide a portable communication device having an antenna with good performance and being sufficiently small to fit into a small portable device. The efficiency of the antenna device should be high to keep the power consumption low. As should be noticed, it is a further important object of the antenna according to the invention to provide high bandwidth to meet said requirements of communication protocols.

[0019] A portable device comprising the antenna device according to above achieves the above objects. In one embodiment, the portable communication device is a headset.

[0020] An advantage of an antenna device according to the present invention is that it is sufficiently small to fit into small portable devices and still provides good efficiency and high bandwidth. Therefore, the antenna device can be adapted to meet requirements of several different communications protocols. Also, as the PCB of the antenna device may be decreased, the weight and the cost of the antenna device are also decreased.

[0021] Further preferred features of the invention are defined in the dependent claims.

[0022] It should be emphasized that the term "comprises/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps, components or groups thereof.

Brief Description of the Drawings

[0023] A preferred and alternative embodiments of the present invention will be described in the following detailed disclosure, reference being made to the accompanying drawings, in which:

Fig. 1 illustrates a small portable device embodied

as a headset;

Fig. 2 shows a general embodiment of the antenna device according to the invention;

Fig. 3 shows a second embodiment of the antenna device according to the invention;

Fig. 4 shows a third embodiment of the antenna device according to the invention;

Fig. 5 shows a mag-log diagram of a measurement made on a prototype of the embodiment of Fig. 3; and
Fig. 6 shows a Smith chart of a measurement made on a prototype of the embodiment of Fig. 3.

Detailed Disclosure of Embodiments

[0024] In Fig. 1 is a small portable communication device illustrated as a headset 1, which is adapted for wireless communication with a mobile telephone 2. The small portable device could be any electronic communication device, which has to be small to meet user preferences and which is adapted to communicate wirelessly with another communication device, which may be stationary or portable.

[0025] In the following, reference will be made to a headset 1 and a mobile telephone 2. However, this is only for convenience and the illustrated headset 1 and mobile telephone 2 are only for exemplifying purposes and should not be taken as limiting the scope of the invention.

[0026] The headset 1 comprises a microphone 3 and a loudspeaker 4, through which a user of the headset 1 may receive and transmit speech to the mobile telephone 2 through a wireless connection 5. Also, it is equally possible to communicate any data between the small portable device and the mobile telephone 2.

[0027] In Fig 2 a first general embodiment of an antenna device 10 according to the invention is shown, which may be positioned in the proximity of the loudspeaker 4 of Fig 1. The antenna device 10 comprises a half-wave folded antenna loop 11 having first 12, second 13, and third 14 portions, respectively, each having a first and a second end. A first connector 15a is connected to the first end of the first portion 12, and a second connector 15b is connected to the second end of the third portion 14. The first end of the second portion 13 is connected to the second end of the first portion 12, and the second end of the second portion 13 is connected to the first end of the third portion 14. In fig. 2, the antenna loop 11 is provided opposite a first front surface of the PCB 16. However, the antenna loop 11 may equally be positioned opposite a second rearwardly facing surface of the PCB 16.

[0028] The antenna loop 11 is connected, through the connectors 15a, 15b, to radio circuitry and a ground plane within the PCB 16, respectively. The PCB 16 can be made out of any known PCB, as long as one layer is used as a dedicated RF (Radio Frequency) ground plane, which also serves as the ground plane of the antenna device 10. The connectors may be a part of the antenna

loop 11 connected to the PCB 16 via holes provided in the PCB. The connectors may be provided at an angle α in relation antenna loop 11 and the PCB 16. This will shorten the total length of the antenna device compared to if the angle α is 90°. If the connectors are provided essentially perpendicular to the PCB 16, the total length of the antenna is longer. However, if the connectors are folded with the angle α the antenna solution is made shorter without effecting the antenna performance.

[0029] Batteries 17a, 17b are positioned at a first side of the PCB 16. The position of the batteries 17a, 17b in relation to the PCB 16 and the connectors 15a, 15b is important for the performance of the antenna device 10, as will be further explained below. In Fig. 2, two batteries 17a, 17b are shown. However, any suitable number of batteries may be utilized, depending on the actual configuration. The batteries 17a, 17b can be of any configuration, technology or size suitable with the headset 1, as long as they are provided in a battery casing.

[0030] The antenna device 10 is a loop antenna, wherein the antenna loop 11 is made out of a metal, such as copper. However, any well conducting material can be used. As an alternative embodiment, the antenna loop could be provided as a loop on one layer of a multi-layer PCB 16. Still another embodiment is to provide the antenna loop 11 as a component formed as a U-shaped dielectric with the antenna loop etched into it (like a thick PCB), making it suitable for SMT (Surface Mounted Technology) pick and place machines. As is shown in Fig 2, the first connector 15a is connected to the PCB at a second side thereof, which is opposite the first side of the PCB 16.

[0031] The first portion 12 extends along a third side of the PCB 16 towards the first side of the PCB. The second portion 13 extends from the second end of the first portion 12 towards a fourth side of the PCB 16. Finally, the third portion 14 extends from the second end of the second portion 13 along the fourth side of the PCB 16 towards the second antenna connector 15b, which is connected to the PCB 16 at the second side thereof.

[0032] The shape of the antenna loop 11 is not fixed, as can be seen from a second embodiment shown in Fig. 3. Like numerals of Fig. 3 correspond to like numerals of Fig. 2. Consequently, the antenna connectors 15a, 15b of Fig. 2 correspond to antenna connectors 25a, 25b of Fig. 3, the antenna loop 11 of Fig. 2 corresponds to an antenna loop 21 of Fig. 3 etc. As is illustrated in Fig 3, the angle between the first portion 22 and the second portion 23, respectively, is less than 90 degrees. The same applies for the angle between the second and third portions 23, 24. However, the angles may be more than 90 degrees (not shown). Further, the first 23 and third 24 portions do not have to be straight, but can be folded. Consequently, the exact design of the antenna loop 11, 21 is not fixed, and has to be thoroughly tested and evaluated in each specific case.

[0033] The second embodiment of the antenna device 20 shown in Fig. 2 comprises a bezel 28. The bezel 28

is provided between the antenna loop 21 and the batteries 27a, 27b, and is connected to the PCB 26. The bezel 28 is optional and utilized for fending off ESD (Electrostatic Discharge) discharges. The bezel extends from the third side of the PCB 26 towards the fourth side of the PCB 26. In the second embodiment it is made of a metal sheet, but can be made of any well conducting material.

[0034] In Fig. 4 a third embodiment of the invention is shown. Like numerals in Fig. 4 correspond to like numerals of Fig. 2 according to the same pattern as was described in relation to Fig. 3. In the third embodiment, the bezel 38 is provided with bezel flanges 39a, 39b extending along the third and fourth sides of the PCB 36. The bezel flanges 39a, 39b are, via the bezel 38, also connected to the PCB 36 and improves ESD robustness without influencing the antenna performance negatively. As should be noticed, the bezel flanges 39a, 39b may be provided without the bezel 38.

[0035] To extend the ground plane of the PCB 16, 26, 36 a ground plane extender is provided in the extension of the first side of the PCB. Any well conducting material will function as the extender. The battery cell provided in a battery casing made of a conducting material, such as metal, may provide the ground plane extender. Consequently, the batteries 17a, 17b, 27a, 27b, 37a, 37b will act as an extension of the ground plane of the PCB 16, 26, 36 if they are positioned in the extension of the first side of the PCB 16, 26, 36, which is opposite the second side where the connectors 15a, 15b, 25a, 25b, 35a, 35b are connected to the PCB 16, 26, 36.

[0036] The position of the at least one battery 17a, 17b, 27a, 27b, 37a, 37b is important for the antenna performance. Although the batteries 17a, 17b, 27a, 27b, 37a, 37b are not directly connected to the ground plane of the PCB 16, 26, 36 they will act together with the ground plane of the PCB to form an extended ground plane, which is larger than the actual ground plane of the PCB. Therefore, the antenna loop 11, 21, 31 will experience a ground plane which is sufficiently large without actually providing a ground plane having an actual size to achieve a certain bandwidth to meet requirements of a certain communications protocol. Consequently, the PCB 16, 26, 36 may be decreased if the batteries 17a, 17b, 27a, 27b, 37a, 37b are provided in a position for extending the ground plane. Therefore, the dimensioning of the antenna and the small portable device can be made small, and light.

[0037] The distance d between the PCB 16, 26, 36 and the batteries 17a, 17b, 27a, 27b, 37a, 37b is approximately about 1 mm in the shown embodiments. However, the distance d has to be tested and evaluated in each specific case.

[0038] A further tuning parameter of the antenna device 10, 20, 30 is that the connectors 15a, 15b, 25a, 25b, 35a, 35b should preferably be provided as close as possible to the edge of the second side of the PCB 16, 26, 36. The closer the connectors 15a, 15b, 25a, 25b, 35a, 35b are to the edge of the second side of the PCB 16,

26, 36, the more bandwidth is gained. Similarly, the first and second portions 12, 22, 32, 13, 23, 33 of the antenna loop, respectively, should preferably be provided as close as possible to the third and fourth side of the PCB 16, 26, 36, respectively. The closer said portions are to the third and fourth sides of the PCB, the more bandwidth is gained.

[0039] The antenna design according to the invention is sufficiently efficient to be adapted for communicating according to several protocols, such as Bluetooth, WLAN, GSM, UMTS, ISM etc. There are a number of tuning parameters for adapting the antenna to a specific protocol, such as the length of the antenna loop 11 (half wave antenna loop), the length L1 of the first and third portions 12, 14, respectively, the length L2 of the second portion 13, the length L3 and width W1, W2 of the PCB 16, the length L4 and width W3 of the batteries 17a, 17b, the height H of the antenna loop 11 above the PCB 16, the distance D between the connectors 15a, 15b, the thickness T of the antenna loop 11, the distance d between the PCB 16 and the batteries 17a, 17b, the angle α between the first and third portions 12, 14 and the connectors 15a, 15b, as is indicated in Fig. 2.

[0040] A preferred thickness of the antenna loop is about 0.1-1 mm.

[0041] The embodiment shown in Fig. 3 is adapted for communication according to the Bluetooth protocol, wherein the center frequency is around 2,4-2,5 GHz, and has the following approximate dimensions:

L1	22 mm
L2	13.4 mm
L3	38 mm
L4	20 mm
W1	10 mm
W2	16 mm
W3	16.5 mm (together)
D	7.5 mm
T	0.1-1 mm
W4	2.3 mm
H	5.1 mm
d	1 mm
α	50°

[0042] In Fig. 5 a log-mag diagram and in Fig. 6 a Smith chart of a measurement made on a prototype of the embodiment of Fig. 3 are shown. The measurement is made with a human body behind the antenna device in order to make the measurement as realistic as possible. From Fig. 5 and Fig 6 of a measurement made on a prototype of the embodiment of Fig. 3 it can be concluded that the

antenna device shows good performance, meeting the bandwidth requirements of the Bluetooth protocol.

[0043] If the height H is increased, bandwidth is gained. However, with an increased height H the antenna will be more sensitive to the environment, such as the microphone 3, the loudspeaker 4, the user of the headset 1, and other electronic components of the headset, and vice versa. Also, in alternative embodiments the first, second and third portions of the antenna loop may be provided in different planes. Each portion can be provided in a different plane if preferred.

[0044] As should be noted, the antenna has an input impedance of 50 ohm, and therefore no impedance matching circuits are needed to match the antenna to the RF circuitry of the PCB.

[0045] The present invention has been described with reference to a few alternative embodiments. However, the embodiments are only for exemplifying purposes and should not be taken as limiting the scope of the invention, which is best defined by the appended independent claims. All dimensions of the antenna device according to the invention have to be thoroughly tested and evaluated in each specific case. Further, the invention has been described in relation to a headset. However, the invention can be adapted to and utilized in any small portable device. Also, the antenna device can be used in other portable devices, such as mobile telephones, mobile terminals, smartphones, or the like, where a small and efficient antenna design is preferred.

Claims

1. A loop antenna device (10, 20, 30) for a portable device (1) such as a headset, the loop antenna device (10, 20, 30) comprising an antenna loop (11, 21, 31) of conducting material being positioned opposite a ground plane, a ground plane extender (17a, 17b, 27a, 27b, 37a, 37b) to extend the ground plane, and a Radio frequency (RF) circuitry, **characterized in that** the ground plane is provided within a and a Radio frequency (RF) circuitry, printed circuit board PCB (16, 26, 36), the antenna loop (11, 21, 31) has first and second ends to be connected to radio frequency (RF) circuitry and the ground plane of the PCB, respectively, the ground plane extender (17a, 17b, 27a, 27b, 37a, 37b) is positioned in a longitudinal extension of the ground plane of the PCB and in the extension of a first side of the PCB (16, 26, 36), and the ground plane extender is a battery casing (17a, 17b, 27a, 27b, 37a, 37b).
2. The loop antenna device according to claim 1, wherein said PCB (16, 26, 36) is a multilayer PCB and said radio frequency (RF) circuitry is provided within said multilayer PCB.
3. The loop antenna device according to claim 1 or 2,

wherein the antenna loop comprises first and second connectors (15a, 15b, 25a, 25b, 35a, 35b) provided at a second side of the PCB (16, 26, 36) opposite said first side for connecting the antenna loop (11, 21, 31) to the RF circuitry and the ground plane of the PCB (16, 26, 36), respectively.

4. The loop antenna device according to any of the previous claims, wherein the antenna loop (11, 21, 31) further comprises:

a first portion (12) having a first and a second end, said portion (12, 22, 32) extending in a first direction along a third side of the PCB (16, 26, 36), the first end being connected to the RF circuitry of the PCB (16, 26, 36);

a second portion (13, 23, 33) having a first and a second end, the first end of the second portion (13, 23, 33) being connected to the second end of the first portion (12, 22, 32), said second portion extending in a second direction from the third side of the PCB (16, 26, 36) towards a fourth side thereof, which is opposite said third side; and

a third portion (14, 24, 34) having a first and a second end, the first end of the third portion (14, 24, 34) being connected to the second end of the second portion (13, 23, 33) and the second end of the third portion (14, 24, 34) being connected to the ground plane of the PCB (16, 26, 36), said third portion (14, 24, 34) extending in the opposite direction of said first direction along said fourth side of the PCB (16, 26, 36).

5. The loop antenna device according to any of the previous claims, wherein the PCB (16, 26, 36) is a multi-layer PCB having one layer used as a dedicated RF ground plane, which also provides the ground plane of the loop antenna device (10, 20, 30).

6. The loop antenna device according to any of the previous claims, wherein the antenna loop (11, 21, 31) is positioned opposite a first or a second surface of the PCB (16, 26, 36).

7. The loop antenna device according to any of the previous claims, wherein the conductive material of the antenna loop (11, 21, 31) is metal.

8. The loop antenna according to claim 6, wherein the antenna loop (11, 21, 31) is a U-shaped dielectric having the antenna shape etched into the dielectric.

9. The loop antenna device according to claim 5, wherein the antenna loop (11, 21, 31) is provided inside the PCB (16, 26, 36).

10. The loop antenna device according to any of the pre-

vious claims, wherein a bezel (28, 38), which is connected to the PCB, extends from the third side of the PCB (26, 36) towards the fourth side of the PCB, and/or bezel flanges (39a, 39b) connected to said ground plane extends along the third and fourth sides of the PCB.

11. A multi-layer printed circuit board (PCB), **characterized by** a loop antenna device according to any of the claims 1-10.

12. A portable communication device, **characterized by** a loop antenna according to any of the claims 1-10.

13. The portable communication device according to claim 12, wherein the portable communication device is a headset (1).

Patentansprüche

1. Eine Schleifenantenne (10, 20, 30) für ein tragbares Gerät (1) wie z. B. ein Headset, wobei die Schleifenantenne (10, 20, 30) eine gegenüber einer Massefläche angebrachte Antennenschleife (11, 21, 31) aus leitendem Material, eine Masseflächeerweiterung (17a, 17b, 27a, 27b, 37a, 37b) zur Erweiterung der Massefläche und eine Funkfrequenzschaltung (RF-Schaltung) aufweist,

dadurch gekennzeichnet,

dass sich die Massefläche in einer Leiterplatte (16, 26, 36) befindet, wobei die Antennenschleife (11, 21, 31) ein erstes und zweites Ende aufweist, um sie jeweils mit der Funkfrequenzschaltung (RF-Schaltung) und der Massefläche der Leiterplatte zu verbinden, dass die Masseflächeerweiterung (17a, 17b, 27a, 27b, 37a, 37b) in einer Längserstreckung der Massefläche der Leiterplatte sowie in einer Erstreckung einer Seite der Leiterplatte (16, 26, 36) angeordnet ist, und dass die Masseflächeerweiterung (17a, 17b, 27a, 27b, 37a, 37b) ein Batteriegehäuse bildet.

2. Die Schleifenantenne nach Anspruch 1, wobei die Leiterplatte (16, 26, 36) eine Mehrlagen-Leiterplatte ist und die Funkfrequenzschaltung (RF-Schaltung) in der Mehrlagen-Leiterplatte angeordnet ist.

3. Die Schleifenantenne nach Anspruch 1 oder 2, wobei die Antennenschleife einen ersten und zweiten Stecker (15a, 15b, 25a, 25b, 35a, 35b) auf der zweiten Seite der Leiterplatte (16, 26, 36) gegenüber der ersten Seite aufweist, um die Antennenschleife (11, 21, 31) jeweils mit der RF-Schaltung und mit der Massefläche der Leiterplatte (16, 26, 36) zu verbinden.

4. Die Schleifenantenne nach einem der vorstehenden Ansprüche, wobei die Antennenschleife (21, 31, 31) weiterhin aufweist:

einen ersten Teil (12, 22, 32) mit einem ersten und einem zweiten Ende, wobei dieser Teil (12, 22, 32) sich in eine erste Richtung entlang einer dritten Seite der Leiterplatte (16, 26, 36) erstreckt, wobei das erste Ende mit der RF-Schaltung der Leiterplatte (16, 26, 36) verbunden ist; einen zweiten Teil (13, 23, 33), der ein erstes und ein zweites Ende aufweist, wobei das erste Ende des zweiten Teils (13, 23, 33) mit dem zweiten Ende des ersten Teils (12, 22, 32) verbunden ist und sich dieser zweite Teil in eine zweite Richtung von der dritten Seite der Leiterplatte (16, 26, 36) zu einer vierten Seite erstreckt, die der dritten Seite gegenüberliegt, und einen dritten Teil (14, 24, 34), der ein erstes und ein zweites Ende aufweist, wobei das erste Ende des dritten Teils (14, 24, 34) mit dem zweiten Ende des zweiten Teils (13, 23, 33) und das zweite Ende des dritten Teils (14, 24, 34) mit der Massefläche der Leiterplatte (16, 26, 36) verbunden sind, wobei sich der dritte Teil (14, 24, 34) entgegengesetzt zur ersten Richtung entlang der vierten Seite der Leiterplatte (16, 26, 36) erstreckt.

5. Die Schleifenantenne nach einem der vorstehenden Ansprüche, wobei die Leiterplatte (16, 26, 36) eine Mehrlagen-Leiterplatte ist, in der eine Lage als spezielle RF-Massefläche verwendet wird, die gleichzeitig die Massefläche für die Schleifenantenne (10, 20, 30) darstellt.

6. Die Schleifenantenne nach einem der vorstehenden Ansprüche, wobei die Antennenrahmen (11, 21, 31) einer ersten oder zweiten Oberfläche der Leiterplatte (16, 26, 36) gegenüberliegt.

7. Die Schleifenantenne nach einem der vorstehenden Ansprüche, wobei das leitende Material der Antennenschleife (11, 21, 31) aus Metall besteht.

8. Die Schleifenantenne nach Anspruch 6, wobei die Antennenschleife (11, 21, 31) ein u-förmiges Dielektrikum ist und die Form der Antenne in dieses Dielektrikum geätzt ist.

9. Die Schleifenantenne nach Anspruch 5, wobei die Antennenschleife (11, 21, 31) in der Leiterplatte (16, 26, 36) angeordnet ist.

10. Die Schleifenantenne nach einem der vorstehenden Ansprüche, wobei eine Deckplatte (28, 38), die mit der Leiterplatte verbunden ist, sich von der dritten Seite der Leiterplatte (26, 36) zur vierten Seite der

Leiterplatte erstreckt und/oder Flansche (39a, 39b) der Deckplatte, die mit dieser Massefläche verbunden sind, entlang der dritten und vierten Seite der Leiterplatte verlaufen.

11. Eine Mehrlagen-Leiterplatte, **gekennzeichnet durch** eine Schleifenantenne nach jedem der Ansprüche 1-10.

12. Ein tragbares Kommunikationsgerät, **gekennzeichnet durch** eine Schleifenantenne nach jedem der Ansprüche 1-10.

13. Das tragbare Kommunikationsgerät nach Anspruch 12, wobei es sich dabei um ein Headset (1) handelt.

Revendications

1. Dispositif d'antenne cadre (10, 20, 30) pour un dispositif portable (1), tel qu'un micro-casque, le dispositif d'antenne cadre (10, 20, 30) comprenant un cadre d'antenne (11, 21, 31) constitué d'une matière conductrice, positionné en face d'un plan de masse, un élément d'extension de plan de masse (17a, 17b, 27a, 27b, 37a, 37b) pour étendre le plan de masse et un circuit de radiofréquence (RF), **caractérisé en ce que** le plan de masse est prévu à l'intérieur d'une plaquette à circuits imprimés (PCI) (16, 26, 36), le cadre d'antenne (11, 21, 31) présentant une première et une deuxième extrémités à connecter au circuit de radiofréquence (RF) et au plan de masse de la PCI, respectivement, l'élément d'extension de plan de masse (17a, 17b, 27a, 27b, 37a, 37b) étant positionné dans un prolongement longitudinal du plan de masse de la PCI et dans le prolongement d'un premier côté de la PCI (16, 26, 36), et l'élément d'extension de plan de masse étant un boîtier de batterie (17a, 17b, 27a, 27b, 37a, 37b).

2. Dispositif d'antenne cadre selon la revendication 1, dans lequel ladite PCI (16, 26, 36) est une PCI multicouche, et ledit circuit de radiofréquence (RF) est prévu à l'intérieur de ladite PCI multicouche.

3. Dispositif d'antenne cadre selon la revendication 1 ou 2, dans lequel le cadre d'antenne comprend un premier et un deuxième connecteurs (15a, 15b, 25a, 25b, 35a, 35b) prévus sur un deuxième côté de la PCI (16, 26, 36) en face - dudit premier côté pour connecter le cadre d'antenne (11, 21, 31) au circuit de RF et au plan de masse de la PCI (16, 26, 36), respectivement.

4. Dispositif d'antenne cadre selon l'une quelconque des revendications précédentes, dans lequel le cadre d'antenne (11, 21, 31) comprend en outre :

- une première partie (12) présentant une première et une deuxième extrémités, ladite partie (12, 22, 32) s'étendant dans une première direction le long d'un troisième côté de la PCI (16, 26, 36), la première extrémité étant connectée au circuit de RF de la PCI (16, 26, 36) ;
 une deuxième partie (13, 23, 33) présentant une première et une deuxième extrémités, la première extrémité de la deuxième partie (13, 23, 33) étant connectée à la deuxième extrémité de la première partie (12, 22, 32), ladite deuxième partie s'étendant dans une deuxième direction à partir du troisième côté de la PCI (16, 26, 36) vers un quatrième côté de celle-ci, qui est opposé audit troisième côté; et
 une troisième partie (14, 24, 34) présentant une première et une deuxième extrémités, la première extrémité de la troisième partie (14, 24, 34) étant connectée à la deuxième extrémité de la deuxième partie (13, 23, 33), et la deuxième extrémité de la troisième partie (14, 24, 34) étant connectée au plan de masse de la PCI (16, 26, 36), ladite troisième partie (14, 24, 34) s'étendant dans la direction opposée à ladite première direction le long dudit quatrième côté de la PCI (16, 26, 36).
- 5
11. Plaquette à circuits imprimés (PCI) multicouche, **caractérisée par** un dispositif d'antenne cadre selon l'une quelconque des revendications 1 à 10.
- 10
12. Dispositif de communication portable, **caractérisé par** une antenne cadre selon l'une quelconque des revendications 1 à 10.
- 15
13. Dispositif de communication portable selon la revendication 12, dans lequel le dispositif de communication portable est un micro-casque d'écoute (1).
- 20
5. Dispositif d'antenne cadre selon l'une quelconque des revendications précédentes, dans lequel la PCI (16, 26, 36) est une PCI multicouche comprenant une couche utilisée comme plan de masse de RF spécialisé, qui forme aussi le plan de masse du dispositif d'antenne cadre (10, 20, 30).
- 30
6. Dispositif d'antenne cadre selon l'une quelconque des revendications précédentes, dans lequel le cadre d'antenne (11, 21, 31) est positionné en face d'une première ou d'une deuxième surface de la PCI (16, 26, 36).
- 35
7. Dispositif d'antenne cadre selon l'une quelconque des revendications précédentes, dans lequel la matière conductrice du cadre d'antenne (11, 21, 31) est un métal.
- 40
8. Dispositif d'antenne cadre selon la revendication 6, dans lequel le cadre d'antenne (11, 21, 31) est un diélectrique en forme de U ayant la forme de l'antenne gravée dans le diélectrique.
- 45
9. Dispositif d'antenne cadre selon la revendication 5, dans lequel le cadre d'antenne (11, 21, 31) est prévu à l'intérieur de la PCI (16, 26, 36).
- 50
10. Dispositif d'antenne cadre selon l'une quelconque des revendications précédentes, dans lequel une collerette (28, 38), qui est connectée à la PCI, s'étend à partir du troisième côté de la PCI (26, 36) en di-
- 55
- rection du quatrième côté de la PCI, et/ou des brides de collerette (39a, 39b) connectées audit plan de masse s'étendent le long des troisième et quatrième côtés de la PCI.

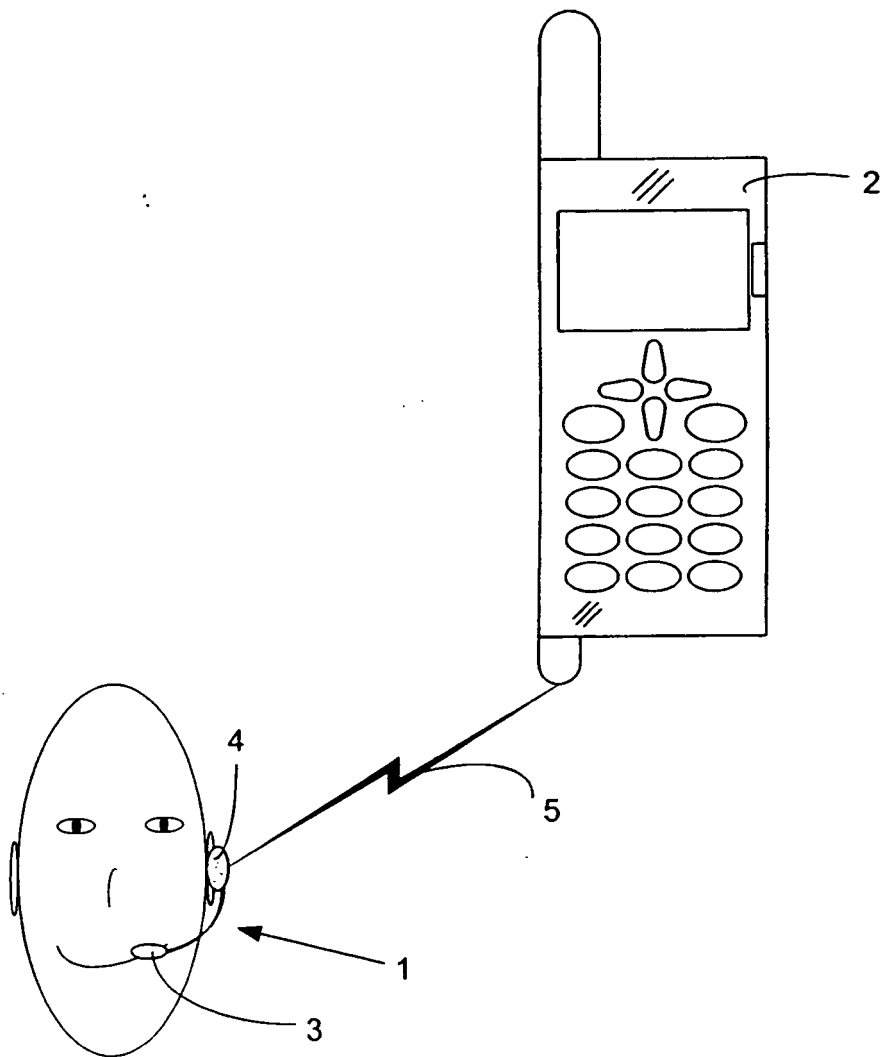


FIG. 1

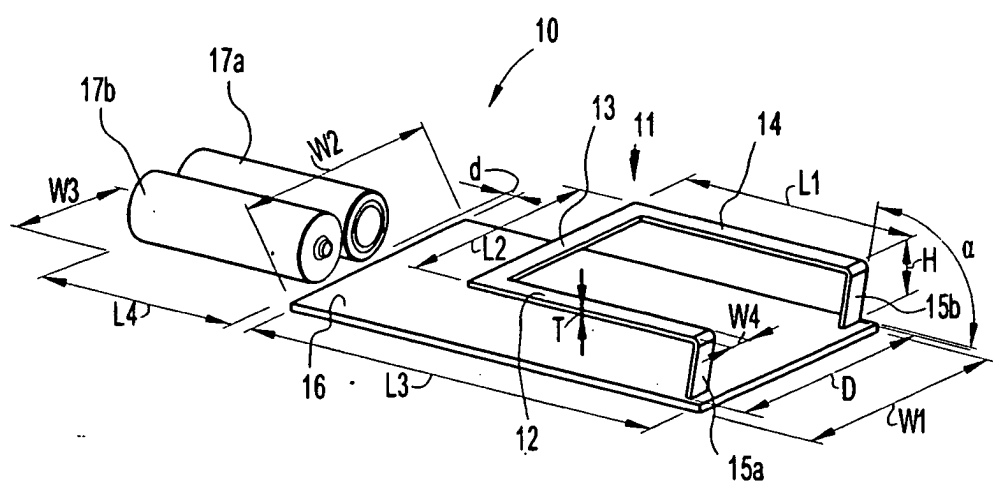


FIG. 2

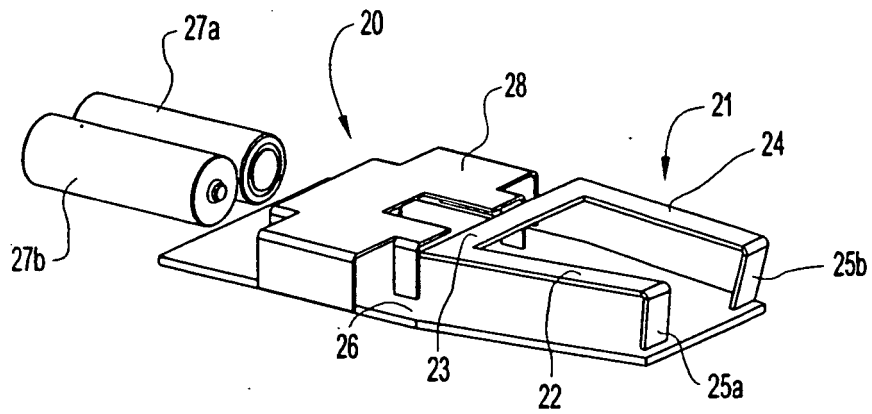


FIG. 3

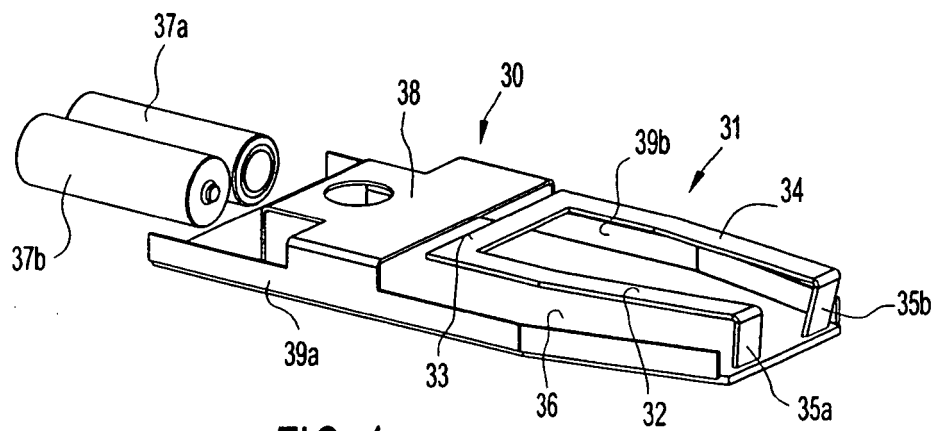


FIG. 4

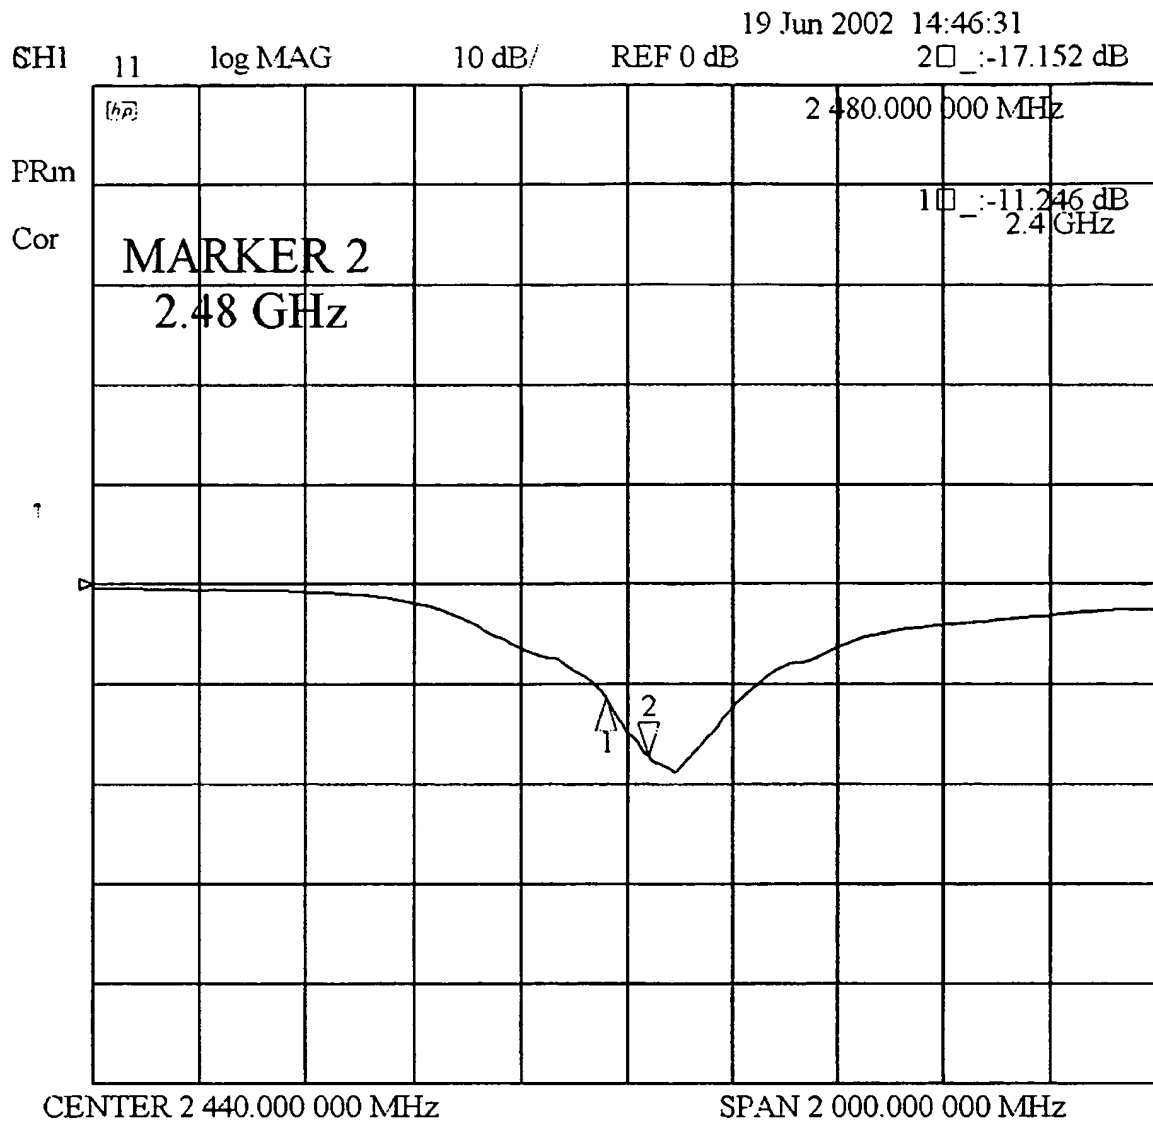


FIG. 5

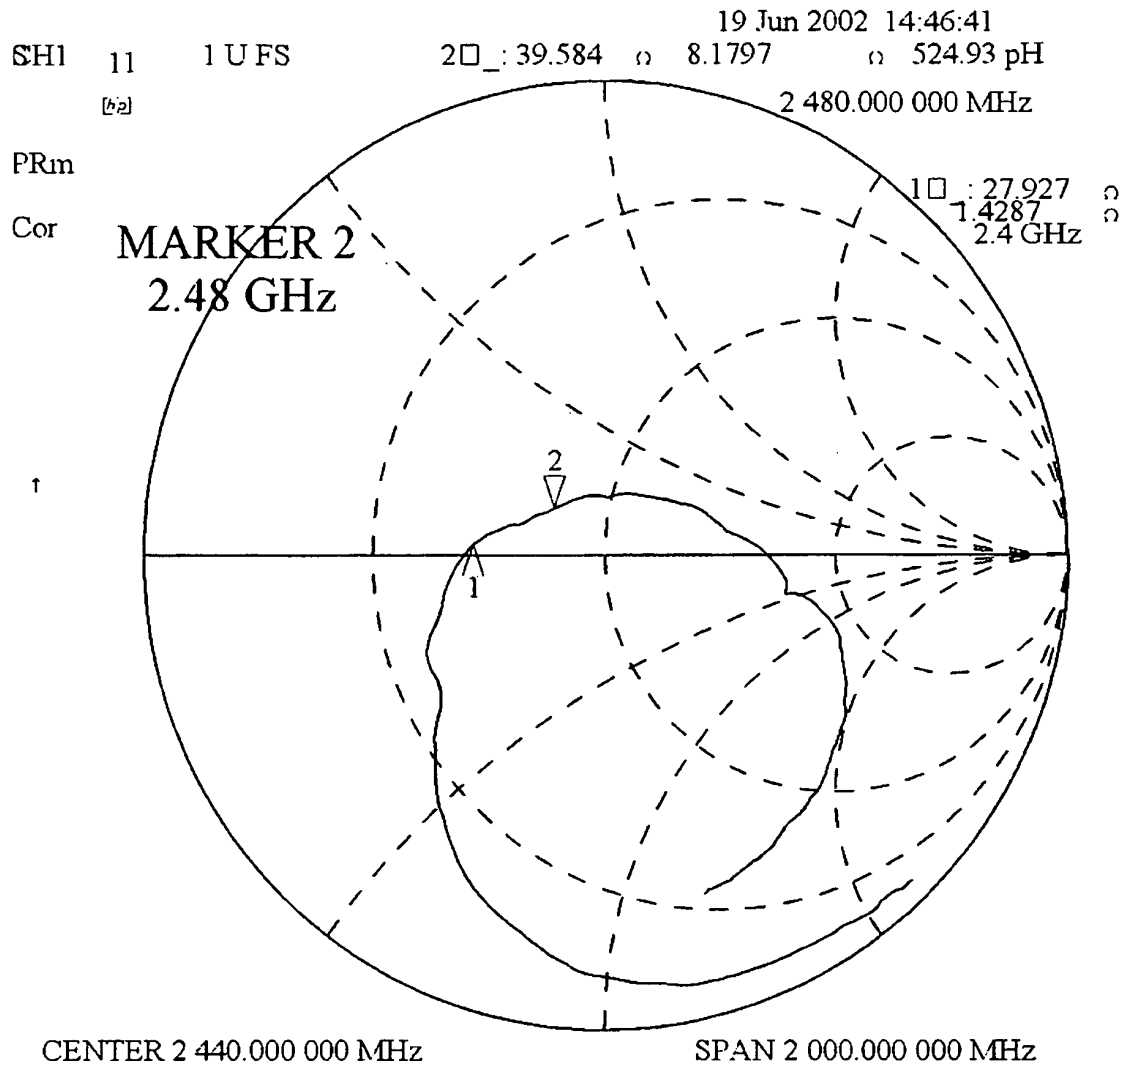


FIG. 6

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5020136 A [0007]