

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 1 400 797 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
24.03.2004 Bulletin 2004/13

(51) Int Cl. 7: G01L 19/04

(21) Application number: 03077763.5

(22) Date of filing: 03.09.2003

(84) Designated Contracting States:  
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HU IE IT LI LU MC NL PT RO SE SI SK TR  
Designated Extension States:  
AL LT LV MK

(30) Priority: 18.09.2002 GB 0221706

(71) Applicant: ABB Offshore Systems Limited  
Bristol BS48 1BS (GB)  
Designated Contracting States:  
DE GB FR

(72) Inventor: Wilson, James Brian  
Nailsea North Somerset BS48 4GB (GB)  
(74) Representative: Newstead, Michael John et al  
Page Hargrave  
Southgate  
Whitefriars  
Lewins Mead  
Bristol BS1 2NT (GB)

### (54) Pressure sensing apparatus

(57) Pressure sensing apparatus (14) comprises pressure responsive means (4) and hydraulic connecting means (11, 12, 13) hydraulically connecting the pressure responsive means with pressure sensing means (5, 9) which produces an indication of sensed pressure. The hydraulic connecting means comprises a tubular member (11) and a longitudinal insert (12) in the

tubular member with hydraulic fluid in the tubular member between the insert and the member, the tubular member, the insert and the hydraulic fluid and the dimensions of the tubular member and the insert being such that the pressure transmitted the hydraulic fluid to the sensing means in use of the apparatus is substantially independent of temperature changes.

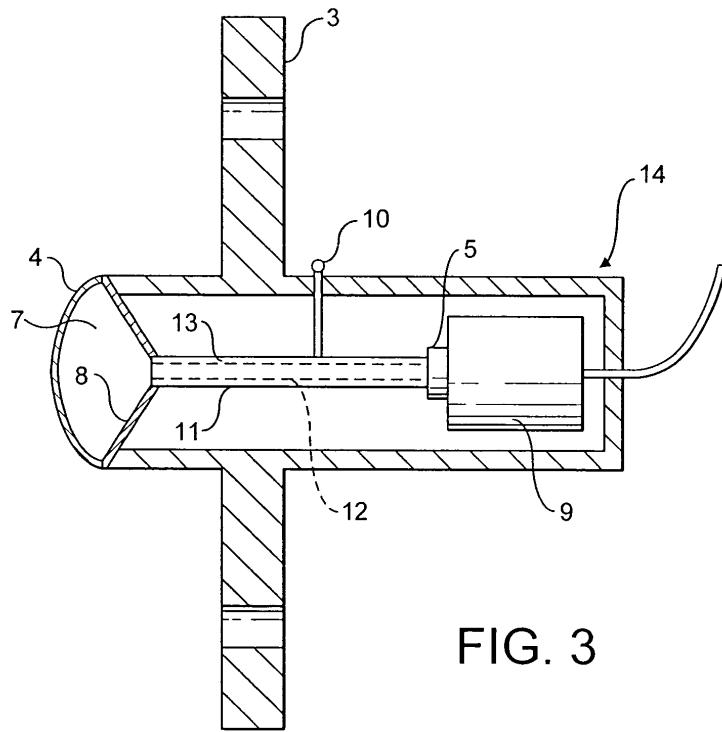


FIG. 3

**Description**

**[0001]** The present invention relates to pressure sensing apparatus, for example for sensing pressure in a fluid extraction well such as a hydrocarbon extraction well.

**[0002]** Fig. 1 shows, diagrammatically in section, typical existing pressure sensing apparatus as an assembly 1 fitted in a hydrocarbon production fluid extraction well. The assembly 1 is typically attached to the wall of a fluid extraction pipe 2 via a flange 3. In order to prevent the fluid flow of wellbore product whose pressure is to be sensed from contaminating and blocking the pressure sensing aperture, a flush diaphragm 4 is fitted over the aperture, the diaphragm hydraulically connecting to a remote pressure sensor 5, in the example a quartz device, via a hydraulic, oil filled, very small bore, tubing 6 and hydraulic oil in a cavity 7 defined by a funnel 8. The pressure sensor 5 is located close to an electronic unit 9 which contains an oscillator for the quartz device and converts the electrical output of the pressure sensor 5 into a form suitable for transmission remotely from the assembly 1. The hydraulic tube 6 connecting the diaphragm 4 to the pressure sensor 5 is typically fitted with a facility 10 to evacuate it and permit filling the tube with hydraulic fluid. The pressure sensor 5 and electronic unit 9 are mounted at the cool end of the assembly 1 (that is in a cool environment, e.g. sea water, as compared with the inside of pipe 2), in order to maximise the life of the assembly.

**[0003]** A problem with such pressure sensor assemblies is that there is a differential thermal expansion between the tube 6 and the hydraulic fluid in the tube, causing errors in pressure measurements. Although some attempt is often made to compensate for this by adjustment in the electronics, this is generally inadequate, particularly under transient conditions, leaving significant errors in pressure measurement.

**[0004]** According to the present invention, there is provided pressure sensing apparatus comprising:

pressure responsive means; and  
hydraulic connecting means hydraulically connecting the pressure responsive means with pressure sensing means which produces an indication of sensed pressure, wherein:

the hydraulic connecting means comprises a tubular member and a longitudinal insert in the tubular member with hydraulic fluid in the tubular member between the insert and the member, the tubular member, the insert and the hydraulic fluid and the dimensions of the tubular member and the insert being such that the pressure transmitted hydraulic fluid to the sensing means in use of the apparatus is substantially independent of temperature changes.

**[0005]** Preferably, the tubular member is metallic.

**[0006]** The insert may be in the form of a rod.

**[0007]** Preferably, the volumetric coefficient of thermal expansion of the material of the tubular member is less than that of the hydraulic fluid and greater than that of the material of the insert. For example, the volumetric coefficient of thermal expansion of the material of the tubular member could be substantially  $30 \times 10^{-6}/^{\circ}\text{C}$ , that of the material of the insert substantially  $0.5 \times 10^{-6}/^{\circ}\text{C}$  and that of the hydraulic fluid substantially  $300 \times 10^{-6}/^{\circ}\text{C}$ , the insert occupying substantially 95% of the internal volume of the tubular member.

**[0008]** The pressure responsive means could comprise a diaphragm.

**[0009]** The pressure sensing means could comprise a pressure sensor and electronic circuitry connected with it.

**[0010]** Fig. 2 shows a sectioned view of a metal tube 11 for use instead of tube 6 in Fig. 1. The tube 11 is made of metal with a volumetric thermal co-efficient of expansion of typically  $30 \times 10^{-6}/^{\circ}\text{C}$ . Inserted in the tube 11 is a longitudinal insert in the form of a rod 12, typically made of silica, which is smaller in diameter than the inner diameter of the tube 11 and has, typically, a volumetric thermal co-efficient of  $0.5 \times 10^{-6}/^{\circ}\text{C}$ . The annular space 13, between the tube 11 and the rod 12, is filled with hydraulic fluid (e.g. oil) which, typically, has a volumetric thermal co-efficient of expansion of  $300 \times 10^{-6}/^{\circ}\text{C}$ . When the temperature of the tube 11 increases, the volume of space 13 increases in dependence on the difference between the volumetric thermal co-efficients of expansion of the tube 11 and the rod 12. The internal diameter of the tube 11 and diameter of the rod 12 are arranged such that the increase of volume of space 13 for a given rise in temperature substantially matches the increase in space of the hydraulic oil filling this volume, for the same temperature rise. As the two volume increases substantially match, there is substantially no change in pressure applied by the hydraulic fluid due to a temperature rise, irrespective of the length of the tube 11. The same situation applies to a fall in temperature of the tube 11. Thus, the hydraulic fluid will transmit the pressure from a diaphragm to a pressure sensor substantially without errors resulting from temperature changes of the tube 11, the pressure transmitted by the fluid being substantially independent of temperature. Typically, with the examples of temperature co-efficients quoted, the rod 12 will need to occupy substantially 95% of the internal volume of the metal tube 11. The percentages can be calculated once the precise expansion rates for the actual choice of the different materials employed to implement the tube 11 and rod 12 are known.

**[0011]** The above temperature compensation of pressure changes due to thermal changes is irrespective of the overall diameter of tube 11, which can be of any diameter required. Thus it can be made large enough to remove the problems of contamination blockages of the very small bore tubes traditionally needed, by ensuring

that the space 13 for the hydraulic fluid is substantial.

**[0012]** Fig. 3, in which items which correspond with those in Fig. 1 have the same reference numerals, shows pressure sensing apparatus in the form of an assembly 14 in which, instead of a small bore tubing 6, there is a tube 11 with a rod 12 as described above, hydraulically connecting diaphragm 4 with pressure sensor 5. Longitudinal expansion of the tube 11 and rod 12 can be accommodated by appropriate mounting of the pressure sensor 5 and electronic unit 7.

**[0013]** Suitable materials for the rod insert 12 have a very low coefficient of thermal expansion and are incompressible at the working pressure of the assembly 14. Although silica is one such material, there may also be other suitable materials such as some grades of glass (Pyrex) and ceramic and some exotic metals (Invar) that can perform the required function equally as well.

## Claims

20

### 1. Pressure sensing apparatus comprising:

pressure responsive means; and  
hydraulic connecting means hydraulically connecting the pressure responsive means with pressure sensing means which produces an indication of sensed pressure, wherein:

25

the hydraulic connecting means comprises a tubular member and a longitudinal insert in the tubular member with hydraulic fluid in the tubular member between the insert and the member, the tubular member, the insert and the hydraulic fluid and the dimensions of the tubular member and the insert being such that the pressure transmitted the hydraulic fluid to the sensing means in use of the apparatus is substantially independent of temperature changes.

30

35

40

### 2. Apparatus according to claim 1, wherein the tubular member is metallic.

45

### 3. Apparatus according to claim 1 or 2, wherein the insert is in the form of a rod.

45

### 4. Apparatus according to any preceding claim, wherein the volumetric coefficient of thermal expansion of the material of the tubular member is less than that of the hydraulic fluid and greater than that of the material of the insert.

50

### 5. Apparatus according to claim 4, wherein the volumetric coefficient of thermal expansion of the material of the tubular member is substantially $30 \times 10^{-6}/^{\circ}\text{C}$ , that of the material of the insert is substantially $0.5 \times 10^{-6}/^{\circ}\text{C}$ , that of the hydraulic fluid is substan-

tially  $300 \times 10^{-6}/^{\circ}\text{C}$  and the insert occupies substantially 95% of the internal volume of the tubular member.

**5 6.** Apparatus according to any preceding claim, wherein the pressure responsive means comprises a diaphragm.

**10 7.** Apparatus according to any preceding claim, wherein the pressure sensing means comprises a pressure sensor and electronic circuitry connected with it.

15

20

25

30

35

40

45

50

55

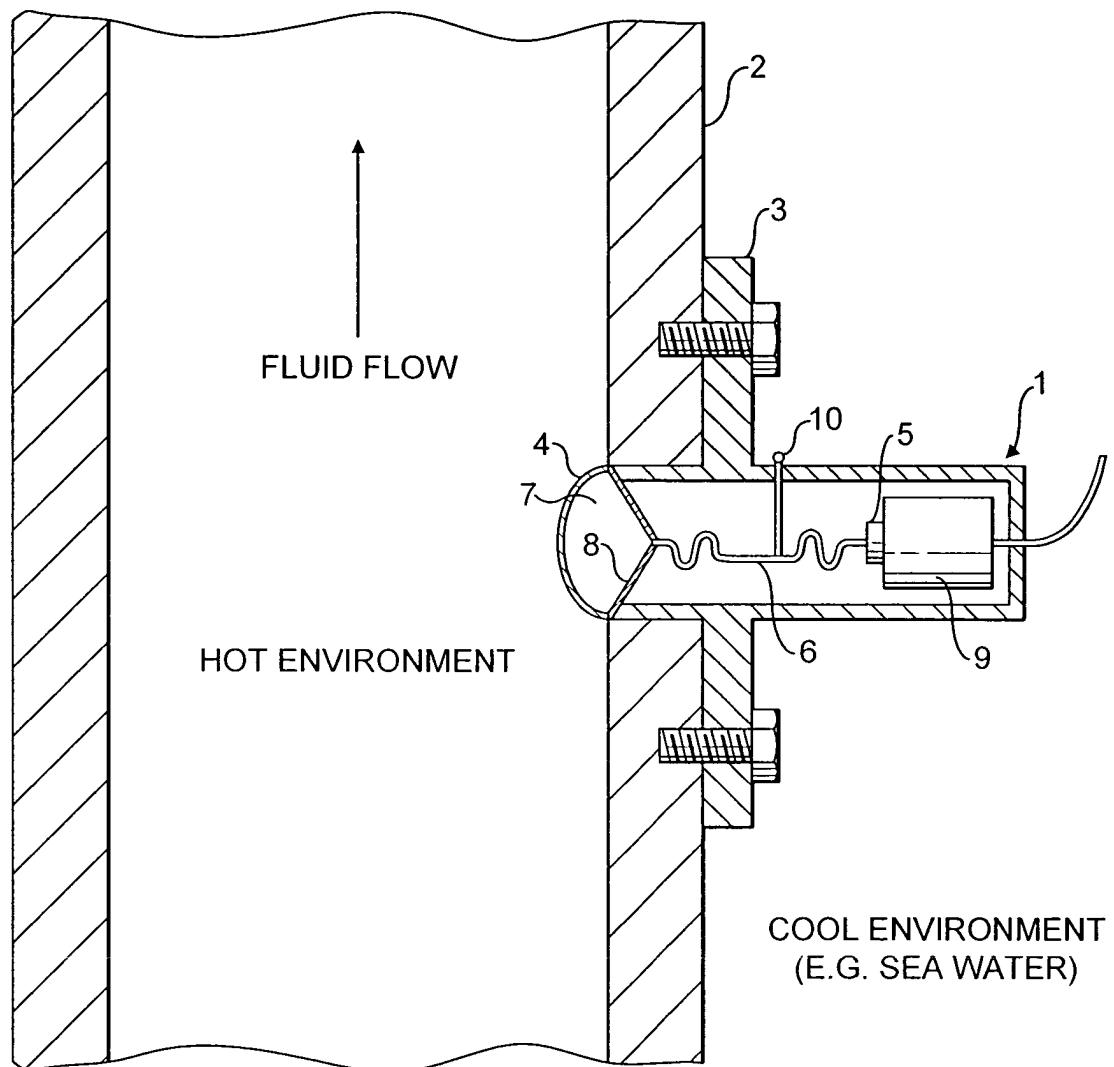


FIG. 1

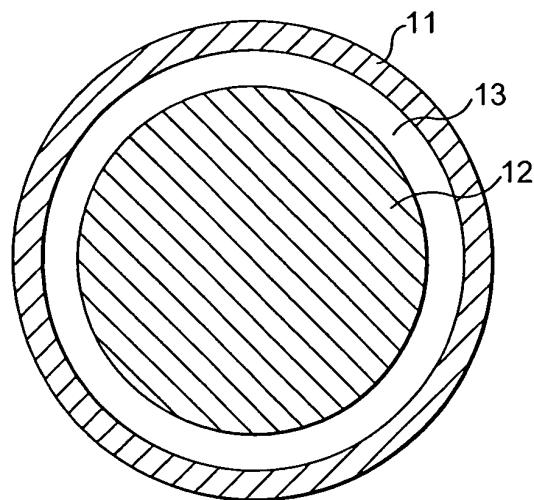


FIG. 2

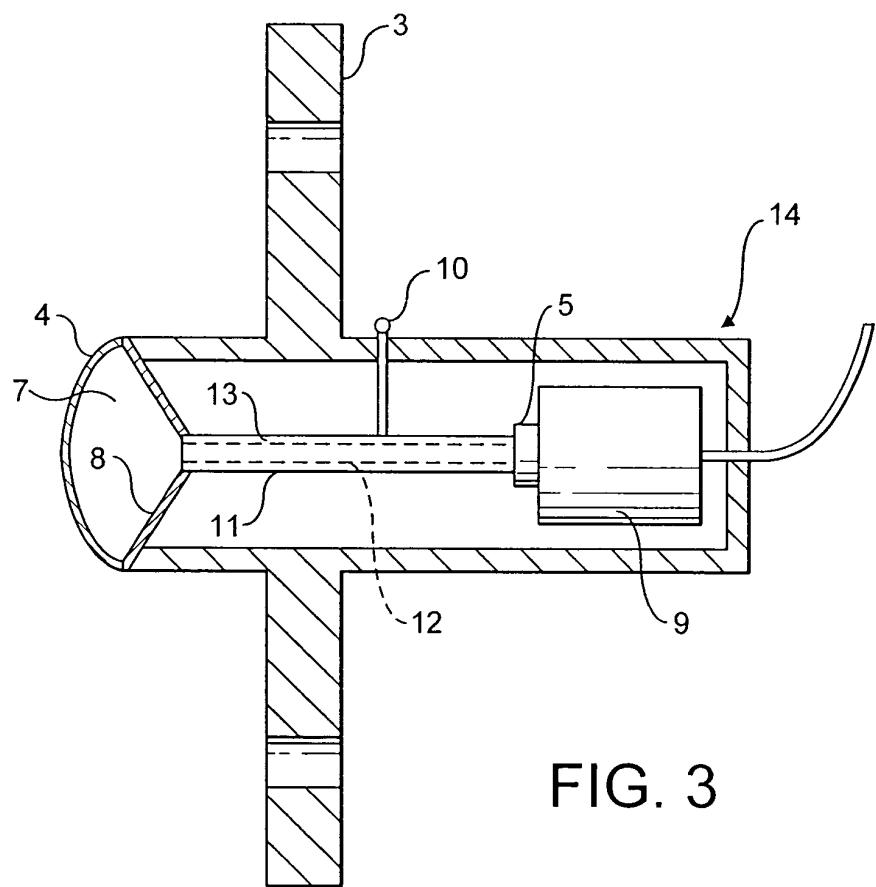


FIG. 3



# European Patent Office

## EUROPEAN SEARCH REPORT

Application Number

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 00 71982 A (KANNGIESER HARTMUT ;ODC OPHTHALMIC DEV COMPANY AG (CH)) 30 November 2000 (2000-11-30) * page 5, line 7 - line 15; claim 1; figure 1 * * page 5, line 20 - line 32 * * page 9, line 28 - line 31 * ---	1,3,4,6, 7	G01L19/04
Y	US 5 161 415 A (KODAMA SEIKI ET AL) 10 November 1992 (1992-11-10)	2	
A	* column 4, line 51 - column 5, line 38; claim 1 *	1,3-7	
A	FR 2 004 679 A (AGA AB) 28 November 1969 (1969-11-28) * the whole document *	1-7	
	-----		
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			G01L E21B
The present search report has been drawn up for all claims			
Place of search	Date of completion of the search	Examiner	
THE HAGUE	2 December 2003	Debesset, S	
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone	T : theory or principle underlying the invention		
Y : particularly relevant if combined with another document of the same category	E : earlier patent document, but published on, or after the filing date		
A : technological background	D : document cited in the application		
O : non-written disclosure	L : document cited for other reasons		
P : intermediate document	8 : member of the same patent family, corresponding document		

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 07 7763

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on. The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-12-2003

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
WO 0071982	A	30-11-2000	WO	0071982 A1	30-11-2000	
			DE	50003280 D1	18-09-2003	
			EP	1183511 A1	06-03-2002	
-----						
US 5161415	A	10-11-1992	NONE			
-----						
FR 2004679	A	28-11-1969	DE	1914926 A1	09-10-1969	
			FR	2004679 A1	28-11-1969	
-----						