



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
14.04.2004 Bulletin 2004/16

(51) Int Cl.7: **A63G 9/00, A63G 27/00**

(21) Application number: **03078181.9**

(22) Date of filing: **08.10.2003**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**
Designated Extension States:
AL LT LV MK

(72) Inventors:
• **Kroon, Louisito Johannes Eusebio
7161 AE Neede (NL)**
• **Kroon, Albert Louisito Phillipus
7161 AE Neede (NL)**

(30) Priority: **09.10.2002 NL 1021610**


(74) Representative: **van Westenbrugge, Andries
Nederlandsch Octrooibureau
Scheveningseweg 82
P.O. Box 29720
2502 LS Den Haag (NL)**

(71) Applicant: **Cobra Beheer B.V.
7161 AE Neede (NL)**

(54) **Amusement device**

(57) An amusement device, comprising a frame made from four support legs which, running obliquely upwards toward one another, at their top end support a rotary member, an arm, one end of which is secured to the rotary member and which can be pivoted between the support legs, and a receiving device for people,

which is suspended from the other end of the arm. The support legs, at their bottom end, are secured to a trailer by means of hinges, the hinge axis of which is oriented transversely with respect to the longitudinal direction of the trailer, and the axis of rotation of the rotary member is oriented in the longitudinal direction of the trailer.

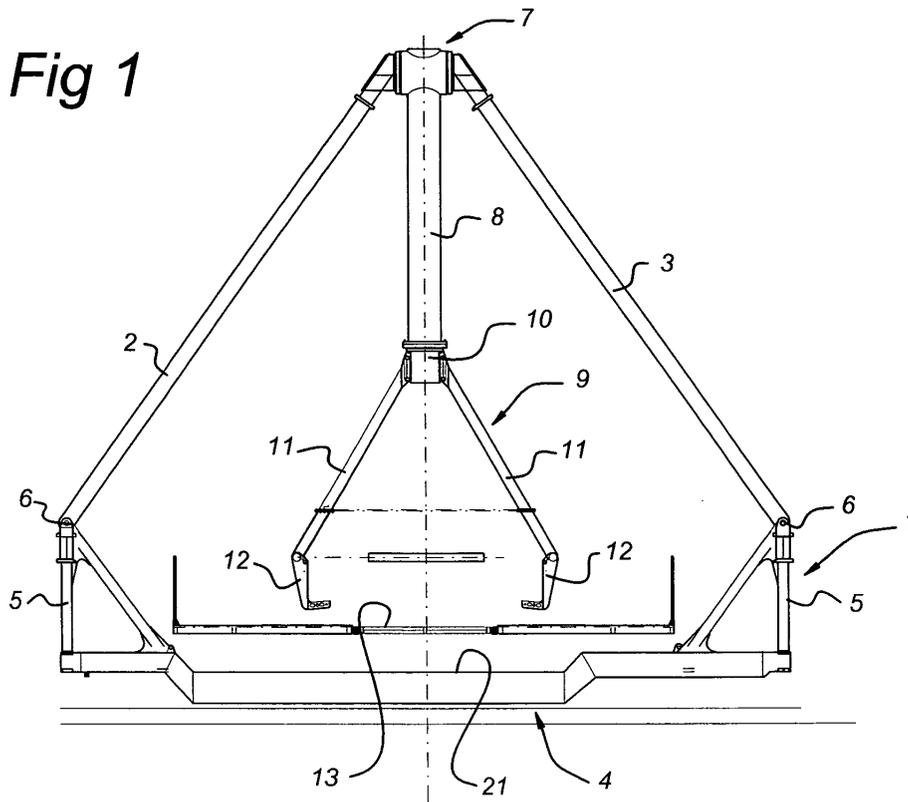

Description

[0001] The invention relates to an amusement device, comprising a frame made from four support legs which, running obliquely upwards toward one another, at their top end support a rotary member, an arm, one end of which is secured to the rotary member and which can be pivoted between the support legs, and a receiving device for people, which is suspended from the other end of the arm.

[0002] An amusement device of this type is known. Its four support legs are jointed. In the assembled state, these support legs each rest directly on the ground in order to provide the device with the required stability. A reasonable degree of stability is highly important in view of the relatively high imbalance which is generated when the amusement device is operating as a result of the swinging arm with a fully occupied receiving device attached to it.

[0003] The support legs and various other components of the known amusement device can be transported on a trailer in the transportation position. Before the amusement device can be used, it has to be assembled, during which operation, as described above, the support legs have to be supported separately, remote from the trailer. A construction method of this type is relatively laborious. In particular the operation of erecting the support legs is laborious. It must be borne in mind that to do this, a good erection spot outside the trailer has to be selected, since otherwise it is impossible to guarantee the stability of the amusement device.

[0004] Therefore, it is an object of the invention to provide an amusement device of the type described above which avoids these drawbacks and can be erected stably in a relatively simple way. This object is achieved by virtue of the fact that the support legs, at their bottom end, are secured to a trailer by means of hinges, the hinge axis of which is oriented transversely with respect to the longitudinal direction of the trailer, and that the axis of rotation of the rotary member is oriented in the longitudinal direction of the trailer.

[0005] In the amusement device according to the invention, the support legs remain permanently attached to the trailer. This makes it possible for the support legs to be set up within a relatively short time and also to be folded down again within a relatively short time. The trailer, which itself must of course be set up on a stable area of ground, is responsible for providing excellent support to the support legs which have been erected.

[0006] Since the width of the trailer, in view of the requirements of road traffic, has to remain within certain limits, the distance between two legs located at an end of the trailer is limited. Therefore, it is not readily possible for the arm with the receiving device to be moved between these pairs of legs. For this reason, the center axis of the rotary member from which the arm with receiving device is suspended is oriented in the longitudinal direction of the trailer, in such a manner that the

movement now takes place between the pairs of support legs and transversely with respect to the trailer.

[0007] To increase the stability, it is possible for stabilizing arms to be located at both longitudinal ends of the trailer, which arms can be displaced between an active position, which is transverse with respect to the longitudinal direction of the trailer, and a folded-down position running along the trailer.

[0008] It is preferable for a trestle to be located at both longitudinal ends of the trailer, in such a manner that in each case two support legs are secured in hinged fashion to each trestle. In that case, the stabilizing arms can each be connected to the trailer and a trestle in such a manner that they can rotate about a vertical axis of rotation. When the amusement device is being set up, these stabilizing arms can easily be unfolded. However, they remain attached to the trailer, which further increases the speed and simplicity of erecting and dismantling the amusement device.

[0009] Furthermore, the floor of the trailer may have a downwardly recessed floor section at the location of the path of the receiving device. In this case, it is possible for a platform to be secured to the recessed floor section. This platform can be moved up and down to allow the occupants to take their seats. In the downwardly moving position, the arm with receiving device has a clear path.

[0010] The arm, at its end remote from the rotary member, has a rotary ring, from which at least two auxiliary arms slope obliquely away from one another, and each of the auxiliary arms bears at least one seat for a person. The arm can preferably be kept relatively short. An advantage of this is that the relatively heavy rotary ring with drive does not have an excessively great moment arm with respect to the rotary member. Consequently, the capacity of the drive can be kept to a limited level.

[0011] Preferably, the support legs are connected to one another in pairs at their top end, in such a manner that support legs of one pair are pivotably secured at one end of the trailer and the support legs of the other pair are pivotably secured at the other end of the trailer. In this case, the dimension of the support legs transversely to the hinge axis is smaller than the distance between these hinge axes at the two ends of the trailer, so that the support legs can be folded down flat onto the trailer.

[0012] The amusement device according to the invention will now be explained in more detail on the basis of the exemplary embodiment illustrated in the figures, in which:

Figure 1 shows a side view of the amusement device,

Figure 2 shows a front view of the amusement device, with the arm swung up,

Figure 3 shows a plan view of the amusement device,

Figures 4 and 5 show a detail relating to the platform,

Figures 6-11 show the various phases involved in constructing the amusement device.

[0013] The amusement device according to the invention illustrated in Figure 1 comprises a frame 1 which has a first pair of support arms 2, a second pair of support arms 3, a trailer 4 and two trestles 5 at the longitudinal ends of the trailer 4. The pairs of support arms 2, 3 are each secured to the trestles 5 by means of hinges 6, the hinge axis of which is oriented transversely with respect to the longitudinal direction of the trailer 4. At their top end, the pairs of support legs 2, 3 support a rotary member 7, the axis of which is oriented in the longitudinal direction of the trailer 4. An arm 8, which bears a receiving device 9 by means of the rotary ring 10, is secured to the rotary member 7. The receiving device 9 has four arms 11, two of which, each bearing a row of seats 12, can be seen in Figures 1 and 2.

[0014] Furthermore, on the trailer 4 at the level of the recessed section 21 there is a platform 13, from where the occupants can gain access to the seats 12. Stabilizing arms 14, which can be displaced between the folded-down position along the trailer 4 shown in Figure 1 and the folded-out position shown in Figure 2, are secured to the longitudinal ends of the trailer 4 and the trestles 5.

[0015] As can be seen clearly from Figures 1 and 2, the arm 8 with the receiving device 9 can be pivoted between on the one hand the pair of legs 2 and on the other hand the pair of legs 3. In the process, the stabilizing arms 14 ensure the required stability of the trailer 4.

[0016] Electro-hydraulic drives for generating the desired rotary movements are provided at the location of the rotary member 7 of the rotary ring 10.

[0017] Figures 4 and 5 show the platform 13 in two different positions. The state shown in Figure 4 illustrates the platform 13 in the position in which the occupants can gain access to the seats 12. For this purpose, the jacks 15, 16 have been moved into their extended position.

[0018] Figure 5 shows the state of the platform 13 in its lowered position. The jacks 15 and 16 have in this case been retracted. In this position, the arm 8 with the receiving device 9 and the seats 12 can move freely over the platform without coming into contact with it and in particular with its gates and fences 17.

[0019] A description of how the amusement device according to the invention can be erected will now be given with reference to Figures 6-11. In the transportation position illustrated in Figure 6, the support legs 2, 3 have been moved downward about their respective hinge pins 6 on the trestles 5. The pair of support legs 2 is connected to a jack 18, and the pair of support legs 3 is connected to a jack 19. At the top end, the pair of support legs 3 is secured to the rotary member 7 by means of a hinge 20. The arm 8, the rotary ring 10 and

the auxiliary arms 9 are located on this rotary member 7.

[0020] As shown in Figure 7, when the device is being erected, first of all the pair of support legs 2 is pivoted upward by means of the jack 18. Figure 8 shows that then the pair of support legs is pivoted upward by means of the jack 19, with the arm 8, the rotary ring 10 and the auxiliary arms 9 also being moved upward with them. After the pair of support arms 3 have been moved into the correct position as shown in Figure 9, and the arm 8 with the rotary member 7 has been pivoted, it is possible, as shown in Figures 10 and 11, for the rotary member 7 to be attached to the pair of support legs 2, for example by means of a bolted connection.

[0021] Finally, the seat devices 12 can be attached to the auxiliary arms 19 and the platform (not shown) can be put in place. Of course, it is also possible for the stabilizing arms 14 (not shown in Figures 6-11) then to be folded out into the state shown in Figure 2.

Claims

1. An amusement device, comprising a frame (1) made from four support legs (2, 3) which, running obliquely upwards toward one another, at their top end support a rotary member (7), an arm (8), one end of which is secured to the rotary member (7) and which can be pivoted between the support legs (2, 3), and a receiving device (9) for people, which is suspended from the other end of the arm (8), **characterised in that** the support legs (2, 3), at their bottom end, are secured to a trailer (4) by means of hinges (6), the hinge axis of which is oriented transversely with respect to the longitudinal direction of the trailer (4), and **in that** the axis of rotation of the rotary member (7) is oriented in the longitudinal direction of the trailer (4).
2. The amusement device as claimed in claim 1, in which stabilizing arms (14), which can be displaced between an active position which is transverse with respect to the longitudinal direction of the trailer (4) and a folded-in position along the trailer (4), are located at both longitudinal ends of the trailer (4).
3. The amusement device as claimed in claim 1 or 2, in which a trestle (5) is located at both longitudinal ends of the trailer (4), and in each case two support legs (2, 3) are secured in a hinged manner to each trestle (5).
4. The amusement device as claimed in claim 2 or 3, in which the stabilizing arms (14) are each connected to the trailer and a trestle in such a manner that they can rotate about a vertical axis of rotation (15).
5. The amusement device as claimed in one of the preceding claims, in which the trailer (4) has a floor

which, at the location of the path of the receiving device, has a downwardly recessed floor section.

6. The amusement device as claimed in claim 5, in which a platform (13) is provided and is secured to the recessed floor section (21). 5
7. The amusement device as claimed in claim 6, in which the platform (13) can be moved up and down. 10
8. The amusement device as claimed in one of the preceding claims, in which the arm (8), at its end remote from the rotary member (7), has a rotary ring (10), from which at least two auxiliary arms (19) slope obliquely away from one another, and each of the auxiliary arms (19) bears at least one seat (12) for a person. 15
9. The amusement device as claimed in one of the preceding claims, in which the support legs (2, 3) are connected to one another in pairs at their top end, in such a manner that support legs (2, 3) of one pair are pivotably secured at one end of the trailer (4) and the support legs (2, 3) of the other pair are pivotably secured at the other end of the trailer (4). 20 25
10. The amusement device as claimed in claim 9, in which the support legs (2) of one of the pairs are releasably secured to the rotary member (7). 30
11. The amusement device as claimed in claim 9 or 10, in which the support legs (3) of one of the pairs are connected in a hinged manner (20) to the rotary member (7). 35
12. The amusement device as claimed in one of the preceding claims, in which the dimension of the support legs (2, 3) transversely to the hinge axis is smaller than the distance between these hinge axes at both ends of the trailer (4). 40

45

50

55

Fig 1

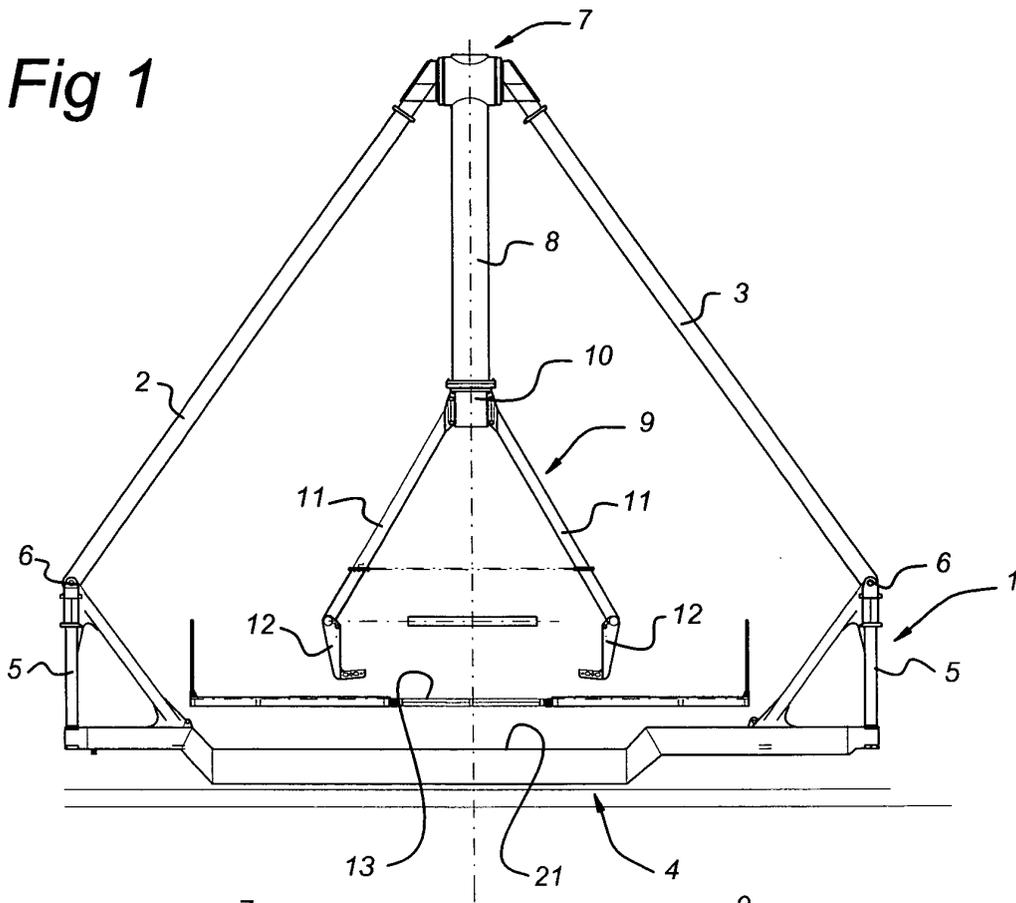


Fig 2

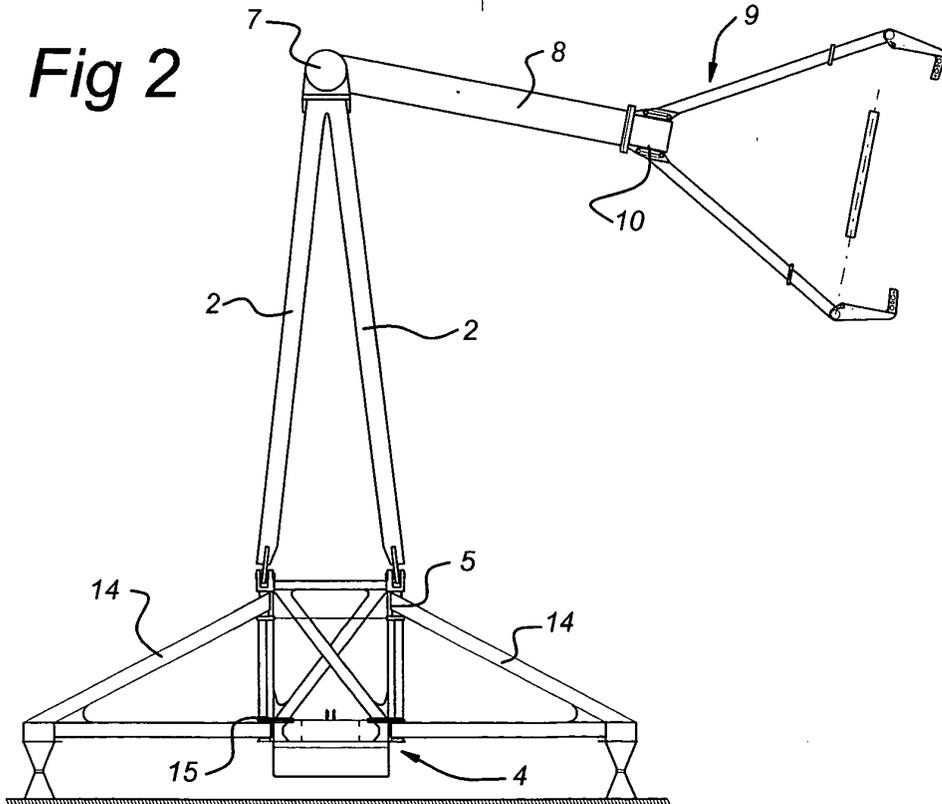


Fig 3

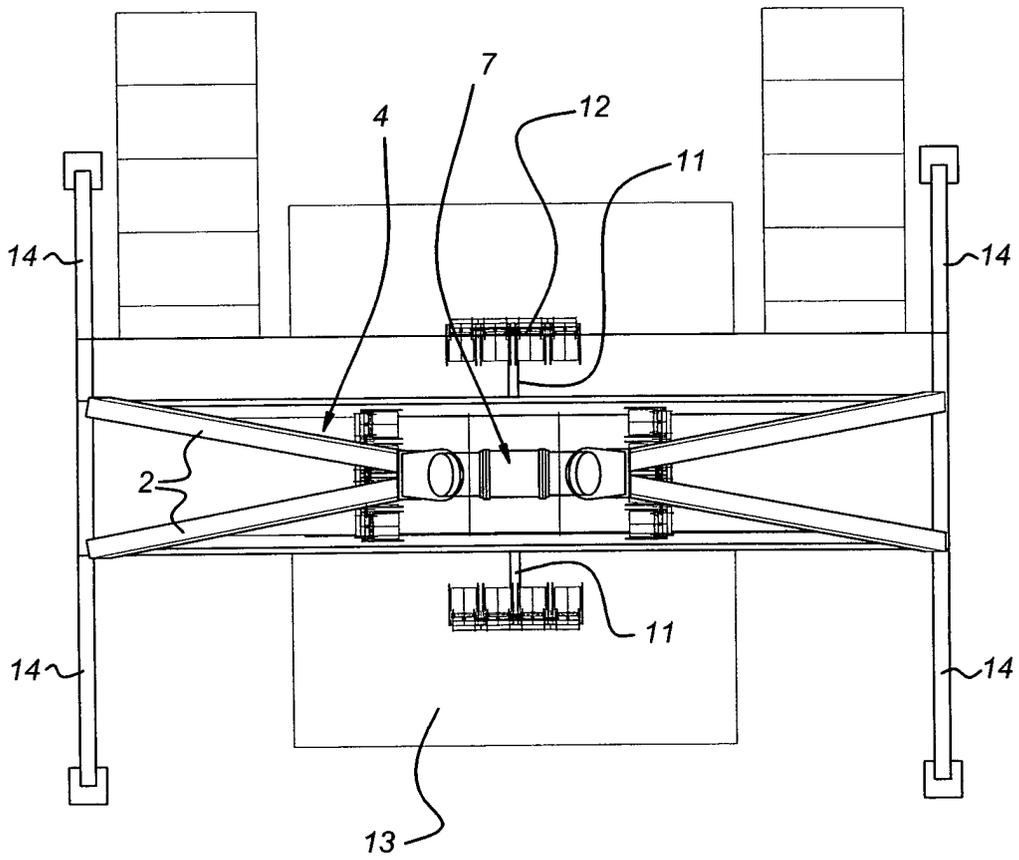


Fig 4

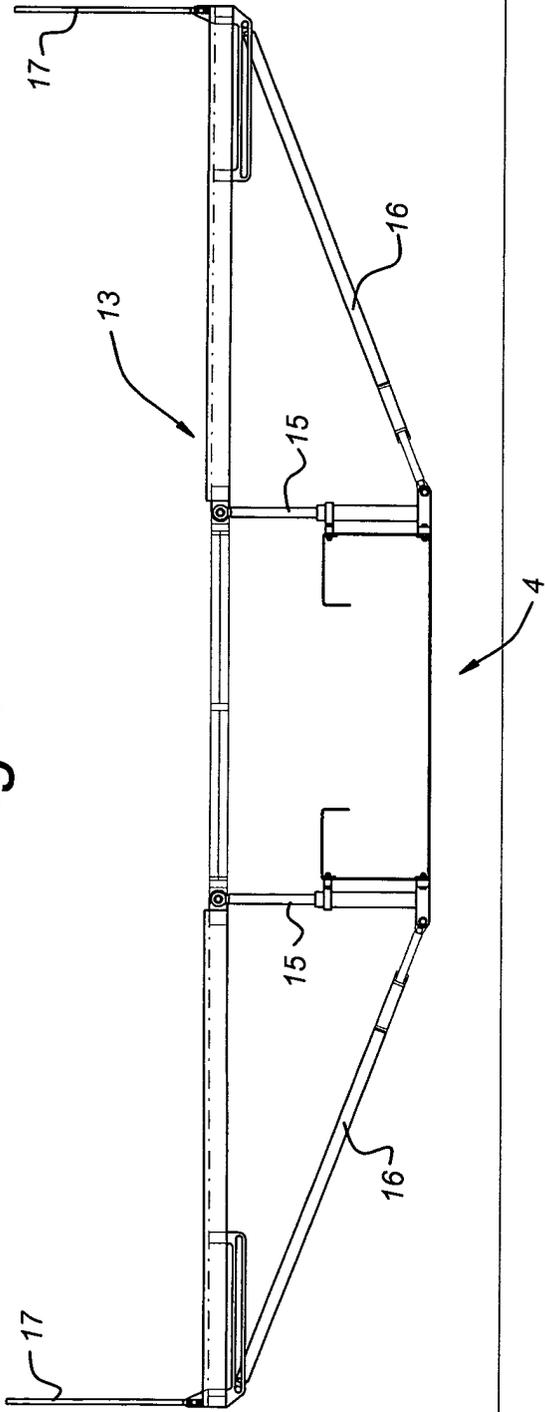


Fig 5

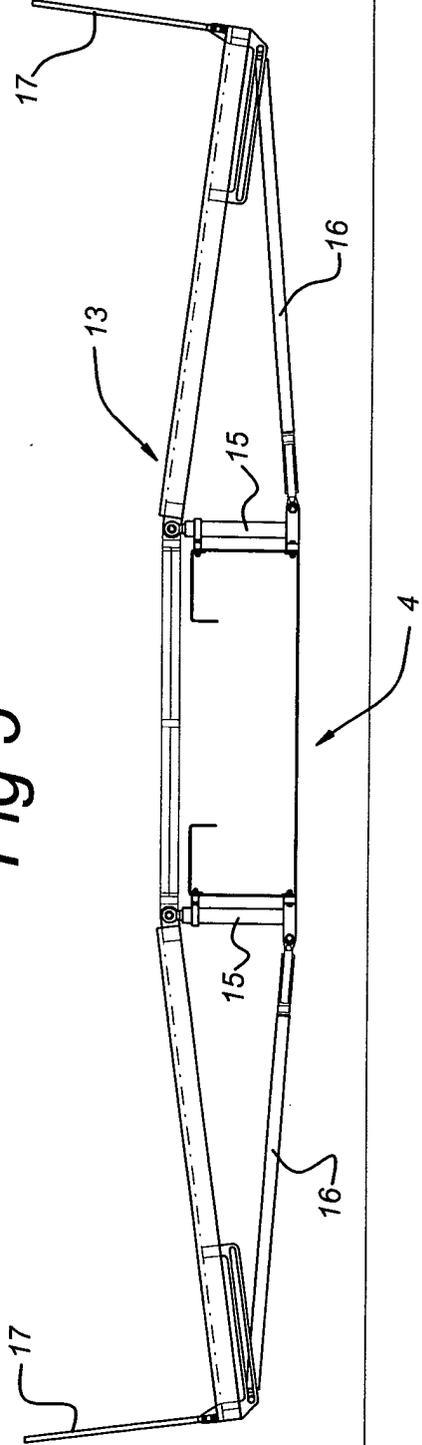


Fig 6

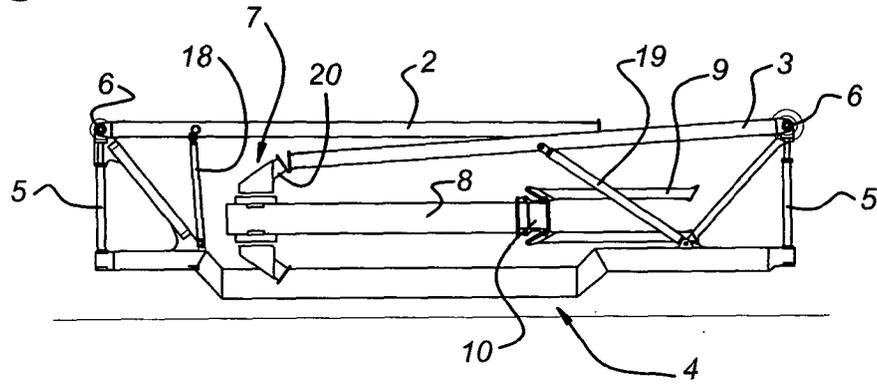


Fig 7

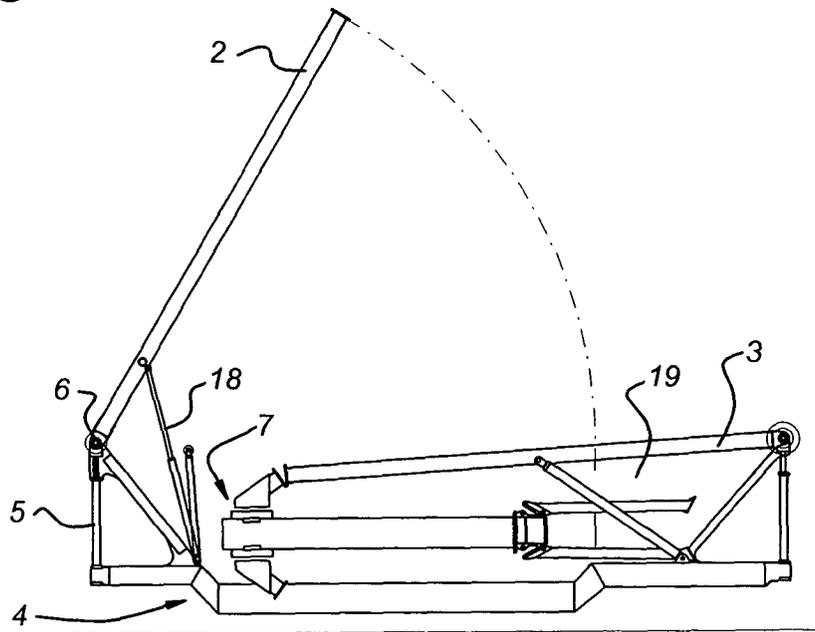


Fig 8

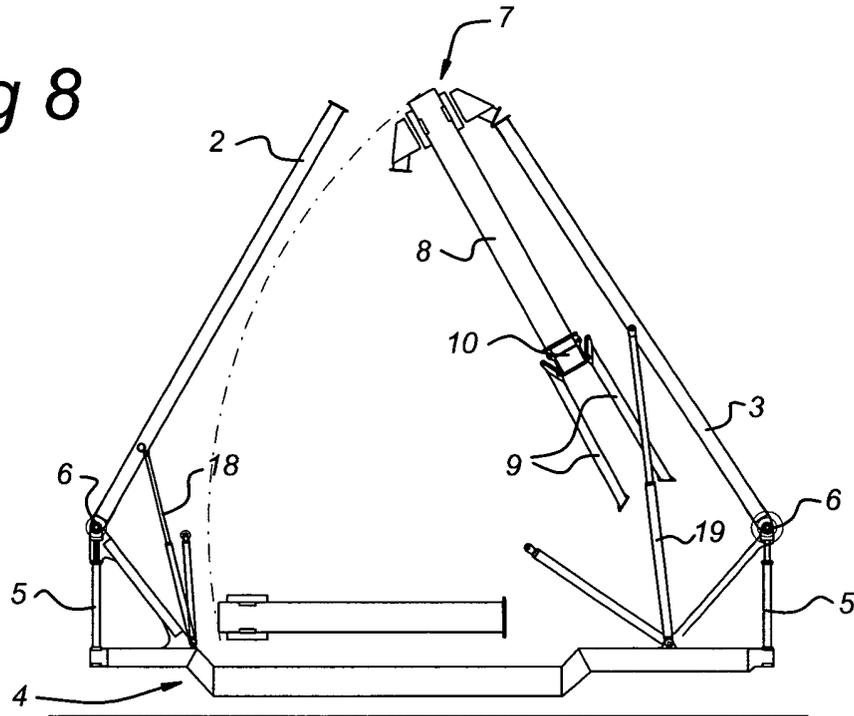


Fig 9

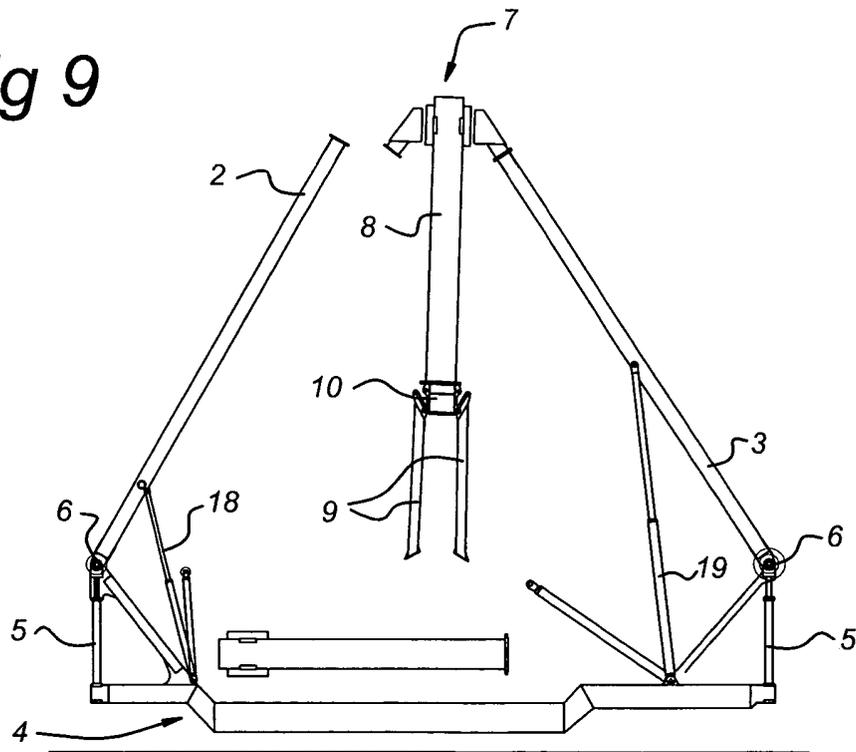


Fig 10


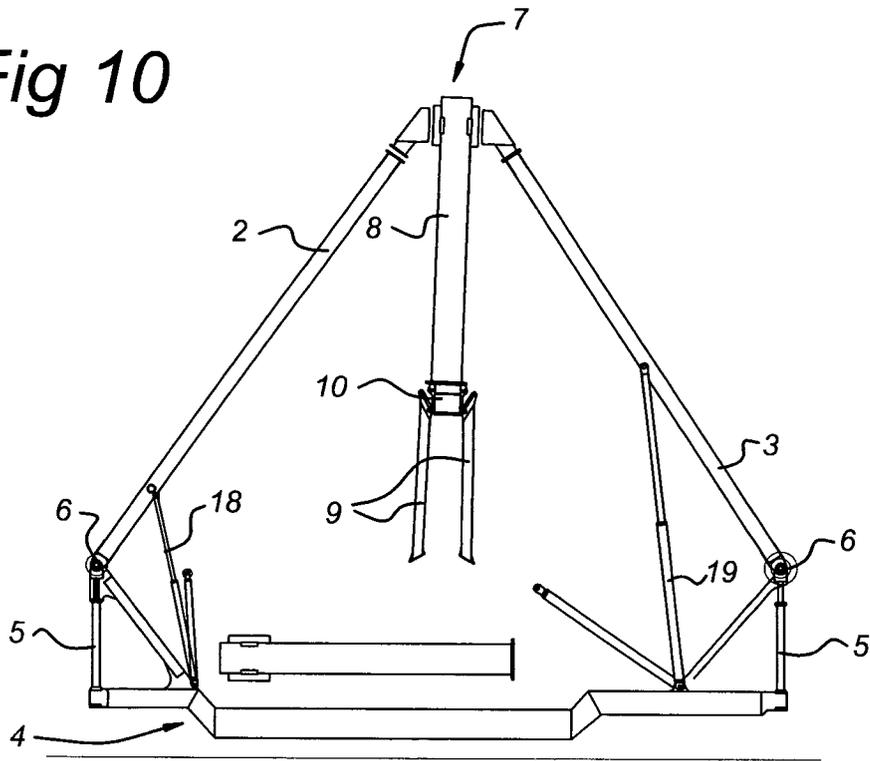


Fig 11



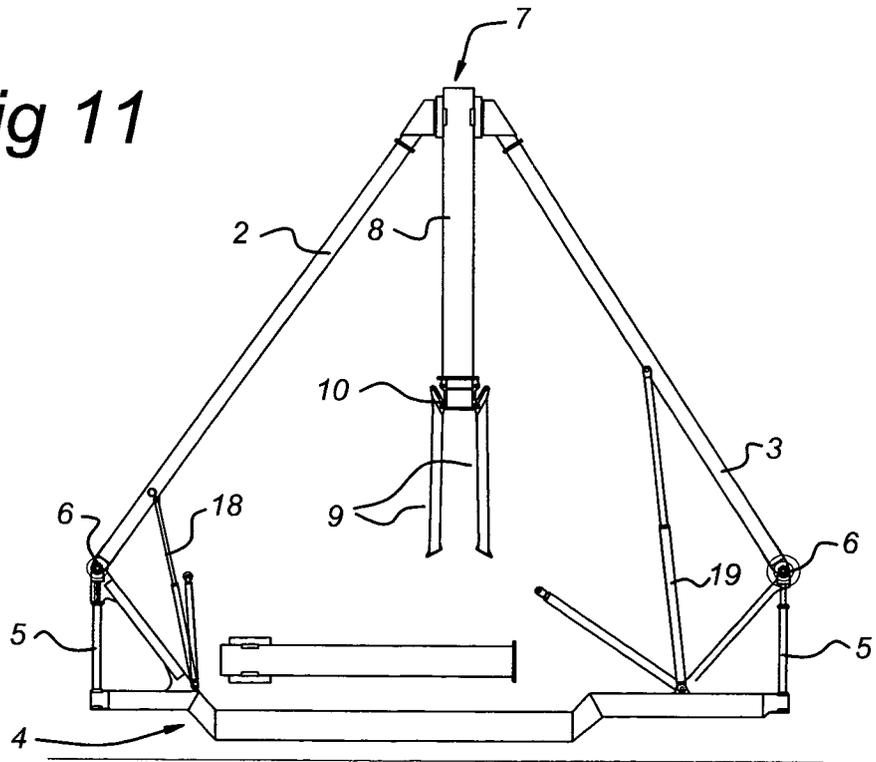

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 07 8181

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	GB 1 212 779 A (SCHWARZKOPF STAHL- U. FAHRZEUGBAU) 18 November 1970 (1970-11-18) * the whole document * ---	1-3,5, 9-11	A63G9/00 A63G27/00
A	US 2 847 216 A (COURTNEY JOHN F) 12 August 1958 (1958-08-12) * figures; examples * ---	1	
A	DE 94 10 114 U (HUSS MASCHFAB GMBH & CO) 8 September 1994 (1994-09-08) * the whole document * ---	1,8	
A	DE 94 15 858 U (COBRA BEHEER BV) 26 January 1995 (1995-01-26) * page 4, line 4 - line 5; figures 2,3 * -----	2,4	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			A63G
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		16 January 2004	Baert, F
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 07 8181

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-01-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 1212779	A	18-11-1970	DE 1603179 A1 US 3612517 A	19-05-1971 12-10-1971
US 2847216	A	12-08-1958	NONE	
DE 9410114	U	08-09-1994	DE 9410114 U1	08-09-1994
DE 9415858	U	26-01-1995	NL 9400063 A DE 9415858 U1 EP 0671193 A1	01-08-1995 26-01-1995 13-09-1995

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82