



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 409 839 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:

06.04.2005 Bulletin 2005/14

(21) Application number: **02754797.5**

(22) Date of filing: **28.06.2002**

(51) Int Cl.7: **E21B 43/1185**

(86) International application number:
PCT/EP2002/007205

(87) International publication number:
WO 2003/002849 (09.01.2003 Gazette 2003/02)

(54) **METHOD AND APPARATUS FOR DETONATING AN EXPLOSIVE CHARGE**

VERFAHREN UND VORRICHTUNG ZUR ZÜNDUNG EINER SPRENGLADUNG

PROCEDE ET DISPOSITIF DESTINES A FAIRE DETONER UNE CHARGE EXPLOSIVE

(84) Designated Contracting States:
FR GB

(30) Priority: **29.06.2001 US 896432**
29.06.2001 US 896430
29.06.2001 US 896433

(43) Date of publication of application:
21.04.2004 Bulletin 2004/17

(73) Proprietor: **SHELL INTERNATIONALE
RESEARCH MAATSCHAPPIJ B.V.
2596 HR Den Haag (NL)**

(72) Inventors:
• **CERNOCKY, Edward, Paul**
Sugar Land, TX 77479 (US)
• **LINDFORS, Allen, J.**
Inyokern, CA 93527 (US)

(56) References cited:
WO-A-95/09966 **US-A- 5 295 544**
US-A- 5 413 045 **US-A- 5 445 228**
US-A- 5 662 178

EP 1 409 839 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to an apparatus for perforating a tubular member extending into a well-bore. Once a well bore has been drilled, utilizing the conventional technique of a drilling string with a drill bit secured to the lower free end, the well is completed by positioning a casing string within the well bore. This increases the integrity of the well bore and provides a path to the surface for the produced fluids. The casing string is normally made up of individual lengths of relatively large diameter metal tubulars secured together by any suitable means, for example screw threads or welds. Conventionally, the casing string is cemented to the well face by circulating cement into the annulus defined between the casing string and the well face. The cemented casing string is subsequently perforated to establish fluid communication between the formations of interest, those containing hydrocarbons, and the interior of the casing string. Perforating has conventionally been performed by means of lowering a perforating gun, having at least one shaped charge positioned within a carrier, down inside the casing string and then firing the charge via wireline control from the surface of the earth. A perforating gun may be constructed to be of any length. The perforating gun is lowered within the casing on wireline or tubing to a point adjacent the zone of interest and the shaped explosive charge is detonated to penetrate or perforate both the casing and the formation. This establishes fluid communication between the cased well bore and the zone of interest. The resulting perforations extend through the casing, cement, and a short distance into the formation. The perforating gun is either removed from the well bore or dropped to the bottom thereof. The formation is then often stimulated by any one of a number of well-known means to enhance production of hydrocarbons therefrom.

[0002] Examples of the known perforating devices can be found in U. S. Patent Nos. 4,538,680 to Brieger et al; 4,619,333 to George; 4,768,597 to Lavigne et al; 4,790,383 to Savage et al; 4,911,251 to George et al; 5,287,924 to Bursleson et al; 5,423,382 to Barton et al; and 6,082,450 to Snider et al. All of these relate to perforating guns which are lowered within a casing string carrying explosive charges which are detonated to perforate the casing outwardly. This had the advantage of leaving the inside of the casing relatively unobstructed since debris and ragged edges would be outwardly directed by the detonations of the charges.

[0003] In the late 1990s, successes were found with casing conveyed perforating guns in which the guns and control lines were attached to the outside of the casing. One disadvantage of this approach is that the externally conveyed elements are subject to damage during normal run-in operations. A second disadvantage is the perforations leaving ragged shards extending inwardly causing obstructions on the inside of the casing.

[0004] PCT application PCT/US00/05774, to Snider

et al, describes another attempt to perforate a tubular from the outside. This differs from the above mentioned perforating from the outside of the casing in that Snider et al propose a perforating gun separate from and exterior to the casing to be perforated. When the Snider et al perforating gun is detonated, portions of the gun act in a manner similar to shrapnel to perforate the casing string. This is not a satisfactory solution to the problem of perforating tubulars in that it raises the possibility of a very ragged perforating which could easily destroy the structural integrity of the casing string, particularly in view of the fact that it utilizes portions of the casing itself to perforate the side of the casing furthest from the perforating gun. This can also result in a ragged inner surface of the casing which could damage or prevent passage of downhole tools and instruments. Perforating a casing from the inside raised this consideration to a much lesser degree.

[0005] Frequently a well penetrates multiple zones of the same formation and/or a plurality of hydrocarbon bearing formations of interest. It is usually desirable to establish communication with each zone and/or formation of interest for injection and/or production of fluids. Conventionally, this has been accomplished in any one of several ways. One way is to use a single perforating gun which is conveyed by wireline or tubing into the well bore and an explosive charge fired to perforate a zone and/or formation of interest. This procedure is then repeated for each zone to be treated and requires running a new perforating gun into the well for each zone and/or formation of interest. One alternative is to have a single perforating gun carrying multiple explosive charges. This multiple explosive charge gun is conveyed on wireline or tubing into the well and, as the gun is positioned adjacent to each zone and/or formation of interest, selected explosive charges are fired to perforate the adjacent zone and/or formation. In another alternative, two or more perforating guns, each having at least one explosive charge, are mounted spaced apart on a single tubing, then conveyed into the well, and each gun is selectively fired when positioned opposite a zone and/or formation of interest. When the select firing method is used, and the zone and/or formation of interest are relatively thin, e.g. 15 feet or less, the perforating gun is positioned adjacent the zone of interest and only some of the shaped charges carried by the perforating gun are fired to perforate only this zone or formation. The gun is then repositioned, by means of the tubing, to another zone or formation and other shaped charges are fired to perforate this zone or formation. This procedure is repeated until all zones and/or formations are perforated, or all of the shaped explosive charges detonated, and the perforating gun is retrieved to the surface by means of the tubing.

[0006] However, the necessity of tripping in and out of the well bore to perforate and stimulate each of multiple zones and/or formations is time consuming and expensive.

[0007] In view of this, multiple zones and/or formations are often simultaneously stimulated, even though this may result in certain zones and/or formations being treated in a manner more suitable for an adjacent zone and/or formation.. Thus a need exists for apparatus and processes to perforate casing which is positioned within a well bore which eliminates the need to run perforating equipment in and out of the well when completing multiple zones and/or formations.

[0008] Disadvantages of the presently known methods of perforating are several, including: the perforating device itself may need to be retrieved; and the cabling systems to convey signals to the charges must be carried outside or inside the tubulars, either subjecting the cabling system to damage and/or taking up space. Protective means, such as wraparound metal protectors, armored cable housings, or grooved casing couplings, must be used to avoid damaging externally mounted cabling systems, explosive charges and their respective detonating means. In order to perforate the adjacent formation, internally conveyed or mounted perforating systems necessarily also perforate the tubular within which they are conveyed which in certain instances, such as when trying to relieve annular pressure, is undesirable.

[0009] Accordingly, it is an object of the present invention to provide an improved apparatus for perforating a tubular member extending into a wellbore, which overcomes the aforementioned drawbacks.

[0010] In accordance with the invention there is provided an apparatus for perforating the wall of a tubular member extending into a wellbore, comprising:

- a tubular member;
- at least one explosive charge in contact with the wall of said tubular member;
- for each explosive charge, a detonation device arranged to detonate the explosive charge; and
- a remote control station in wireless and cable less communication with the detonation device whereby a signal from said control station causes said detonation device to detonate the respective explosive charge; and

characterised in that the tubular member is a casing.

[0011] The present invention will now be described, by way of example, with reference to the accompanying drawings in which:

Figure 1 is a side elevation, partially in section, of an embodiment of the invention utilizing explosive charges attached to a tubing wall;

Figure 2 is a detailed section through one of the shaped charges of the present invention;

Figure 3 is a side elevation of an embodiment of the invention utilizing external ribs containing the explosive charges;

Figure 4 is a side elevation of an embodiment of the invention utilizing an explosive linear strip;

Figure 5 is a block level schematic diagram of the programmable interface and detonation device; and

Figure 6 is a detail plan view of the exploding bridgewire detonation device of the present invention.

[0012] The method and apparatus of the present invention is described in an embodiment for perforating a tubing string and the adjacent formation without the need for conventional perforating guns and their related extensive downhole wiring or cables. The described apparatus can best be described as a "self-perforating" production tubular or casing. What this means is at least one portion of the tubing making up the production tubing and/or casing itself carries the perforating charges, all necessary apparatus to control detonation and, after detonation, production continues through the now perforated tubing or casing.

[0013] Turning now to the drawings, as seen in Figure 1, a tubular 10 is provided with an outside surface 12, a tubular wall 14, and an inside surface 16. Explosive charges and their associated detonators 18 are attached to the outer surface of the wall, preferably in blind bores 20. In wells, where space is at a premium, this embodiment allows the explosive charges to be set close to flush with the outside surface 12 thereby lessening the danger of damage to the explosive charges and their detonators during running of the tubular downhole.

[0014] The self-perforating tubing or casing of the present invention is made from standard tubular materials having coaxial outside and inside surfaces with a closed wall extending therebetween. At least one explosive charge is mounted in direct contact with the outside surface of the wall of the tubular. This contact may be a mechanical connection, such as, by adhering the explosive charges to the outside surface of the tubular; but preferably is by drilling receiving blind bores in the wall of the tubular and fixing the explosive charges into the respective blind bores; or

by bracketing, banding, clamping or by the use of adhesives the explosive charges to the outside surface of the tubular. The tubular itself may also be modified in other ways to carry the explosive charges. An example is to add one or more ribs to the outside of the tubular, preferably in a helical spiral around the outside surface. The explosive charges may then be placed within the ribs. Prefabricated, molded plastic sleeves could also be used to carry the explosive charges. Such sleeves could be made to attach to the outside surface of the tubular, for example in a clamping manner or as shrink wrap, and could be provided with additional features, such as molded channels to allow circulation of well fluids, for example cement slurry, through the annular space between the casing and the well bore.

[0015] Figure 2 shows a cross section through an explosive charge 18 in accordance with the first embodi-

ment. The tubular 10 is first prepared by boring a series of blind bores 20 about the circumference. These bores 20 can be in set geometric patterns, randomly spaced, aligned vertical rows, circumferential bands, etc. in accordance with the desired plan for perforating. The shaped explosive charges 18 are secured in their respective blind bores 20 by any known means, such as threading or affixing the explosive charge into the blind bore with an adhesive material. The explosive charges 18 are then connected to their respective detonating means (not shown) for single, multiple, sequential, etc. detonation in accordance with the plan for perforating. The detonating means are in wireless/cableless contact with control means (also not shown) at the surface. When the explosive charge 18 is detonated, it will shear a plug 22 (shown in phantom) from wall 14. This amounts to no-jet perforating.

[0016] This preferred method to perforate the pipe string uses an explosive charge to open a hole from outside to inside to create a flow path between the inside and outside of the pipe. A second explosive charge can, if so desired, be used to perforate outwardly through the annular space, which may be cement filled, into the formation or zone of interest. The present method can be considered "plugging" in that an explosive charge is set in contact with the casing wall, or in a partially penetrating blind bore drilled into the casing wall, and detonation of that explosive charge creates a stress riser that shears a steel "plug" out of the casing wall leave a hole of known geometry and size without burrs or splatter inside the casing that can block or damage equipment being run in the hole.

[0017] A key feature of the present system is the slim overall profile which does not increase borehole size requirements.

[0018] A collar, sleeve or coating of a diameter greater than that of the casing and with channel(s) cut helically on its exterior surface can be used to provide protected clearance for the charge, receiver, and controller while allowing clearance for flow of fluids and slurries, for example cement, past the collar. A hole or holes can be partially drilled into the collar from the outside to provide a site for a stress riser when the perforating charge is ignited without substantially affecting the pressure rating of the casing string.

[0019] In Figure 3, a tubular 24 has an outside surface 26 and one or more ribs 28 wrapped around and secured to the outside surface. A plurality of explosive charges 30 are placed in recesses in the ribs 28 to lie against the outer surface 26. This embodiment maintains full strength of the tubular, as the wall is without the blind bores of the embodiment of Figure 1, but has a slightly larger profile. However, the ribs 28 can be used to advantage by directing flow during casing running and cementing operations.

[0020] The embodiment of Figure 4 utilizes a linear strip or shaped explosive charge 32 placed on and winding helically about the outside surface 34 of the tubular

36 oriented to shoot outward into the cement and/or formation. Such helically arranged linear strip charges provides a channel for flow and exposes a greater surface area of rock/sand to be perforated, as compared to conventional "button" or conical shaped charges. The flexible strips may be oriented in a variety of patterns.

[0021] Explosive strips may be constructed so that the force of the explosion is highly directional. When explosive linear strips are used, it is advisable to place them on the outside surface of the outermost tubing string, such as the casing, so that the force is directed outward and the structural integrity of the casing is not compromised. This is an important new advantage of the subject system.

[0022] With all of the above-mentioned embodiments of the present invention, the use of shaped explosive charges allows a controlled and directed explosive force thereby allowing use as a means to open holes to release annular pressure without damaging internal tubulars.

[0023] Figure 5 shows a schematic of the detonation device of the present invention including a wireless receiver 38; digital signal processing logic and control 40; exploding bridge wire 42; high voltage supply 44; and energy storage and trigger means 46. A coded wireless signal from the control at the surface will be received by receiver 38, the digital signal processed by the associated micro processor based logic 40 and, if the code designates that the respective explosive charge is to be detonated, sends a signal to the trigger means 46 which will supply high voltage to explosive bridge wire 42 to trigger detonation of the respective explosive charge.

[0024] Among the advantages of this system are: the coded signal allows selective detonation of the explosive charges individually, in sequence, in patterns, etc., and the wireless signal does not transmit the power to initiate detonation of the explosive charge thereby reducing the risk of accidental detonation of the explosive charge.

[0025] Figure 6 shows a detail of an explosive bridge wire 42, which can be compared to a printed circuit board 48 with the bridge portion 50 of the circuit 52 overlying an aperture 54, thus bridge. The bridge 50 has dimensions smaller than the rest of the circuit 52, so that, upon application of power to the circuit 52, the bridge 50 will flash vaporize creating enough energy to cause detonation of the nearby explosive charge 18.

[0026] The explosive charge is in communication with a detonation device which receives signals, via a programmable logic interface, to detonate the explosive charge. The explosive charges may be programmed and/or wired to fire independently of each other, or several may be linked together, in parallel or in series, to fire together. One explosive charge or several explosive charges may be connected to a single detonator. The detonator is typically conveyed into the well as an attachment to the casing/tubing, but it may be remote, such as at the surface.

[0027] The present invention has one or more antenna (not shown) embedded in the well casing to facilitate wireless communication with the surface. Embedding antennas into the casing and adding instrumentation to the casing allows all wells thus equipped to have increased capabilities for monitoring and/or further processing. Embedding antennas into the casing avoids irregular inside surface topography and its related problems. This allows normal inside casing well operations to be performed in an unhindered fashion. The embedded antenna resides in a relief area machined into the inside of each connection. It is generally circular in shape, but could have substantially any shape or form including, but not limited to, a single wire, a loop of wire, or a coil of looped wire. The antenna forms an electrically isolated area from the casing itself. The antenna can be designed to work with any frequency or communication protocol specified by the user. Many communication protocols and practical techniques exist for wireless communication through an empty or partially filled wave guide. The well bore casing would be such a wave guide. The antenna can be designed to work within any size of well casing. The antenna design, coupled with a properly designed transceiver unit, would allow more than one antenna to be embedded into the well casing, if so desired.

[0028] Build up of trapped annular pressure is a major threat when constructing subsea wells. In a conventional subsea well, there is no opportunity to vent trapped annular pressure. Conventional perforating equipment cannot be used since such equipment would also perforate the inner most tubular, which is intended to be a pressure barrier. The use of the subject self-perforating casing provides the capability for selectively perforating an outer casing string while leaving the innermost string intact thereby providing a flow path for venting of pressure in an outward direction from the annular space in the formation.

[0029] The use of an explosive strip charge allows perforation of much increased surface area of rock/sand compared with the usual circular (hole) charge. The explosive strip charge may be axially or circular or spiral oriented with chosen pitch. The use of an explosive strip charge in conventional (internal to pipe) perforating is not possible because such a charge would cut a path along the casing, significantly decreasing the structural strength of the casing. Because the proposed strip charge lies outside the pipe, it is designed specifically to not reduce the structural strength of the casing, while cutting a strip of large surface area along the bore wall surface.

[0030] The use of molded plastic ribs attached to the outside of the casing allows fluids and slurries, for example cement, to be pumped around and be directed by the ribs. Either straight or spiral crests on the ribs hold the explosive charges in place and enclose means used to connect the explosive charges to their respective detonating devices.

[0031] The method for producing exploding bridgewire detonators uses both standard and non-standard circuit board manufacturing techniques. Previous techniques to produce exploding bridgewires have used extremely fine wires of gold, copper, or other conductive material joined to conductors by a variety of known methods. The present method replaces the previous fine wires and attachment techniques with etched or plated circuit board traces. The exploding bridgewire trace is in contact with a small mass of low density explosive consisting of PETN, RDX, HMX or other secondary explosive to begin the detonation process. This small mass of low density explosive is in contact with a larger mass of high density explosive to complete the initiation process.

[0032] As a high voltage pulse is passed through the exploding bridgewire trace, the trace is vaporized and sends a shock wave into the low density explosive, initiating detonation. The low density explosive in turn initiates the larger mass of high density explosive to complete the detonation train. The output from this secondary charge can then be used to initiate larger masses of explosives. Additionally, the initial mass of low density explosive may be in contact with the final mass of high density explosive to be used in an explosive device.

[0033] The circuit board trace for the exploding bridgewire is shown in Figure 6. In the figure a wider trace that acts as a conductive path narrows down to the trace shown, the narrow trace acts as the exploding bridgewire. Variations in lengths, widths and thicknesses of the trace provide for tailoring of voltage and energy requirements for initiating the explosive. Variations of the trace sizes, types of explosives in contact with the traces, and densities of explosives are all considered to be pertinent to the method described.

[0034] The subject explosive bridge wire detonating system is a major improvement over the previously widely used primacord for detonation. The board can be built to withstand high operating temperatures, where primacord cannot be used because of its instability. The subject explosive bridge wire detonating system also provides a way to make selective perforating with conventional guns much cheaper and easier to operate. The digitally operated controller and downhole battery power source provide easy selectivity for the system which enables the perforator to be constructed safely offsite and run in the hole without having to wait for a complete well evaluation, improving safety and saving rig time. In completion intervals that may be impacted by gas and water contact within a producing interval, the selectivity allows the system to be run into and cemented in the well before log evaluation is completed because the spacing of the charges would preferably overlap beyond the potential completion intervals.

[0035] The linear perforating charge increases the amount of formation exposed for completion. The linear charge is an outwardly directed jet perforator that is designed to penetrate the formation with a high velocity

jet, not by expansion of gas. Also, the linear explosive charge can be used in combination with the above discussed "plugging" explosive charges and can be fired sequentially, e.g., first plugging holes in the casing and then firing the linear charge.

[0036] The coded wireless signal sent downhole in the present invention is used only to arm the explosive charges. The power to initiate the explosive charge comes from a battery positioned downhole as a part of the detonating system.

[0037] The present apparatus requires a control station and a wireless and cableless means for communicating between the control station and the detonation device. Any wireless or cableless communication method may be used including, but not restricted to, radio waves, infrared waves, acoustic waves, optical light waves, seismic waves, magnetic waves, or combinations thereof. Wireless signals are conveyed using the tubular string wall as a waveguide. Alternatively, a ball containing a transponder may be dropped downhole, sending signals to the controllers for the detonators as it passes them. If a "smart ball" or transponder is used, signals may vary as the smart ball progresses thus allowing only selected explosive charges to detonate.

[0038] The use of the subject apparatus varies only slightly if the tubular is production tubing or if it is casing. When perforating as part of a production tube or tubes, the perforating device is attached as part of the tool string and lowered into a well bore in the typical manner in which production tubulars are run into a well. The tubular(s) to which perforating device(s) are attached are placed within the tubing string such that, when the tubing string is in place, the perforating device(s) are adjacent to predetermined zones to be perforated. The explosive charges are detonated, as described above, by means of wireless and cableless communication. Once the perforation operation is complete, one may begin to produce or inject liquids, gases, or a combination thereof through the production tubing string or, if desired, through the production casing string.

[0039] When the self-perforating tube is a portion of the casing, the subject method varies only slightly. In the casing scenario the self-perforating casing is made part of the casing string and the casing string is set such that the at least one self-perforating casing is set adjacent a predetermined zone to be perforated. The self-perforating casing and its external charges are cemented into the well bore. Detonation of the explosive charges then takes place as previously described.

[0040] When tubing is run inside casing, an annular space is formed between the outside surface of the tubing and the inside surface of the casing. A pressure differential typically builds up in this annular space. Trapped annular pressure is a major threat to the mechanical integrity of certain wells, such as subsea wells. It is not desirable to perforate the innermost production tubing in such wells, for the purpose of relieving this pressure since the innermost tubing is used as a barrier

to prevent escape of well fluids. Conventional perforating equipment has the disadvantage of perforating both the tubing as well as the casing. The apparatus and method of the present invention have the further advantage of allowing one to selectively perforate an outer casing to relieve (vent) annular pressure during the operating life of the well. Explosive charges may be placed on the casing or on the outside wall of an outer production tubing string. By use of directional explosive charges, all force may be directed outward, so that only the outer strings are perforated, allowing annular pressure to vent, while the integrity of the inner production strings is maintained intact to provide the desired barrier.

[0041] The present invention may be subject to many modifications and changes without departing from the spirit or essential characteristics thereof. The described embodiments should therefore be considered in all respects as illustrative and not restrictive of the scope of the present invention, as defined by the appended claims, without departing from its spirit or scope as set forth herein.

Claims

1. An apparatus for perforating the wall of a tubular member (10) extending into a wellbore, comprising:
 - a tubular member;
 - at least one explosive charge (18) in contact with the wall (14) of said tubular member;
 - for each explosive charge, a detonation device arranged to detonate the explosive charge; and
 - a remote control station in wireless and cable less communication with the detonation device whereby a signal from said control station causes said detonation device to detonate the respective explosive charge; and

characterised in that the tubular member is a casing.
2. The apparatus of claim 1, comprising a plurality of said explosive charges each capable of independent detonation.
3. The apparatus of claim 2, wherein said explosive charges are grouped to detonate in a specific sequence.
4. The apparatus of any one of claims 1-3, wherein said control station is at a surface and said wireless and cable less communication is selected from radio waves, infrared waves, acoustic waves, optical light waves, seismic waves, magnetic waves, and combinations thereof.
5. The apparatus of any one of claims 1-4, wherein

said tubular member is one of a production tubular and a wellbore casing.

6. The apparatus of any one of claims 1-5, wherein each explosive charge is fixed to the outside surface (12) of said tubular member. 5
7. The apparatus of any one of claims 1-6, wherein each explosive charge is secured in a blind bore (20) in the wall of said tubular. 10
8. The apparatus of any one claims 1-7, wherein each explosive charge is a linear strip charge (32) attached to the outside surface of said tubular member along a helical path. 15
9. The apparatus of any one of claims 1-8, further comprising:
- at least one rib (28) secured helically around said outside surface of the tubular member; wherein each explosive charge is positioned in said at least one rib so as to contact the outer surface of the tubular member. 20
10. The apparatus of any one of claims 1-9, wherein the detonation device comprises:
- a wireless receiver (38); 30
microprocessor (40) and control means connected to said wireless receiver;
an explosive bridge wire (42);
high voltage supply means (44); and
energy storage and trigger means (46), whereby a coded wireless signal received by said receiver is decoded by the micro processor and, if the code designates that the respective explosive charge is to be detonated, sends a signal to the trigger means which will supply high voltage to explosive bridge wire which will create sufficient energy to initiate detonation of the respective explosive charge. 40
11. The apparatus of claim 10, wherein said coded signal allows selective detonation of a plurality of explosive charges individually or in sequence. 45
12. The apparatus of claim 10 or 11, wherein the power for initiating detonation of the explosive charge is provided independently from the wireless signal thereby reducing the risk of accidental detonation of the explosive charge. 50
13. The apparatus of any one of claims 10-12, wherein said explosive bridge wire comprises: 55

a circuit board (48) having an aperture (54)

therein;

an electrical circuit (52) formed on said board with a portion of the circuit overlying said aperture forming a bridge, said bridge having dimensions smaller than the rest of the circuit so that, upon application of power to the circuit, the bridge will flash vaporize causing detonation of the nearby explosive charge.

14. The apparatus of any one of claims 10-13, wherein the wireless receiver includes an antenna embedded in said tubular member to facilitate wireless communication with the surface.
15. The apparatus of claim 14, wherein said embedded antenna resides in a relief area machined into the inside of each connection of the tubular member.
16. The apparatus of claim 15, wherein said antenna is a coil of looped wire. 20

Patentansprüche

- 25 1. Vorrichtung zum Perforieren der Wand eines Rohrelementes (10), das sich in ein Bohrloch erstreckt, mit:
- einem Rohrelement; 30
- zumindest einer Sprengladung (18) in Berührung mit der Wand (14) des Rohrelementes;
- wobei für jede Sprengladung eine Detonationseinrichtung vorgesehen ist, um die Sprengladung zu detonieren; und 35
- einer Fernsteuerungsstation in drahtloser und kabelloser Verbindung mit der Detonationseinrichtung, wobei ein Signal der Steuerungsstation bewirkt, daß die Detonationseinrichtung die entsprechende Sprengladung detoniert; und 40
- dadurch gekennzeichnet, daß** das Rohrelement eine Auskleidung ist.
- 45 2. Vorrichtung nach Anspruch 1 mit einer Vielzahl von Sprengladungen, die je zu unabhängiger Detonation befähigt sind.
- 50 3. Vorrichtung nach Anspruch 2, bei welcher die Sprengladungen so gruppiert sind, daß sie in einer spezifischen Folge detonieren.
- 55 4. Vorrichtung nach einem der Ansprüche 1-3, bei welcher sich die Steuerungsstation an der Oberfläche befindet und die draht- und kabellose Verbindung aus Radiowellen, Infrarotwellen, Akustikwellen, optischen Lichtwellen, seismischen Wellen, Magnetwellen und Kombinationen derselben gewählt wird.

5. Vorrichtung nach einem der Ansprüche 1-4, bei welcher das Rohrelement ein Förderrohr oder eine Bohrlochauskleidung ist.
6. Vorrichtung nach einem der Ansprüche 1-5, bei welcher jede Sprengladung an der Außenfläche (12) des Rohrelementes befestigt ist.
7. Vorrichtung nach einem der Ansprüche 1-6, bei welcher jede Sprengladung in einer Blindbohrung (20) in der Wand des Rohres befestigt ist.
8. Vorrichtung nach einem der Ansprüche 1-7, bei welcher jede Sprengladung eine lineare Streifenladung (32) ist, die an der Außenfläche des Rohrelementes entlang eines wendelförmigen Pfades befestigt ist.
9. Vorrichtung nach einem der Ansprüche 1-8, die ferner aufweist:
- zumindest eine Rippe (28), die wendelförmig um die Außenseite des Rohrelementes herum befestigt ist; wobei
- jede Sprengladung in der zumindest einen Rippe derart positioniert ist, daß sie die Außenfläche des Rohrelementes kontaktiert.
10. Vorrichtung nach einem der Ansprüche 1-9, bei welcher die Detonationseinrichtung aufweist:
- einen Funkempfänger (38);
- einen Mikroprozessor (40) und Steuermittel, die mit dem Funkempfänger verbunden sind;
- einen Sprengbrückendraht (42);
- eine Hochspannungsquelle (44); und
- Energiespeicher und Ansteuermittel (46), wobei ein kodierte Funksignal, das von dem Funkempfänger empfangen wird, von dem Mikroprozessor dekodiert wird, und falls der Kode bestimmt, daß die Sprengladung zu detonieren ist, ein Signal an die Ansteuermittel sendet, die eine Hochspannung an den Sprengbrückendraht legen, der ausreichende Energie erzeugt, um die Detonation der entsprechenden Sprengladung einzuleiten.
11. Vorrichtung nach Anspruch 10, bei welcher das kodierte Signal eine selektive Detonation einer Vielzahl von Sprengladungen einzeln oder in einer Folge gestattet.
12. Vorrichtung nach Anspruch 10 oder 11, bei welcher die Energie zum Auslösen der Detonation der Sprengladung unabhängig von dem Funksignal bereitgestellt wird, wodurch die Gefahr einer zufälligen Detonation der Sprengladung reduziert wird.
13. Vorrichtung nach einem der Ansprüche 10-12, bei welcher der Sprengbrückendraht aufweist:
- eine Schalttafel (48) mit einer Öffnung (54);
- einen elektrischen Kreis (52), der auf der Tafel ausgebildet ist, wobei ein Teil des Kreises über der Öffnung liegt, um eine Brücke zu bilden, wobei die Brücke Dimensionen hat, die kleiner als der Rest des Kreises sind, derart, daß bei Anlegen von Spannung an den Kreis die Brücke blitzverdampft, wodurch die Detonation der benachbarten Sprengladung bewirkt wird.
14. Vorrichtung nach einem der Ansprüche 10-13, bei welcher der Funkempfänger eine Antenne aufweist, die in dem Rohrelement eingebettet ist, um die Funkverbindung mit der Oberfläche zu erleichtern.
15. Vorrichtung nach Anspruch 14, bei welcher die eingebettete Antenne in einer Reliefzone liegt, die in der Innenseite jeder Verbindung des Rohrelementes ausgearbeitet ist.
16. Vorrichtung nach Anspruch 15, bei welcher die Antenne eine Wicklung eines Schleifendrahtes ist.

Revendications

1. Appareil pour perforer la paroi d'un élément tubulaire (10) s'étendant dans un trou de forage, comprenant :
- un élément tubulaire;
- au moins une charge explosive (18) en contact avec la paroi (14) dudit élément tubulaire;
- pour chaque charge explosive, un dispositif de détonation aménagé pour faire détoner la charge explosive; et
- un poste de télécommande en communication sans fil et sans câble avec le dispositif de détonation, dans lequel un signal issu dudit poste de commande amène ledit dispositif de détonation à faire détoner la charge explosive respective; et
- caractérisé en ce que** l'élément tubulaire est un cuvelage.
2. Appareil selon la revendication 1, comprenant une pluralité desdites charges explosives, chacune étant pouvant détoner indépendamment.

3. Appareil selon la revendication 2, dans lequel lesdites charges explosives sont groupées pour détoner dans une séquence spécifique.
4. Appareil selon l'une quelconque des revendications 1 à 3, dans lequel ledit poste de commande se trouve sur une surface et ladite communication sans fil et sans câble est choisie parmi les ondes radio, les ondes infrarouges, les ondes acoustiques, les ondes optiques, les ondes sismiques, les ondes magnétiques ou leurs combinaisons.
5. Appareil selon l'une quelconque des revendications 1 à 4, dans lequel ledit élément tubulaire est choisi parmi une tubulure de production et un cuvelage de trou de forage.
6. Appareil selon l'une quelconque des revendications 1 à 5, dans lequel chaque charge explosive est fixée à la surface extérieure (12) dudit élément tubulaire.
7. Appareil selon l'une quelconque des revendications 1 à 6, dans lequel chaque charge explosive est fixée dans un trou borgne (20) dans la paroi de ladite tubulure.
8. Appareil selon l'une quelconque des revendications 1 à 7, dans lequel chaque charge explosive est une charge en bande linéaire (32) fixée à la surface extérieure dudit élément tubulaire le long d'un trajet en hélice.
9. Appareil selon l'une quelconque des revendications 1 à 8, comprenant en outre :
- au moins une nervure (28) fixée en hélice autour de ladite surface extérieure de l'élément tubulaire, dans lequel chaque charge explosive est placée dans ladite au moins une nervure afin d'établir un contact avec la surface extérieure de l'élément tubulaire.
10. Appareil selon l'une quelconque des revendications 1 à 9, dans lequel le dispositif de détonation comprend :
- un récepteur sans fil (38);
des moyens de commande à microprocesseur (40) connectés audit récepteur sans fil;
un fil de pontage explosif (42);
des moyens d'alimentation haute tension (44);
et
des moyens de stockage d'énergie et de déclenchement (46), dans lesquels un signal sans fil codé reçu par ledit récepteur est décodé par le microprocesseur et, si le code indique que l'on doit faire détoner la charge explosive res-
- pective, envoie un signal au moyen de déclenchement qui fournira une haute tension au fil de pontage explosif, qui créera suffisamment d'énergie pour initier la détonation de la charge explosive respective.
11. Appareil selon la revendication 10, dans lequel ledit signal codé permet la détonation sélective d'une pluralité de charges explosives individuellement ou en séquence.
12. Appareil selon la revendication 10 ou 11, dans lequel l'énergie nécessaire pour initier la détonation de la charge explosive est fournie indépendamment du signal sans fil, réduisant de la sorte le risque de détonation accidentelle de la charge explosive.
13. Appareil selon l'une quelconque des revendications 10 à 12, dans lequel ledit fil de pontage explosif comprend :
- une plaquette de circuit (48) présentant une ouverture (54);
un circuit électrique (52) formé sur ladite plaquette et dont une partie recouvre ladite ouverture pour former un pont, ledit pont ayant des dimensions plus petites que le reste du circuit de sorte que, par application d'énergie au circuit, le pont subisse une vaporisation éclair provoquant la détonation de la charge explosive voisine.
14. Appareil selon l'une quelconque des revendications 10 à 13, dans lequel le récepteur sans fil comprend une antenne noyée dans ledit élément tubulaire pour faciliter la communication sans fil avec la surface.
15. Appareil selon la revendication 14, dans lequel ladite antenne noyée réside dans une région de dégagement usinée à l'intérieur de chaque raccordement de l'élément tubulaire.
16. Appareil selon la revendication 15, dans lequel ladite antenne est une bobine de câble bouclé.

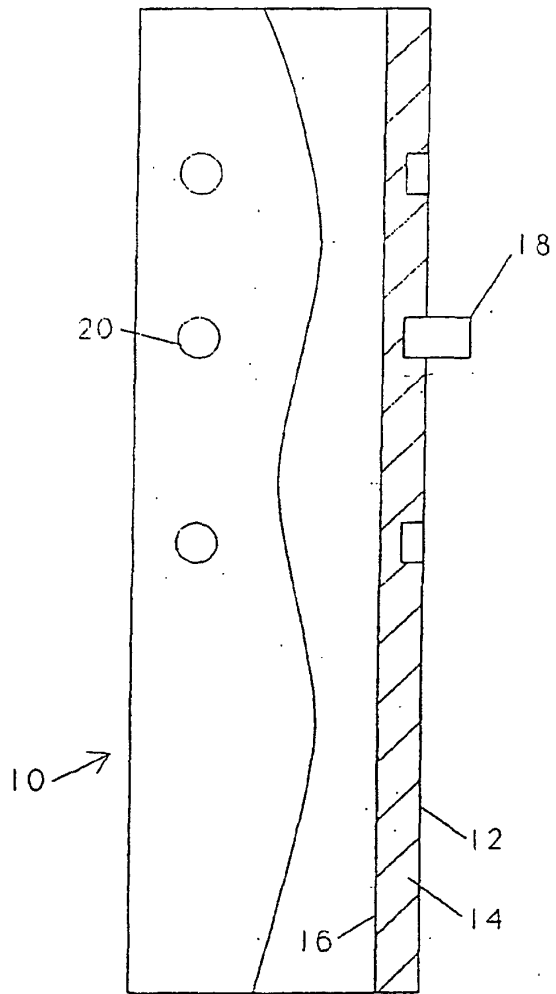


FIG. 1

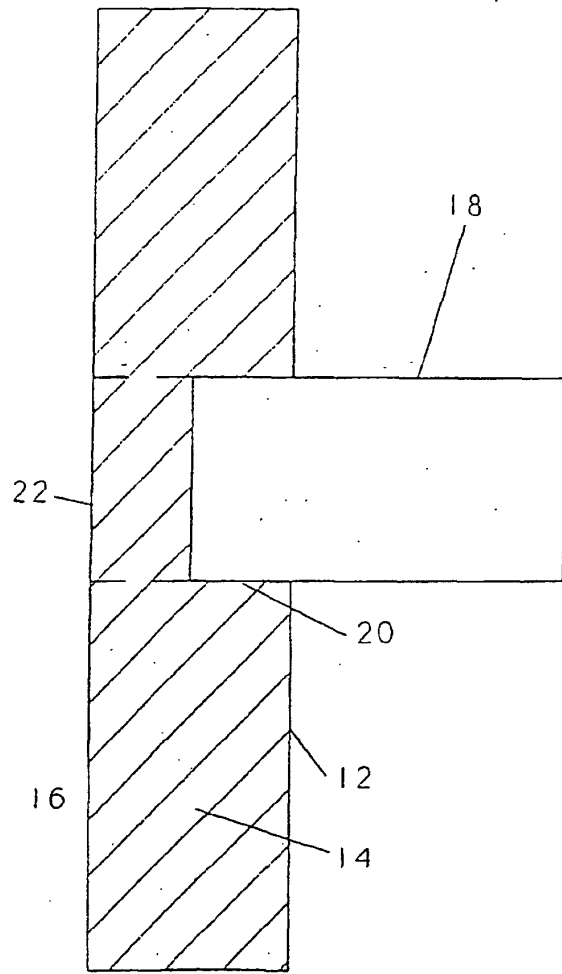


FIG. 2

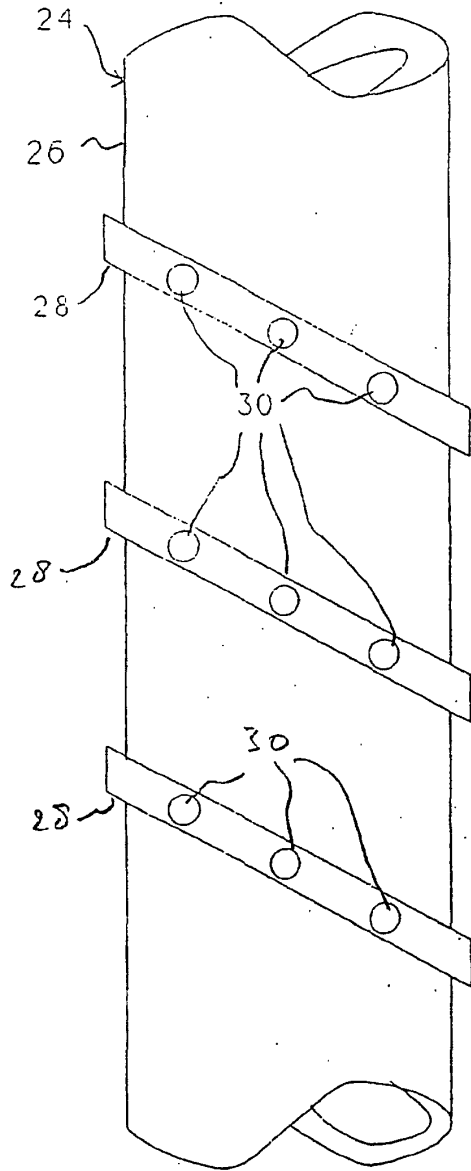


FIG. 3

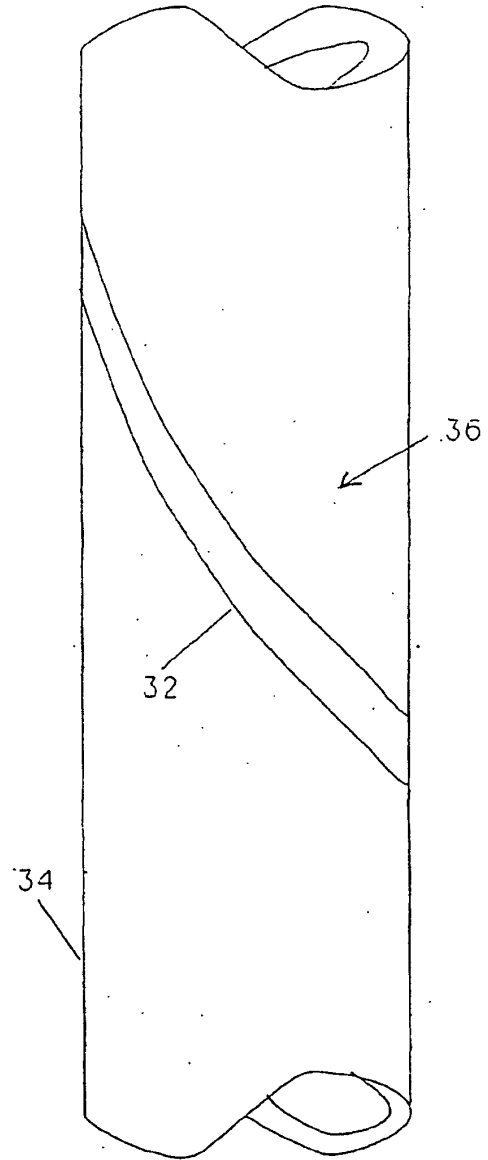


FIG. 4

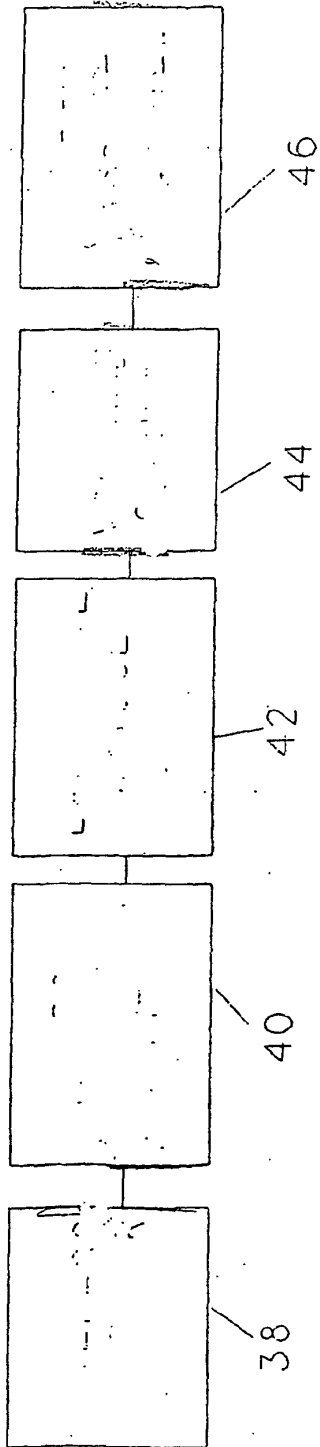


FIG. 5

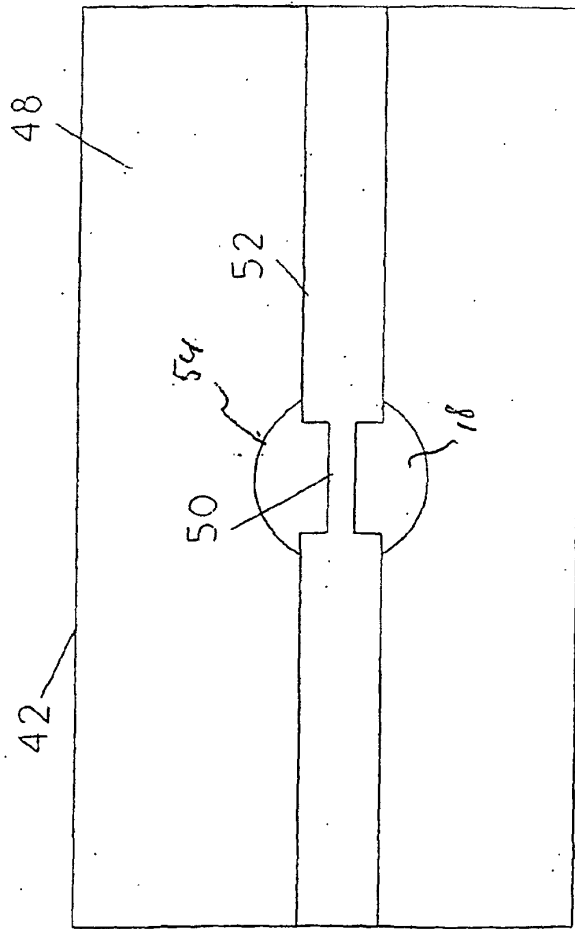


FIG. 6