(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 1 410 738 A1

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
21.04.2004 Bulletin 2004/17

(51) Int Cl.[7]: **A47C 1/032**

(21) Application number: **03077995.3**

(22) Date of filing: **22.09.2003**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PT RO SE SI SK TR
Designated Extension States:
AL LT LV MK

(30) Priority: **16.10.2002 IT MI20022194**

(71) Applicant: **ICF S.p.A.**
20060 Vignate (Milano) (IT)

(72) Inventor: **Sangiorgio, Claudio**
20122 Milano (IT)

(74) Representative: **Marchi, Massimo et al**
c/o Marchi & Partners s.r.l.,
Via Pirelli, 19
20124 Milano (IT)

(54) Chair with movable seat and backrest

(57) A chair (1) with a seat (2) and a backrest (3), a structure (5) supporting the seat (2), and a base (4); the support structure (5) has two lateral uprights (11, 12) and at least one projecting element (13) provided with a substantially longitudinal guide (14), and the backrest (3) is associated with two right-angle elements (16, 17); each of the right-angle elements (16, 17) has a first end (18) connected to the backrest (3), a central part (19) connected rotatably by means of a first hinging pin (20) to a top end (21) of one of the uprights (11, 12) of the support structure (5) of the seat (2) and a second end (22) connected by means of a second hinging pin (23) to the seat (2); the seat (2) is connected to the support structure (5) by means of a telescopic rod (30), which can be shortened and lengthened in a resilient manner, and an element (31) which can be slidably engaged in the guide (14) of the projecting element (13).

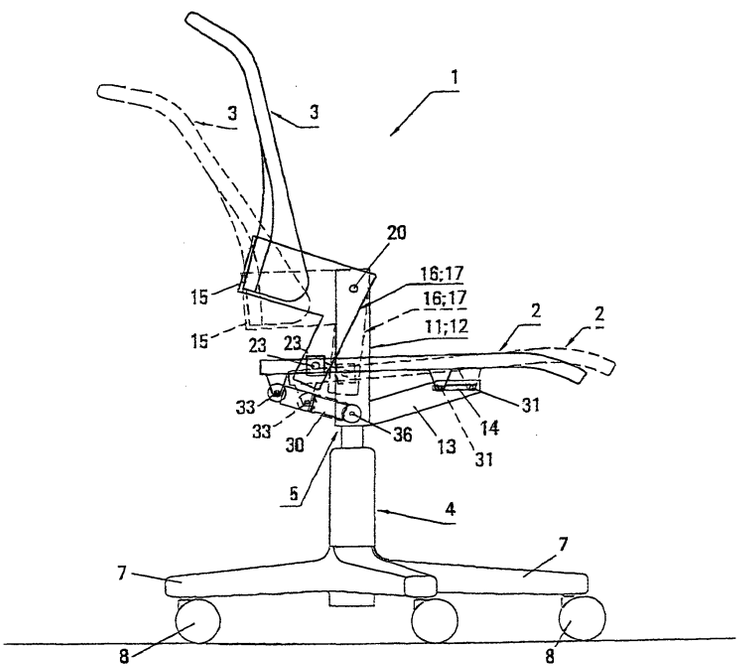


FIG. 2

EP 1 410 738 A1

Description

[0001] The present invention relates to a chair with a movable seat and backrest.

[0002] It is a commonly held view that chairs, in particular office chairs, should be adjustable ergonomically depending on the positions assumed by the user during the various conditions of intense, normal or relaxed working activity.

[0003] For this purpose various types of reclinable chairs, where the seat and backrest tilt simultaneously forwards or backwards, have been proposed.

[0004] In general, in these known chairs, the axis of rotation of the seat is in an intermediate position between the front end and the rear end of the seat or in the vicinity of the front end of the seat.

[0005] In known chairs where the axis of rotation of the seat is in an intermediate position between the front end and the rear end of the seat, when the backrest is reclined backwards the front part of the seat is raised with respect to the floor to a maximum distance from the floor allowed by the system used to adjust the inclination between backrest and seat. This movement of the seat raises the user's legs from the floor and the weight of the raised legs exerts an undesirable pressure on the rear side of the user's thighs.

[0006] Instead, in known chairs where the axis of rotation of the seat is situated in the vicinity of the front end of the seat, the user's legs are not raised when the backrest and the seat are inclined backwards because the distance between the front end of the seat and the floor remains constant.

[0007] However, lowering of the rear end of the seat tends to cause an undesirable backwards slipping movement of the user's pelvis and unpleasant pulling of his/her clothes.

[0008] In order to overcome these drawbacks, a chair in which the seat and the backrest tilt, performing different angular rotations, has been proposed.

[0009] US 4,429,917 describes a chair of this second type which comprises a seat, a backrest and a hinged parallelogram, said hinged parallelogram comprising a support, said seat forming a second connection of said hinged parallelogram, said hinged parallelogram comprising a third connection having an end portion rotatably connected to a rear portion of said support and an opposite end portion rotatably connected to a rear portion of said seat, a fourth connection having a first end portion rotatably connected to a front portion of said support and a second end portion rotatably connected to a front portion of said seat, and means for mounting and fixing said backrest to said fourth connection so as to perform a rotational movement together with said fourth connection about said rotatable connection between said fourth connection and said support.

[0010] In this chair, the centre of instantaneous rotation of the hinged parallelogram is situated underneath the seat and, while the backrest and the seat tilt backwards at different angles of rotation, the seat moves backwards towards the backrest. In the embodiment of the chair described in the abovementioned document, the angle of inclination of the seat is equal to about one third of the angle of inclination of the backrest. According to the abovementioned document (column 6, lines 35-39), this reduced inclination of the seat has the purpose of allowing the user to keep his/her feet on the floor and avoid slipping of the pelvis.

[0011] A first disadvantage of the chair described in US 4,429,917 is that its structure is complex and therefore the production thereof is costly.

[0012] Moreover, it must be considered that the body of a person who is working sat at a desk is continuously moving. In order to safeguard the person's health, the chair should therefore allow the person to assume the most widely varying natural positions required by the work being performed without moving away from the desk.

[0013] This is not allowed, however, either by the chair described in US 4,429,917, nor by other known chairs in which a backwards inclination of the user's trunk results in a backwards displacement of the entire body and a consequent movement away from the work station. Thus, for example, the eyes move away from the monitor and the hands move away from the mouse, forcing the user to assume unnatural and therefore damaging positions.

[0014] A first object of the present invention is to design a chair which is provided with a movable backrest and seat and does not have the abovementioned drawbacks.

[0015] A second object of the present invention is to design a chair which is provided with a movable backrest and seat and has a robust structure and is simple and low cost to construct.

[0016] A third object of the present invention is to provide a chair which is provided with a movable backrest and seat in which the movement is achieved by means of simple modifications of the components conventionally used to construct a chair with a fixed backrest and seat.

[0017] The abovementioned object is achieved, in accordance with the invention, by means of a chair having a seat, a backrest, a structure supporting the seat, and a base, characterized in that said support structure has two lateral uprights and at least one projecting element provided with a substantially longitudinal guide, in that said backrest is associated with two right-angle elements, each of said right-angle elements having a first end connected to said backrest, a central part connected rotatably by means of a first hinging pin to a top end of one of said uprights of said seat support structure and a second end connected to said seat by means of a second hinging pin, said seat being connected to said support structure also by means of a telescopic rod which can be shortened and lengthened in a resilient manner, and an element slidably engaged in said guide of said

projecting element so that a backwards rotation of said backrest about the first hinging pins causes forwards sliding of said seat and vice versa.

[0018] An important characteristic feature of the chair according to the invention is that the first hinging pins which rotatably connect the right-angle elements, which are joined to the backrest, to the seat support structure are situated above the seat. This allows the abovementioned first hinging pins to be positioned such that the imaginary axis which connects them coincides with the main imaginary axis of rotation of the body of the user in the seated position. Typically, this imaginary axis of rotation connects the two hips of the user and is situated at about 60-100 mm above the plane of the seat.

[0019] This typical arrangement of the first hinging pins and the particular type of mechanism envisaged in the chair according to the invention allows a particular synchronized movement of the backrest and the seat such that a backwards inclination of the backrest results in a translatory forward movement of the seat, and vice versa, with a minimum displacement in the centre of gravity of the user's body.

[0020] In this way, the backwards counter-thrust exerted by the weight of the user automatically balances the resilient reaction of the telescopic rod.

[0021] This allows the degree of resilient reaction of the telescopic rod to be reduced.

[0022] These movements of the backrest and the seat assist, therefore, in a natural and ergonomic manner the movements of the user's body.

[0023] This will allow the person sitting in the chair to continue performing his/her work, such as for example the movement of a mouse, also during the forwards and backwards movements of the backrest.

[0024] In a preferred embodiment, the seat according to the present invention is raised upwards through 3-7°, preferably about 5°, while the backrest tilts backwards through about 20-30°.

[0025] Preferably, the ratio between the angles of inclination of the seat and the backrest range from about 1:10 to 1:5, even more preferably it may be about 1:6.

[0026] Another advantage of the chair according to the invention is its constructional simplicity due to the limited number of components.

[0027] Advantageously, the abovementioned slight raising movement of the seat according to the invention is obtained by inclining slightly the sliding guide, and therefore the sliding plane, of the seat with respect to the surface (floor) on which the chair is placed.

[0028] Another advantage of the chair according to the invention is its constructional simplicity due to the limited number of components; in particular, without using a special moving device, but by suitably connecting together the conventional structural components of a chair: i.e. base, seat and backrest.

[0029] Other characteristic features and advantages of the invention will now be illustrated with reference to two embodiments shown by way of a non-limiting example in the accompanying drawings, in which:

Fig. 1 is a side view of a chair according to a first embodiment of the present invention;

Fig. 2 shows the chair according to Fig. 1 in the condition where the backrest is vertical (continuous lines) and in the condition where the backrest is inclined backwards (broken lines).;

Fig. 3 shows the chair according to Fig. 1 in the condition where the backrest is inclined backwards;

Fig. 4 is an exploded view of a chair according to a second embodiment of the invention.

[0030] Figs. 1-3 show a chair 1 having a movable seat 2 and backrest 3, a base 4 and a structure 5 supporting the seat 2.

[0031] The base 4 comprises a telescopic column 6 provided with radial legs 7 and swivel wheels 8 which rest on a floor 40.

[0032] The structure 5 supporting the seat 2 comprises a cross-piece 10, two lateral uprights 11 and 12 integral with the cross-piece 10 and forming a mirror image of each other, as well as a longitudinal projecting element 13 directed towards the front part of the chair. The projecting element 13 has a slide-type guide 14 which is substantially longitudinal and formed by an eyelet, the function of which will be illustrated further below.

[0033] Advantageously, armrests (not shown) may be connected to the lateral uprights 11 and 12, thus being adjustable heightwise in a simple and effective manner.

[0034] The backrest 3 is integrally joined to a curved transverse band 15 which is connected to two lateral right-angle elements 16 and 17 which are a mirror image of each other. Each right-angle or angular element 16 or 17 has a first end 18, a central part 10 and a second end 22. The end 18 is integrally joined to the transverse band 15 by means of known fixing methods (not shown). The central part 19 is rotatably connected, by means of a hinging pin 20 to a top end 21 of an upright 11 or 12 of the structure 5 supporting the seat 2. The end 22 is rotatably connected by means of a hinging pin 23 to a side 24 or 25 of the seat 2.

[0035] The hinging pins 20 are situated above the seat 2, at a height of about 80 mm, so that they are substantially aligned with the imaginary axis which connects the hips of the user in the seated position.

[0036] The seat 2 is connected at the bottom to the support structure 5 by means of a telescopic rod 30 which can be shortened and lengthened in a resilient manner and a pin (or a wheel) 32 slidably engaged in the eyelet (slide-type guide) 14 of the projecting element 13. The rod 30 has ends 32 and 35. The end 32 is connected by means of a hinging pin 33 to a plate 34 fixed to the seat 2 and the end 35 is connected by means of a hinging pin 36 to the cross-piece 10 of the structure 5 supporting the seat 2. The pin 31 is mounted on a plate 37 fixed to the seat 2.

[0037] The telescopic rod 30 is of the metallic spring

or pneumatic type, not shown, having a pre-tensioning force capable of keeping the seat 2 and the backrest 3 in the initial position shown in Fig. 1.

[0038] When the user wishes to incline the chair 1, he/she exerts, with the trunk of the body, a pushing force on the backrest 3 directed backwards. The backwards inclination of the backrest 3 causes a forwards translation of the seat 2 and a simultaneous slight tilting thereof upwards (Figs. 2 and 3). The backrest 3, rotating in an anticlockwise direction about the hinging pins 20, causes the forwards displacement of the seat 2 and slight tilting thereof by means of the mechanisms comprising the right-angle elements 16 and 17, the hinging pins 20 and 23, the telescopic rod 30, the pin 31 and the eyelet 14. With the forwards displacement of the seat, the telescopic rod 30 is shortened and its spring is compressed into a predefined stop position corresponding to the predefined maximum inclination of the backrest, where it provides a resilient reaction capable of bringing the seat 2 and the backrest 3 back into the initial position (Figs. 1 and 2) when the user ceases pushing against the backrest.

[0039] Fig. 4 shows a second embodiment of the chair 1 according to the invention, in which the same reference numbers are used to indicate the same parts shown in Figs. 1-3.

[0040] This second embodiment according to Fig. 4 differs from that of Figs. 1-3 simply in that the right-angle elements 16 and 17 are integral with the backrest 3, being formed as one piece by means of moulding.

[0041] The person skilled in the art will easily understand that it is possible to make numerous modifications to the two embodiments illustrated without, however, departing from the invention claimed.

Claims

1. Chair having a seat (2) and a backrest (3), a structure (5) supporting the seat (2), and a base (4), **characterized in that** said support structure (5) has two lateral uprights (11, 12) and at least one projecting element (13) provided with a substantially longitudinal guide (14), **in that** said backrest (3) is associated with two right-angle elements (16, 17), each of said right-angle elements (16, 17) having a first end (18) connected to said backrest (3), a central part (19) connected rotatably by means of a first hinging pin (20) to a top end (21) of one of said uprights (11, 12) of said structure (5) supporting the seat (2) and a second end (22) connected to said seat (2) by means of a second hinging pin (23), said seat (2) being connected to said support structure (5) also by means of a telescopic rod (30) which can be shortened and lengthened in a resilient manner, and an element (31) slidably engaged in said guide (14) of said projecting element (13) so that a backwards rotation of said backrest (3) about the first hinging pins (20) causes forwards sliding of said seat (2) and vice versa.

2. Chair (1) according to Claim 1, **characterized in that** the first hinging pins (20) of said right-angle elements (16, 17) are situated above said seat (2).

3. Chair (1) according to Claim 2, **characterized in that** said first hinging pins (20) of said right-angle elements (16, 17) are positioned such that the imaginary axis which connects them coincides substantially with the imaginary axis which connects the two hips of the user.

4. Chair (1) according to any one of the preceding Claims 1 to 3, **characterized in that** said first hinging pins (20) are situated at about 60-100 mm above the plane of the seat.

5. Chair (1) according to any one of the preceding Claims 1 to 4, **characterized in that** said guide (14) is parallel to a surface on which said chair is placed.

6. Chair (1) according to any one of the preceding Claims 1 to 4, **characterized in that** said guide (14) is slightly inclined with respect to surface on which said chair is placed.

7. Chair (1) according to Claim 6, **characterized in that** said seat is raised upwards through 3-7°.

8. Chair (1) according to Claim 7, **characterized in that** said seat is raised upwards through 5°.

9. Chair (1) according to Claim 6, **characterized in that** said backrest is inclined backwards through 20-30°.

10. Chair (1) according to one or more of Claims 6 to 9, **characterized in that** the ratio between the angles of inclination of the seat and the backrest ranges from 1:10 to 1:5.

11. Chair (1) according to Claim 10, **characterized in that** the ratio between the angles of inclination of the seat and the backrest is about 1:6.

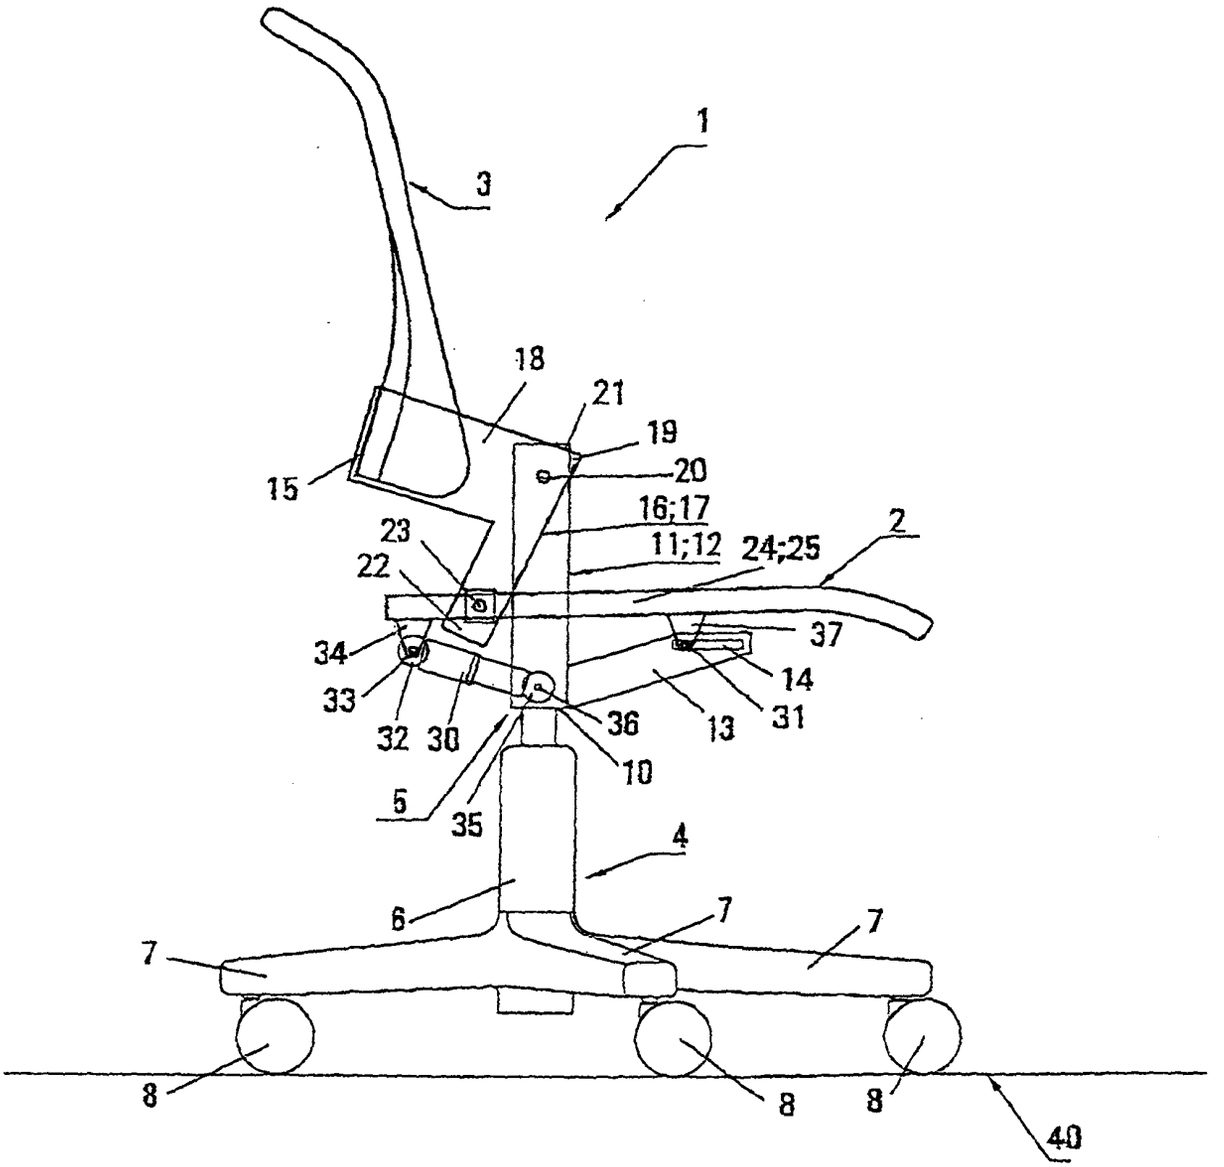

1
3
18
21
19
20
15
16;17
11;12
24;25
2
23
22
37
34
14
33
32
30
36
13
31
10
5
35
4
6
7
7
7
8
8
8
40

FIG. 1

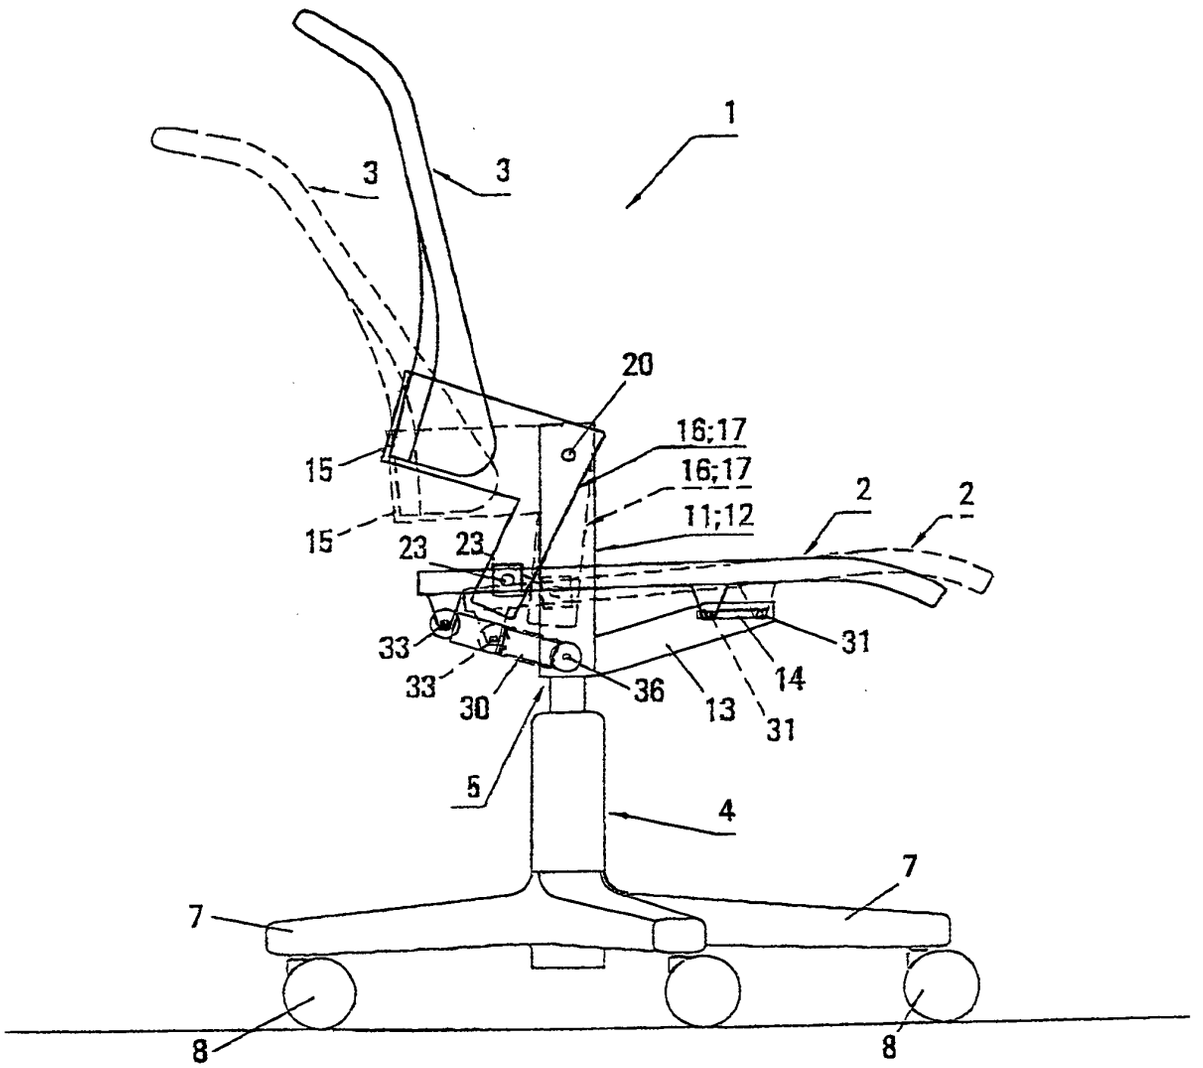


FIG. 2

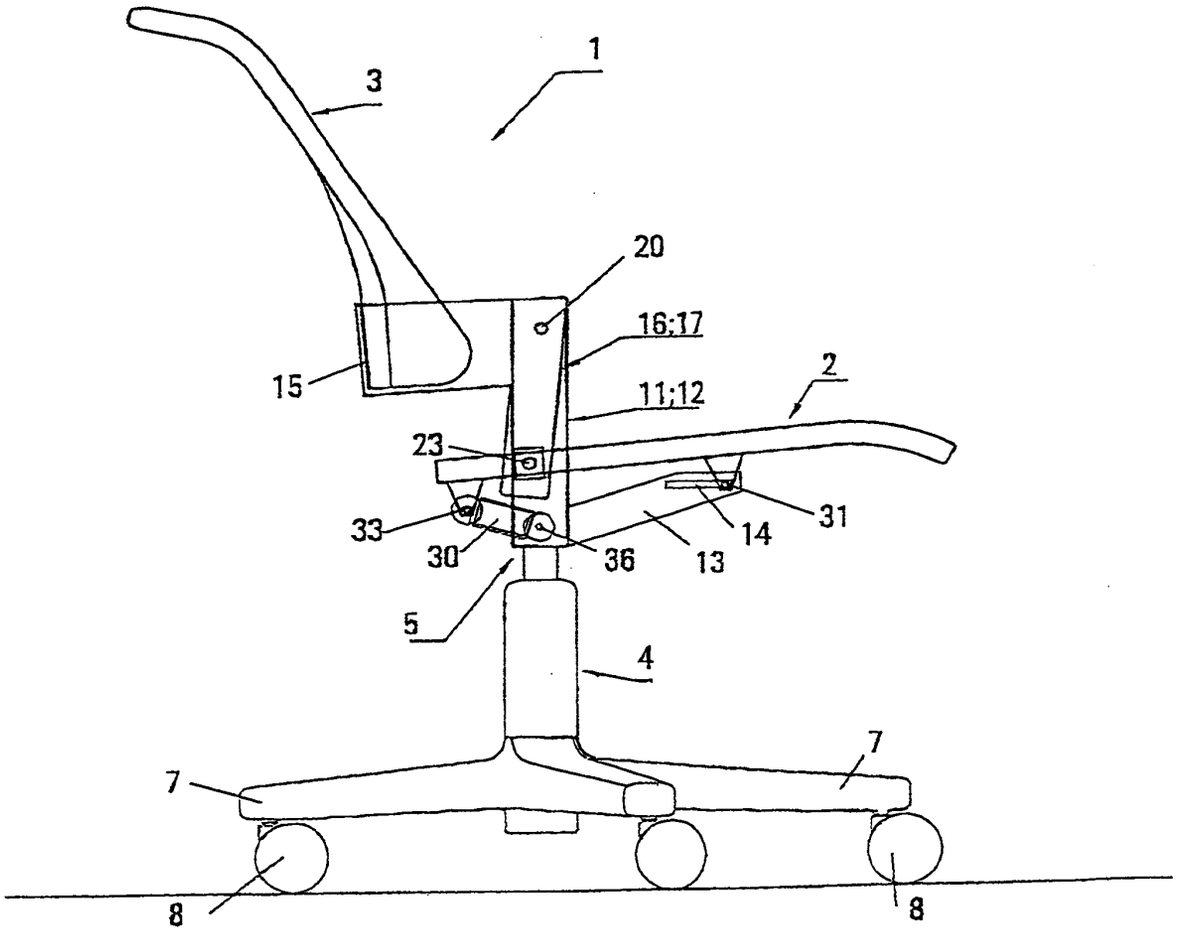


FIG. 3

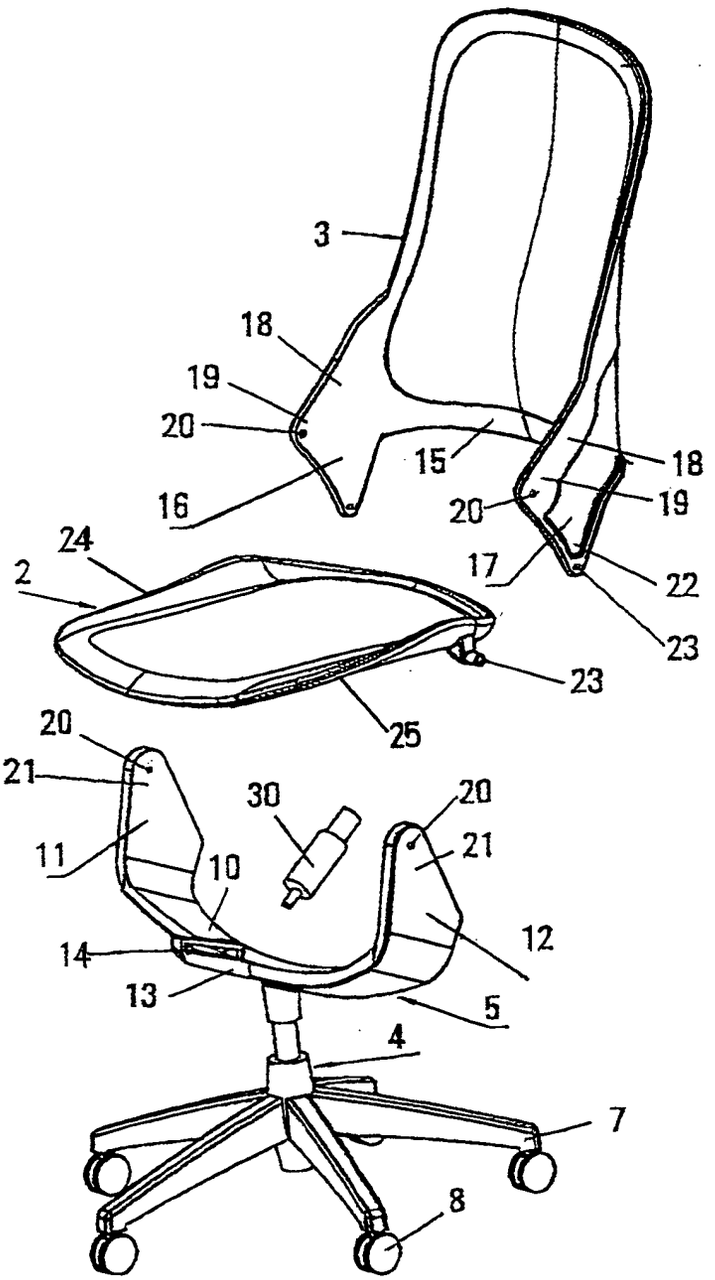

3
18
19
20
16
15
18
20
19
17
22
23
24
2
23
25
20
21
30
20
21
11
10
12
14
13
5
4
7
8

FIG. 4

European Patent Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 07 7995

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	EP 0 460 717 A (DAVIS FURNITURE IND INC) 11 December 1991 (1991-12-11) * claims 1,4; figures *	1-11	A47C1/032
A	US 5 909 923 A (DEKRAKER LARRY) 8 June 1999 (1999-06-08) * abstract; figures 5,24-30 *	1-3	
A	DE 100 64 204 A (WILKHAHN WILKENING & HAHNE) 4 July 2002 (2002-07-04) * claims; figure 4 *	1,6	
A	EP 1 060 694 A (KOENIG & NEURATH AG) 20 December 2000 (2000-12-20) * claims 1-5; figures 1,2 *	1	
A	EP 0 265 782 A (VOELKLE ROLF) 4 May 1988 (1988-05-04) * column 3; figures 15,16 *	1	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			A47C

The present search report has been drawn up for all claims

Place of search	Date of completion of the search	Examiner
THE HAGUE	16 December 2003	Amghar, N

CATEGORY OF CITED DOCUMENTS

X : particularly relevant if taken alone
Y : particularly relevant if combined with another document of the same category
A : technological background
O : non-written disclosure
P : intermediate document

T : theory or principle underlying the invention
E : earlier patent document, but published on, or after the filing date
D : document cited in the application
L : document cited for other reasons

& : member of the same patent family, corresponding document

EPO FORM 1503 03.82 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO. EP 03 07 7995

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-12-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0460717 A	11-12-1991	US 4840426 A	20-06-1989
		AT 83624 T	15-01-1993
		EP 0460717 A2	11-12-1991
		AT 115375 T	15-12-1994
		AU 2295588 A	06-04-1989
		DE 3852505 D1	26-01-1995
		DE 3876922 D1	04-02-1993
		DK 499988 A	31-03-1989
		EP 0309804 A2	05-04-1989
		ES 2037782 T3	01-07-1993
		ES 2067103 T3	16-03-1995
		FI 884467 A	31-03-1989
		GR 3007435 T3	30-07-1993
		NO 884328 A	31-03-1989
US 5909923 A	08-06-1999	AU 750107 B2	11-07-2002
		AU 1101399 A	17-05-1999
		BR 9813119 A	15-08-2000
		CA 2304816 A1	06-05-1999
		CN 1277543 T	20-12-2000
		EP 1033927 A1	13-09-2000
		JP 2001522618 T	20-11-2001
		TW 483741 B	21-04-2002
		WO 9921456 A1	06-05-1999
DE 10064204 A	04-07-2002	DE 10064204 A1	04-07-2002
EP 1060694 A	20-12-2000	DE 29910620 U1	19-10-2000
		EP 1060694 A1	20-12-2000
		US 6513874 B1	04-02-2003
EP 0265782 A	04-05-1988	DE 3635044 A1	28-04-1988
		AT 52671 T	15-06-1990
		CA 1309334 C	27-10-1992
		DE 3762696 D1	21-06-1990
		EP 0265782 A2	04-05-1988
		JP 1766466 C	11-06-1993
		JP 4055693 B	04-09-1992
		JP 63186605 A	02-08-1988
		US 4848837 A	18-07-1989

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82