



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 411 210 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
21.04.2004 Bulletin 2004/17

(51) Int Cl.7: **F01D 5/28**, C25D 15/02,
C23C 30/00, C23C 28/00

(21) Application number: **02405881.0**

(22) Date of filing: **15.10.2002**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR**
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: **ALSTOM Technology Ltd**
5400 Baden (CH)

(72) Inventors:
• **Bossmann, Hans-Peter**
79787 Lauchringen (DE)

- **Duda, Thomas**
5415 Nussbaumen (CH)
- **Khan, Abdus S.**
5408 Ennetbaden (CH)
- **Schnell, alexander**
5408 Ennetbaden (CH)
- **Stefansson, Karl-Johan**
5024 Küttigen (CH)
- **Toennes, Chirstoph**
5200 Brugg (CH)

(54) **Method of depositing an oxidation and fatigue resistant MCrAlY-coating**

(57) A method of depositing a layer (6) of highly oxidation and fatigue resistant MCrAlY-coating by an electroplated process has been described. A relative thin coating on an industrial gas turbine component was applied with a thickness control of $\pm 20 \mu\text{m}$ of the thickness

of the applied layer (6) on gas turbine articles (1). The said MCrAlY coatings comprise an addition of (wt.-%) 0.01 to 3 %Fe. In addition to Fe the MCrAlY coatings may contain 0,5-2.5% Si, 0-1.5% Hf, 0.01-0.2% Zr and 0-2% Ta, alone or in combination.

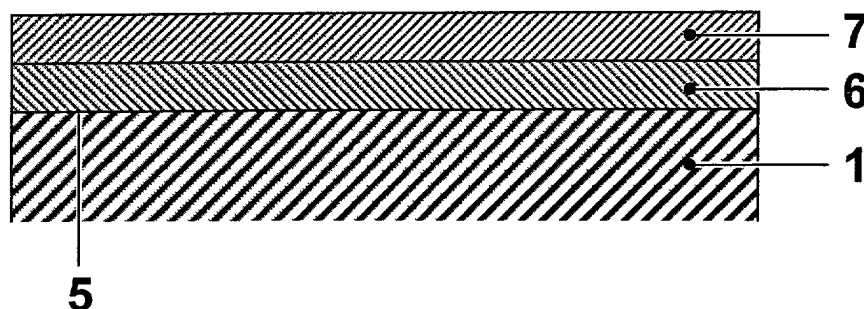


Fig. 2

EP 1 411 210 A1

Description**FIELD OF INVENTION**

[0001] This invention relates according to claim 1 to a protection of gas turbine blades and vanes against oxidation and thermal mechanical fatigue by using MCrAlY overlay coatings deposited by an electroplated process.

STATE OF THE ART

[0002] The turbine blades and vanes designed for use at high temperature are usually coated with environmentally resistant coatings. For example, MCrAlY overlay coatings are used for protection of turbine blades and vanes. MCrAlY protective overlay coatings are widely known in the prior art. They are a family of high temperature coatings, wherein M is selected from one or a combination of iron, nickel and cobalt. As an example US-A-3,528,861 or US-A-4,585,481 are disclosing such kind of oxidation resistant coatings. US-A-4, 152,223 as well discloses such method of coating and the coating itself. Besides the γ/β -MCrAlY-coating, there is another class of overlay MCrAlY coatings which are based on a γ/γ' -gamma/gamma prime-structure, which is for example disclosed in US-A-4,546,052 or US-A-4,973,445. The advantages of γ/γ' -coatings is that they have a negligible thermal expansion mismatch with alloy of the underlying turbine article and are likely to have a better thermal mechanical properties.

[0003] Among γ/γ' - and γ/β -coatings, the field of γ/β -coatings have been an active area of research and a series of patents has been issued. E.g. a NiCrAlY coating is described in US-A-3,754,903 and a CoCrAlY coating in US-A-3,676,058. US-A-4,346,137 discloses an improved high temperature fatigue resistance NiCoCrAlY coating. US-A-4,419,416, US-A-4,585,481, RE-32,121 and US-A-4, 743,514 describe MCrAlY coatings containing Si and Hf. US-A-4,313,760 discloses a superalloy coating composition with good oxidation, corrosion and fatigue resistance. Additional examples MCrAlY coatings are known from US-B1-6,280,857, US-B1-6,221,181, US-A-5,455,119, US-A-5,154,885, US-A-5, 035,958 or US-B1-6,207,297. They all deal primarily with improving the oxidation resistance of MCrAlY coatings.

[0004] Thermal barrier coatings are used to provide thermal insulation of the components in various types of engines e.g. in turbine engines. Furthermore, in the state of the art Thermal Barrier Coatings (TBC) are known from different patents. US-A-4,055,705, US-A-4,248,940, US-A-4,321,311 or US-A-4,676,994 disclose a TBC-coating for the use in the turbine blades and vanes. The ceramics used are yttria stabilized zirconia and applied by plasma spray (US-A-4, 055,705, US-A-4, 248,940) or by electron beam process (US-A-4, 321,311, US-A-4, 676,994) on top of the MCrAlY bond coat.

[0005] One major disadvantage of γ/γ' -type of MCrAlY coatings is that due to the low aluminum content they do not form a continuous alumina film at temperatures below 1000°C what leads to a problem with the bonding adherence with the TBC. Therefore US-A-5,894,053 developed a process of forming a roughened surface by applying particulate materials on the surface using binder, principally soldering powder. In recent years, there has been a significant thrust in developing low thermal conductivity ceramics, US-B1-6,365,236, US-B1-6,299,971 and US-B1-6,284,323 and a continuation of efforts in improving the mechanical TBC adhesion by surface roughening. US-A1-2002/0009609, US-A1-2002/0004143, US-A1-2002/0004142, US-A-6,136,453 or US-B1-6,210,812 disclose some examples.

[0006] It is generally known in the industry that the coatings on turbine blades or vanes can fail by one or more of the following degradation modes. These are oxidation, corrosion, TMF (Thermal Mechanical Fatigue) and a combination of TMF and oxidation. Coatings failure in a turbine engine solely by oxidation is not a typical scenario. Further, in advanced turbine engines, incidences of corrosion are not common due to higher engine operating temperature and use of cleaner fuels. What is commonly observed is that the MCrAlY coatings are cracked by TMF. Subsequently the cracks allow oxygen diffuse or penetrate into the substrate. Since the substrate is not oxidation resistant the advancing oxygen (through the cracks) causes the oxidation of the underlying substrate and triggers the failure of the components. It is therefore important that the coatings be resistant to fatigue as well as oxidation since fatigue cracking appears to be one of the primary triggering mechanisms of the failure of the coatings.

[0007] One approach of improving the fatigue resistance of coatings is by modification of the composition of the coatings and secondly by the use of a thin coating or possibly a combination of both.

[0008] US-A-4,346,137 and US-A-4,758,480 described a method of improving the fatigue resistance of overlay coatings by a modification of composition. In US-A-4, 346,137, the platinum was added to MCrAlY coatings, which reduces the thermal expansion mismatch between the coatings and the substrate, hence also reduces the propensity of the coatings to cracking. This results in a significant improvement of the TMF life of the coatings. On the other hand, the US-A-4,758,480 discloses a class of protected coatings for superalloys in which the coating compositions are based on the composition of the underlying substrate. By tailoring the coatings to the substrate composition, diffusional stability results and other mechanical properties of the coating such as coefficient of thermal expansion and modulus, are brought closer to the substrate. The coatings thus obtained have not only increased oxidation resistance and diffusional

stability but also exhibit a substantially higher TMF life.

[0009] The increase of coating thickness decreases TMF life of coatings. The problem is then to find a method that allows a deposition of thin protective coatings on complex turbine airfoils. A literature search shows that the MCrAlY overlay coatings are generally deposited by plasma spray process (i.e. APS, VPS, LPPS or HVOF). Although not widely used, there is also other manufacturing process; examples are electron beam physical vapor deposition (EB-PVD) and sputtering. However, there are limitations of these processes; a) difficult or unable to deposit a thin coating uniformly, b) poor thickness control and c) a line of sight limitation. Since airfoils contain many complex contoured surface i.e. airfoil to platform transition area, leading edge etc., the line of sight limitation present a difficulty in getting a good uniform coverage of coatings with microstructural integrity.

[0010] Interestingly, in a series of patents, US-A-5,558,758, US-A-5,824,205 and US-A-5,833,829 described the deposition of MCrAlY coatings by electroplated process. The process involves a deposition of the coating precursor, CrAlM2 powder in a M1 bath where M2 is one or more of Si, Ti, Hf, Ga, Nb, Mn, Pt and rare earth elements and M1 consists of Ni, Co, Fe alone or in combination. The as-deposited coating is heat-treated to obtain the final coating structure.

SUMMARY OF THE INVENTION

[0011] The objective is to find a MCrAlY-bond or overlay coating with good oxidation and fatigue resistance. Another object of the present invention to find a method of depositing a MCrAlY-coating on a turbine component with uniformity. Yet another object of the invention is to deposit a thin MCrAlY-coating on a large industrial gas turbine blade or vane with a good thickness control of the deposited layer. Another object is to deposit the MCrAlY-coatings on a component with a good microstructural conformity and metallurgical integrity.

[0012] According to the invention a method of deposition a MCrAlY-coating by means of an electroplated process was found according to features of the claim 1 or 2.

[0013] It is noted that the cost of the application of a coating by an electroplated process is considerably lower than by a conventional plasma spray coating. In addition, the electroplated process has a thickness control of $\pm 20 \mu\text{m}$ or better, whereas conventional plasma spray coating processes have thickness scatters of $\pm 75 \mu\text{m}$ or even more. Thus, a coating with a layer thickness in a range of 25-400 μm can be applied. A thinner coating increase the TMF life of the coating. The used electroplated process has no line of sight limitation and can coat complex contour surfaces without any difficulty. In addition the coating thus manufactured contains very little oxygen impurity. The deposited coating is heat-treated in vacuum, argon, hydrogen at 1140°C for 2 to 12 hours.

[0014] An addition of (wt.-%) 0.01 to 3% Fe is provided for increased ductility. An addition of (wt.-%) 0.5-2.5% Si, 0.2-1.5% Hf, 0.01-0.2% Zr or 0-2% Ta either alone or in combination for increased scale adhesion of the deposited coating.

[0015] On top of the applied layers a layer of a ceramic thermal barrier coating (TBC) such as yttria-stabilized zirconia (YSZ) with suitable composition can be applied.

BRIEF DESCRIPTION OF DRAWINGS

[0016] Preferred embodiments of the invention are illustrated in the accompanying drawings, in which

Fig. 1 shows a gas turbine blade as an example and

Fig. 2 one embodiment of a MCrAlY-bond-coating on the external surface of the gas turbine blade according to the present invention.

[0017] The drawings show only parts important for the invention.

DETAILED DESCRIPTION OF INVENTION

[0018] The present invention is generally applicable to components that operate within environments characterised by relatively high temperature, and are therefore subjected to severe thermal stresses and thermal cycling. Notable examples of such components include the high and low pressure nozzles and blades, shrouds, combustor liners and augmentor hardware of gas turbine engines. Fig. 1 shows as an example such an article 1 as blades or vanes comprising a blade 2 against which hot combustion gases are directed during operation of the gas turbine engine, a cavity, not visible in Figure 1, and cooling holes 4, which are on the external surface 5 of the component 1 as well as on the platform 3 of the component. Through the cooling holes 4 cooling air is ducted during operation of the engine to cool the external surface 5. The external surface 5 is subjected to severe attack by oxidation, corrosion and erosion due to the hot combustion gases. In many cases the article 1 consists of a nickel or cobalt base super alloy such as disclosed,

by way of an example, in US-A-5,759,301. In principle, the article 1 can be single crystal (SX), directionally solidified (DS) or polycrystalline. While the advantages of this invention is described with reference to a turbine blade or vane as shown in Fig. 1, the invention is generally applicable to any component on which a coating system may be used to protect the component from its environment.

Example of the invention

[0019] As shown in Tab. 1 a series of MCrAlY-coatings were identified and deposited by electroplated process.

Tab. 1

	Ni	Co	Cr	Al	Y	Si	Ta	Comment
SE329	Bal.	23	18	10	0.5			Uniform
SE329-1	Bal.	21	21	11.5	0.3			*
SE349	Bal.	30	13	11.5	0.3	1.2	0.5	*
SE349-1	Bal.	24.6	15.3	9.4	0.4	1.2	0.4	*
SE303	Bal.	--	19.5	9.1	0.27	--	--	Coating uniform
SE29-1	Bal.	27.5	18.5	10.19	0.26	--	--	uniform

* powder reacted with the electrolytic bath

[0020] The phase and diffusional stability of the coatings in Table 1 were calculated using the DICTRA software package developed by Thermo-Calc Software, Sweden. The coatings were applied according to the procedure outlined in US-A-5,558,758, US-A-5,824,205 and US-A-5,833,829. Both coating heat-treatment and compositional adjustments are often necessary for homogenization of composition-microstructure i.e. complete reactions of 'CrAl' particles with the matrix. The coatings deposited provided good oxidation resistance, for example, the SE329 formed α -alumina scale in the temperature range 800-1100°C. The TMF life of the coating was determined in a strain-controlled test, open cycle, 800-100°C and 1000-100°C, with a dwell time at maximum temperature of 5 minute. The TMF-life of the SE329-coating was compared with plasma sprayed coatings described by US-A-6,221,181. The TMF life of the electroplated coating was at least 2 times higher than the life of the plasma sprayed coatings. It is to be stated that the thickness of the electroplated SE329 was $220 \pm 20 \mu\text{m}$, the baseline plasma spray coating was nominal $300 \mu\text{m}$ thick with a plasma spray coating thickness scatter of at least $\pm 75 \mu\text{m}$. Thus, a coating with a layer thickness in a range of 25-400 μm can be applied. A thinner coating increase the TMF life of the coating. It is noted that the cost of the application of a coating by an electroplated process is a third of a conventional plasma spray coating cost. The used electroplated process has no line of sight limitation and can coat complex contour surfaces without any difficulty. In addition the coating thus manufactured contains very little oxygen impurity. The oxygen impurity is known to adversely affect the fatigue life of coatings. The deposited coating is heat-treated in vacuum, argon, hydrogen at 1140°C for 2 to 12 hours.

[0021] It is believed that the TMF life of the coatings, for example, improved TMF life of SE329 was probably due to a combination of a) a leaner coating b) the coating composition, c) the microstructure and heat-treatment and d) low oxygen content of the coating. The SE329 coating was successfully manufactured by an electroplated process on low pressure turbine blades. The deposited coating on the blade was uniformly distributed over external surfaces including the airfoil-platform transition area, fillet, leading and trailing edge.

[0022] Fe is added (wt.-%) 0.01 to 3% in order to enhance the ductility of the coatings while the additions of 0.5-2.5% Si, 0.2-1.5% Hf, 0.01-0.2% Zr or 0-2% Ta either alone or in combination are provided for increased oxidation resistance of the deposited coating.

[0023] As seen in Fig. 2 the layer of MCrAlY-coating 6 was deposited on the external surface of the article 1. The layer 6 was deposited as bond coating with a layer of a ceramic coating 7 such a ceramic thermal barrier coating (TBC) on top of the bond layer 6. As TBC yttria-stabilized zirconia (YSZ) with suitable composition being about 4 to 20 wt.-%, though other ceramic materials could be used, such as yttria, non-stabilized zirconia, or ceria (CeO_2), scandia (Sc_2O_3) or other oxides. The ceramic layer 7 is deposited to a thickness that is sufficient to provide the required thermal protection for the underlying substrate, generally in the order of about 300-600 μm .

[0024] While our invention has been described by an example, it is apparent that other forms could be adopted by one skilled in the art. Accordingly, the scope of our invention is to be limited only by the attached claims.

REFERENCE NUMBERS

[0025]

- 5 1 Article
- 2 Blade
- 3 Platform
- 4 Cooling holes
- 5 External surface of article 1
- 10 6 Layer of MCrAlY
- 7 Layer of ceramic coating

Claims

- 15 1. A method of depositing a layer of a MCrAlY-coating (6) on the surface (5) of an article (1), wherein the layer of the MCrAlY-coating (6) which comprises (wt.-%) 21-25% Co, 16-20% Cr, 8-12% Al, 0.01-0.5 % Y, Rest Ni is deposited by an electroplated process.
- 20 2. The method according to claim 1, wherein a layer of the MCrAlY-coating (6) which comprises (wt.-%) 23% Co, 18% Cr, 10% Al, 0.5% Y, Rest Ni is deposited by the electroplated process.
- 3. The method according to claim 1 or 2, wherein a layer of the MCrAlY-coating (6) having a γ/β -microstructure is deposited.
- 25 4. The method according to claim 1 or 2, wherein the deposited coating is heat-treated in vacuum, argon, hydrogen at 1140°C for 2 to 12 hours.
- 30 5. The method according to claim 1 or 2, wherein a layer of the MCrAlY-coating (6) comprising in addition (wt.-%) 0.01 to 3% Fe is deposited.
- 6. The method according to claim 1 or 2, wherein a layer of the MCrAlY-coating (6) comprising in addition (wt.-%) 0.5-2.5% Si, 0-1.5% Hf, 0.01-0.2% Zr either alone or in combination is deposited.
- 35 7. The method according to claim 1 or 2, wherein a layer of the MCrAlY-coating (6) comprising in addition (wt.-%) 0-2% Ta is deposited.
- 8. The method according to claim 1 or 2, wherein a layer of the MCrAlY-coating (6) is deposited with a thickness control of $\pm 20 \mu\text{m}$ of the thickness of the deposited layer (6).
- 40 9. The method according to claim 7, wherein a layer of the MCrAlY-coating (6) having a thickness in the range of 25-400 μm is deposited.
- 10. The method according to claim 8, wherein a layer of the MCrAlY-coating (6) having a thickness in the range of 25-300 μm is deposited.
- 45 11. The method according to claim 9, wherein a layer of the MCrAlY-coating (6) having a thickness in the range of 25-100 μm is deposited.
- 50 12. The method according to claim 10, wherein a layer of the MCrAlY-coating (6) having a thickness in the range of 25-50 μm is deposited.
- 13. The method according to any of the claim 1 to 11, wherein a layer of the MCrAlY-coating (6) is deposited as overlay or bond coat under a layer of a ceramic coating (7).
- 55 14. The method according to any of the claims 1 to 12, wherein a gas turbine article (1) such as blades or vanes is coated.

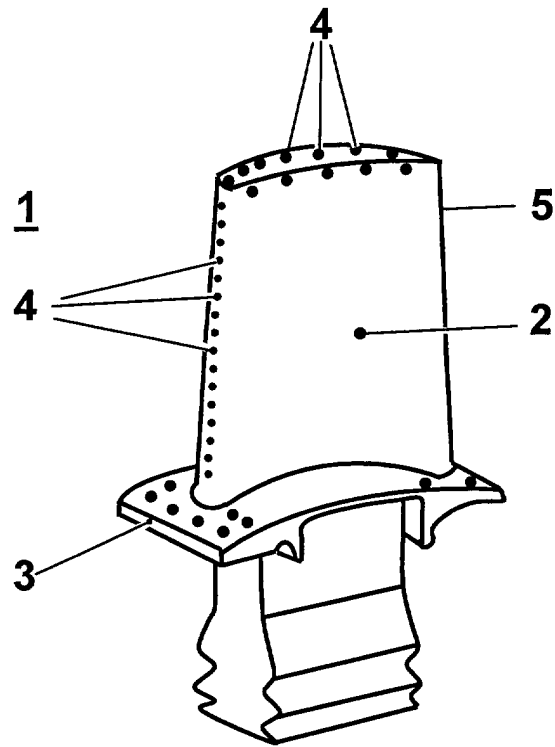


Fig. 1

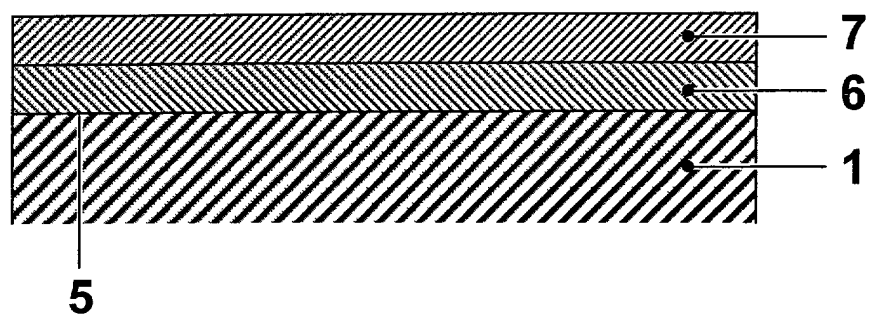


Fig. 2



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 40 5881

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 848 077 A (UNITED TECHNOLOGIES CORP) 17 June 1998 (1998-06-17) * page 1, line 3-6 * * page 3, line 34-55 * ---	1,6,7, 13,14	F01D5/28 C25D15/02 C23C30/00 C23C28/00
X	EP 0 992 603 A (UNITED TECHNOLOGIES CORP) 12 April 2000 (2000-04-12) * page 4, line 4-30 * * page 1, line 3-5 * ---	1,6,7, 13,14	
Y,D	US 6 280 857 B1 (TOENNES CHRISTOPH ET AL) 28 August 2001 (2001-08-28) * column 2, line 59-61 * * column 3; example EC3; table 2B * ---	1,3,4,6, 7,13,14	
Y,D	US 4 419 416 A (GUPTA DINESH K ET AL) 6 December 1983 (1983-12-06) * column 3, line 50-62; table 2 * * column 6, line 14 * ---	1,6,9-14	
Y	EP 0 816 526 A (UNITED TECHNOLOGIES CORP) 7 January 1998 (1998-01-07) * column 1, line 6-11 * * column 6, line 13-26 * * column 7, line 20-27 * * column 4, line 5-25 * ---	1,6,9-14	TECHNICAL FIELDS SEARCHED (Int.Cl.7) F01D C23C C25D
Y	EP 0 288 156 A (BAJ LTD) 26 October 1988 (1988-10-26) * column 1, line 26-37 * * column 2, line 37 - column 3, line 31 * ---	1,3,4,6, 7,9-14	
Y	US 4 789 441 A (FOSTER JOHN ET AL) 6 December 1988 (1988-12-06) * column 1, line 52 - column 2, line 68 * * column 3, line 54 - column 4, line 20 * --- -/-	1,3,4,6, 7,13,14	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 13 March 2003	Examiner Joffreau, P-0
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 40 5881

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y,D	US 5 824 205 A (FOSTER JOHN) 20 October 1998 (1998-10-20) * column 2, line 46-54 * * column 3, line 11-34,62-67 * ---	1,4,6,7, 9-14	
Y,D	US 5 833 829 A (FOSTER JOHN) 10 November 1998 (1998-11-10) * column 2, line 59 - column 3, line 21 * * column 4, line 6-11 * -----	1,6,7, 9-14	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Place of search MUNICH		Date of completion of the search 13 March 2003	Examiner Joffreau, P-0
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 40 5881

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-03-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0848077	A	17-06-1998	US 6117560 A	12-09-2000
			EP 0848077 A1	17-06-1998
			JP 10212108 A	11-08-1998
			US 6177200 B1	23-01-2001
			US 6231991 B1	15-05-2001
			US 6284323 B1	04-09-2001
			US 2001007719 A1	12-07-2001

EP 0992603	A	12-04-2000	US 6177200 B1	23-01-2001
			CN 1253878 A	24-05-2000
			EP 0992603 A1	12-04-2000
			JP 3081611 B2	28-08-2000
			JP 2000119870 A	25-04-2000
			KR 2000028723 A	25-05-2000
			SG 82020 A1	24-07-2001
			US 6284323 B1	04-09-2001

US 6280857	B1	28-08-2001	WO 9923279 A1	14-05-1999
			AU 5314898 A	24-05-1999
			EP 0948667 A1	13-10-1999
			JP 2001507758 T	12-06-2001

US 4419416	A	06-12-1983	AU 548508 B2	12-12-1985
			AU 8676282 A	10-02-1983
			BE 894020 A1	01-12-1982
			BR 8204522 A	26-07-1983
			CA 1185129 A1	09-04-1985
			CH 653375 A5	31-12-1985
			DE 3229293 A1	24-03-1983
			FR 2511042 A1	11-02-1983
			GB 2107349 A ,B	27-04-1983
			IL 66444 A	28-02-1986
			IT 1152484 B	31-12-1986
			JP 1506997 C	13-07-1989
			JP 58037145 A	04-03-1983
			JP 63054794 B	31-10-1988
			KR 8901033 B1	20-04-1989
			MX 159750 A	16-08-1989
			NL 8203074 A ,B,	01-03-1983
			SE 453305 B	25-01-1988
			SE 8204425 A	22-07-1982
			US 4585481 A	29-04-1986
			US RE32121 E	22-04-1986

EP 0816526	A	07-01-1998	DE 69707365 D1	22-11-2001
			DE 69707365 T2	11-07-2002

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 40 5881

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-03-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0816526	A		EP 0816526 A2	07-01-1998
			JP 3258599 B2	18-02-2002
			JP 10068089 A	10-03-1998
			JP 2002180270 A	26-06-2002

EP 0288156	A	26-10-1988	CA 1324104 A1	09-11-1993
			DE 3872294 D1	30-07-1992
			DE 3872294 T2	03-12-1992
			EP 0288156 A1	26-10-1988
			ES 2032552 T3	16-02-1993
			GB 2204881 A ,B	23-11-1988
			JP 2704878 B2	26-01-1998
			JP 64000281 A	05-01-1989
			US 4810334 A	07-03-1989

US 4789441	A	06-12-1988	BE 903377 A1	04-04-1986
			CA 1268139 A1	24-04-1990
			DE 3535548 A1	17-04-1986
			FR 2571386 A1	11-04-1986
			GB 2167446 A ,B	29-05-1986
			IT 1224259 B	04-10-1990
			JP 1627755 C	28-11-1991
			JP 2053520 B	16-11-1990
			JP 61179900 A	12-08-1986
			NL 8502724 A ,B,	01-05-1986

US 5824205	A	20-10-1998	AT 179227 T	15-05-1999
			AU 711926 B2	21-10-1999
			AU 2988895 A	22-02-1996
			DE 69509208 D1	27-05-1999
			DE 69509208 T2	11-11-1999
			DK 724657 T3	25-10-1999
			EP 0724657 A1	07-08-1996
			ES 2130628 T3	01-07-1999
			FI 961303 A	21-05-1996
			WO 9603535 A1	08-02-1996
			GR 3030507 T3	29-10-1999
			JP 9504832 T	13-05-1997
			NO 961152 A	21-03-1996
			RU 2142520 C1	10-12-1999

US 5833829	A	10-11-1998	AT 196171 T	15-09-2000
			AU 711870 B2	21-10-1999
			AU 2988995 A	22-02-1996
			DE 69518732 D1	12-10-2000
			DE 69518732 T2	31-05-2001

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 40 5881

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-03-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5833829 A	DK	724658 T3	16-10-2000
	EP	0724658 A1	07-08-1996
	ES	2150578 T3	01-12-2000
	FI	961304 A	21-05-1996
	WO	9603536 A1	08-02-1996
	GR	3034959 T3	28-02-2001
	JP	9504341 T	28-04-1997
	NO	961153 A	21-03-1996
	RU	2134313 C1	10-08-1999

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82