



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 413 212 A1**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 158(3) EPC

(43) Date of publication:
28.04.2004 Bulletin 2004/18

(51) Int Cl.7: **A24D 3/16**, A24D 3/04,
A24D 1/02

(21) Application number: **02755724.8**

(86) International application number:
PCT/JP2002/007808

(22) Date of filing: **31.07.2002**

(87) International publication number:
WO 2003/013287 (20.02.2003 Gazette 2003/08)

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **ATOBE, Ichiro, c/o JAPAN TOBACCO INC.**
Tokyo 130-8603 (JP)
• **OMORI, Fumihiko, c/o JAPAN TOBACCO INC.**
Tokyo 130-8603 (JP)

(30) Priority: **02.08.2001 JP 2001235202**

(74) Representative: **Behnisch, Werner, Dr. et al**
Reinhard-Skühra-Weise
Friedrichstrasse 31
80801 München (DE)

(71) Applicant: **Japan Tobacco Inc.**
Tokyo 105-8422 (JP)

(54) **FILTER FOR CIGARETTE**

(57) A cigarette filter has filter sections including filter materials (2) individually wrapped with plug wrap paper (3), forming paper (5) for wrapping the filter sections integrally, and tipping paper covering the forming paper

so as to connect the filter sections to a cigarette section to form a cigarette, characterized in that activated charcoal (41) and silica/alumina (42) are contained as adsorbents in at least one of the filter materials (2) and a space between the filter materials (2).

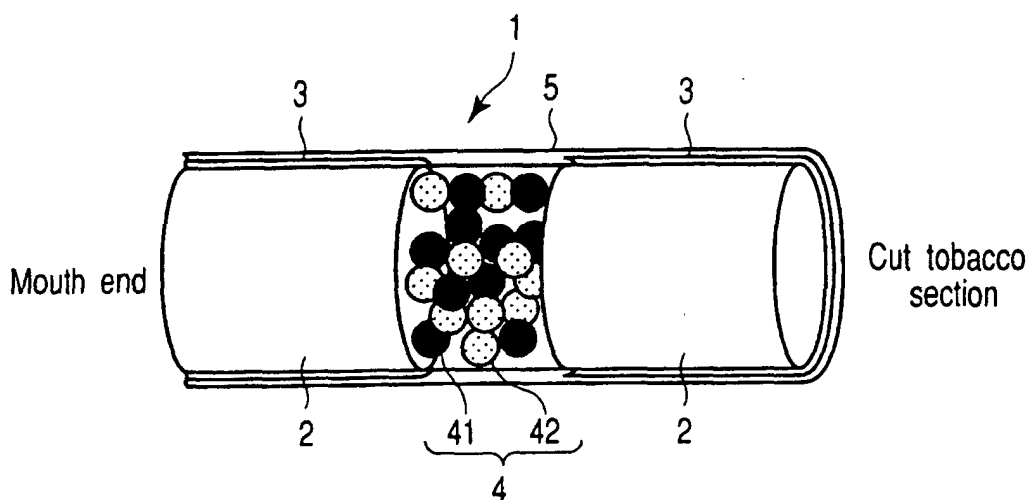


FIG. 1

EP 1 413 212 A1

Description

Technical Field

5 **[0001]** The present invention relates to an improved cigarette filter capable of singularly adsorbing specified components contained in mainstream smoke.

Background Art

10 **[0002]** Japanese Patent Disclosure (Kokai) No. 63-160659, for example, discloses a deodorizing agent (adsorbing agent) consisting of an inorganic mineral-based porous material carrying ferrous sulfate/L-ascorbic acid. The document also discloses an example of a filter for a cigarette in which the deodorizing agent is contained.

[0003] However, the adsorbent disclosed in the document is intended to adsorb mainly ammonia, and it is not described at all in the document what components of the mainstream smoke are removed in the case where the adsorbent is contained in the cigarette filter. In general, in the case of using a filter containing an adsorbent capable of unselectively adsorbing various components contained in the mainstream smoke, it is known to the art that the taste and flavor of the cigarette are adversely affected.

15 **[0004]** An object of the present invention is to provide a cigarette filter, which permits prominently suppressing adverse effect on the taste and flavor of a cigarette and which permits selectively removing specified components contained in mainstream smoke.

Disclosure of Invention

25 **[0005]** A cigarette filter according to the present invention comprises: filter sections including filter materials individually wrapped with plug wrap paper; forming paper for wrapping the filter sections integrally; and tipping paper covering the forming paper so as to connect the filter sections to a cigarette section to form a cigarette, characterized in that activated charcoal and silica/alumina are contained as adsorbents in at least one of the filter materials and a space between the filter materials.

30 **[0006]** In the cigarette filter of the present invention, the plug wrap paper or the forming paper may contain the activated charcoal and the silica/alumina as the adsorbents.

[0007] The cigarette filter according to the present invention has actual structures including, for example, (1) a structure that two filter materials are provided and a mixture of the activated charcoal and the silica/alumina is loaded in the space between the two filter materials, (2) a structure that two filter materials are provided and a mixture of the activated charcoal and the silica/alumina is dispersed in one of the filter materials, (3) a structure that three filter materials are provided and the activated charcoal and the silica/alumina are individually loaded in the two spaces between the three filter materials, and (4) a structure that three filter materials are provided and the activated charcoal is dispersed in one filter material and the silica/alumina is dispersed in another filter material.

35 **[0008]** Another cigarette filter according to the present invention comprises a cigarette holder body including filter materials arranged therein, characterized in that activated charcoal and silica/alumina are contained as adsorbents in at least one of the filter materials and a space between the filter materials.

40 **[0009]** Incidentally, the structure of the cigarette filter according to the present invention is not limited to those exemplified above, and various modifications are conceivable.

Brief Description of Drawings

45 **[0010]**

FIG. 1 schematically shows an example of a structure of a cigarette filter according to the present invention;
 FIG. 2 schematically shows another example of a structure of a cigarette filter according to the present invention;
 50 FIG. 3 schematically shows another example of a structure of a cigarette filter according to the present invention;
 FIG. 4 schematically shows a further example of a structure of a cigarette filter according to the present invention;
 and
 FIG. 5 is a cross-sectional view of a cigarette holder to which the cigarette filter according to the present invention is applied.

55 **Best Mode for Carrying Out the Invention**

[0011] In the present invention, attention is paid to pyrazines and phenols as specified components contained in

mainstream smoke of a cigarette.

[0012] The present inventor has found that, where activated charcoal and silica/alumina are used in combination as adsorbents for the cigarette filter, these adsorbents produce a synergetic effect so as to singularly remove the specified components contained in the mainstream smoke, thereby accomplishing the present invention.

[0013] The filter materials used in the present invention include, for example, acetate, paper, and an unwoven fabric. As the activated charcoal of the adsorbents, coconut shell activated charcoal may be used. As the silica/alumina of the adsorbents, a product marketed under the trade name of "Kyoward 700SN" by Kyowa Chemical Industry Co., Ltd, for example, may be used. The product contains 63.0% by weight of SiO_2 and 10.3% by weight of Al_2O_3 and has weight loss on drying of 14.5% by weight.

[0014] In the present invention, the amount of the activated charcoal and the silica/alumina is set as follows: where the adsorbents are contained in the filter material, the total amount of the adsorbents should be set to 1 mg to 150 mg, preferably 20 mg to 60 mg, per 10 mm of the filter material, and where the adsorbents are contained in the space between the filter materials, the total amount of the adsorbents should be set to 5 mg to 300 mg, preferably 30 mg to 120 mg per 5 mm of the space.

[0015] Examples of the present invention will now be described.

[0016] A cigarette filter as a control without containing any adsorbent was prepared as follows. Two filter materials (plain filters) were prepared by forming acetate having a filament fineness of 2.2 denier and a tow fineness of 40,000 denier to have a length of 10 mm, and the filter materials were wrapped with plug wrap paper, respectively, so as to obtain two filter sections. Two filter materials were arranged to have a 5-mm space formed therebetween, and the two filter sections were wrapped with forming paper without loading any adsorbent in the space. The ventilation resistance of the filter was found to be 80 mmH₂O (1050 mL/min).

[0017] FIG. 1 shows an example of a cigarette filter prepared in this Example. The cigarette filter 1 was prepared as follows. Two filter materials (plain filters) 2 were prepared by forming acetate having a filament fineness of 2.2 denier and a tow fineness of 40,000 denier to have a length of 10 mm, and the filter materials were wrapped with plug wrap paper, respectively, so as to obtain two filter sections. Two filter materials 2 were arranged to have a space formed therebetween, and the two filter sections were wrapped with forming paper under the state that a mixture of 30 mg of activated charcoal 41 and 30 mg of silica/alumina (trade name: Kyoward 700SN) 42 as adsorbents 4 was loaded in the space. In this case, the space was controlled to permit the adsorbents to have an apparent density of 100%.

[0018] For references, cigarette filters were also prepared with loading 30 mg of activated charcoal alone or 30 mg of silica/alumina alone as an adsorbent in the space.

[0019] Also, cigarette filters were prepared with loading 60 mg of activated charcoal alone or 60 mg of silica/alumina alone, i.e., an adsorbent two times as much as that in the cigarette filters noted above, in the space.

[0020] Each of the above cigarette filters was connected with a tape to a cigarette section prepared by wrapping cut tobacco with wrapper paper so as to prepare various cigarettes for experiments differing from each other in the type of the adsorbent as shown in Table 1. A commercial cigarette rod was used for the cigarette section. A test for collecting the mainstream smoke was applied to these cigarettes as follows.

[0021] The cigarette was connected to an automatic smoking machine with a tube (made of Tygon). A Cambridge filter was not provided. The automatic smoking machine was allowed to smoke the cigarette under the standard smoking conditions, with the combustion length set at 40 mm. The mainstream smoke from the exhaust port was collected in a gas bag (made of Tedlar) having He put therein in advance, and then the inner volume of the gas bag was adjusted with He to be 8 L in total. Fifty mL of the gas taken from the gas bag was analyzed by gas chromatography.

[0022] Attention was paid to pyrazines, phenols, hydrocarbons and ketones as specified components of the mainstream smoke, and data analysis of each of the specified components was performed based on the peak area on the gas chromatograph. Table 1 shows the penetration of each of the pyrazines and phenols. The penetration T_a of each of these specified components is represented by:

$$T_a = A_a/A_{cnt},$$

where A_{cnt} denotes the peak area of the specified component on the gas chromatograph in the case where the adsorbent was not used (the control), and A_a denotes the peak area of the specified component on the gas chromatograph in the case of using the adsorbent "a". Each measured value shown in Table 1 was obtained on the basis of the peak area of the specified component on the gas chromatograph.

[0023] Also, the predicted value of the penetration for the filter using 60 mg of activated charcoal denotes the square of the measured value of the penetration for the filter using 30 mg of activated charcoal. Similarly, the predicted value of the penetration for the filter using 60 mg of silica/alumina denotes the square of the measured value of the penetration for the filter using 30 mg of silica/alumina.

[0024] On the other hand, the predicted value of the penetration in the case of using the two types of the adsorbents

shown in Table 1 denotes the calculated value of the penetration estimated from the penetration for the adsorbent in the case of using singly each of the two types of the adsorbents. To be more specific, the predicted value is represented by $(T_a \times T_b)$, where T_a denotes the penetration (measured value) of the specified component in the case of using the adsorbent "a", and T_b denotes the penetration (measured value) of the specified component in the case of using the adsorbent "b".

[0025] If the measured value of the penetration in the case of using a plurality of different types of adsorbents in combination is prominently smaller than the predicted value, it can be judged that the specified components are singularly adsorbed, which supports the synergetic effect produced by the combination of the plurality of types of the adsorbents. Table 1 shows the results of the above experiments.

Table 1

Adsorbent	Penetration			
	Pyrazines		Phenols	
	Measured value	Predicted value	Measured value	Predicted value
None	1.00		1.00	
Activated charcoal (30 mg)	0.60		0.68	
Silica/alumina (30 mg)	0.73		0.61	
Activated charcoal (60 mg)	0.38	0.36	0.48	0.46
Silica/alumina (60 mg)	0.54	0.53	0.38	0.37
Mixture of activated charcoal (30 mg) and silica/alumina (30 mg) (total 60 mg)	0.22	0.44	0.30	0.41

[0026] Where the activated charcoal alone was used twice as much or where silica/alumina alone was used twice as much, a significant difference was not recognized between the measured value and the predicted value.

[0027] A difference between the measured value and the predicted value was small in respect of hydrocarbons and ketones (not shown in Table 1), and thus, a synergetic effect produced by combination of plural types of adsorbents was not recognized.

[0028] To the contrary, where the combination of the activated charcoal and the silica/alumina was used as the

adsorbents, the measured values were markedly smaller than the predicted values in respect of pyrazines and phenols as shown in Table 1, which clearly supports that a synergetic effect on the singular adsorption of these specified components was produced.

[0029] From the results given above, if the specified components of pyrazines and phenols are to be effectively adsorbed by using the activated charcoal alone or the silica/alumina alone, it is necessary to further increase the amount of the adsorbent. In this case, it is expected that the flavor and taste of the cigarettes are markedly affected. On the other hand, in the case of using in combination the activated charcoal and silica/alumina as the adsorbents, it is expected that the specified components of pyrazines and phenols may be adsorbed effectively even if the amount of the adsorbents is small, and thus, the flavor and taste of the cigarette are less affected.

[0030] FIG. 2 shows another example of a cigarette filter according to the present invention. The cigarette filter 1 was prepared as follows: preparing three filter materials (plain filters) 2; forming three filter sections by wrapping plug wrap paper 3 around each of the filter materials 2; loading individually activated charcoal 41 and silica/alumina (trade name: Kyoward 700SN) 42 as adsorbents 4 in the space on the cut tobacco side and in the space on the mouth side between the three filter sections; and wrapping forming paper 5 around the three filter sections. In FIG. 2, the activated charcoal 41 was loaded in the space on the mouth side and the silica/alumina was loaded in the space on the cut tobacco side. To the contrary, however, the silica/alumina 42 may be loaded in the space on the mouth side and the activated charcoal may be loaded in the space on the cut tobacco side.

[0031] FIG. 3 shows still another example of a cigarette filter according to the present invention. The cigarette filter 1 was prepared as follows: preparing a filter material (plain filter) 2 obtained by forming acetate and another filter material 21 obtained by forming acetate having adsorbents of activated charcoal 41 and silica/alumina 42 dispersed therein; forming two filter sections by wrapping plug wrap paper 3 around each of the filter materials 2 and 21; and wrapping forming paper 5 around the two filter sections.

[0032] FIG. 4 shows still another example of a cigarette filter according to the present invention. The cigarette filter 1 was prepared as follows: preparing a filter material (plain filter) 2 obtained by forming acetate, a filter material (charcoal filter) 21 obtained by forming acetate having activated charcoal as an adsorbent dispersed therein, and a filter material 22 obtained by forming acetate having silica/alumina as an adsorbent dispersed therein; forming three filter sections by wrapping plug wrap paper 3 around each of the filter materials 2, 21 and 22; and wrapping forming paper 5 around the three filter sections. The arrangement of the filter materials 21 and 22 is not particularly limited. It is possible to arrange any of these filter materials on the cut tobacco side.

[0033] Further, in the cigarette filter according to the present invention, it is possible to add activated charcoal and silica/alumina as adsorbents to the forming paper.

[0034] The cigarette filter according to the present invention can be applied in the form of a cigarette holder as shown in FIG. 5. The cigarette holder comprises a cylindrical cigarette holder body 51 having a mouth-end section 52 formed at one end, two filter materials 2 arranged inside the cigarette holder body 51, and a mixture of activated charcoal 41 and silica/alumina 42 as adsorbents 4 loaded in the space between the two filter materials 2.

[0035] The cigarette filter shown in FIG. 5 is obtained by applying the structure shown in FIG. 1 to a cigarette holder. Likewise, it is possible to apply the structure shown in each of FIGS. 2 to 4 to a cigarette holder.

[0036] In the cigarette filter of any of the types described above, a synergetic effect is produced by the activated charcoal and the silica/alumina so as to singularly adsorb pyrazines and phenols.

Industrial Applicability

[0037] According to the present invention, it is possible to provide a cigarette filter, which permits selectively removing specified components contained in mainstream smoke while suppressing the effect on the flavor and taste of the cigarette to a minimum.

Claims

1. A cigarette filter, comprising: filter sections including filter materials individually wrapped with plug wrap paper; forming paper for wrapping the filter sections integrally; and tipping paper covering the forming paper so as to connect the filter sections to a cigarette section to form a cigarette,
characterized in that activated charcoal and silica/alumina are contained as adsorbents in at least one of the filter materials and a space between the filter materials.
2. The cigarette filter according to claim 1, **characterized in that** the plug wrap paper or the forming paper contains the activated charcoal and the silica/alumina as the adsorbents.

EP 1 413 212 A1

3. The cigarette filter according to claim 1 or 2, **characterized in that** two filter materials are provided, and a mixture of the activated charcoal and the silica/alumina is loaded in the space between the two filter materials.
- 5 4. The cigarette filter according to claim 1 or 2, **characterized in that** two filter materials are provided, and a mixture of the activated charcoal and the silica/alumina is dispersed in one of the filter materials.
5. The cigarette filter according to claim 1 or 2, **characterized in that** three filter materials are provided, and the activated charcoal and the silica/alumina are individually loaded in the two spaces between the three filter materials.
- 10 6. The cigarette filter according to claim 1 or 2, **characterized in that** three filter materials are provided, and the activated charcoal is dispersed in one filter material and the silica/alumina is dispersed in another filter material.
- 15 7. A cigarette filter, comprising a cigarette holder body including filter materials arranged therein, **characterized in that** activated charcoal and silica/alumina are contained as adsorbents in at least one of the filter materials and a space between the filter materials.

20

25

30

35

40

45

50

55

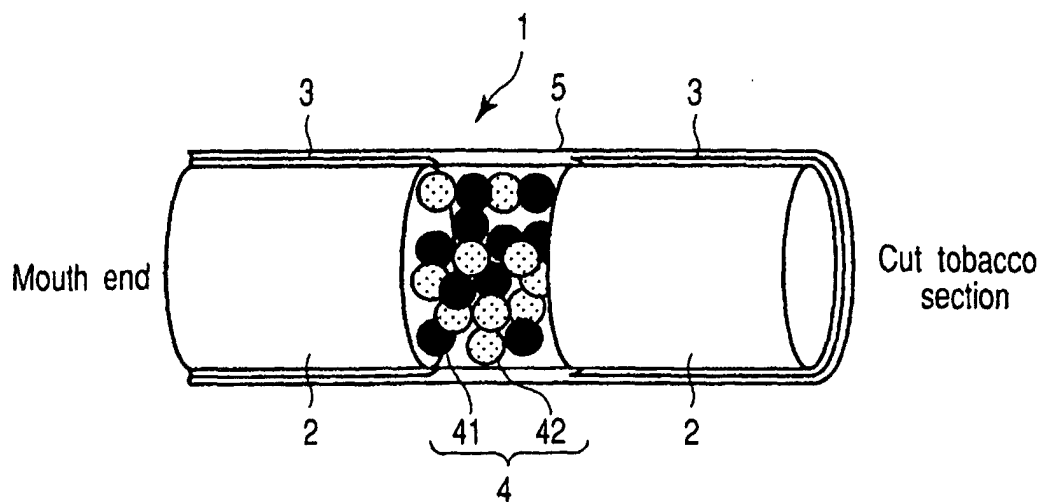


FIG. 1

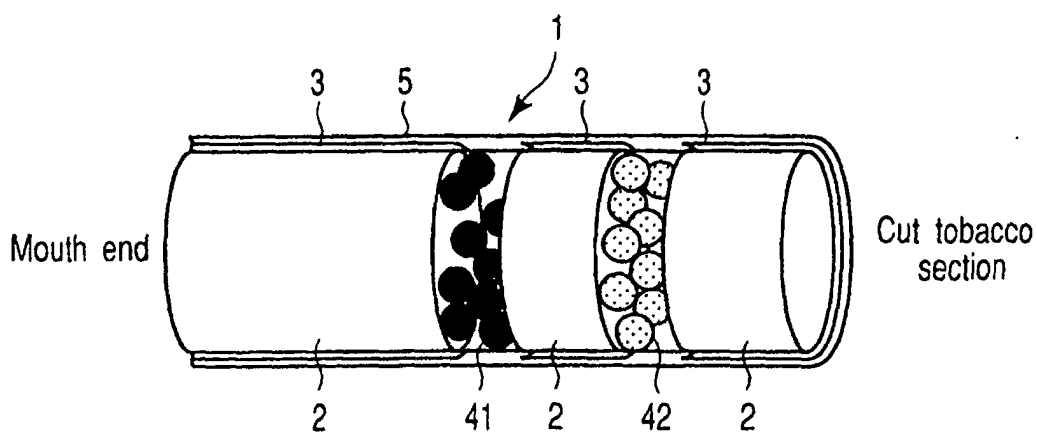


FIG. 2

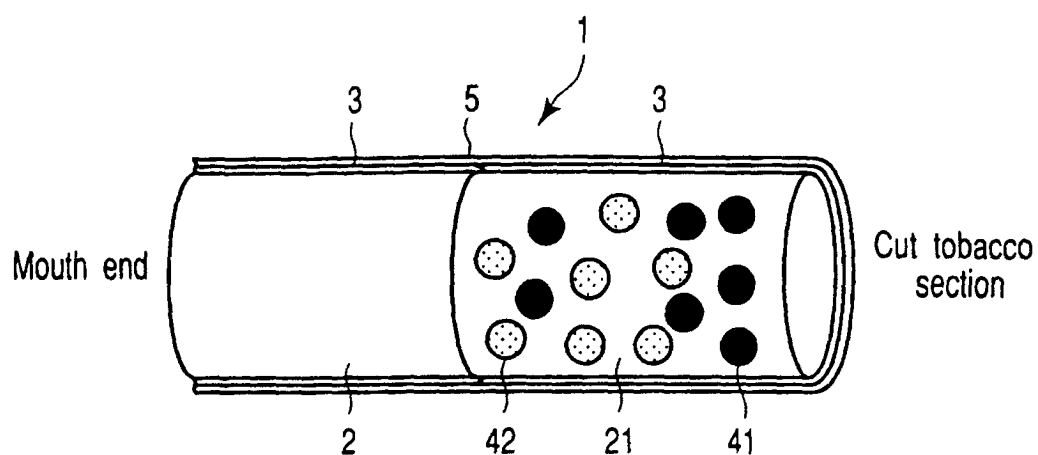


FIG. 3

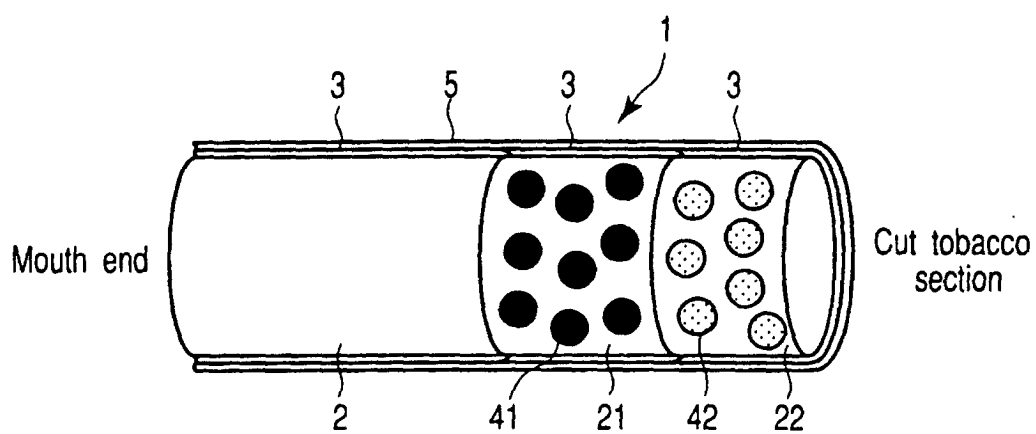


FIG. 4

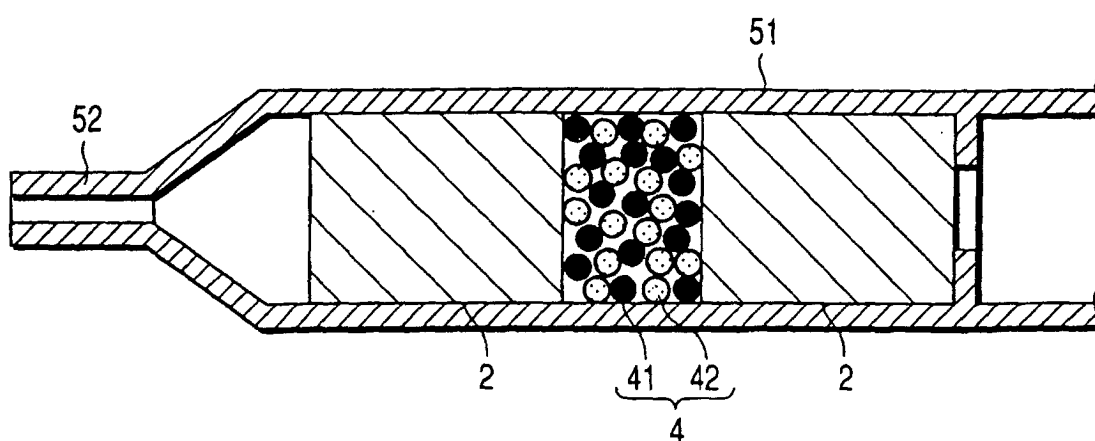


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP02/07808

A. CLASSIFICATION OF SUBJECT MATTER

Int.Cl⁷ A24D3/16, A24D3/04, A24D1/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Int.Cl⁷ A24D1/02, 3/00-3/16

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho	1926-1996	Toroku Jitsuyo Shinan Koho	1994-2002
Kokai Jitsuyo Shinan Koho	1971-2002	Jitsuyo Shinan Toroku Koho	1996-2002

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 11-235169 A (Daicel Chemical Industries, Ltd.), 31 August, 1999 (31.08.99), Par. No. [0018] (Family: none)	1-7
Y	JP 61-68135 A (Japan Tobacco Inc.), 08 April, 1986 (08.04.86), Page 4, upper right column (Family: none)	1-7
Y	JP 4-267871 A (Cigarette Components Ltd.), 24 September, 1992 (24.09.92), Figs. 5 to 6, 9 to 10 & US 5662126 A	2

☒ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search
28 August, 2002 (28.08.02)

Date of mailing of the international search report
10 September, 2002 (10.09.02)

Name and mailing address of the ISA/
Japanese Patent Office

Authorized officer

Facsimile No.

Telephone No.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP02/07808

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 2000-246095 A (Mazda Motor Corp.), 12 September, 2000 (12.09.00), Figs. 5 to 7 & WO 00/35580 A & EP 1054730 A	3-6
Y	JP 63-160659 A (Japan Tobacco Inc.), 04 July, 1988 (04.07.88), (Family: none)	7
A	JP 2001-165 A (Tokyo Bioceramics Institute Co., Ltd.), 09 January, 2001 (09.01.01), (Family: none)	2-4
A	JP 9-299073 A (Takashi SATO), 25 November, 1997 (25.11.97), (Family: none)	2, 4, 6

Form PCT/ISA/210 (continuation of second sheet) (July 1998)