



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 420 292 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
19.05.2004 Bulletin 2004/21

(51) Int Cl.7: **G03C 1/498**, B41M 5/30,
B41M 5/32

(21) Application number: **03104028.0**

(22) Date of filing: **30.10.2003**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**
Designated Extension States:
AL LT LV MK


(72) Inventors:
• **Geuens, Ingrid Agfa-Gevaert
2640 Mortsel (BE)**
• **Uyttendaele, Carlo Agfa-Gevaert
2640 Mortsel (BE)**
• **Hoogmartens, Ivan Agfa-Gevaert
2640 Mortsel (BE)**
• **Loccufier, Johan Agfa-Gevaert
2640 Mortsel (BE)**

(30) Priority: **14.11.2002 EP 02102586**

(71) Applicant: **AGFA-GEVAERT
2640 Mortsel (BE)**

(54) **Stabilizers for use in substantially light-insensitive thermographic recording materials.**

(57) A substantially light-insensitive black and white monosheet thermographic recording material comprising a support and a thermosensitive element, the thermosensitive element containing a substantially light-insensitive organic silver salt, an organic reducing agent therefor in thermal working relationship therewith, a binder and at least one stabilizer selected from the group consisting of 1-phenyl-5-mercaptotetrazole compounds in which the phenyl group is substituted with a substituent containing an optionally substituted aryl group; and



EP 1 420 292 A1

Description

FIELD OF THE INVENTION

5 **[0001]** The present invention concerns stabilizers for use in substantially light-insensitive thermographic recording materials.

BACKGROUND OF THE INVENTION


10 **[0002]** Thermography is an image-forming process including a heating step and hence includes photothermography in which the image-forming process includes image-wise exposure and direct thermal processes in which the image-forming process includes an image-wise heating step. In direct thermal printing a visible image pattern is produced by image-wise heating of a recording material.

15 **[0003]** EP-A 0 218 385 discloses a thermally developable light-sensitive material which has at least one light-sensitive silver halide containing layer on a support and which further contains a compound represented by the general formula (I):




20 wherein X is the residue of the development restrainer; J is a divalent linkage; F is an immobilizing group that is capable of reducing the diffusibility of the compound of formula (I) or a silver salt or silver complex thereof during thermal development; m is 0 or 1; and n is an integer of 1 to 3. EP-A 0 218 385 discloses the following 1-phenyl-5-mercaptotetrazole compounds in which the phenyl group is substituted with a substituent containing an optionally substituted aryl group:


A-25:

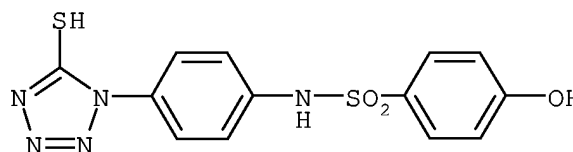

A-40:



B-4:

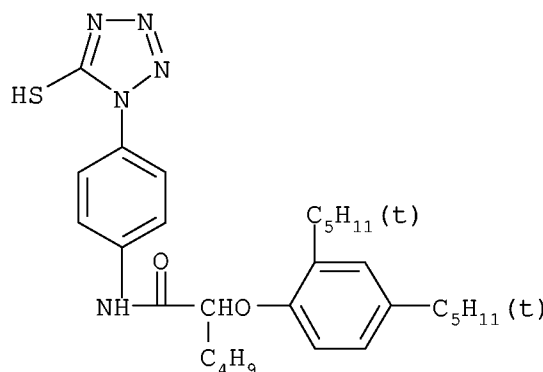


55

B-5:

5

10

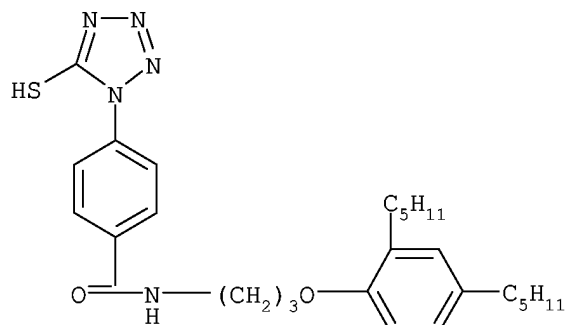


B-6:

15

20

25

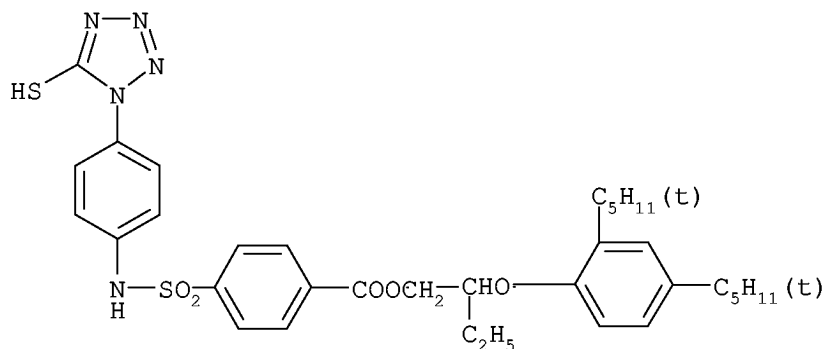


B-29:

30

35

40

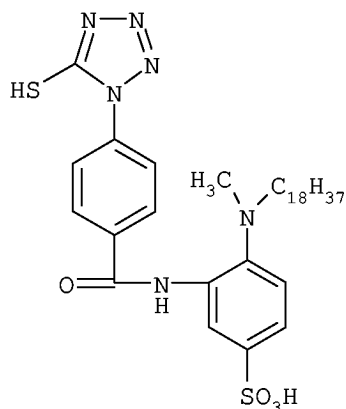


[0004] EP-A 0 256 820 discloses a thermal developing light-sensitive material comprising a support and, provided thereon, photographic structural layers comprising at least one layer containing light-sensitive silver halide, said photographic structural layer comprising a compound represented (1): Formula (1) X_1-L_1-A

45 wherein X_1 represents a residual group of a photographic restrainer, L_1 is a mere bonding hand or a divalent group and A is selected from the group consisting of a hydrogen atom, an amino group, a hydroxyl group, a carboxyl group or a salt thereof, a sulfo group or a salt thereof and a sulfin group or a salt thereof, and a compound represented by general formula (2): Formula (2) X_2-L_2-B wherein X_2 represents a residual group of a photographic restrainer, L_2 is a divalent group and B is a ballast group. EP-A 0 256 820 discloses the following 1-phenyl-5-mercaptotetrazole compounds in which the phenyl group is substituted with a substituent containing an optionally substituted aryl group:


A-8:

55



B-4:

5

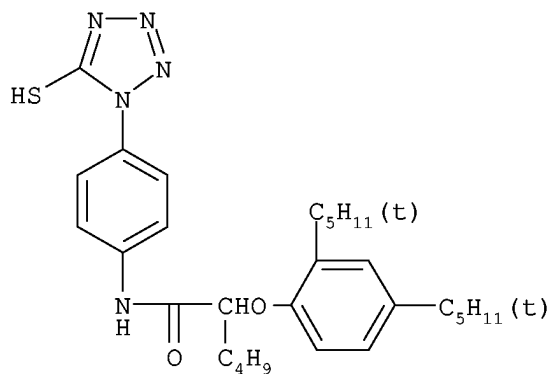


10

15

B-5:


20

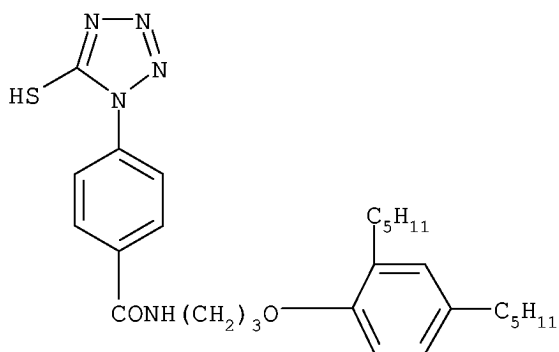

25

B-6:

30

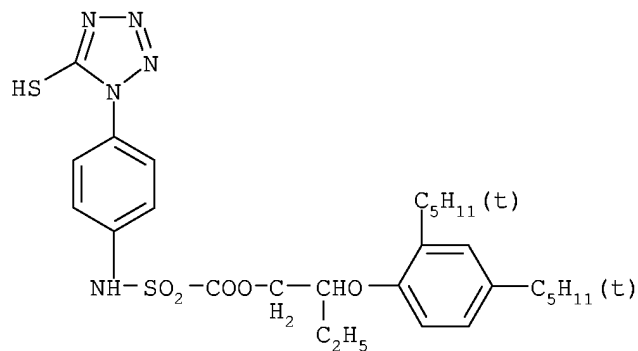


35

40

B-31:

45

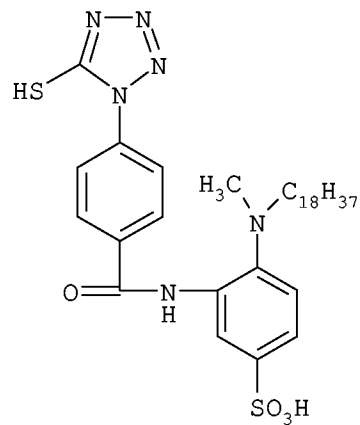


50

55


[0005] EP-A 0 295 507 discloses a process for the production of colour images by the photographic dye diffusion

EP 1 420 292 A1

process in which a first light-sensitive sheet material is imagewise exposed, at least one of said first light-sensitive sheet material and a second light-insensitive sheet material is moistened with an aqueous liquid and the two sheet materials are together heated to 50°C to 100°C with their coated surfaces in contact and then separated, said first sheet material containing, on a layer support, at least one light-sensitive silver halide emulsion layer and at least one nondiffusible colour providing compound which is capable of being decomposed imagewise in the process of development to release a diffusible dye and said second sheet material containing a salt of a strong organic base and a weak acid, wherein said first sheet material contains a combination of compounds corresponding to the following formulae I and II:




wherein R¹ denotes hydrogen, alkyl with up to 6 carbon atoms, halogen, hydroxy, alkoxy or substituents which together form a condensed benzene ring, and

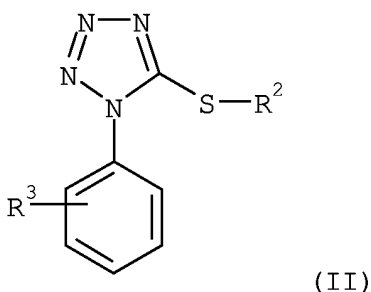


wherein R² denotes a group which can be split off in the process of development of the material and R³ denotes hydrogen, halogen, alkyl with up to 4 carbon atoms, alkoxy, carboxy, carbalkoxy, carbonamido or sulphonamido. EP-A 0 295 507 also discloses the following 1-phenyl-5-mercaptotetrazole compounds in which the phenyl group is substituted with a substituent:

SH-14 :




[0006] EP-A 0 838 722 discloses a photothermographic material comprising (a) a reducible silver source, (b) a photocatalyst, (c) a reducing agent, (d) a binder, and (e) at least one compound of the following general formula (I): X-L₁-D wherein D is an electron donative group of atoms, with the proviso that where D is a hydrazino group which is not a part of a semicarbazido group, no oxo group is substituted to the carbon atom which is directly attached to a nitrogen atom of the hydrazine, X is a group capable of promoting adsorption to silver halide, and L₁ is a valence bond or a linking group. EP-A 0 838 722 discloses the following 1-phenyl-5-mercaptotetrazole compounds in which the phenyl group is substituted with a substituent containing an optionally substituted aryl group:

6:

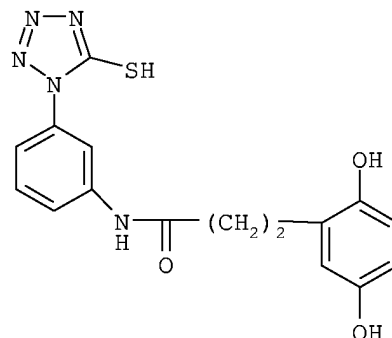


12:




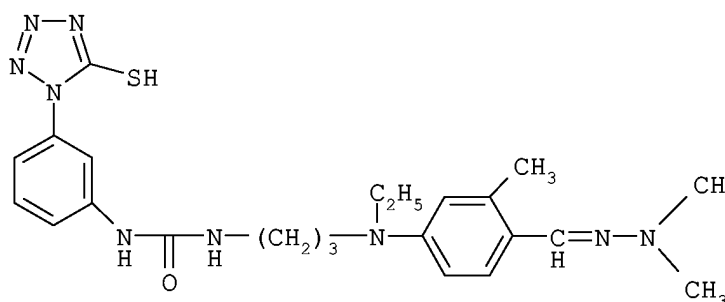


[0007] EP-A 0 218 385, EP-A 0 256 820, EP-A 0 295 507 and EP-A 0 838 722 all disclose the use of 1-phenyl-5-mercaptotetrazole compounds in which the phenyl group is substituted with a substituent containing an optionally substituted aryl group. However, the technology of substantially light-insensitive thermographic materials containing substantially light-insensitive organic silver salts is substantially different from that of photothermographic materials containing substantially light-insensitive organic silver salts, despite the fact that in both cases the image results from the reduction of organic silver salts. However, this is a superficial similarity masking the fact that the realization of the species which catalyze this reduction is completely different, being image-wise exposure of photosensitive silver halide-containing photo-addressable thermally developable elements in the case of photothermographic recording materials and image-wise heating of thermosensitive elements which do not contain photosensitive silver halide in the case of thermographic recording materials. This difference in technology is further underlined by the nature of the ingredients used in the two types of materials, the most significant difference being the absence of photosensitive silver halide and spectral sensitizing agents in substantially light-insensitive thermographic recording materials, but also reflected in the different reducing agents used, stronger reducing agents being used in substantially light-insensitive thermographic recording materials, the different stabilizers, the different toning agents etc. Furthermore, the thermal development processes themselves are significantly different in that the whole material is heated at temperatures of less than 150°C for periods of seconds (e.g. 10s) in the case of photothermographic recording materials, whereas in the case of substantially light-insensitive thermographic recording materials the materials are image-wise heated at much higher temperatures for periods of ms (e.g. 10-20 ms). Moreover, thermal development in substantially light-insensitive thermographic recording materials involves the liquid crystalline phases of the organic silver salts, whereas this is not the case in the thermal development step in the case of photothermographic recording materials even when using the same organic silver salts. Realization of a neutral image tone is a major problem in the case of substantially light-insensitive thermographic recording materials due to the very short heating times, whereas it is much less of a problem in photothermographic recording materials due to the much longer heating times.




[0008] EP-A 0 713 133 discloses a thermal imaging system consisting of (i) a donor element comprising on a support a donor layer containing a binder and a thermotransferable reducing agent capable of reducing a silver source to metallic silver and (ii) a receiving element comprising on a support a receiving layer comprising a silver source, capable of being reduced by means of heat in the presence of a reducing agent, a binder and a stabiliser selected from the group consisting of benzotriazoles, heterocyclic mercaptanes, sulphonic acids, 1,3,4-triazo-indinolines, 1,3-dinitroaryl compounds, 1,2,3-triazoles, phthalic acids and phthalic acid derivatives. EP-A 0 713 133 discloses that preferred heterocyclic mercaptanes are mercaptotetrazoles corresponding to the following general formula (C) :



and discloses the following 1-phenyl-5-mercapto-tetrazole compounds:

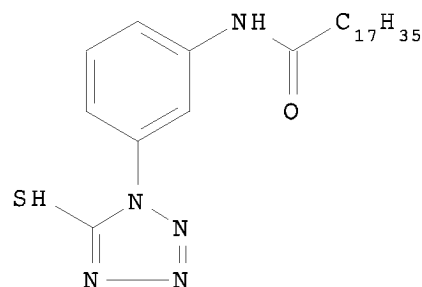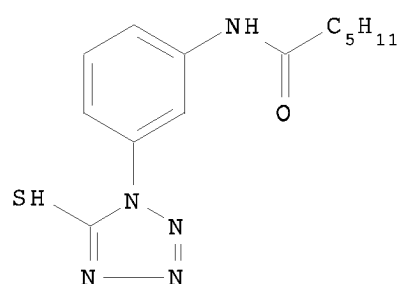

[0009] EP-A 0 901 040 discloses a substantially light-insensitive monosheet recording material comprising a support and a thermosensitive element containing a substantially light-insensitive organic silver salt, an organic reducing agent therefor in thermal working relationship therewith and a binder, characterized in that said thermosensitive element further contains an unsaturated carbocyclic or heterocyclic stabilizer compound substituted with a -SA group where A is hydrogen, a counterion to compensate the negative charge of the thiolate group or a group forming a symmetrical or an asymmetrical disulfide and said recording material is capable of producing prints with a numerical gradation value defined as the quotient of the fraction $(2.5 - 0.1)/(E_{2.5} - E_{0.1})$ greater than 2.3, where $E_{2.5}$ is the energy in Joule applied in a dot area of $87 \mu\text{m} \times 87 \mu\text{m}$ of the imaging layer that produces an optical density value of 2.5, and $E_{0.1}$ is the energy in Joule applied in a dot area of the imaging layer material that produces an optical density value of 0.1. EP-A 0 901 040 discloses the following 1-phenyl-5-mercapto-tetrazole compounds:



[0010] WO 94/16361 discloses a multilayer heat-sensitive material which comprises: a color-forming layer comprising: a color-forming amount of finely divided, solid colorless noble metal or iron salt of an organic acid distributed in a carrier composition; a color-developing amount of a cyclic or aromatic organic reducing agent, which at thermal copy

and printing temperatures is capable of a color-forming reaction with the noble metal or iron salt; and an image-toning agent; characterized in that (a) the carrier composition comprises a substantially water-soluble polymeric carrier and a dispersing agent for the noble metal or iron salt and (b) the material comprises a protective overcoating layer for the color-forming layer. Furthermore, WO 94/16361 discloses that suitable antifoggants are well-known photographic anti-foggants such as mercaptobenzotriazole, chromate, oxalate, citrate, carbonate, benzotriazole (BZT), 5-methylbenzotriazole, 5,6-dimethylbenzotriazole, 5-bromobenzotriazole, 5-chlorobenzotriazole, 5-nitro-benzotriazole, 4-nitro-6-chlorobenzotriazole, 5-nitro-6-chlorobenzotriazole, 4-hydroxy-6-methyl-1,3,3a,7-tetraazaindene, benzimidazole, 2-methylbenzimidazole, 5-nitrobenzimidazole, 1-phenyl-5-mercaptotetrazole, 2-mercaptobenzimidazole, 2-mercaptobenzothiazole, 2-mercaptobenzoxazole, 2-mercaptothiazoline, 2-mercapto-4-methyl-6,6'-dimethylpyrimidine, 1-ethyl-2-mercapto-5-amino-1,3,4-triazole, 1-ethyl-5-mercapto-1,2,3,4-tetrazole, 2,5-dimercapto-1,3,4-thiodiazole, 2-mercapto-5-aminothiodiazole, dimethyldithiocarbamate, and diethyldithiocarbamate.

[0011] WO 96/10213 discloses a thermographic imaging element comprising a substrate having coated on at least one surface thereof a thermographic imaging system comprising at least one layer comprising light-insensitive organic silver salt; reducing agent for silver ion; binder; toner; and a dye which absorbs radiation in the wavelength range of 750-1100 nm, wherein said at least one layer comprising said light-insensitive organic silver salt forms an image density greater than about 1.0 when exposed to 0.10 - 2.0 joules/cm² of said radiation in 0.20 to 200 microseconds. WO 96/10213 does not disclose a stabilizer against the influence of light, but mentions the optional incorporation of benzotriazole in the thermographic imaging element, but only exemplifies the incorporation of benzotriazole.

[0012] Substantially light-insensitive thermographic recording materials contain the imaging-forming components both before and after image formation and unwanted image-forming must be hindered both during storage prior to printing and in prints exposed to light on light-boxes e.g. during examination by radiologists. Furthermore, such stabilization must take place without adverse effects upon the image quality particularly the image tone. Thermographic printers are being introduced with ever higher throughputs, which require thermographic recording materials able to provide stabilization without an adverse effect on the image quality at such faster throughputs. There is therefore a need for stabilizers which fulfil these requirements.

ASPECTS OF THE INVENTION


[0013] It is therefore an aspect of the present invention to provide stabilizers for use in substantially light-insensitive thermographic recording materials suitable for use in high throughput thermographic printers without adverse effect on the image tone.

[0014] Further aspects and advantages of the invention will become apparent from the description hereinafter.

SUMMARY OF THE INVENTION

[0015] It has been surprisingly found that specific types of 5-mercapto-tetrazole compounds provide effective stabilization in substantially light-insensitive thermographic recording materials suitable for use in high throughput thermographic printers without an adverse effect on the image tone as characterized by CIELAB a* and b* values. The L*, a* and b* CIELAB-values were determined by spectrophotometric measurements according to ASTM Norm E179-90 in a R(45/0) geometry with evaluation according to ASTM Norm E308-90.

[0016] Aspects of the present invention are realized with a substantially light-insensitive black and white monosheet thermographic recording material comprising a support and a thermosensitive element, the thermosensitive element containing a substantially light-insensitive organic silver salt, an organic reducing agent therefor in thermal working relationship therewith, a binder and at least one stabilizer selected from the group consisting of 1-phenyl-5-mercaptotetrazole compounds in which the phenyl group is substituted with a substituent containing an optionally substituted aryl group; and



[0017] Preferred embodiments of the present invention are disclosed in the detailed description of the invention.

DETAILED DESCRIPTION OF THE INVENTION

Definitions

5 **[0018]** The term alkyl means all variants possible for each number of carbon atoms in the alkyl group i.e. for three carbon atoms: n-propyl and isopropyl; for four carbon atoms: n-butyl, isobutyl and tertiary-butyl; for five carbon atoms: n-pentyl, 1,1-dimethylpropyl, 2,2-dimethylpropyl and 2-methyl-butyl etc.

[0019] The term acyl group as used in disclosing the present invention means -(C=O)-aryl and -(C=O)-alkyl groups.

10 **[0020]** The L*, a* and b* CIELAB-values are defined in ASTM Norm E179-90 in a R(45/0) geometry with evaluation according to ASTM Norm E308-90.

[0021] Substantially light-insensitive means not intentionally light sensitive.

[0022] Heating in association with the expression a substantially water-free condition as used herein, means heating at a temperature of 80 to 250°C. The term "substantially water-free condition" as used herein means that the reaction system is approximately in equilibrium with water in the air, and water for inducing or promoting the reaction is not particularly or positively supplied from the exterior to the element. Such a condition is described in T.H. James, "The Theory of the Photographic Process", Fourth Edition, Macmillan 1977, page 374.

Thermosensitive element

20 **[0023]** The term thermosensitive element as used herein is that element which contains all the ingredients which contribute to image formation. According to the present invention, the thermosensitive element contains one or more substantially light-insensitive organic silver salts, one or more reducing agents therefor in thermal working relationship therewith and a binder. The element may comprise a layer system in which the above-mentioned ingredients may be dispersed in different layers, with the proviso that the substantially light-insensitive organic silver salts are in reactive association with the reducing agents i.e. during the thermal development process the reducing agent must be present in such a way that it is able to diffuse to the particles of substantially light-insensitive organic silver salt so that reduction to silver can occur. Such materials include the possibility of one or more substantially light-insensitive organic silver salts and/or one or more organic reducing agents therefor being encapsulated in heat-responsive microcapsules, such as disclosed in EP-A 0 736 799 herein incorporated by reference.

30


1-phenyl-5-mercaptotetrazole compounds

[0024] The substantially light-insensitive thermographic recording material of the present invention can contain at least one 1-phenyl-5-mercaptotetrazole compound in which the phenyl group is substituted with a substituent containing an optionally substituted aryl group. Preferred substituents for the phenyl group include -NHCO-phenyl, -NHCO-(1-naphthyl), -NHCO-(2-naphthyl), -NHCONH-phenyl, -NHSO₂-phenyl, -NHSO₂-(1-naphthyl), -NHSO₂-(2-naphthyl), -SO₂NH-phenyl, -CONH-phenyl, -CONH-(1-naphthyl), -CONH-(2-naphthyl), -NHCO-(2-thienyl) and -NHCONHCO-phenyl groups. Preferred substituents for the aryl group are selected from the group consisting of halogen atoms, ester groups, -OCOO-alkyl groups,

40 -NHCOO-alkyl groups, -NHOC-alkyl groups, -CONH-alkyl groups, -S-alkyl groups and mercapto, alkyl, alkoxy, nitrile, acyl and nitro groups.

[0025] According to a first embodiment of the substantially light-insensitive black and white monosheet thermographic recording material, according to the present invention, the 1-phenyl-5-mercaptotetrazole compound in which the phenyl group is substituted with a substituent containing an optionally substituted aryl group is represented by formula (I):


45



wherein R¹ is -NH-(C=O)-Ar, -NH-(C=O)-NH-Ar, -NH-(C=O)-O-Ar, -O-(C=O)-NH-Ar, -(C=O)-NH-Ar, -NH-SO₂-Ar, -O-(C=O)-Ar, -O-(C=O)-O-Ar, -(C=O)-Ar, -(C=O)-O-Ar, -SO₂-Ar, -SO₂-NH-Ar, or -Ar; and Ar is an optionally substituted


aryl or heteroaryl group. Preferred substituents for the aryl and heteroaryl groups include halogen atoms, ester groups, -OCOO-alkyl groups, -NHCOO-alkyl groups, -NHOC-alkyl groups, -CONH-alkyl groups, -S-alkyl groups and mercapto, alkyl, alkoxy, nitrile, acyl and nitro groups.

[0026] According to a second embodiment of the substantially light-insensitive black and white monosheet thermographic recording material, according to the present invention, the 1-phenyl-5-mercaptotetrazole compound in which the phenyl group is substituted with a substituent containing an optionally substituted aryl group is represented by formula (II):



wherein R² is -NH-(C=O)-Ar, -NH-(C=O)-NH-Ar, -NH-(C=O)-O-Ar, -O-(C=O)-NH-Ar, -(C=O)-NH-Ar, -NH-SO₂-Ar, -O-(C=O)-Ar, -O-(C=O)-O-Ar, -(C=O)-Ar, -(C=O)-O-Ar, -SO₂-Ar, -SO₂-NH-Ar, or -Ar; and Ar is an optionally substituted aryl or heteroaryl group. Preferred substituents for the aryl and heteroaryl groups include halogen atoms, ester groups, -OCOO-alkyl groups, -NHCOO-alkyl groups, -NHOC-alkyl groups, -CONH-alkyl groups, -S-alkyl groups and mercapto, alkyl, alkoxy, nitrile, acyl and nitro groups.

[0027] According to a third embodiment of the substantially light-insensitive black and white monosheet thermographic recording material, according to the present invention, the at least one stabilizer is selected from the group consisting of:

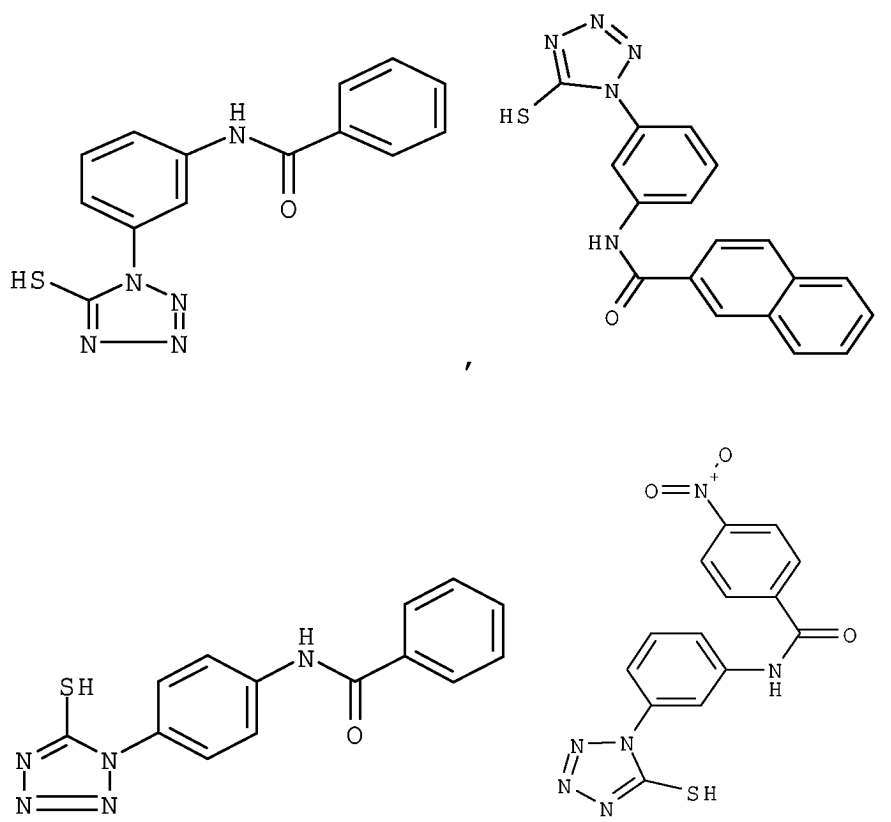

5

10

15

20

25





30

35

40

45


50

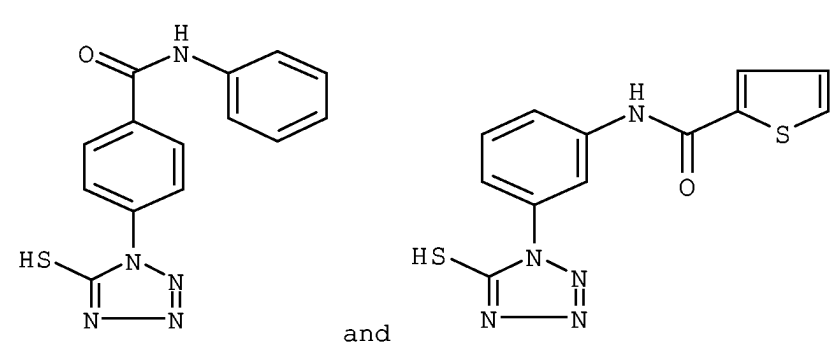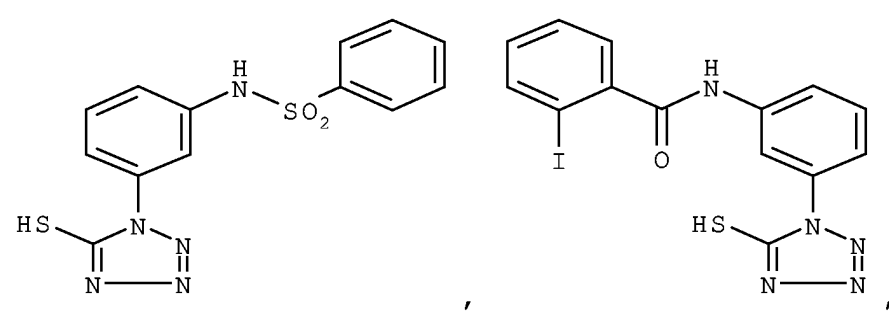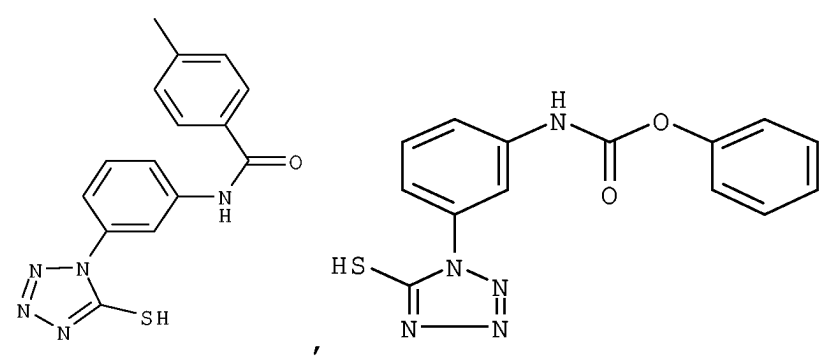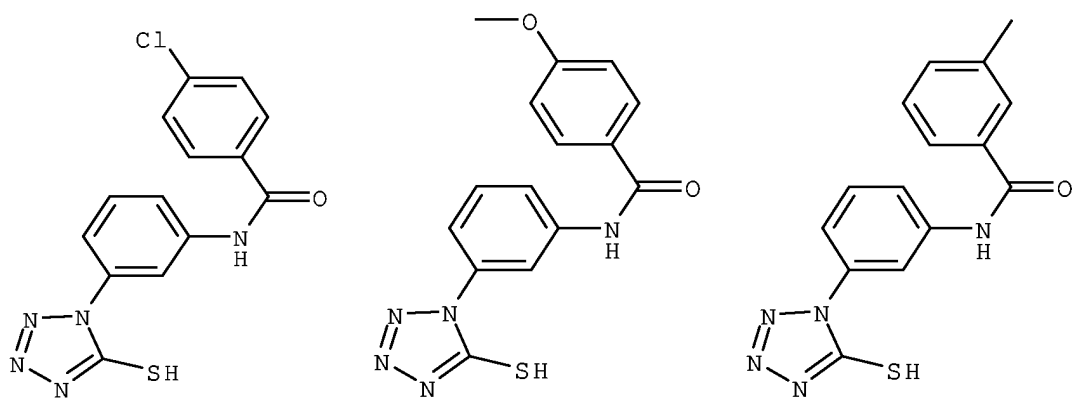

and

[0028] 1-phenyl-5-mercaptotetrazole compounds in which the phenyl group is substituted with a substituent containing an optionally substituted aryl group and

55



5

10 according to the present invention, can be prepared from readily available starting materials using standard organic chemistry techniques known to one skilled in the art and available in such reference books such as Houben-Weyl.

[0029] Suitable 1-phenyl-5-mercaptotetrazole (PMT) compounds in which the phenyl group is substituted with a substituent containing an optionally substituted aryl group, according to the present invention, include:

15

20

25

30






35






40






45

50

55

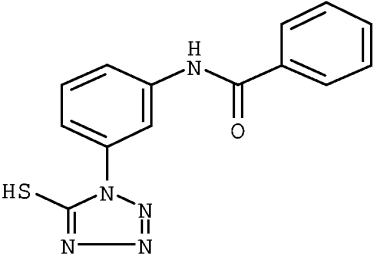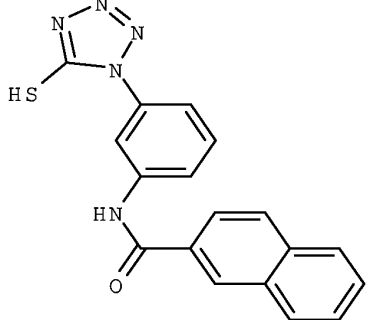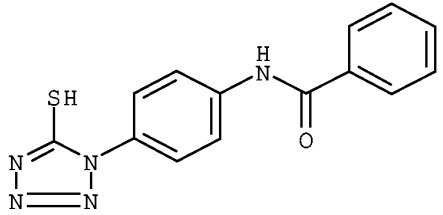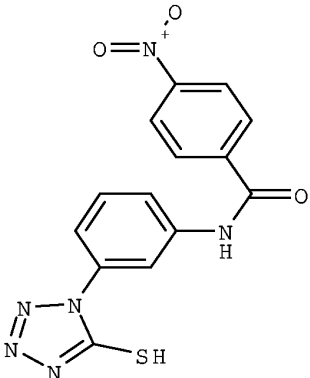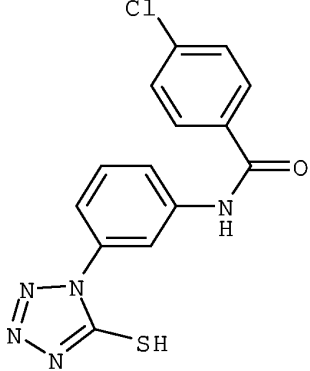PMT-nr.	Structure	
5 10 PMT-1		1-(3'-benzoyl-amino-phenyl)-5-mercaptotetrazole
15 20 PMT-2		1-[3'-(2-naphthoyl-amino)-phenyl]-5-mercaptotetrazole
25 30 PMT-3		1-[4'-(benzoyl-amino)-phenyl]-5-mercaptotetrazole
35 40 PMT-4		1-[3'-(p-nitro-benzoyl-amino)-phenyl]-5-mercaptotetrazole
45 50 55 PMT-5		1-[3'-(p-chloro-benzoyl-amino)-phenyl]-5-mercaptotetrazole

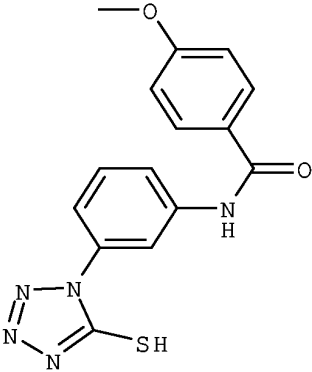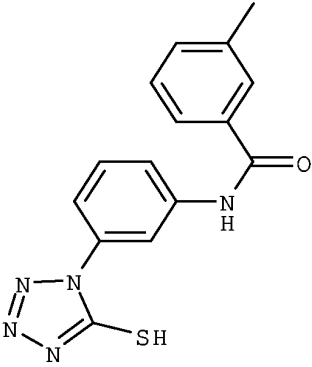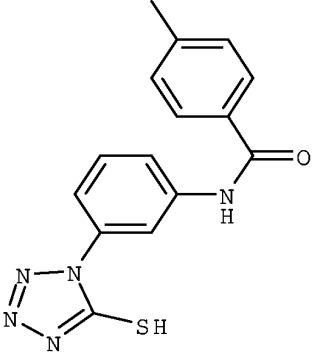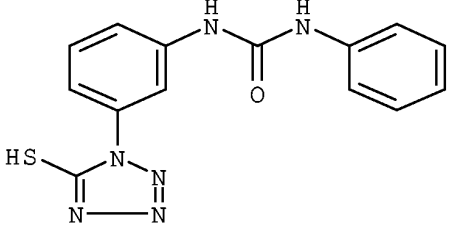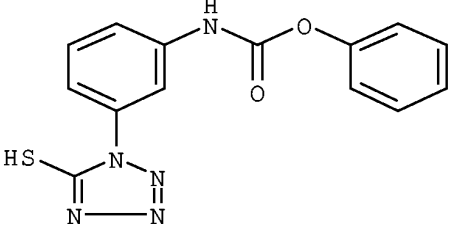PMT-6		1-[3'-(p-methoxy-benzoyl-amino)-phenyl]-5-mercaptotetrazole
PMT-7		1-[3'-(m-methyl-benzoyl-amino)-phenyl]-5-mercaptotetrazole
PMT-8		1-[3'-(p-methyl-benzoyl-amino)-phenyl]-5-mercaptotetrazole
PMT-9		
PMT-10		

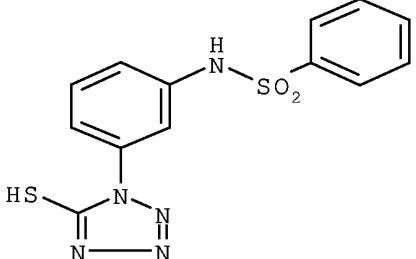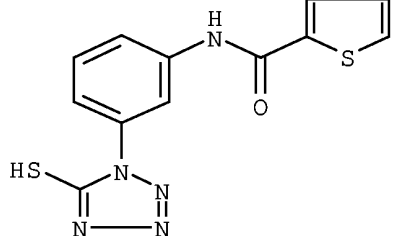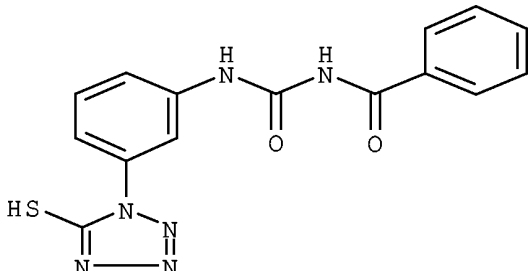PMT-11		
PMT-12		
PMT-13		
PMT-14		
PMT-15		

50 Organic silver salt

[0030] According to a fourth embodiment of the substantially light-insensitive black and white monosheet thermographic recording material of the present invention, the organic silver salts are not double organic salts containing a silver cation associated with a second cation e.g. magnesium or iron ions.

55 [0031] According to a fifth embodiment of the substantially light-insensitive black and white monosheet thermographic recording material of the present invention, at least one of the organic silver salts is a substantially light-insensitive silver salt of an organic carboxylic acid.

[0032] According to a sixth embodiment of the substantially light-insensitive black and white monosheet thermo-

graphic recording material of the present invention, at least one of the organic silver salts is a substantially light-insensitive silver salt of an aliphatic carboxylic acids known as a fatty acid, wherein the aliphatic carbon chain has preferably at least 12 C-atoms, e.g. silver laurate, silver palmitate, silver stearate, silver hydroxystearate, silver oleate and silver behenate, which silver salts are also called "silver soaps". Other silver salts of an organic carboxylic acid as described in GB-P 1,439,478, e.g. silver benzoate, may likewise be used to produce a thermally developable silver image. Combinations of different silver salt of an organic carboxylic acids may also be used in the present invention, as disclosed in EP-A 964 300.

[0033] Organic silver salts may be dispersed by standard dispersion techniques. Ball mills, bead mills, microfluidizers, ultrasonic apparatuses, rotor stator mixers etc. have been found to be useful in this regard. Mixtures of organic silver salt dispersions produced by different techniques may also be used to obtain the desired thermographic properties e. g. of coarser and more finely ground dispersions of organic silver salts.

Reducing agents

[0034] According to an seventh embodiment of the black and white thermographic recording material, according to the present invention, the reducing agent is an organic compound containing at least one active hydrogen atom linked to O, N or C, such as is the case with, aromatic di- and tri-hydroxy compounds. 1,2-dihydroxybenzene derivatives, such as catechol, 3-(3,4-dihydroxyphenyl) propionic acid, 1,2-dihydroxybenzoic acid, gallic acid and esters e.g. methyl gallate, ethyl gallate, propyl gallate, tannic acid, and 3,4-dihydroxy-benzoic acid esters are preferred, with those described in EP-A 0 692 733 and EP-A 0 903 625 being particularly preferred.

[0035] Combinations of reducing agents may also be used that on heating become reactive partners in the reduction of the one or more substantially light-insensitive organic silver salt. For example, combinations of sterically hindered phenols with sulfonyl hydrazide reducing agents such as disclosed in US 5,464,738; trityl hydrazides and formyl-phenyl-hydrazides such as disclosed in US 5,496,695; trityl hydrazides and formyl-phenyl-hydrazides with diverse auxiliary reducing agents as disclosed in US 5,545,505, US 5,545,507 and US 5,558,983; acrylonitrile compounds as disclosed in US 5,545,515 and US 5,635,339; and 2-substituted malonodialdehyde compounds as disclosed in US 5,654,130.

Binder of the thermosensitive element

[0036] The film-forming binder of the thermosensitive element may be all kinds of natural, modified natural or synthetic resins or mixtures of such resins, in which the at least one organic silver salt can be dispersed homogeneously either in aqueous or solvent media: e.g. cellulose derivatives, starch ethers, galactomannan, polymers derived from α,β -ethylenically unsaturated compounds such as polyvinyl chloride, after-chlorinated polyvinyl chloride, copolymers of vinyl chloride and vinylidene chloride, copolymers of vinyl chloride and vinyl acetate, polyvinyl acetate and partially hydrolyzed polyvinyl acetate, polyvinyl alcohol, polyvinyl acetals that are made from polyvinyl alcohol as starting material in which only a part of the repeating vinyl alcohol units may have reacted with an aldehyde, preferably polyvinyl butyral, copolymers of acrylonitrile and acrylamide, polyacrylates, polymethacrylates, polystyrene and polyethylene or mixtures thereof.

[0037] Suitable water-soluble film-forming binders for use in thermographic recording materials according to the present invention are: polyvinyl alcohol, polyacrylamide, polymethacrylamide, polyacrylic acid, polymethacrylic acid, polyvinylpyrrolidone, polyethyleneglycol, proteinaceous binders, polysaccharides and water-soluble cellulose derivatives. A preferred water-soluble binder for use in the thermographic recording materials of the present invention is gelatine.

[0038] The binder to organic silver salt weight ratio is preferably in the range of 0.2 to 7, and the thickness of the thermosensitive element is preferably in the range of 5 to 50 μm . Binders are preferred which do not contain additives, such as certain antioxidants (e.g. 2,6-di-tert-butyl-4-methylphenol), or impurities which adversely affect the thermographic properties of the thermographic recording materials in which they are used.

Toning agent

[0039] According to an eighth embodiment of the black and white monosheet thermographic recording material, according to the present invention, the thermosensitive element contains a toning agent, which enables a neutral black image tone to be obtained in the higher densities and neutral grey in the lower densities.

[0040] According to a ninth embodiment of the black and white monosheet thermographic recording material, according to the present invention, the thermosensitive element further contains a toning agent selected from the group consisting of phthalimides, phthalazinones, benzoxazine diones and naphthoxazine diones e.g. phthalimides and phthalazinones within the scope of the general formulae described in US 4,082,901; the toning agents described in US 3,074,809, 3,446,648 and 3,844,797; and the heterocyclic toner compounds of the benzoxazine dione or naph-

thoxazine dione type as disclosed in GB 1,439,478, US 3,951,660 and US 5,599,647, herein incorporated by reference.

[0041] According to a tenth embodiment of the substantially light-insensitive black and white monosheet thermographic recording material, according to the present invention, the substantially light-insensitive thermographic material contains a thermosensitive element, the thermosensitive element containing one or more toning agents selected from the group consisting of phthalazinone, benzo[e][1,3]oxazine-2,4-dione, 7-methyl-benzo[e][1,3]oxazine-2,4-dione, 7-methoxy-benzo[e][1,3]oxazine-2,4-dione and 7-(ethylcarbonato)-benzo[e][1,3]oxazine-2,4-dione.

Auxiliary antifoggants

[0042] According to an eleventh embodiment of the black and white monosheet thermographic recording material, according to the present invention, the thermographic recording material further contains an auxiliary antifoggant to obtain improved shelf-life and reduced fogging.

[0043] According to a twelfth embodiment of the black and white monosheet thermographic recording material, according to the present invention, the thermographic recording material further contains an antifoggant selected from the group consisting of benzotriazole, substituted benzotriazoles and aromatic polycarboxylic acid such as ortho-phthalic acid, 3-nitro-phthalic acid, tetrachlorophthalic acid, mellitic acid, pyromellitic acid and trimellitic acid and anhydrides thereof.

[0044] According to a thirteenth embodiment of the black and white monosheet thermographic recording material, according to the present invention, the thermosensitive element further contains an optionally substituted benzotriazole.

Polycarboxylic acids and anhydrides thereof

[0045] According to a fourteenth embodiment of the black and white monosheet thermographic recording material, according to the present invention, the thermosensitive element further contains at least one polycarboxylic acid and/or anhydride thereof in a molar percentage of at least 15 with respect to all the organic silver salt(s) present and in thermal working relationship therewith. The polycarboxylic acid may be aliphatic (saturated as well as unsaturated aliphatic and also cycloaliphatic) or an aromatic polycarboxylic acid, may be substituted and may be used in anhydride form or partially esterified on the condition that at least two free carboxylic acids remain or are available in the heat recording step.

Surfactants and dispersants

[0046] Surfactants and dispersants aid the dispersion of ingredients which are insoluble in the particular dispersion medium. The substantially light-insensitive thermographic material used in the present invention may contain one or more surfactants, which may be anionic, non-ionic or cationic surfactants and/or one or more dispersants. Suitable dispersants are natural polymeric substances, synthetic polymeric substances and finely divided powders, e.g. finely divided non-metallic inorganic powders such as silica.

Support

[0047] According to a fifteenth embodiment of the substantially light-insensitive black and white monosheet thermographic recording material, according to the present invention, the support is transparent or translucent. It is preferably a thin flexible carrier made transparent resin film, e.g. made of a cellulose ester, e.g. cellulose triacetate, polypropylene, polycarbonate or polyester, e.g. polyethylene terephthalate. The support may be in sheet, ribbon or web form and subbed if needs be to improve the adherence to the thereon coated thermosensitive element. The support may be dyed or pigmented to provide a transparent coloured background for the image.

Protective layer

[0048] According to a sixteenth embodiment of the substantially light-insensitive black and white monosheet thermographic recording material, according to the present invention, the thermosensitive element is provided with a protective layer. In general this protects the thermosensitive element from atmospheric humidity and from surface damage by scratching etc. and prevents direct contact of printheads or heat sources with the recording layers. Protective layers for thermosensitive elements which come into contact with and have to be transported past a heat source under pressure, have to exhibit resistance to local deformation and good slipping characteristics during transport past the heat source during heating. A slipping layer, being the outermost layer, may comprise a dissolved lubricating material and/or particulate material, e.g. talc particles, optionally protruding from the outermost layer. Examples of suitable lubricating materials are a surface active agent, a liquid lubricant, a solid lubricant or mixtures thereof, with or without a polymeric

binder.

Coating techniques

5 **[0049]** The coating of any layer of the substantially light-insensitive thermographic material used in the present invention may proceed by any coating technique e.g. such as described in Modern Coating and Drying Technology, edited by Edward D. Cohen and Edgar B. Gutoff, (1992) VCH Publishers Inc., 220 East 23rd Street, Suite 909 New York, NY 10010, USA. Coating may proceed from aqueous or solvent media with overcoating of dried, partially dried or undried layers.

10 Thermographic processing

[0050] Thermographic imaging is carried out by the image-wise application of heat either in analogue fashion by direct exposure through an image or by reflection from an image, or in digital fashion pixel by pixel either by using an infra-red heat source, for example with a Nd-YAG laser or other infra-red laser, with a substantially light-insensitive thermographic material preferably containing an infra-red absorbing compound, or by direct thermal imaging with a thermal head.

[0051] In thermal printing image signals are converted into electric pulses and then through a driver circuit selectively transferred to a thermal printhead. The thermal printhead consists of microscopic heat resistor elements, which convert the electrical energy into heat via Joule effect. The operating temperature of common thermal printheads is in the range of 300 to 400°C and the heating time per picture element (pixel) may be less than 1.0ms, the pressure contact of the thermal printhead with the recording material being e.g. 200-1000g/linear cm, i.e. with a contact zone (nip) of 200 to 300 µm a pressure of 5000 to 50,000 g/cm², to ensure a good transfer of heat.

[0052] In order to avoid direct contact of the thermal printing heads with the outermost layer on the same side of the support as the thermosensitive element when this outermost layer is not a protective layer, the image-wise heating of the recording material with the thermal printing heads may proceed through a contacting but removable resin sheet or web wherefrom during the heating no transfer of recording material can take place.

[0053] Activation of the heating elements can be power-modulated or pulse-length modulated at constant power. EP-A 654 355 discloses a method for making an image by image-wise heating by means of a thermal head having energizable heating elements, wherein the activation of the heating elements is executed duty cycled pulsewise. EP-A 622 217 discloses a method for making an image using a direct thermal imaging element producing improvements in continuous tone reproduction.

[0054] Image-wise heating of the recording material can also be carried out using an electrically resistive ribbon incorporated into the material. Image- or pattern-wise heating of the recording material may also proceed by means of pixel-wise modulated ultrasound.

Industrial application

[0055] Thermographic imaging can be used for the production of reflection type prints and transparencies, in particular for use in the medical diagnostic field in which black-imaged transparencies are widely used in inspection techniques operating with a light box.

[0056] The invention is illustrated hereinafter by way of comparative examples and invention examples. The percentages and ratios given in these examples are by weight unless otherwise indicated.

45 Subbing layer Nr. 01 has the composition:

[0057]

50	copolymer of 88% vinylidene chloride, 10% methyl acrylate and 2% itaconic acid	79.1 mg/m ²
	Kieselso ^l ® 100F, a colloidal silica from BAYER	18.6 mg/m ²
	Mersolat® H, a surfactant from BAYER	0.4 mg/m ²
	Ultravon® W, a surfactant from CIBA-GEIGY	1.9 mg/m ²

55

EP 1 420 292 A1

Subbing layer Nr. 02 has the composition:

[0058]

5	copolymer of 88% vinylidene chloride, 10% methyl acrylate and 2% itaconic acid	151 mg/m ²
	Kieselso ^l @ 100F, a colloidal silica from BAYER	35 mg/m ²
	Mersolat [®] H, a surfactant from BAYER	0.75 mg/m ²

10 [0059] Ingredients in the thermosensitive element in addition to the above-mentioned ingredients:

BL5HP = S-LEC BL5HP, a polyvinyl butyral from SEKISUI;
 Oil = BAYSILON, a silicone oil from BAYER;
 VL = DESMODUR VL, a 4,4'-diisocyanatodiphenylmethane from BAYER;

15 Reducing agents:

[0060]

20 R01 = 3,4-dihydroxybenzonnitrile;
 R02 = 3,4-dihydroxybenzophenone;

Toning agent:


25 [0061]

T01 = 7-(ethylcarbonato)-benzo[e][1,3]oxazine-2,4-dione;
 T02 = 7-methyl-benzo[e][1,3]oxazine-2,4-dione;


30 Stabilizers:

[0062]

35 S01 = glutaric acid
 S02 = tetrachlorophthalic acid anhydride
 S03 = benzotriazole
 S04 =

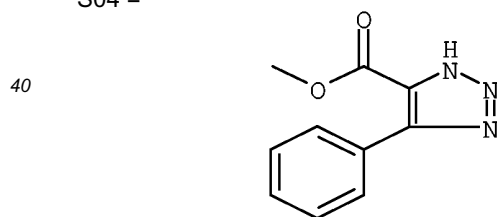


45 PMT-C1 = 1-phenyl-5-mercapto-tetrazole
 PMT-C2 =

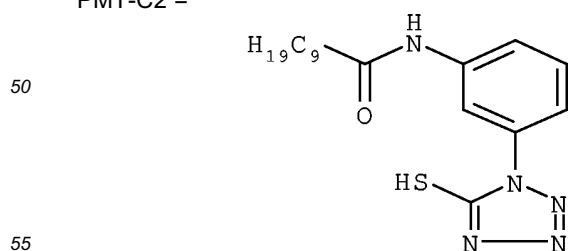

PMT-C3 =

5


10

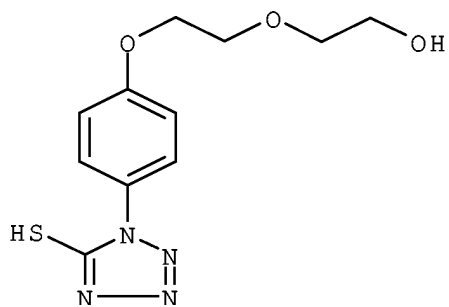

PMT-C4 =

15


20

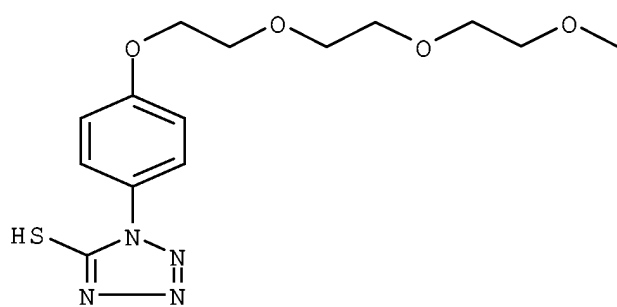

PMT-C5 =

25


30

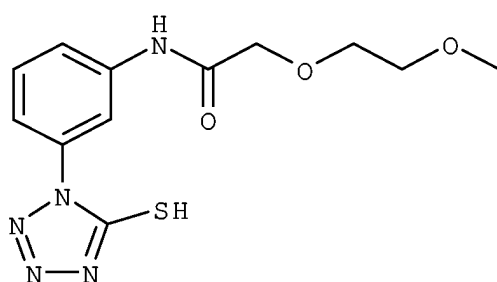

PMT-C6 =

35

40

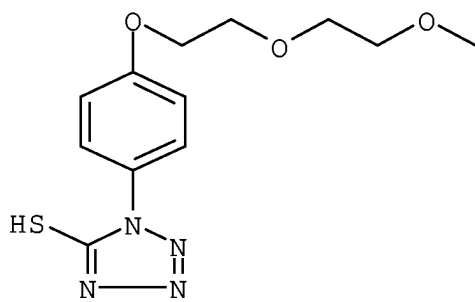


45

PMT-C7 =


50

55



PMT-C8 =


5

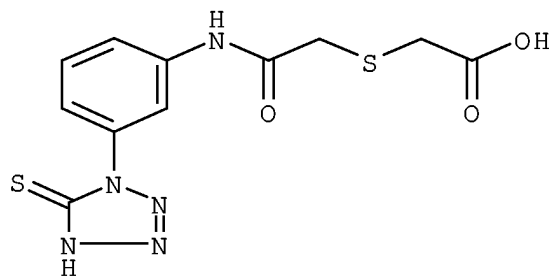

10

PMT-C9 =


15

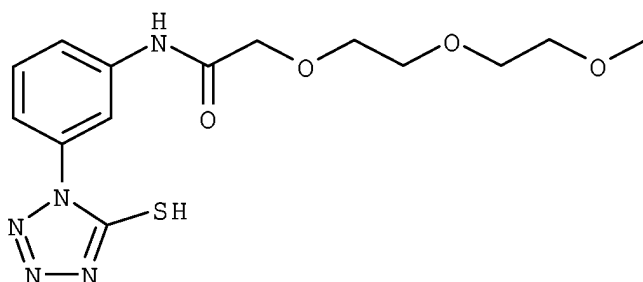

20

PMT-C10 =


25



30

PMT-C11 =

35

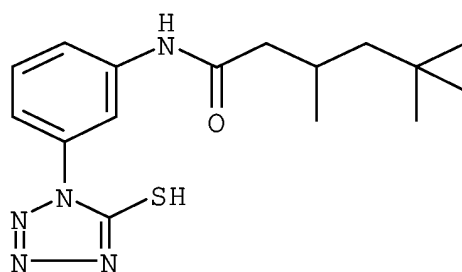

40

Ingredients in the protective layer:

45 **[0063]**

- ERCOL™ 48 20 = a polyvinylalcohol from ACETEX EUROPE;
 LEVASIL™ VP AC 4055 = a 15% aqueous dispersion of colloidal silica with acid groups predominantly neutralized with sodium ions and a specific surface area of 500 m²/g, from BAYER AG has been converted into the ammonium salt;
 50 ULTRAVON™ W = 75-85% concentrate of a sodium arylsulfonate from Ciba Geigy converted into acid form by passing through an ion exchange column;
 SYLOID™ 72 = a silica from Grace;
 SERVOXYL™ VPDZ 3/100 = a mono[isotridecyl polyglycoether (3 EO)] phosphate, from SERVO DELDEN B.V.;
 55 SERVOXYL™ VPAZ 100 = a mixture of monolauryl and dilauryl phosphate, from SERVO DELDEN B.V.;
 MICROACE TALC P3 = an Indian talc from NIPPON TALC;
 RILANIT™ GMS = a glycerine monotallow acid ester, from HENKEL AG
 TMOS = tetramethylorthosilicate hydrolyzed in the presence of methanesulfonic acid.

EP 1 420 292 A1

COMPARATIVE EXAMPLES 1 to 3

5 **[0064]** The substantially light-insensitive thermographic materials of COMPARATIVE EXAMPLES 1 to 3 were prepared by coating a dispersion with the following ingredients in 2-butanone onto a 175 μ m thick blue-pigmented polyethylene terephthalate support with CIELAB a*- and b*- values of -9.5 and -17.9 respectively subbed on the emulsion-coated side with subbing layer 01 giving layers after drying at 50°C for 1h in a drying cupboard with the compositions given in Table 1.

10

15

20

25

30

35

40

45

50

55

Table 1:

Comparative example nr.	stabilizer		AgBeh coverage [g/m ²]	BL 5 HP [g/m ²]	R01 mol% vs AgB	R02 mol% vs AgB	T01 mol% vs AgB	T02 mol% vs AgB	S01 mol% vs AgB	S02 mol% vs AgB	V L [g / m ²]	O i l [g / m ²]
	type	conc. mol% vs AgB										
1	S03	10	3.89	15.12	50	30	5	10	22	5	0.137	0.035
2	PMT-C1	10	3.89	15.12	50	30	5	10	22	5	0.137	0.035
3	PMT-C2	10	3.89	15.12	50	30	5	10	22	5	0.137	0.035

EP 1 420 292 A1

The thermosensitive elements were then coated with an aqueous composition with the following ingredients, which was adjusted to a pH of 3.8 with 1N nitric acid, to a wet layer thickness of 85 μm and then dried at 50°C for 15 minutes to produce a protective layer PRO-L with the composition:

5	ERCOL™ 48 20 =	2.1g/m ²
	LEVASIL™ VP AC 4055 =	1.05g/m ²
	ULTRAVON™ W =	0.075g/m ²
10	SYLOID™ 72 =	0.09 g/m ²
	SERVOXYL™ VPDZ 3/100 =	0.075g/m ²
15	SERVOXYL™ VPAZ 100 =	0.075g/m ²
	MICROACE TALC P3 =	0.045g/m ²
	RILANIT™ GMS =	0.15g/m ²
20	TMOS =	0.87g/m ² (assuming that the TMOS was completely converted to SiO ₂)

After coating the protective layer was hardened by heating the substantially light-insensitive thermographic material at 45°C for 7 days at a relative humidity of 70%.

25

Thermographic printing

[0065] The substantially light-insensitive thermographic recording materials of COMPARATIVE EXAMPLES 1 to 3 were printed using a DRYSTAR™ 4500 printer from AGFA-GEVAERT with a resolution of 508 dpi which had been modified to operate at a printing speed of 14 mm/s and a line-time of 3.5 ms instead of 7.1 ms and in which the 75 μm long (in the transport direction) and 50 μm wide thermal head resistors were power-modulated to produce different image densities.

30

[0066] The maximum densities of the images (D_{max}) measured through a visible filter with a MACBETH™ TR924 densitometer were all greater than 2.2.

35

Evaluation of thermographic properties

[0067] The image tone of fresh prints made with the substantially light-insensitive thermographic recording materials of COMPARATIVE EXAMPLES 1 to 3 was assessed on the basis of the L*, a* and b* CIELAB-values at optical densities, D, of 1.0 and 2.0 and the results given in Table 2.

40

Archivability tests:

[0068] Simulated long-term archivability tests were performed by heating prints made with the substantially light-insensitive thermographic recording materials of COMPARATIVE EXAMPLES 1 to 3 at 57°C in 34% relative humidity in the dark for 3 days and determining the shifts in CIELAB a*- and b*-values. The results are also given in Table 2.

45

Light-box tests:

[0069] Light-box tests were performed by exposing the substantially light-insensitive thermographic materials of COMPARATIVE EXAMPLES 1 to 3 for 3 days on top of the white PVC window of a specially constructed light-box placed in a Votsch conditioning cupboard set at 30°C and a relative humidity of 85%. Only a central area of the window 550mm long by 500mm wide was used for mounting the test materials to ensure uniform exposure.

50

[0070] The stainless steel light-box used was 650mm long, 600mm wide and 120mm high with an opening 610mm long and 560mm wide with a rim 10mm wide and 5mm deep round the opening, thereby forming a platform for a 5mm thick plate of white PVC 630mm long and 580mm wide, making the white PVC-plate flush with the top of the light-box and preventing light loss from the light-box other than through the white PVC-plate. This light-box was fitted with 9 Planilux? TLD 36W/54 fluorescent lamps 27mm in diameter mounted length-wise equidistantly from the two sides, with

55

EP 1 420 292 A1

the lamps positioned equidistantly to one another and the sides over the whole width of the light-box and with the tops of the fluorescent tubes 30mm below the bottom of the white PVC plate and 35mm below the materials being tested. The shifts in CIELAB a^* - and b^* -values at an optical density, D , of 1.0 and the shift in the CIELAB b^* -value were determined for COMPARATIVE EXAMPLES 1 to 3 and the results are also given in Table 2.

5

10

15

20

25

30

35

40

45

50

55

Table 2:

Comparative Example nr.	stabilizer type	CIELAB-values of prints with fresh film				Shift in CIELAB- values of prints after 3d/57°C/ 34%RH in dark		Shift of CIELAB-values of prints after 3d/30°C/85%RH light-box exposure		
		D = 1.0		D = 2.0		D = 1.0		D = 1.0		Dmin
		a*	b*	a*	b*	Δa^*	Δb^*	Δa^*	Δb^*	Δb^*
1	S03	-3.48	-5.92	-1.24	-4.77	+0.02	-0.81	-0.52	+2.57	+5.15
2	PMT-C1	-3.65	-4.23	-1.82	-3.64	-0.44	-0.82	-0.51	+2.80	+6.46
3	PMT-C2	-1.31	-5.59	+4.96	+1.56	-0.12	+0.57	-0.44	0	+3.12

EP 1 420 292 A1

COMPARATIVE EXAMPLES 4 to 10 and INVENTION EXAMPLES 1 to 14

[0071] The substantially light-insensitive thermographic materials of COMPARATIVE EXAMPLES 4 to 10 and INVENTION EXAMPLES 1 to 14 were prepared by coating a dispersion with the following ingredients in 2-butanone onto the support described for COMPARATIVE EXAMPLES 1 to 3 giving layers after drying at 85°C for 3 minutes in a drying cupboard with the compositions given in Table 3.

5

10

15

20

25

30

35

40

45

50

55

Table 3:

Comparative example nr.	stabilizer of present invention		AgBeh coverage [g/m ²]	BL5 H P [g/m ²]	R01 mol% vs AgB	R02 mol% vs AgB	T02 mol% vs AgB	S01 mol% vs AgB	S02 mol% vs AgB	VL [g/m ²]	Oil [g/m ²]
	type	mol% vs AgB									
4	S03	10	4.15	16.6	35	45	15	24	4.91	0.19	0.037
5	S03	10	4.15	16.6	35	45	15	24	4.91	0.19	0.037
6	PMT-C2	10	4.15	16.6	35	45	15	24	4.91	0.19	0.037
7	PMT-C3	10	4.15	16.6	35	45	15	24	4.91	0.19	0.037
8	PMT-C4	10	4.15	16.6	35	45	15	24	4.91	0.19	0.037
9	PMT-C5	10	4.15	16.6	35	45	15	24	4.91	0.19	0.037
10	PMT-C6	10	4.15	16.6	35	45	15	24	4.91 0.19	0.19	0.037
Invention example nr											
1	PMT-1	10	4.15	16.6	35	45	15	24	4.91	0.19	0.037
2	PMT-2	10	4.15	16.6	35	45	15	24	4.91	0.19	0.037
3	PMT-3	10	4.15	16.6	35	45	15	24	4.91	0.19	0.037
4	PMT-4	10	4.15	16.6	35	45	15	24	4.91	0.19	0.037

Table 3: (continued)

Comparative example nr.	stabilizer of present invention		AgBeh coverage [g/m ²]	BL5 H P [g/m ²]	R01 mol% vs AgB	R02 mol% vs AgB	T02 mol% vs AgB	S01 mol% vs AgB	S02 mol% vs AgB	VL [g/m ²]	Oil [g/m ²]
Invention example nr											
5	PMT-5	10	4.15	16.6	35	45	15	24	4.91	0.19	0.037
6	PMT-6	10	4.15	16.6	35	45	15	24	4.91	0.19	0.037
7	PMT-7	10	4.15	16.6	35	45	15	24	4.91	0.19	0.037
8	PMT-8	10	4.15	16.6	35	45	15	24	4.91	0.19	0.037
9	PMT-9	10	4.15	16.6	35	45	15	24	4.91	0.19	0.037
10	PMT-10	10	4.15	16.6	35	45	15	24	4.91	0.19	0.037
11	PMT-11	10	4.15	16.6	35	45	15	24	4.91	0.19	0.037
12	PMT-12	10	4.15	16.6	35	45	15	24	4.91	0.19	0.037
13	PMT-13	10	4.15	16.6	35	45	15	24	4.91	0.19	0.037
14	S04	10	4.15	16.6	35	45	15	24	4.91	0.19	0.037

EP 1 420 292 A1

The thermosensitive elements were then provided with a protective layer as described for COMPARATIVE EXAMPLES 1 to 3.

[0072] The thermographic properties of the substantially light-insensitive thermographic recording materials of COMPARATIVE EXAMPLES 4 to 10 and INVENTION EXAMPLES 1 to 14 were evaluated as described for COMPARATIVE EXAMPLES 1 to 3 except that the light-box tests for COMPARATIVE EXAMPLE 5 and INVENTION EXAMPLE 13, as indicated in Table 4, were carried out using a PLANILUX™ light-box DX 105x43 cm/EHR-AP with a maximum light intensity of ca. 4700 cd/m² having a length of 1235 cm, width of 62 cm and depth of 10 cm, a surface of 105 cm x 42 cm being used, and were exposed for 2 days under ambient conditions. The results are given in Table 4.

5

10

15

20

25

30

35

40

45

50

55

Table 4:

Comparative Example nr.	stabilizer type	CIELAB-values of prints with fresh film				Shift in CIELAB- values of prints after 3d/57°C/ 34%RH in dark		Shift of CIELAB- values of prints after 3d/30°C/ 85%RH light-box exposure		
		D = 1.0		D = 2.0		D = 1.0		D = 1.0		Dmin
		a*	b*	a*	b*	Δa^*	Δb^*	Δa^*	Δb^*	Δb^*
4	S03	-2.18	-9.19	+0.74	-6.64	-0.51	+2.71	0.0	+0.98	+2.73
5#	S03	-2.24	-8.82	+0.70	-6.59	-0.72	+1.95	-0.03	+0.26	+1.67
6	PMT-C2	+1.23	-6.78	+7.81	+3.0	-1.35	+10.8	-0.15	+0.14	+1.06
7	PMT-C3	-2.41	-6.51	-0.31	-4.47	+0.44	+5.77	+0.47	+5.58	+9.7
8	PMT-C4	+0.61	-2.49	+6.42	+1.64	+2.18	+14.31	+0.96	+7.23	+2.81
9	PMT-C5	-3.32	-6.14	-0.81	-2.91	-0.06	+4.48	-0.25	+9.84	+9.02
10	PMT-C6	-1.20	-4.56	+3.22	+0.75	+0.22	+10.73	-0.48	+6.99	+3.11
Invention Example										
1	PMT-1	-2.78	-7.59	+0.25	-5.54	-0.08	+5.58	-0.51	+0.86	+2.17
2	PMT-2	-3.14	-6.89	-0.67	-5.55	-0.69	+2.56	-0.23	+0.45	+0.56
3	PMT-3	-2.34	-8.15	+0.41	-6.29	-0.74	+3.95	+0.05	+1.17	+0.21
4	PMT-4	-2.60	-7.32	-0.35	-6.18	-1.04	+2.47	-0.05	-0.02	+1.04
5	PMT-5	-2.49	-8.25	+0.77	-5.58	-1.3	+2.26	-0.19	+0.49	+0.37
6	PMT-6	-3.49	-7.31	-1.03	-6.12	-0.45	+2.71	-0.01	-0.24	+0.40
7	PMT-7	-3.37	-6.94	-0.65	-5.58	-0.38	+1.77	-0.01	-0.44	+0.76
8	PMT-8	-3.25	-7.87	+0.05	-5.50	-0.29	+2.62	0	+0.27	+0.63
9	PMT-9	-1.40	-8.50	+3.99	-4.27	-0.94	+1.49	-0.38	+0.2	+0.87
10	PMT-10	-2.87	-6.93	+0.17	-5.09	-0.9	+0.74	-0.02	+0.31	+0.27
11	PMT-11	-2.99	-7.58	-0.52	-5.92	-0.72	+1.31	-0.10	+0.01	+1.13
12	PMT-12	-3.14	-6.70	-0.47	-5.12	-0.79	+1.09	+0.05	+0.51	+1.61

Table 4: (continued)

Comparative Example nr.	stabilizer type	CIELAB-values of prints with fresh film				Shift in CIELAB- values of prints after 3d/57°C/ 34%RH in dark		Shift of CIELAB- values of prints after 3d/30°C/ 85%RH light-box exposure		
Invention Example										
13#	PMT-13	-2.82	-9.13	+0.02	-6.66	-0.79	+0.66	-0.03	+1.01	+2.27
14	S04	-2.74	-8.01	+0.48	-5.26	-0.16	+3.27	-0.88	+2.62	+3.28

light-box exposure carried out for 2 days under ambient conditions in PLANILUX™ light-box DX

[0073] The results reported in Table 4 were generated with substantially light-insensitive thermographic recording materials with a different compositions from the substantially light-insensitive thermographic recording material on which the results reported in Table 2 were based, However, by comparing the results in the two table generated with substantially light-insensitive thermographic recording materials with the same stabilizer, the influence of this difference in composition can be estimated. The results for the substantially light-insensitive thermographic recording materials of COMPARATIVE EXAMPLE 1, COMPARATIVE EXAMPLE 4 and COMPARATIVE EXAMPLE 5 using stabilizer S03, benzotriazole, and those for the substantially light-insensitive thermographic recording materials of COMPARATIVE EXAMPLE 3 and COMPARATIVE EXAMPLE 6 using stabilizer PMT-C2 are given in Table 5.

5

10

15

20

25

30

35

40

45

50

55

Table 5:

Comparative Example nr.	stabilizer type	CIELAB-values of prints with fresh film				Shift in CIELAB- values of prints after 3d/57°C/ 34%RH in dark		Shift of CIELAB- values of prints after 3d/30°C/ 85%RH light-box exposure		
		D = 1.0		D = 2.0		D = 1.0		D = 1.0		Dmin
		a*	b*	a*	b*	Δa^*	Δb^*	Δa^*	Δb^*	Δb^*
1	S03	-3.48	-5.92	-1.24	-4.77	+0.02	-0.81	-0.52	+2.57	+5.15
4	S03	-2.18	-9.19	+0.74	-6.64	-0.51	+2.71	0.0	+0.98	+2.73
5	S03	-2.24	-8.82	+0.70	-6.59	-0.72	+1.95	-0.03#	+0.26#	+1.67#
3	PMT-C2	-1.31	-5.59	+4.96	+1.56	-0.12	+0.57	-0.44	0	+3.12
6	PMT-C2	+1.23	-6.78	+7.81	+3.0	-1.35	+10.8	-0.15	+0.14	+1.06

2d/ambient conditions instead of 3d/30°C/85%RH

[0074] This comparison shows that the alternative light-box test used for COMPARATIVE EXAMPLE 5 and INVENTION EXAMPLE 13 gave comparable shifts in CIELAB a*- and b*-values to those obtained with the standard light-box test in the case of substantially light-insensitive thermographic recording materials containing 10 mol% of S03 (benzotriazole) and that the composition of substantially light-insensitive thermographic recording material used for COMPARATIVE EXAMPLES 4 to 10 and INVENTION EXAMPLES 1 to 14 gives:

- more positive a*-values at D = 1.0 and 2.0;
- more negative b*-values at D = 1.0;
- higher shifts in CIELAB values after 3d/57°C/34%RH in the dark; and
- ca. 2.0 lower shifts in CIELAB b*-values after light-box exposure;

compared with the composition of substantially light-insensitive thermographic recording materials used for COMPARATIVE EXAMPLES 1 to 3. Bearing this information in mind the results reported in Tables 2 and 4 can be considered as a whole.

[0075] In the CIELAB-system a negative CIELAB a*-value indicates a greenish image-tone becoming greener as a* becomes more negative, a positive a*-value indicating a reddish image-tone becoming redder as a* becomes more positive. A negative CIELAB b*-value indicates a bluish tone which becomes increasingly bluer as b* becomes more negative and a positive b*-value indicates a yellowish image-tone becoming more yellow as b* becomes more positive. In terms of the visual perception of an image as a whole, the image tone of elements of the image with a density of 1.0 have a stronger effect than the image tone of elements with lower or higher optical density.

[0076] In evaluating image tone the image tone of the SCOPIX™ LT2B silver halide emulsion laser medical hardcopy film from AGFA-GEVAERT has been used as a benchmark:

D = 1.0		D = 2.0	
CIELAB a*-value	CIELAB b*-value	CIELAB a*-value	CIELAB b*-value
-4.40	-7.5	-2.39	-3.30

[0077] If the results for substantially light-insensitive thermographic recording materials containing 1-phenyl-5-mercaptotetrazoles (PMT's) reported in Tables 2 and 4 are considered as a whole, the following conclusions can be drawn:

- the substantially light-insensitive thermographic recording materials containing PMT-C2 exhibited prohibitively positive CIELAB a*-values, although exhibiting acceptable stability to light in the light-box test;
- the substantially light-insensitive thermographic recording materials containing PMT-C1 and PMT-C3 to PMT-C6 all exhibited poor stability to light in the light-box test as shown by high shifts in CIELAB b*-values at D = 1.0 and Dmin; and
- the substantially light-insensitive thermographic recording materials containing PMT-1 to PMT-13 all exhibited acceptable image tone and acceptable stability to light.

INVENTION EXAMPLES 15 and 16

[0078] The substantially light-insensitive thermographic materials of INVENTION EXAMPLES 15 and 16 in which S03, benzotriazole, was used in the thermosensitive element in combination with various 1-phenyl-5-mercapto-tetrazole stabilizers were prepared by coating a dispersion with the following ingredients in 2-butanone onto a 175µm thick blue-pigmented polyethylene terephthalate support with CIELAB a*- and b*- values of -9.5 and -17.9 respectively subbed on the emulsion-coated side with subbing layer 02 giving layers after drying at 50°C for 1h in a drying cupboard with the compositions given in Table 6.

Table 6:

Invention example nr.	invention stabilizer		AgBeh coverage [g/m ²]	BL5H P [g/ m ²]	R01 mol% vs AgB	R02 mol% vs AgB	T02 mol% vs AgB	S01 mol% vs AgB	S02 mol% vs AgB	S03 mol% vs AgB	VL [g/ m ²]	Oil [g/ m ²]
	type	mol% vs AgB										
15	PMT-1	3	3.94	15.52	35	45	15	27	5	3	0.175	0.033
16	PMT-14	3	3.94	15.52	35	45	15	27	5	3	0.175	0.033

[0079] The thermosensitive elements were then provided with a protective layer as described for COMPARATIVE EXAMPLES 1 to 3.

[0080] The thermographic properties of the substantially light-insensitive thermographic recording materials of INVENTION EXAMPLES 15 and 16 were evaluated as described above for COMPARATIVE EXAMPLES 1 to 3. The results are given in Table 7.

Table 7:

Comparative Example nr.	stabilizer type	CIELAB-values of prints with fresh film				Shift in CIELAB-values of prints after 3d/57°C/34%RH in dark		Shift of CIELAB-values of prints after 3d/30°C/85%RH light-box exposure		
		D = 1.0		D = 2.0		D = 1.0		D = 1.0		Dmin
		a*	b*	a*	b*	Δa^*	Δb^*	Δa^*	Δb^*	Δb^*
15	PMT-1	-3.0	-7.8	-0.4	-5.7	+0.3	+5.2	-0.3	+0.8	+2.4
16	PMT-14	-3.2	-6.9	-0.8	-5.3	+0.3	+4.0	-0.4	+0.7	+2.9

[0081] The results of Table 7 show that the 1-phenyl-5-mercaptotetrazole compounds, according to the present invention, upon incorporation into the thermosensitive elements of substantially light-insensitive thermographic recording materials also provide acceptable image tone in fresh materials and acceptable stability in light-box tests when used in combination with S03, benzotriazole.

INVENTION EXAMPLES 17 to 21

[0082] The substantially light-insensitive thermographic materials of INVENTION EXAMPLES 17 to 21 in which S03, benzotriazole, was used in the thermosensitive element in combination with various 1-phenyl-5-mercapto-tetrazole stabilizers were prepared by coating a dispersion with the following ingredients in 2-butanone onto a 175 μ m thick blue-pigmented polyethylene terephthalate support with CIELAB a*- and b*- values of -9.5 and -17.9 respectively subbed on the emulsion-coated side with subbing layer 02 giving layers after drying at 50°C for 1h in a drying cupboard with the compositions given in Table 8.

Table 8:

Invention example nr.	invention stabilizer		AgBeh coverage [g/m ²]	BL5H P [g/m ²]	R01 mol% vs AgB	R02 mol% vs AgB	T02 mol% vs AgB	S01 mol% vs AgB	S02 mol% vs AgB	S03 mol% vs AgB	VL [g/m ²]	Oil [g/m ²]
	type	mol% vs AgB										
17	PMT-1	3	3.94	15.52	35	45	15	27	5	3	0.175	0.033
18	PMT-9	3	3.94	15.52	35	45	15	27	5	3	0.175	0.033
19	PMT-10	3	3.94	15.52	35	45	15	27	5	3	0.175	0.033
20	PMT-11	3	3.94	15.52	35	45	15	27	5	3	0.175	0.033
21	PMT-12	3	3.94	15.52	35	45	15	27	5	3	0.175	0.033

[0083] The thermosensitive elements were then provided with a protective layer as described for COMPARATIVE EXAMPLES 1 to 3.

[0084] The thermographic properties of the substantially light-insensitive thermographic recording materials of INVENTION EXAMPLES 17 to 21 were evaluated as described above for COMPARATIVE EXAMPLES 1 to 3. The results are given in Table 9.

Table 9:


Comparative Example nr.	stabilizer type	CIELAB-values of prints with fresh film				Shift in CIELAB-values of prints after 3d/57°C/34%RH in dark		Shift of CIELAB-values of prints after 3d/30°C/85%RH light-box exposure		
		D = 1.0		D = 2.0		D = 1.0		D = 1.0		Dmin
		a*	b*	a*	b*	Δa^*	Δb^*	Δa^*	Δb^*	Δb^*
17	PMT-1	-3.2	-8.9	-0.5	-6.3	+0.2	+6.8	-0.4	+2.9	+2.2
18	PMT-9	-3.1	-8.0	-0.7	-6.1	+0.2	+5.1	-0.4	+2.5	+2.7
19	PMT-10	-2.9	-9.1	+0.3	-6.2	+0.3	+6.6	-0.6	+2.1	+2.4
20	PMT-11	-3.3	-9.1	-0.7	-6.7	+0.4	+5.7	-0.4	+2.2	+2.2
21	PMT-12	-3.3	-8.5	-0.9	-6.3	+0.2	+5.7	-0.3	+2.0	+3.0

[0085] The results of Table 9 show that the 1-phenyl-5-mercaptotetrazole compounds, according to the present invention, upon incorporation into the thermosensitive elements of substantially light-insensitive thermographic recording materials also provide acceptable image tone in fresh materials and acceptable stability in light-box tests when used in combination with S03, benzotriazole.

The present invention may include any feature or combination of features disclosed herein either implicitly or explicitly or any generalisation thereof irrespective of whether it relates to the presently claimed invention. In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention.

Claims


1. A substantially light-insensitive black and white monosheet thermographic recording material comprising a support and a thermosensitive element, said thermosensitive element containing a substantially light-insensitive organic silver salt, an organic reducing agent therefor in thermal working relationship therewith, a binder and at least one stabilizer selected from the group consisting of 1-phenyl-5-mercaptotetrazole compounds in which said phenyl group is substituted with a substituent containing an optionally substituted aryl group; and



2. Substantially light-insensitive black and white monosheet thermographic recording material according to claim 1, wherein said substituent for said phenyl group is selected from the group consisting of -NHCO-phenyl, -NHCO-(1-naphthyl), -NHCO-(2-naphthyl), -NHCONH-phenyl, -NHSO₂-phenyl, -NHSO₂-(1-naphthyl), -NHSO₂-(2-naphthyl), -SO₂NH-phenyl, -CONH-phenyl, -CONH-(1-naphthyl), -CONH-(2-naphthyl), -NH-


CO-(2-thienyl) and -NHCONHCO-phenyl groups.

3. Substantially light-insensitive black and white monosheet thermographic recording material according to claim 1 or 2, wherein said optional substituent for said aryl group is selected from the group consisting of halogen atoms, ester groups, -OCOO-alkyl groups, -NHCOO-alkyl groups, -NHOC-alkyl groups, -CONH-alkyl groups, -S-alkyl groups and mercapto, alkyl, alkoxy, nitrile, acyl and nitro groups.
4. Substantially light-insensitive black and white monosheet thermographic recording material according to any of the preceding claims, wherein said 1-phenyl-5-mercaptotetrazole compound in which said phenyl group is substituted with a substituent containing an optionally substituted aryl group is represented by formula (I):



wherein R¹ is -NH-(C=O)-Ar, -NH-(C=O)-NH-Ar, -NH-(C=O)-O-Ar, -O-(C=O)-NH-Ar, -(C=O)-NH-Ar, -NH-SO₂-Ar, -O-(C=O)-Ar, -O-(C=O)-O-Ar, -(C=O)-Ar, -(C=O)-O-Ar, -SO₂-Ar, -SO₂-NH-Ar, or -Ar; and Ar is an optionally substituted aryl or heteroaryl group.


5. Substantially light-insensitive black and white monosheet thermographic recording material according to any of the preceding claims, wherein said 1-phenyl-5-mercaptotetrazole compound in which said phenyl group is substituted with a substituent containing an optionally substituted aryl group is represented by formula (II):




wherein R² is -NH-(C=O)-Ar, -NH-(C=O)-NH-Ar, -NH-(C=O)-O-Ar, -O-(C=O)-NH-Ar, -(C=O)-NH-Ar, -NH-SO₂-Ar, -O-(C=O)-Ar, -O-(C=O)-O-Ar, -(C=O)-Ar, -(C=O)-O-Ar, -SO₂-Ar, -SO₂-NH-Ar, or -Ar; and Ar is an optionally substituted aryl or heteroaryl group.

6. Substantially light-insensitive black and white monosheet thermographic recording material according to claim 4 or 5, wherein said aryl or heteroaryl group is substituted
7. Substantially light-insensitive black and white monosheet thermographic recording material according any of the preceding claims, wherein said at least stabilizer is selected from the group consisting of:

5

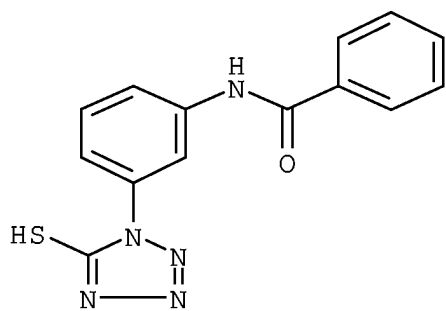


10

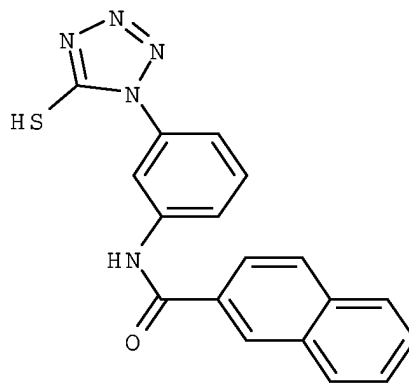


15

20

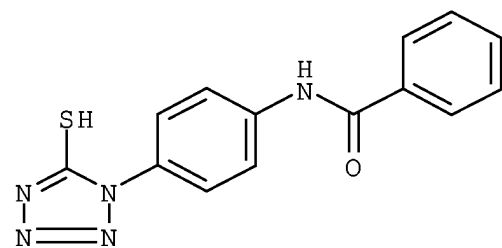


25

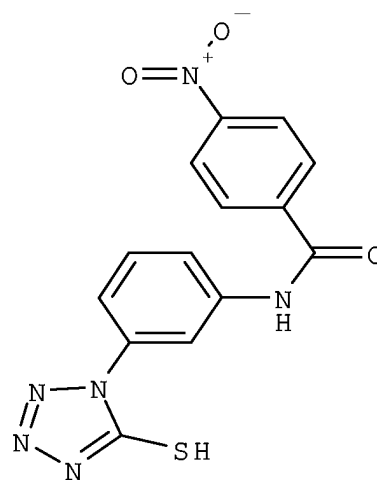


30

35

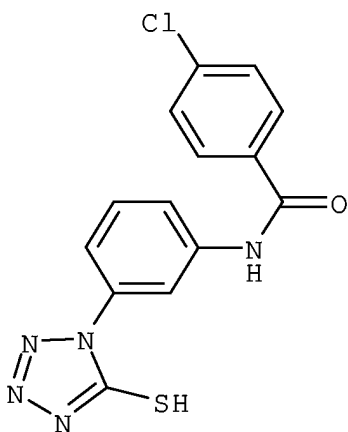

40

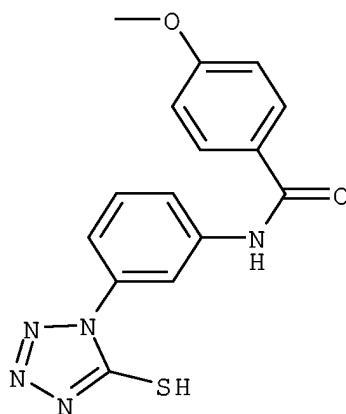


45

50

55


5

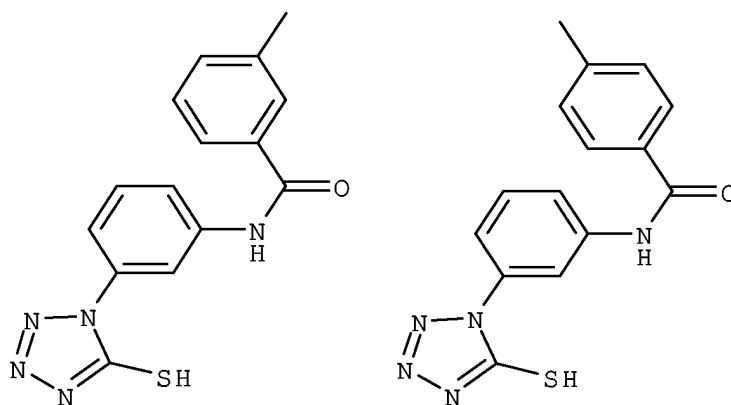

10


15

20

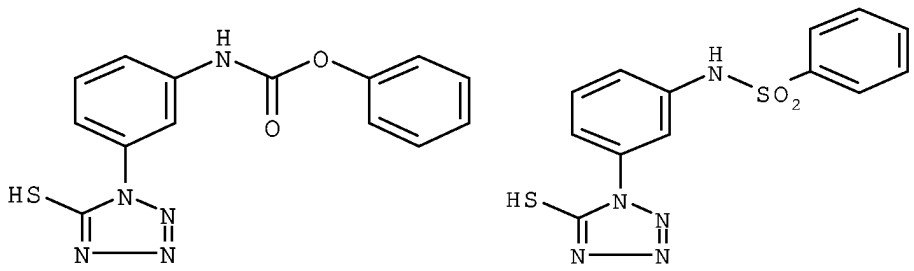

25

30

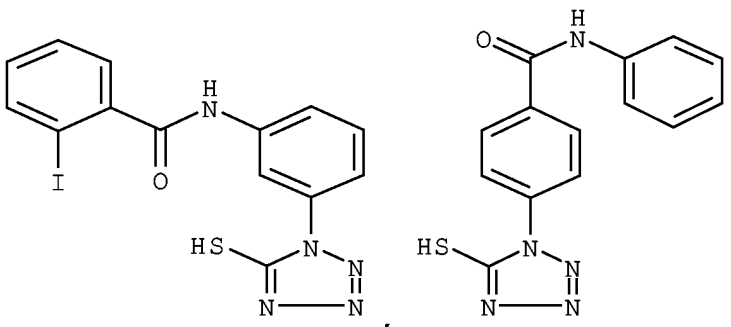


35

40

and

45

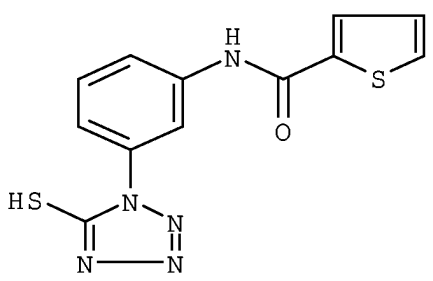

50

55

8. Substantially light-insensitive black and white monosheet thermographic recording material according to any of the preceding claims, wherein said thermosensitive element further comprises an optionally substituted benzotriazole.



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 10 4028

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	US 2002/155401 A1 (YAMAGUCHI) 24 October 2002 (2002-10-24) * page 12, right-hand column * * page 13, left-hand column; examples I.5, I.6 * * page 13, right-hand column; example I.11 * * page 18, right-hand column; examples I.83-I.85 * * page 31; example 100 * * page 63, left-hand column; table * ---	1-6,8	G03C1/498 B41M5/30 B41M5/32
Y	US 2001/038977 A1 (KATOH) 8 November 2001 (2001-11-08) * page 16; example 59 * * page 31, paragraph 227 * * claim 1 * ---	1,2,4-6,8	
D,Y	EP 0 218 385 A (KONISHIROKU) 15 April 1987 (1987-04-15) * page 18; example A.25 * * page 20; examples A.40, A.43, A.44 * * page 60; examples B.4-B.6 * * page 64; example B.29 * * claim 1 * ---	1-4,6,8	TECHNICAL FIELDS SEARCHED (Int.Cl.7) G03C B41M
D,Y	EP 0 256 820 A (KONISHIROKU) 24 February 1988 (1988-02-24) * page 11; example A.8 * * page 22, line 1 - line 19 * * page 22, line 28 - line 33 * * page 27, line 35 - page 28, line 33 * * page 35; example B.31 * * page 79, line 12 - line 14; claim 1 * --- -/--	1-4,6,8	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 2 December 2003	Examiner Magrizos, S
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 10 4028

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
D,Y	EP 0 295 507 A (AGFA-GEVAERT) 21 December 1988 (1988-12-21) * page 11; example SH.14 * * claim 1 * ---	1,2,4-6, 8	
D,Y	EP 0 838 722 A (FUJI) 29 April 1998 (1998-04-29) * page 12; example 6 * * page 13; example 12 * * page 19; examples 41,42 * * page 27, line 7; claim 1 * ---	1,3-6,8	
Y	EP 0 933 672 A (KONICA) 4 August 1999 (1999-08-04) * page 16; example P.9 * * page 17; example P.15 * * claim 1 * ---	1,4-6	
Y	EP 0 897 130 A (FUJI) 17 February 1999 (1999-02-17) * abstract * * claims 1,3 * ---	1-6,8	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Y	US 5 686 228 A (MURRAY ET AL.) 11 November 1997 (1997-11-11) * column 1, line 11 - line 14; claims 1,14 * ---	1-6,8	
Y	US 4 201 582 A (WHITE) 6 May 1980 (1980-05-06) * claims 1,18 * -----	1-6,8	
The present search report has been drawn up for all claims			
Place of search	Date of completion of the search	Examiner	
THE HAGUE	2 December 2003	Magrizos, S	
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 03.82 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 03 10 4028

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-12-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002155401 A1	24-10-2002	JP 2002287294 A	03-10-2002
US 2001038977 A1	08-11-2001	JP 2001281792 A	10-10-2001
EP 218385 A	15-04-1987	JP 1794980 C	28-10-1993
		JP 4077892 B	09-12-1992
		JP 62065035 A	24-03-1987
		JP 1746095 C	25-03-1993
		JP 4027538 B	12-05-1992
		JP 62078554 A	10-04-1987
		JP 1797037 C	28-10-1993
		JP 5002220 B	12-01-1993
		JP 62090647 A	25-04-1987
		JP 5088818 B	24-12-1993
		JP 62121452 A	02-06-1987
		JP 6001364 B	05-01-1994
		JP 62123456 A	04-06-1987
		DE 3686228 D1	03-09-1992
		DE 3686228 T3	28-08-1997
		EP 0218385 A2	15-04-1987
		EP 0236508 A1	16-09-1987
		WO 8701824 A1	26-03-1987
		US 4837141 A	06-06-1989
		US 5064753 A	12-11-1991
EP 256820 A	24-02-1988	DE 3780725 D1	03-09-1992
		DE 3780725 T2	18-03-1993
		EP 0256820 A2	24-02-1988
		US 5032499 A	16-07-1991
		JP 63153539 A	25-06-1988
EP 295507 A	21-12-1988	DE 3719880 A1	05-01-1989
		EP 0295507 A2	21-12-1988
		JP 1004740 A	09-01-1989
		US 4840871 A	20-06-1989
EP 838722 A	29-04-1998	JP 10120928 A	12-05-1998
		EP 0838722 A2	29-04-1998
		US 6120983 A	19-09-2000
EP 933672 A	04-08-1999	EP 0933672 A1	04-08-1999
		JP 11316436 A	16-11-1999
		US 2001018169 A1	30-08-2001
EP 897130 A	17-02-1999	JP 11119372 A	30-04-1999
		EP 0897130 A1	17-02-1999

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 03 10 4028

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-12-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 897130 A		JP 2003075959 A	12-03-2003
		US 6586170 B1	01-07-2003

US 5686228 A	11-11-1997	AU 3504797 A	20-02-1998
		CA 2258646 A1	05-02-1998
		DE 69702859 D1	21-09-2000
		DE 69702859 T2	10-05-2001
		EP 0914628 A1	12-05-1999
		JP 2000515995 T	28-11-2000
		WO 9804958 A1	05-02-1998

US 4201582 A	06-05-1980	BE 828685 A1	03-11-1975
		CA 1043617 A1	05-12-1978
		DE 2519585 A1	06-11-1975
		FR 2269736 A1	28-11-1975
		GB 1501005 A	15-02-1978
		JP 50151138 A	04-12-1975
