



(11) **EP 1 427 237 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

(15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see
Claims DE 1
Claims EN 2, 19
Claims FR 18

(51) Int Cl.:
H04W 36/12 (2009.01)

(86) International application number:
PCT/JP2002/009369

(87) International publication number:
WO 2003/026336 (27.03.2003 Gazette 2003/13)

(48) Corrigendum issued on:
01.09.2010 Bulletin 2010/35

(45) Date of publication and mention
of the grant of the patent:
28.04.2010 Bulletin 2010/17

(21) Application number: **02765515.8**

(22) Date of filing: **12.09.2002**

(54) **Handover control apparatus, radio terminal device, edge router, router, mobile communication system and handover control method**

Weiterreichungssteuervorrichtung, Funkendgerät, Edge-Router, Router, Mobilkommunikationssystem und Weiterreichungssteuerverfahren

Appareil de commande de transfert, dispositif de terminal radio, routeur de frontière, routeur, système de communication mobile, et procédé de commande de transfert

(84) Designated Contracting States:
DE GB

(30) Priority: **12.09.2001 JP 2001277127**

(43) Date of publication of application:
09.06.2004 Bulletin 2004/24

(73) Proprietor: **NTT DoCoMo, Inc.**
Tokyo 100-6150 (JP)

(72) Inventors:
• **IGARASHI, Ken**
Tokyo 100-6150 (JP)

• **IWASAKI, Atsushi**
Tokyo 100-6150 (JP)
• **ISOBE, Shinichi**
Tokyo 100-6150 (JP)

(74) Representative: **Viering, Jentschura & Partner**
Postfach 22 14 43
80504 München (DE)

(56) References cited:
EP-A- 0 993 155 EP-A- 1 011 243
WO-A-02/19615 WO-A2-00/11878
JP-A- 11 055 721 JP-A- 2000 078 165
JP-A- 2000 324 169 JP-A- 2000 341 330
JP-A- 2001 045 534

EP 1 427 237 B9

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] The present invention relates to a handover control apparatus, a mobile communication system, and a handover control method configured to specify a relay router to be provided with the RR (Regional Registration) function, out of CORs (Cross Over Routers) under which edge routers provided in respective base stations for radio communication with radio terminal unit such as cellular phones and the like are connected, so as to preliminarily route an invariable path even after a handover, thereby decreasing a time period of the handover.

Background Art

[0002] Fig. 4 is a block diagram for explaining the general handover operation in the conventional mobile communication systems.

[0003] This mobile communication system shown in Fig. 4 is comprised of a plurality of base stations 16, 18, 20, 22 for radio communication with radio terminal units 12, 14 such as cellular phones, a plurality of routers 24, 26 connected above each of the base stations 16-22, a gateway device 28 connected above each of the routers 24, 26, and a CN (Correspondent Node) 30 which is a communication terminal unit of a correspondent party connected through a communication network to the gateway device 28.

[0004] In this configuration, where there is an overlap zone, i.e., where radio zones overlap each other as in the case of a radio zone 32 formed by radio waves of the base station 16 and a radio zone 34 of the base station 18, the radio terminal unit 12 presently under communication with the base station 16 evaluates the condition of radio waves from the destination base station 18 and initiates a handover transaction.

[0005] First, the radio terminal unit 12 transmits a movement notification message, as indicated by an arrow Y1, through the destination base station 18, router 24, and gateway device 28 to the CN 30 of the communication correspondent. In response thereto the CN 30 transmits an acknowledgment as indicated by an arrow Y2 and the radio terminal unit receives the acknowledgment and thereafter receives data packets transmitted from the CN 30.

[0006] On the other hand, where there is no overlap zone, as in the case of a radio zone 36 of the base station 20 and a radio zone 38 of the base station 22, the radio terminal unit 14 first detects fade away of a radio link with the base station 20 where it is presently registered, and thereafter initiates a handover transaction.

[0007] First, the radio terminal unit 14 transmits a movement notification message, as indicated by an arrow Y3, through the destination base station 22, router 26, and gateway device 28 to the CN 30 of the communication correspondent. In response thereto the CN 30

transmits an acknowledgment as indicated by an arrow Y4, and the radio terminal unit receives the acknowledgment and then receives data packets transmitted from the CN 30 of the communication correspondent.

5 **[0008]** In the case where there exists an overlap zone as described above, if the handover transaction takes a long time and results in failure in handover within the overlap zone, there will occur a short break of communication because of failure in update of the path to the destination. In the case where there is no overlap zone, 10 if the handover transaction takes a long time after the movement to the new base station 22, there will occur a short break of communication as long as the time taken. In either case, a significant element for improvement in 15 performance is to keep the time for the handover transaction as short as possible. The time period of the handover transaction is largely dependent upon the time for detection of the new base station and the time for the update of the path to the communication correspondent.

20 **[0009]** Therefore, IETF presents the following technique of reducing the time period of the handover transaction, as shown in Fig. 5: relay routers 24a, 26a are introduced into the domain and movement under command of the relay routers 24a, 26a is supported by 25 change of location registration in the relay routers 24a, 26a.

[0010] The operation in this case will be described. First, as indicated by an arrow Y10, suppose the radio terminal unit 12 has moved from the edge router 16a to the edge router 18a. In this case, since the previous and new edge routers 16a, 18a both are connected to the relay router 24a, the movement is one under command of the relay router 24a and thus the radio terminal unit 12 transmits a location update request to the relay router 24a as indicated by an arrow Y11. 30

35 **[0011]** In response thereto, the relay router 24a performs path rerouting. Namely, the relay router 24a performs path rerouting from a path 42 of connection between the relay router 24a and the edge router 16a to a path 44 of connection between the relay router 24a and the edge router 18a. At this time, no change is made in a path 46 of connection between the CN 30 and the relay router 24a. 40

45 **[0012]** Next, suppose the radio terminal unit 12 has moved from the edge router 18a to the edge router 20a as indicated by an arrow Y12. In this case, since there is the difference between the relay routers connected to the previous edge router 18a and to the new edge router 20a, i.e., between 24a and 26a, the radio terminal unit 12 notifies the CN 30 of the communication correspondent of the change of the relay router to 26a, as indicated by an arrow Y13. 50

[0013] In response thereto, the path from the CN 30 through the gateway device 28 to the relay router is rerouted from the path of connection between the CN 30 and the relay router 24a to a path 48 of connection between the CN 30 and the relay router 26a, and a path from the relay router 26a to the radio terminal unit 12 has 55

to be a path 50 of connection from the relay router 26a through the edge router 20a to the radio terminal unit 12. Namely, all the paths from the CN 30 to the radio terminal unit 12 need to be rerouted.

[0014] In the case of the conventional method, as described above, only when the radio terminal unit moves between the edge routers 16a, 18a under the same relay router 24a, there is no need for notification of update of location registration to the CN 30 of the communication correspondent and the time necessary for the handover transaction can be reduced thereby.

[0015] EP 1 011 243 A1 discloses a single phase local mobility scheme for wireless access to packet-based networks, wherein a mobile device initially powers up while attached to a base station. The mobile device acquires an IP address and initiates a power up path setup message to a domain router which adds routing table entries equating a router interface with its IP address in the domain root router and each intermediate router. Assuming that the mobile device alters its point of attachment within the same domain to another base station, and packets for the mobile device are to be routed via the domain root router through another router and the other base station to the mobile device, the routing table entries for the mobile device's IP address stored at the said base stations and at the other router require updating but no change is required for the routing table entry at the domain root router. This is because the domain root router forwards packets with the mobile device's IP address to the other router over the same interface regardless of whether ultimate delivery of the packet to the mobile device is via the one or the other base station.

Disclosure of the Invention

[0016] In the above conventional handover control method, when the radio terminal unit 12 moves between the relay routers 24a, 26a, a location change notification has to be sent to the CN 30 of the communication correspondent at the time of handover after all and this poses the problem of increase in the time period of the handover transaction.

[0017] An object of the present invention is therefore to provide a handover control apparatus, a radio terminal unit, an edge router, a router, a mobile communication system, and a handover control method capable of readily decreasing the handover transaction time by obviating the need for the path rerouting up to CN 30 of the communication correspondent at the time of handover.

[0018] In order to solve the above problem, a handover control apparatus of the present invention is a handover control apparatus adapted to control handover of a radio terminal unit between edge routers which are provided in respective base stations for radio communication with radio terminal unit and to which routers are connected above in a hierarchical structure, the handover control apparatus comprising: control means adapted to specify a relay router out of CORs where all paths from an edge

router before movement of the radio terminal unit and from every edge router as a candidate for a destination of the movement to a communication correspondent intersect, wherein each of said edge routers stores information about edge routers mounted in base stations forming radio zones adjacent to a radio zone of a base station in which the edge router in question is mounted, and information about superordinate routers to which the adjacent edge routers and the edge router in question are connected, and wherein said control means specifies a router where all the paths intersect, as a Cross Over Router on the basis of the stored information.

[0019] In order to solve the above problem, a mobile communication system of the present invention is a mobile communication system adapted to implement handover of a radio terminal unit between base stations, the mobile communication system comprising: routers connected above the base stations in a hierarchical structure and configured to perform relaying of data to the base stations; and edge routers provided in the respective base stations, each edge router being configured to specify a relay router out of CORs where all paths from a base station before movement of the radio terminal unit and from every base station as a candidate for a destination of the movement to a communication correspondent intersect, wherein each of said edge routers stores information about edge routers mounted in base stations forming radio zones adjacent to a radio zone of a base station in which the edge router in question is mounted, and information about superordinate routers to which the adjacent edge routers and the edge router in question are connected, and wherein a router where all the paths intersect is specified as a COR on the basis of the stored information.

[0020] In order to solve the above problem, a handover control method of the present invention is a handover control method of controlling handover of a radio terminal unit between edge routers which are provided in respective base stations for radio communication with radio terminal unit and to which routers are connected above in a hierarchical structure, the handover control method comprising: a control step of specifying a relay router out of CORs where all paths from an edge router before movement of the radio terminal unit and from every edge router as a candidate for a destination of the movement to a communication correspondent intersect. The method further comprises a storage step wherein each of said edge routers stores information about edge routers mounted in base stations forming radio zones adjacent to a radio zone of a base station in which the edge router in question is mounted, and information about superordinate routers to which the adjacent edge routers and the edge router in question are connected. Said control step is to specify a router where all the paths intersect, as a COR on the basis of the information stored in the storage step.

[0021] This configuration makes it feasible to specify the common relay router to the edge router currently un-

der connection with the radio terminal unit and every edge router as a destination candidate, whereby the handover can be performed by only sending the location change notification to the thus specified relay router. Namely, the handover can be performed without sending the location change notification up to the communication correspondent as before, so that the time period of the handover transaction can be readily reduced.

Brief Description of the Drawings

[0022]

Fig. 1 is a block diagram showing a configuration of a mobile communication system according to an embodiment.

Fig. 2 is a block diagram for explaining an operation of handover in the mobile communication system according to the embodiment.

Fig. 3 is a block diagram for explaining another operation of handover in the mobile communication system according to the embodiment.

Fig. 4 is a block for explaining the general handover operation in the conventional mobile communication system.

[0023] Fig. 5 is another block diagram for explaining the handover operation for decrease of the handover transaction time in the conventional mobile communication system.

Best Mode for Carrying out the Invention

[0024] An embodiment of the present invention will be described below in detail with reference to the drawings.

[0025] Fig. 1 is a block diagram showing a configuration of a mobile communication system according to an embodiment of the present invention.

[0026] This mobile communication system shown in Fig. 1 is comprised of a plurality of edge routers 102, 104, 106, 108, 110, 112, 114, 116 provided in respective base stations for radio communication with radio terminal unit 100 such as a cellular phone or the like, a plurality of routers 118, 120, 122, 124 connected above the edge routers 102-116, routers 126, 128 each connected above these routers 118-124, a gateway device 130 connected above each of the routers 126, 128, and a CN 132 which is a communication terminal unit of a correspondent party connected through a communication network to the gateway device 130.

[0027] Each of the edge routers 102-116 stores information about locations of edge routers mounted in base stations forming radio zones adjacent to a radio zone of a base station in which the edge router in question is mounted, and information about locations of superordinate routers to which these adjacent edge routers and the edge router in question are connected.

[0028] The features of the present embodiment in this

configuration will be described below. For example, supposing the radio terminal unit 100 presently connected to the edge router 102 moves, it is expected from the location information stored in the edge router 102 before the movement that the edge router 104 will be a candidate for the destination of the movement and the radio terminal unit 100 will move to the edge router 104.

[0029] In this case, CORs are the superordinate routers 118 and 126 and gateway device 130 connected to the destination candidate edge router 104. Here a COR is a router under which all edge routers as potential handover destinations are located, and router on a path to the communication correspondent. In this case, the gateway device 130 can also be considered to be one router.

[0030] When there are a plurality of CORs as candidates as in this case, a relay router is specified out of the above CORs by making use of information about applications used by the user, the load on the network, radio technology, and so on. Here the relay router is a router as an origin of switching of path. Namely, location information of a radio terminal unit under command is registered in the relay router and data addressed to the radio terminal unit is tunneled at the relay router to be forwarded to the radio terminal unit.

[0031] If the information about the applications used by the user, the load on the network, the radio technology, etc. as described above is not available, a location update message can be received faster by locating the RR function in the COR closer to the radio terminal unit 100 (i.e., by determining the COR closer to the radio terminal unit 100 as a relay router). In this case, therefore, the router 118 being the COR closer to the radio terminal unit is specified as a relay router, out of the CORs where all the paths from the edge router 102 being the edge router before the movement of the radio terminal unit 100 and from the edge router 104 as a destination candidate to the CN 132 being the terminal unit of the correspondent party intersect, and the RR function is located in the router 118. Here the RR function (Regional Registration function) is a function of recording location information of radio terminal unit and forwarding data to a specific radio terminal unit on the basis of the location information.

[0032] In the next case where the radio terminal unit 100 is connected to the edge router 104, destination candidates are the edge routers 102 and 106. In this case, since the router 118 is connected above the edge router 102 and the router 120 is connected above the edge router 106, a common router connected to the both edge routers 102 and 106 is a much higher router 126. In this case, the router 126 and gateway device 130 are CORs where all the paths from the edge routers 102 and 106 to the CN 132 of the correspondent terminal unit intersect. If the number of destination edge routers can be narrowed down by making use of information about the direction of movement of the radio terminal unit 100, the condition of radio links, etc., the router 118 or 120 above each edge router 102 or 106 can also be defined as a

candidate of COR.

[0033] Thereafter, the relay router is specified out of the above CORs by making use of the applications used by the user, the load on the network, the radio technology, etc. as described previously. If the information about the applications used by the user, the load on the network, the radio technology, etc. as described is not available, the router 126 being the COR closer to the radio terminal unit is specified as a relay router, out of the CORs where all the paths from the edge router 104 being the edge router before the movement of the radio terminal unit 100 and from each of the edge routers 102, 106 being the destination candidates to the CN 132 being the correspondent terminal unit intersect, and the RR function is located in the router 126.

[0034] The handover operation of the radio terminal unit 100 with the RR function in a specific COR as a relay router as described above will be described with reference to Fig. 2.

[0035] The description will be given about a situation where the radio terminal unit 100 presently connected to the edge router 106 moves to the edge router 108 as indicated by an arrow Y15. When the radio terminal unit 100 is connected to the edge router 106, the destination candidates are the edge routers 104 and 108, and the router 126 is thus selected as a relay router; the CN 132 of the communication correspondent is notified of the location information of the router 126 being the relay router.

[0036] Thereafter, the radio terminal unit 100 moves to the edge router 108 and then sends a location change notification to the router 126 being the relay router. Then, without any change in the path from the CN 132 to the router 126, the path from the router 126 to the radio terminal unit 100 is switched from a path 140 via the edge router 106 to a path 142 via the edge router 108.

[0037] Since the location of the relay router herein is closer than the CN 132 of the communication correspondent, it also becomes feasible to decrease the time for location registration and thus decrease the time period necessary for the handover transaction.

[0038] After completion of the movement of the radio terminal unit 100 to under the edge router 108, the destination candidates thereafter are the edge routers 106 and 110, and the gateway device 130 is selected as a relay router. Since the selected gateway device 130 is different from the router 126 being the previous relay router before the movement, it is necessary to move the relay router from the router 126 to the gateway device 130. Therefore, the radio terminal unit 100 sends an RR instruction to the gateway device 130. Here the RR instruction (Regional Registration instruction) is an instruction to make a specific router function as a relay router.

[0039] Then the CN 132 of the communication correspondent is immediately notified that the gateway device 130 became a new relay router. This process is not carried out during the handover, but is carried out after completion of the handover transaction. However, packets are sent via the router 126 even during the period in which

the CN 132 of the communication correspondent is notified that the relay router is the gateway device 130, and thus this process invokes no short break of communication. After the above notification to the CN 132, the path from CN 132 to the gateway device 130 is established and the path from the gateway device 130 to the radio terminal unit 100 is further established.

[0040] As described above, the mobile communication system of the present embodiment is constructed in the configuration wherein there are the routers 118-128 and gateway device 130 connected above the edge routers 102-116 provided in the respective base stations in the hierarchical structure and configured to perform the relaying of data to the base stations and wherein the router 126 being the COR closer to the radio terminal unit 100 is specified as a relay router, out of the CORs where all the paths from the edge router 104 before the movement of the radio terminal unit 100 and from each of all the edge routers 102, 106 being destination candidates to the CN 132 of the communication correspondent intersect.

[0041] This makes it feasible to specify the common relay router 126 to the edge router 104 presently under connection with the radio terminal unit 100 and the edge router 106 as a destination candidate, whereby the handover can be performed by only sending the location change notification to the specified relay router 126. Namely, the handover can be performed without sending the location change notification up to the CN 132 of the communication correspondent as before, so that the handover transaction time can be readily reduced.

[0042] The edge routers 102-116 each are provided with the function of storing the information about the edge routers mounted in the base stations forming the radio zones adjacent to the radio zone of the base station in which the edge router in question is mounted, and the information about the superordinate routers to which these adjacent edge routers and edge router in question are connected, and specifying the router where all the paths intersect, as a COR from the stored information. This makes it feasible to readily specify the COR.

[0043] Since the edge router 102-116 notifies the radio terminal unit 100 registered in the edge router, of the information of the relay router, the radio terminal unit 100 can access the relay router through the destination edge router during the period of the handover.

[0044] The RR function is located in the router 126 being the COR closer to the radio terminal unit 100, as a relay router, and the communication correspondent of the radio terminal unit 100 is notified of the location information of the relay router 126 where the RR function is located. Through this operation, the communication correspondent is preliminarily notified of the location to the relay router in which the location registration relaying function is located, and the radio terminal unit can change the location by simply sending a location registration request to the relay router to update the path after movement; therefore, the handover transaction time can be

reduced, as compared with the case where the location change notification is sent to the communication correspondent.

[0045] If after the movement of the radio terminal unit 100 from the edge router 106 to the edge router 108, the specified relay router 126 is different from the relay router before the movement, the location registration relaying function is located in another relay router 130; therefore, the location registration relaying point can be properly changed after the movement of the radio terminal unit 100.

[0046] In addition, the number of edge routers as potential destinations can be narrowed down if the information about radio links, the information about the moving direction of the terminal, or the like is available; then the relay router as a relay node can be located at a COR closer to the terminal, whereby the handover transaction time can be reduced more.

[0047] In the future, the radio resources are expected to become more stringent, for example, because the frequency bands become higher, so as to narrow the area covered by one base station. Under such circumstances, if the time for each handover transaction can be reduced, the overlap zone can be narrowed and it can lead to effective utilization of the radio resources.

[0048] The mobile communication system in the above embodiment was constructed in the configuration wherein the radio terminal unit 100 was notified of the information about the relay router, the radio terminal unit 100 sent the RR instruction to the COR specified as the relay router, on the basis of the information, and the COR provided the RR function on the basis of the RR instruction transmitted from the radio terminal unit 100. However, this may be modified into such a configuration that the edge router transmits the RR instruction to the COR specified as the relay router and the COR provides the RR function on the basis of the RR instruction transmitted from the edge router. The handover operation in the case adopting this configuration will be described below.

[0049] Fig. 3 is a block diagram for explaining the handover operation in the case adopting the above configuration. In the present configuration, the information about relay routers corresponding to the respective edge routers 102-116 is preliminarily stored in each of the edge routers 102-116.

[0050] For example, speaking of the edge router 106, destination candidates for movement of the mobile terminal unit 100 under the edge router 106 are the edge routers 104, 108 from the network configuration (including the location information) shown in Fig. 3. Therefore, the router 126 closer to the radio terminal unit 100 is specified as a relay router, out of the CORs (router 126 and gateway device 130) where all the paths from the edge router 106 before the movement and from each of the edge routers 104, 108 as destination candidates to the CN 132 intersect. In this case, the information that the router 126 was specified as a relay router is recorded in the edge router 106.

[0051] Speaking of the edge router 108, destination candidates for movement of the mobile terminal unit 100 under the edge router 108 are the edge routers 106, 110 from the network configuration (including the location information) shown in Fig. 3. Therefore, the gateway device 130, which is a COR where all the paths from the edge router 108 before the movement and from each of the edge routers 106, 110 as destination candidates to the CN 132 of the communication correspondent intersect, is specified as a relay router. In this case, the information that the gateway device 130 was specified as a relay router is recorded in the edge router 108.

[0052] Under such circumstances, suppose the radio terminal unit 100 moves from under the edge router 106 to under the edge router 108, as indicated by an arrow Y15.

[0053] When the radio terminal unit 100 moves from under the edge router 106 to under the edge router 108, the edge router 108 transmits a location change notification (Y19) to the router 126 being the old relay router to reroute the path from Y16 to Y17, in order to change the path between the radio terminal unit 100 having moved from the edge router 106 and the CN 132 of the communication correspondent.

[0054] Subsequently, the edge router 108 transmits an RR instruction (Y20) to the gateway device 130 specified as a relay router, on the basis of the information of the relay router preliminarily recorded, to reroute the path from Y17 to Y18. The gateway device 130, receiving the RR instruction, provides the RR function from then on as a relay router.

[0055] This configuration obviates the need for notifying the radio terminal unit 100 of the information of the relay router and for informing the user (radio terminal unit 100) of the network configuration, and thus the network configuration can be blocked off.

Industrial Applicability

[0056] The present invention is applicable to mobile communication systems and, particularly, to the handover control apparatus, radio terminal unit, edge routers, routers, and handover control methods in the mobile communication systems.

Claims

1. A handover control apparatus adapted to control handover of a radio terminal unit (100) between edge routers (102, 104, 106, 108, 110, 112, 114, 116) which are provided in respective base stations for radio communication with radio terminal unit (100) and to which routers (118, 120, 122, 124, 126, 128, 130) are connected above in a hierarchical structure, said handover control apparatus comprising:

control means adapted to specify a relay router

out of Cross Over Routers where all paths from an edge router (102, 104, 106, 108, 110, 112, 114, 116) before movement of the radio terminal unit (100) and from every edge router (102, 104, 106, 108, 110, 112, 114, 116) as a candidate for a destination of the movement to a communication correspondent intersect;

characterised in that

each of said edge routers (102, 104, 106, 108, 110, 112, 114, 116) stores information about edge routers (102, 104, 106, 108, 110, 112, 114, 116) mounted in base stations forming radio zones adjacent to a radio zone of a base station in which the edge router (102, 104, 106, 108, 110, 112, 114, 116) in question is mounted, and information about superordinate routers (118, 120, 122, 124, 126, 128, 130) to which the adjacent edge routers (102, 104, 106, 108, 110, 112, 114, 116) and the edge router (102, 104, 106, 108, 110, 112, 114, 116) in question are connected, and wherein said control means specifies a router where all the paths intersect, as a Cross Over Router on the basis of the stored information.

2. The handover control apparatus according to Claim 1, wherein the control means notifies the radio terminal unit (100) registered in the edge router (102, 104, 106, 108, 110, 112, 114, 116), of information about the relay router.
3. A radio terminal unit (100) configured to, on the basis of the information about the relay router notified of by the handover control apparatus as set forth in Claim 2, transmit a Regional Registration instruction to the Cross Over Router specified as a relay router by the handover control apparatus.
4. A router configured to provide a Regional Registration function on the basis of the Regional Registration instruction transmitted from the radio terminal unit (100) as set forth in Claim 3.
5. The handover control apparatus according to Claim 1, wherein the control means notifies the edge router of the information about the relay router.
6. An edge router (102, 104, 106, 108, 110, 112, 114, 116) configured to, on the basis of the information about the relay router notified of by the handover control apparatus as set forth in Claim 5, transmit a Regional Registration instruction to the Cross Over Router specified as a relay router by the handover control apparatus.
7. A router configured to provide a Regional Registra-

tion function on the basis of the Regional Registration instruction transmitted from the edge router (102, 104, 106, 108, 110, 112, 114, 116) as set forth in Claim 6.

8. The handover control apparatus according to Claim 2 or 5, wherein the control means locates a location registration relaying function in said Cross Over Router as a relay router, and notifies the communication correspondent of the radio terminal unit (100) of information about a location of the relay router where the location registration relaying function is located.
9. The handover control apparatus according to Claim 8, wherein after completion of the handover of the radio terminal unit (100) and in timing different from that of the handover, where the specified relay router is different from the relay router before the movement, the control means locates the location registration relaying function in another relay router and data is also continuously forwarded from the relay router before the movement.
10. A mobile communication system adapted to implement handover of a radio terminal unit (100) between base stations, said mobile communication system comprising:
 - routers (102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130) connected above the base stations in a hierarchical structure and configured to perform relaying of data to the base stations; and
 - edge routers (102, 104, 106, 108, 110, 112, 114, 116) provided in the respective base stations, each edge router (102, 104, 106, 108, 110, 112, 114, 116) being configured to specify a relay router out of Cross Over Routers where all paths from a base station before movement of the radio terminal unit (100) and from every base station as a candidate for a destination of the movement to a communication correspondent intersect;

characterised in that

each of said edge routers (102, 104, 106, 108, 110, 112, 114, 116) stores information about edge routers (102, 104, 106, 108, 110, 112, 114, 116) mounted in base stations forming radio zones adjacent to a radio zone of a base station in which the edge router (102, 104, 106, 108, 110, 112, 114, 116) in question is mounted, and information about superordinate routers (118, 120, 122, 124, 126, 128, 130) to which the adjacent edge routers (102, 104, 106, 108, 110, 112, 114, 116) and the edge router (102, 104, 106, 108, 110, 112, 114, 116) in question are

connected, and wherein a router where all the paths intersect is specified as a Cross Over Router on the basis of the stored information.

11. The mobile communication system according to Claim 10, wherein said edge router (102, 104, 106, 108, 110, 112, 114, 116) notifies the radio terminal unit (100) registered in the edge router (102, 104, 106, 108, 110, 112, 114, 116), of information about the relay router.
12. The mobile communication system according to Claim 11, wherein the radio terminal unit (100) transmits a Regional Registration instruction to the Cross Over Router specified as the relay router, based on the information about the relay router notified of by the edge router (102, 104, 106, 108, 110, 112, 114, 116).
13. The mobile communication system according to Claim 12, wherein the Cross Over Router specified as the relay router provides a Regional Registration function on the basis of the Regional Registration instruction transmitted from the radio terminal unit (100).
14. The mobile communication system according to Claim 10, wherein the edge router (102, 104, 106, 108, 110, 112, 114, 116) transmits a Regional Registration instruction to the Cross Over Router specified as the relay router.
15. The mobile communication system according to Claim 14, wherein the Cross Over Router specified as the relay router provides a Regional Registration function on the basis of the Regional Registration instruction transmitted from the edge router (102, 104, 106, 108, 110, 112, 114, 116).
16. The mobile communication system according to Claim 11 or 14, wherein a location registration relaying function is located in said Cross Over Router as a relay router and wherein the communication correspondent of the radio terminal unit (100) is notified of information about a location of the relay router where the location registration relaying function is located.
17. The mobile communication system according to Claim 16, wherein after completion of the handover of the radio terminal unit and in timing different from that of the handover, where the specified relay router is different from the relay router before the movement, the location registration relaying function is located in

another relay router and data is also continuously forwarded from the relay router before the movement.

18. A handover control method of controlling handover of a radio terminal unit (100) between edge routers (102, 104, 106, 108, 110, 112, 114, 116) which are provided in respective base stations for radio communication with radio terminal unit (100) and to which routers (118, 120, 122, 124, 126, 128, 130) are connected above in a hierarchical structure, said handover control method comprising:

a control step of specifying a relay router out of Cross Over Routers where all paths from an edge router (102, 104, 106, 108, 110, 112, 114, 116) before movement of the radio terminal unit (100) and from every edge router (102, 104, 106, 108, 110, 112, 114, 116) as a candidate for a destination of the movement to a communication correspondent intersect; and

characterised by

a storage step wherein each of said edge routers (102, 104, 106, 108, 110, 112, 114, 116) stores information about edge routers (102, 104, 106, 108, 110, 112, 114, 116) mounted in base stations forming radio zones adjacent to a radio zone of a base station in which the edge router (102, 104, 106, 108, 110, 112, 114, 116) in question is mounted, and information about superordinate routers (118, 120, 122, 124, 126, 128, 130) to which the adjacent edge routers (102, 104, 106, 108, 110, 112, 114, 116) and the edge router (102, 104, 106, 108, 110, 112, 114, 116) in question are connected, and

wherein said control step is to specify a router where all the paths intersect, as a Cross Over Router on the basis of the information stored in the storage step.

19. The handover control method according to Claim 18, wherein said control step is to notify the radio terminal unit (100) registered in the edge router (102, 104, 106, 108, 110, 112, 114, 116), of information about the relay router.
20. The handover control method according to Claim 19, wherein the radio terminal unit (100) transmits a Regional Registration instruction to the Cross Over Router specified as the relay router, based on the information about the relay router notified of by the edge router (102, 104, 106, 108, 110, 112, 114, 116).
21. The handover control method according to Claim 20, wherein the Cross Over Router specified as the relay router provides a Regional Registration function on the basis of the Regional Registration instruction

transmitted from the radio terminal unit (100).

22. The handover control method according to Claim 18, wherein the edge router (102, 104, 106, 108, 110, 112, 114, 116) transmits a Regional Registration instruction to the Cross Over Router specified as the relay router.
23. The handover control method according to Claim 22, wherein the Cross Over Router specified as the relay router provides a Regional Registration function on the basis of the Regional Registration instruction transmitted from the edge router (102, 104, 106, 108, 114, 112, 114, 116).
24. The handover control method according to Claim 19 or 22, wherein said control step is to locate a location registration relaying function in said Cross Over Router as a relay router, and notify the communication correspondent of the radio terminal unit (100) of information about a location of the relay router where the location registration relaying function is located.
25. The handover control method according to Claim 24, wherein after completion of the handover of the radio terminal unit (100) and in timing different from that of the handover, where the specified relay router is different from the relay router before the movement, said control step is to locate the location registration relaying function in another relay router and also continuously forward data from the relay router before the movement.

Patentansprüche

1. Handover-Kontroll-Apparat, eingerichtet zum Kontrollieren von Handover einer Funk-Endgerät-Einheit (100) zwischen Kanten-Routern (102, 104, 106, 108, 110, 112, 114, 116), welche in jeweiligen Basis-Stationen für Funk-Kommunikation mit Funk-Endgerät-Einheit (100) bereitgestellt werden und mit welchen Router (118, 120, 122, 124, 126, 128, 130) darüber verbunden sind in einer hierarchischen Struktur, der Handover-Kontroll-Apparat aufweisend:

Kontroll-Mittel, eingerichtet zum Spezifizieren eines Relais-Routers aus Kreuzungspunkt-Routern, wo sich alle Pfade von einem Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) vor Bewegung der Funk-Endgerät-Einheit (100) und von jedem Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) als einem Kandidaten für ein Ziel der Bewegung zu einem Kommunikations-Korrespondenten schneiden; **gekennzeichnet dadurch, dass** jeder der Kanten-Router (102, 104, 106, 108,

110, 112, 114, 116) Information über Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116), die in Basis-Stationen, die Funk-Zonen bilden angrenzend an eine Funk-Zone einer Basis-Station, in welcher der fragliche Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) angebracht ist, angebracht sind, und Information über übergeordnete Router (118, 120, 122, 124, 126, 128, 130), mit welchen die angrenzenden Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) und der fragliche Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) verbunden sind, speichert, und wobei das Kontroll-Mittel einen Router, wo sich all die Pfade schneiden, als einen Kreuzungspunkt-Router spezifiziert auf der Basis der gespeicherten Information.

2. Handover-Kontroll-Apparat gemäß Anspruch 1, wobei das Kontroll-Mittel die in dem Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) registrierte Funk-Endgerät-Einheit (100) von Information über den Relais-Router benachrichtigt.
3. Funk-Endgerät-Einheit (100) eingerichtet zum, auf der Basis der von dem Handover-Kontroll-Apparat gemäß Anspruch 2 benachrichtigten Information über den Relais-Router, Übertragen einer Regional-Registrierungs-Instruktion zu dem von dem Handover-Kontroll-Apparat als ein Relais-Router spezifizierten Kreuzungspunkt-Router.
4. Router, eingerichtet zum Bereitstellen einer Regional-Registrierungs-Funktion auf der Basis der von der Funk-Endgerät-Einheit (100) gemäß Anspruch 3 übertragenen Regional-Registrierungs-Instruktion.
5. Handover-Kontroll-Apparat gemäß Anspruch 1, wobei das Kontroll-Mittel den Kanten-Router von Information über den Relais-Router benachrichtigt.
6. Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) eingerichtet zum, auf der Basis der von dem Handover-Kontroll-Apparat gemäß Anspruch 5 benachrichtigten Information über den Relais-Router, Übertragen einer Regional-Registrierungs-Instruktion zu dem von dem Handover-Kontroll-Apparat als einen Relais-Router spezifizierten Kreuzungspunkt-Router.
7. Router, eingerichtet zum Bereitstellen einer Regional-Registrierungs-Funktion auf der Basis der von dem Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) gemäß Anspruch 6 übertragenen Regional-Registrierungs-Instruktion.
8. Handover-Kontroll-Apparat gemäß Anspruch 2 oder 5,

wobei das Kontroll-Mittel eine Orts-Registrierungs-Relais-Funktion in dem Kreuzungspunkt-Router als einem Relais-Router lokalisiert, und den Kommunikations-Korrespondenten der Funk-Endgerät-Einheit (100) von Information über eine Lokalisierung des Relais-Routers, wo die Orts-Registrierungs-Relais-Information lokalisiert ist, benachrichtigt.

9. Handover-Kontroll-Apparat gemäß Anspruch 8, wobei nach Abschluss des Handovers der Funk-Endgerät-Einheit (100) und in einer Zeitvorgabe verschieden von der des Handovers, wobei der spezialisierte Relais-Router verschieden von dem Relais-Router vor der Bewegung ist, das Kontroll-Mittel die Orts-Registrierungs-Relais-Funktion in einem anderen Relais-Router lokalisiert, und Daten auch kontinuierlich von dem Relais-Router vor der Bewegung weitergeleitet werden.
10. Mobilkommunikationssystem, eingerichtet zum Implementieren von Handover einer Funk-Endgerät-Einheit (100) zwischen Basis-Stationen, das Mobilkommunikationssystem aufweisend:

Router (102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130), verbunden über den Basis-Stationen in einer hierarchischen Struktur und eingerichtet zum Durchführen von Weiterleitung von Daten zu den Basis-Stationen; und

Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116), bereitgestellt in den jeweiligen Basis-Stationen, jeder Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) eingerichtet zum Spezifizieren eines Relais-Routers aus Kreuzungspunkt-Router, wo sich alle Pfade von einer Basis-Station vor Bewegung der Funk-Endgerät-Einheit (100) und von jeder Basis-Station als einem Kandidaten für ein Ziel der Bewegung zu einem Kommunikations-Korrespondenten schneiden;

gekennzeichnet dadurch, dass

jeder der Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) Information über Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116), die in Basis-Stationen, die Funk-Zonen bilden angrenzend an eine Funk-Zone einer Basis-Station, in welcher der fragliche Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) angebracht ist, angebracht sind, und Information über übergeordnete Router (118, 120, 122, 124, 126, 128, 130), mit welchen die angrenzenden Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) und der fragliche Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) verbunden sind, speichert, und wobei ein Router, wo sich all die Pfade schneiden, als einen Kreuzungspunkt-Router spezifiziert wird auf der Basis der

gespeicherten Information.

11. Mobilkommunikationssystem gemäß Anspruch 10, wobei der Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) die in dem Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) registrierte Funk-Endgerät-Einheit (100) von Information über den Relais-Router benachrichtigt.
12. Mobilkommunikationssystem gemäß Anspruch 11, wobei die Funk-Endgerät-Einheit (100) eine Regional-Registrierungs-Instruktion zu dem als den Relais-Router spezifizierten Kreuzungspunkt-Router überträgt, basierend auf der von dem Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) benachrichtigten Information über den Relais-Router.
13. Mobilkommunikationssystem gemäß Anspruch 12, wobei der als der Relais-Router spezifizierte Kreuzungspunkt-Router eine Regional-Registrierungs-Funktion auf der Basis der von der Funk-Endgerät-Einheit (100) übertragenen Regional-Registrierungs-Instruktion bereitstellt.
14. Mobilkommunikationssystem gemäß Anspruch 10, wobei der Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) eine Regional-Registrierungs-Instruktion zu dem als den Relais-Router spezifizierten Kreuzungspunkt-Router überträgt.
15. Mobilkommunikationssystem gemäß Anspruch 14, wobei der als der Relais-Router spezifizierte Kreuzungspunkt-Router eine Regional-Registrierungs-Funktion auf der Basis der von dem Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) übertragenen Regional-Registrierungs-Instruktion bereitstellt.
16. Mobilkommunikationssystem gemäß Anspruch 11 oder 14, wobei eine Orts-Registrierungs-Relais-Funktion in dem Kreuzungspunkt-Router als einem Relais-Router lokalisiert wird, und wobei der Kommunikations-Korrespondent der Funk-Endgerät-Einheit (100) von Information über eine Lokalisierung des Relais-Routers, wo die Orts-Registrierungs-Relais-Information lokalisiert ist, benachrichtigt wird.
17. Mobilkommunikationssystem gemäß Anspruch 16, wobei nach Abschluss des Handovers der Funk-Endgerät-Einheit und in einer Zeitvorgabe verschieden von der des Handovers, wobei der spezialisierte Relais-Router verschieden von dem Relais-Router vor der Bewegung ist, die Orts-Registrierungs-Relais-Funktion in einem anderen Relais-Router lokalisiert wird und Daten auch kontinuierlich von dem Relais-Router vor der Bewegung weitergeleitet werden.

18. Handover-Kontroll-Verfahren des Kontrollierens von Handover einer Funk-Endgerät-Einheit (100) zwischen Kanten-Routern (102, 104, 106, 108, 110, 112, 114, 116), welche in jeweiligen Basis-Stationen für Funk-Kommunikation mit Funk-Endgerät-Einheit (100) bereitgestellt werden und mit welchen Router (118, 120, 122, 124, 126, 128, 130) darüber verbunden sind in einer hierarchischen Struktur, das Handover-Kontroll-Verfahren aufweisend:

einen Kontroll-Schritt des Spezifizierens eines Relais-Routers aus Kreuzungspunkt-Routern, wo sich alle Pfade von einem Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) vor Bewegung der Funk-Endgerät-Einheit (100) und von jedem Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) als einem Kandidaten für ein Ziel der Bewegung zu einem Kommunikations-Korrespondenten schneiden; und **gekennzeichnet durch**

einen Speicher-Schritt, in dem jeder der Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) Information über Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116), die in Basis-Stationen, die Funk-Zonen bilden angrenzend an eine Funk-Zone einer Basis-Station, in welcher der fragliche Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) angebracht ist, angebracht sind, und Information über übergeordnete Router (118, 120, 122, 124, 126, 128, 130), mit welchen die angrenzenden Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) und der fragliche Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) verbunden sind, speichert, und

wobei der Kontroll-Schritt ist zum Spezifizieren eines Routers, wo sich all die Pfade schneiden, als einen Kreuzungspunkt-Router auf der Basis der in dem Speicher-Schritt gespeicherten Information.

19. Handover-Kontroll-Verfahren gemäß Anspruch 18, wobei der Kontroll-Schritt ist zum Benachrichtigen der in dem Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) registrierten Funk-Endgerät-Einheit (100) von Information über den Relais-Router.
20. Handover-Kontroll-Verfahren gemäß Anspruch 19, wobei die Funk-Endgerät-Einheit (100) eine Regional-Registrierungs-Instruktion zu dem als den Relais-Router spezifizierten Kreuzungspunkt-Router überträgt, basierend auf der von dem Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) benachrichtigten Information über den Relais-Router.
21. Handover-Kontroll-Verfahren gemäß Anspruch 20,

Einheit (100) übertragenen Regional-Registrierungs-Instruktion bereitstellt.

22. Handover-Kontroll-Verfahren gemäß Anspruch 18, wobei der Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) eine Regional-Registrierungs-Instruktion zu dem als den Relais-Router spezifizierten Kreuzungspunkt-Router überträgt.
23. Handover-Kontroll-Verfahren gemäß Anspruch 22, wobei der als der Relais-Router spezifizierte Kreuzungspunkt-Router eine Regional-Registrierungs-Funktion auf der Basis der von dem Kanten-Router (102, 104, 106, 108, 110, 112, 114, 116) übertragenen Regional-Registrierungs-Instruktion bereitstellt.
24. Handover-Kontroll-Verfahren gemäß Anspruch 19 oder 22, wobei der Kontroll-Schritt ist zum Lokalisieren einer Orts-Registrierungs-Relais-Funktion in dem Kreuzungspunkt-Router als einem Relais-Router, und Benachrichtigen des Kommunikations-Korrespondenten der Funk-Endgerät-Einheit (100) von Information über eine Lokalisierung des Relais-Routers, wo die Orts-Registrierungs-Relais-Information lokalisiert ist.
25. Handover-Kontroll-Verfahren gemäß Anspruch 24, wobei nach Abschluss des Handovers der Funk-Endgerät-Einheit (100) und in einer Zeitvorgabe verschieden von der des Handovers, wo der spezifizierte Relais-Router verschieden von dem Relais-Router vor der Bewegung ist, der Kontroll-Schritt ist zum Lokalisieren der Orts-Registrierungs-Relais-Funktion in einem anderen Relais-Router und auch kontinuierlich Daten Weiterleiten von dem Relais-Router vor der Bewegung.

40 Revendications

1. Appareil de commande de transfert apte à commander un transfert d'une unité de terminal radio (100) entre des routeurs de frontière (102, 104, 106, 108, 110, 112, 114, 116) qui sont disposés dans des stations de base respectives pour une communication radio avec l'unité de terminal radio (100), et auxquels sont connectés des routeurs (118, 120, 122, 124, 126, 128, 130) dans une structure hiérarchique, ledit appareil de commande de transfert comprenant :

des moyens de commande aptes à spécifier un routeur relais parmi des routeurs de croisement où se croisent tous les chemins qui proviennent d'un routeur de frontière (102, 104, 106, 108, 110, 112, 114, 116) avant un déplacement de l'unité de terminal radio (100) et de chaque routeur de frontière (102, 104, 106, 108, 110, 112,

114, 116) en tant que candidat à une destination du déplacement vers un correspondant de communication ;

caractérisé en ce que :

- chacun desdits routeurs de frontière (102, 104, 106, 108, 110, 112, 114, 116) stocke des informations qui concernent les routeurs de frontière (102, 104, 106, 108, 110, 112, 114, 116) montés dans des stations de base qui forment des zones radio adjacentes à une zone radio d'une station de base dans laquelle est monté le routeur de frontière en question (102, 104, 106, 108, 110, 112, 114, 116), et des informations qui concernent des routeurs superordonnés (118, 120, 122, 124, 126, 128, 130) auxquels sont connectés les routeurs de frontière adjacents (102, 104, 106, 108, 110, 112, 114, 116) et le routeur de frontière en question (102, 104, 106, 108, 110, 112, 114, 116), et dans lequel lesdits moyens de commande spécifient un routeur où tous les chemins se croisent, comme étant un routeur de croisement sur la base des informations stockées.
2. Appareil de commande de transfert selon la revendication 1, dans lequel les moyens de commande notifient à l'unité de terminal radio (100) enregistrée dans le routeur de frontière (102, 104, 106, 108, 110, 112, 114, 116), des informations qui concernent le routeur relais.
 3. Unité de terminal radio (100) configurée, sur la base des informations qui concernent le routeur relais notifié par l'appareil de commande de transfert selon la revendication 2, de manière à transmettre une instruction d'enregistrement régional au routeur de croisement spécifié comme étant un routeur relais par l'appareil de commande de transfert.
 4. Routeur configuré de manière à fournir une fonction d'enregistrement régional sur la base de l'instruction d'enregistrement régional transmise par l'unité de terminal radio (100) selon la revendication 3.
 5. Appareil de commande de transfert selon la revendication 1, dans lequel les moyens de commande notifient au routeur de frontière des informations qui concernent le routeur relais.
 6. Routeur de frontière (102, 104, 106, 108, 110, 112, 114, 116) configuré, sur la base des informations qui concernent le routeur relais notifié par l'appareil de commande de transfert selon la revendication 5, de manière à transmettre une instruction d'enregistre-

ment régional au routeur de croisement spécifié comme étant un routeur relais par l'appareil de commande de transfert.

- 5 7. Routeur configuré de manière à fournir une fonction d'enregistrement régional sur la base de l'instruction d'enregistrement régional transmise par le routeur de frontière (102, 104, 106, 108, 110, 112, 114, 116) selon la revendication 6.
- 10 8. Appareil de commande de transfert selon la revendication 2 ou la revendication 5, dans lequel les moyens de commande localisent une fonction de relais d'enregistrement d'emplacement dans ledit routeur de croisement comme étant un routeur relais, et notifient au correspondant de la communication de l'unité de terminal radio (100) des informations qui concernent un emplacement du routeur relais où se situe la fonction de relais d'enregistrement d'emplacement.
- 15 9. Appareil de commande de transfert selon la revendication 8, dans lequel à la fin du transfert de l'unité de terminal radio (100) et selon une synchronisation différente de celle du transfert, où le routeur relais spécifié est différent du routeur relais avant le déplacement, les moyens de commande localisent la fonction de relais d'enregistrement d'emplacement dans un autre routeur relais et des données sont également transmises de manière continue par le relais routeur avant le déplacement.
- 20 10. Système de communication mobile apte à mettre en application un transfert d'une unité de terminal radio (100) entre des stations de base, ledit système de communication mobile comprenant :
 - 25 des routeurs (102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130) connectés aux stations de base dans une structure hiérarchique et configurés de manière à exécuter un relais des données vers les stations de base ; et
 - 30 des routeurs de frontière (102, 104, 106, 108, 110, 112, 114, 116) disposés dans les stations de base respectives, chaque routeur de frontière (102, 104, 106, 108, 110, 112, 114, 116) étant configuré de manière à spécifier un routeur relais parmi des routeurs de croisement où se croisent tous les chemins qui proviennent d'une station de base avant un déplacement de l'unité de terminal radio (100) et de chaque station de base en tant que candidat à une destination du déplacement vers un correspondant de communication ;
- 35
- 40
- 45
- 50
- 55

caractérisé en ce que :

- chacun desdits routeurs de frontière (102, 104, 106, 108, 110, 112, 114, 116) stocke des informations qui concernent les routeurs de frontière (102, 104, 106, 108, 110, 112, 114, 116) montés dans des stations de base qui forment des zones radio adjacentes à une zone radio d'une station de base dans laquelle est monté le routeur de frontière en question (102, 104, 106, 108, 110, 112, 114, 116), et des informations qui concernent des routeurs superordonnés (118, 120, 122, 124, 126, 128, 130) auxquels sont connectés les routeurs de frontière adjacents (102, 104, 106, 108, 110, 112, 114, 116) et le routeur de frontière en question (102, 104, 106, 108, 110, 112, 114, 116), et dans lequel est spécifié un routeur où tous les chemins se croisent, comme un routeur de croisement sur la base des informations stockées.
11. Système de communication mobile selon la revendication 10, dans lequel ledit routeur de frontière (102, 104, 106, 108, 110, 112, 114, 116) notifie à l'unité de terminal radio (100) enregistrée dans le routeur de frontière (102, 104, 106, 108, 110, 112, 114, 116), des informations qui concernent le routeur relais.
12. Système de communication mobile selon la revendication 11, dans lequel l'unité de terminal radio (100) transmet une instruction d'enregistrement régional au routeur de croisement spécifié comme étant le routeur relais, sur la base des informations qui concernent le routeur relais notifiées par le routeur de frontière (102, 104, 106, 108, 110, 112, 114, 116).
13. Système de communication mobile selon la revendication 12, dans lequel le routeur de croisement spécifié comme étant le routeur relais fournit une fonction d'enregistrement régional sur la base de l'instruction d'enregistrement régional transmise par l'unité de terminal radio (100).
14. Système de communication mobile selon la revendication 10, dans lequel le routeur de frontière (102, 104, 106, 108, 110, 112, 114, 116) transmet une instruction d'enregistrement régional au routeur de croisement spécifié comme étant le routeur relais.
15. Système de communication mobile selon la revendication 14, dans lequel le routeur de croisement spécifié comme étant le routeur relais fournit une fonction d'enregistrement régional sur la base de l'instruction d'enregistrement régional transmise par le routeur de frontière (102, 104, 106, 108, 110, 112, 114, 116).
16. Système de communication mobile selon la revendication 11 ou la revendication 14, dans lequel une fonction de relais d'enregistrement d'emplacement se situe dans ledit routeur de croisement comme étant un routeur relais, et dans lequel le correspondant de la communication de l'unité de terminal radio (100) est notifié d'informations qui concernent un emplacement du routeur relais où se situe la fonction de relais d'enregistrement d'emplacement.
17. Système de communication mobile selon la revendication 16, dans lequel à la fin du transfert de l'unité de terminal radio et selon une synchronisation différente de celle du transfert, où le routeur relais spécifié est différent du routeur relais avant le déplacement, la fonction de relais d'enregistrement d'emplacement se situe dans un autre relais routeur et des données sont également transmises de manière continue par le relais routeur avant le déplacement.
18. Procédé de commande de transfert destiné à commander un transfert d'une unité de terminal radio (100) entre des routeurs de frontière (102, 104, 106, 108, 110, 112, 114, 116) qui sont disposés dans des stations de base respectives pour une communication radio avec l'unité de terminal radio (100), et auxquels sont connectés des routeurs (118, 120, 122, 124, 126, 128, 130) dans une structure hiérarchique, ledit procédé de commande de transfert comprenant :
- une étape de commande destinée à spécifier un routeur relais parmi des routeurs de croisement où se croisent tous les chemins qui proviennent d'un routeur de frontière (102, 104, 106, 108, 110, 112, 114, 116) avant un déplacement de l'unité de terminal radio (100) et de chaque routeur de frontière (102, 104, 106, 108, 110, 112, 114, 116) en tant que candidat à une destination du déplacement vers un correspondant de communication ; et
- caractérisé par :**
- une étape de stockage dans laquelle chacun desdits routeurs de frontière (102, 104, 106, 108, 110, 112, 114, 116) stocke des informations qui concernent les routeurs de frontière (102, 104, 106, 108, 110, 112, 114, 116) montés dans des stations de base qui forment des zones radio adjacentes à une zone radio d'une station de base dans laquelle est monté le routeur de frontière en question (102, 104, 106, 108, 110, 112, 114, 116), et des informations qui concernent des routeurs superordonnés (118, 120, 122, 124, 126, 128, 130) auxquels sont connectés

les routeurs de frontière adjacents (102, 104, 106, 108, 110, 112, 114, 116) et le routeur de frontière en question (102, 104, 106, 108, 110, 112, 114, 116), et

dans lequel ladite étape de commande sert à spécifier un routeur où tous les chemins se croisent, comme un routeur de croisement sur la base des informations stockées dans l'étape de stockage.

19. Procédé de commande de transfert selon la revendication 18,
dans lequel ladite étape de commande sert à notifier à l'unité de terminal radio (100) enregistrée dans le routeur de frontière (102, 104, 106, 108, 110, 112, 114, 116), des informations qui concernent le routeur relais. 5
20. Procédé de commande de transfert selon la revendication 19,
dans lequel l'unité de terminal radio (100) transmet une instruction d'enregistrement régional au routeur de croisement spécifié comme étant le routeur relais, sur la base des informations qui concernent le routeur relais notifiées par le routeur de frontière (102, 104, 106, 108, 110, 112, 114, 116), 10
21. Procédé de commande de transfert selon la revendication 20,
dans lequel le routeur de croisement spécifié comme étant le routeur relais fournit une fonction d'enregistrement régional sur la base de l'instruction d'enregistrement régional transmise par l'unité de terminal radio (100). 15
22. Procédé de commande de transfert selon la revendication 18,
dans lequel le routeur de frontière (102, 104, 106, 108, 110, 112, 114, 116) transmet une instruction d'enregistrement régional au routeur de croisement spécifié comme étant le routeur relais. 20
23. Procédé de commande de transfert selon la revendication 22,
dans lequel le routeur de croisement spécifié comme étant le routeur relais fournit une fonction d'enregistrement régional sur la base de l'instruction d'enregistrement régional transmise par le routeur de frontière (102, 104, 106, 108, 110, 112, 114, 116). 25
24. Procédé de commande de transfert selon la revendication 19 ou la revendication 22,
dans lequel ladite étape de commande sert à localiser une fonction de relais d'enregistrement d'emplacement dans ledit routeur de croisement comme étant un routeur relais, et à notifier au correspondant de la communication de l'unité de terminal radio (100) des informations qui concernent un emplace- 30

ment du routeur relais où se situe la fonction de relais d'enregistrement d'emplacement. 35

25. Procédé de commande de transfert selon la revendication 24,
dans lequel à la fin du transfert de l'unité de terminal radio (100) et selon une synchronisation différente de celle du transfert, où le routeur relais spécifié est différent du routeur relais avant le déplacement, ladite étape de commande sert à localiser la fonction de relais d'enregistrement d'emplacement dans un autre routeur relais, et également à transmettre des données de manière continue à partir du routeur relais avant le déplacement. 40

Fig.1

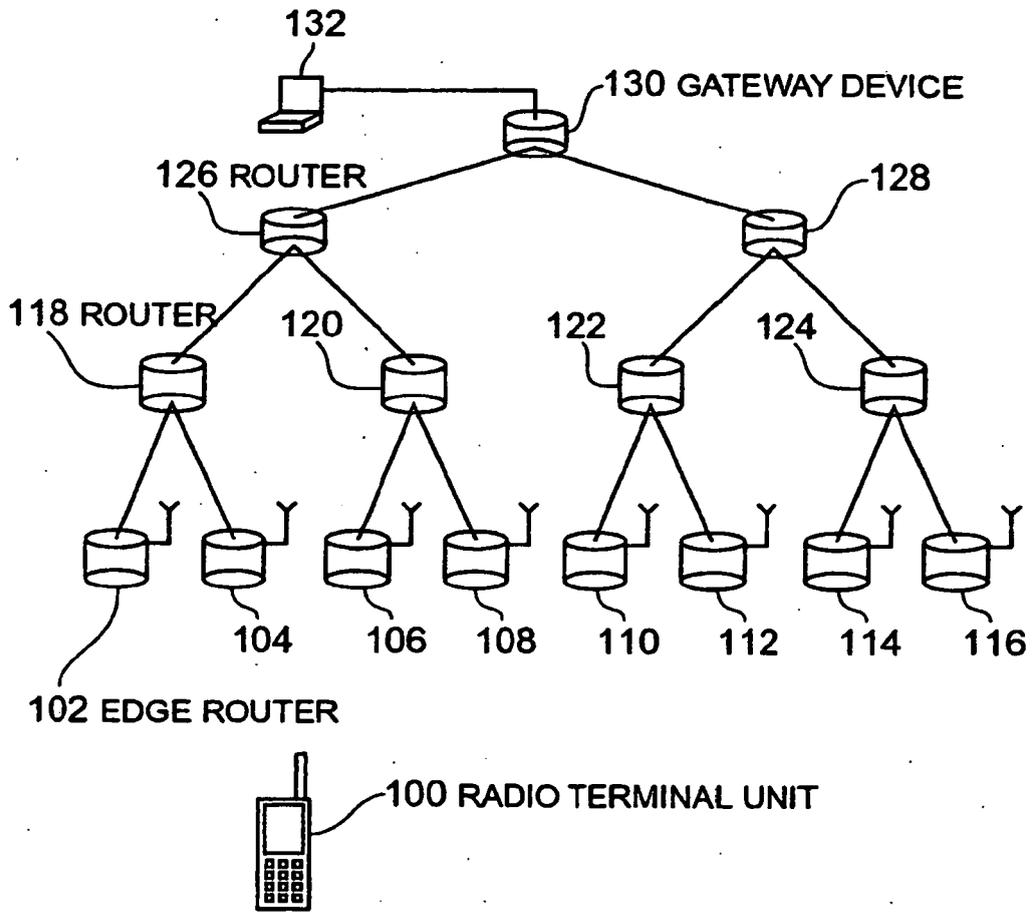


Fig.2

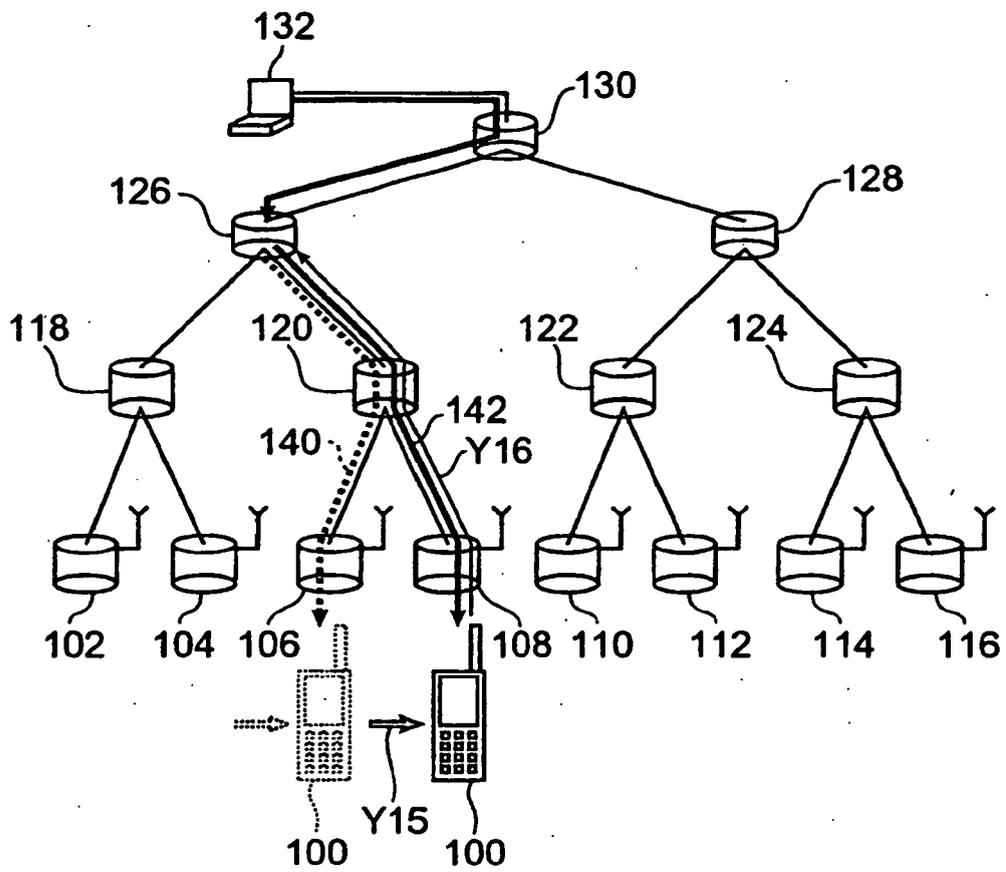


Fig.3

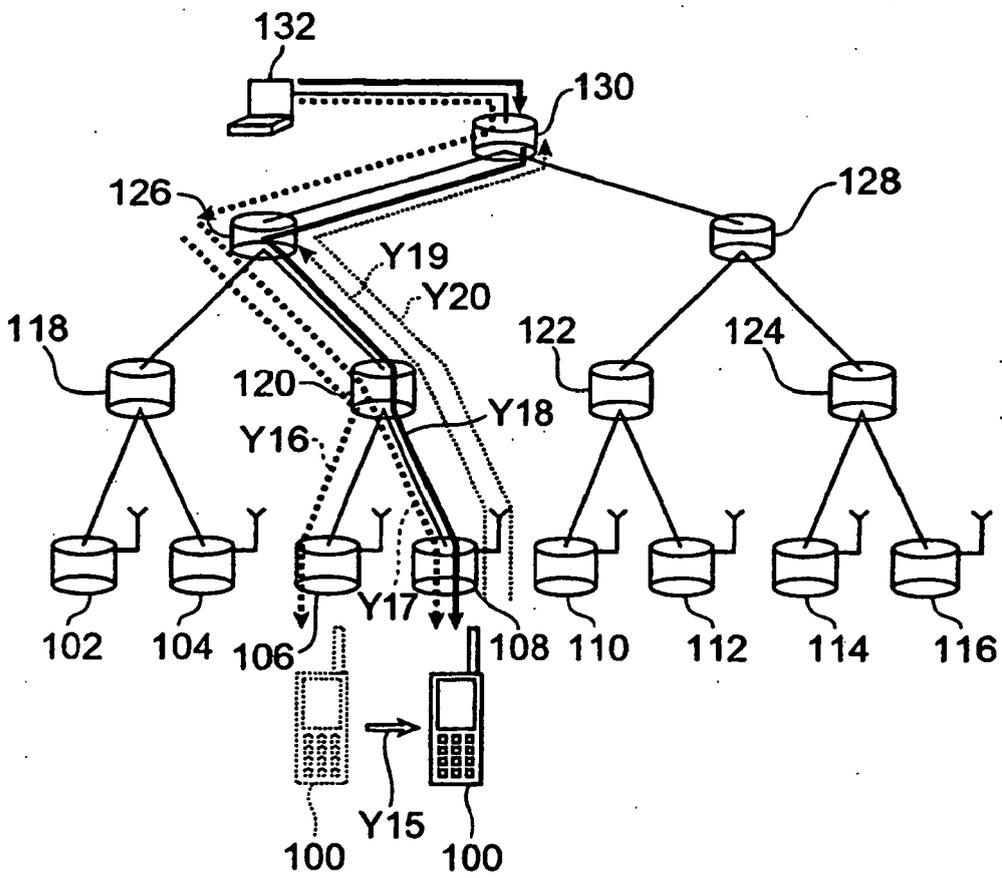


Fig.4


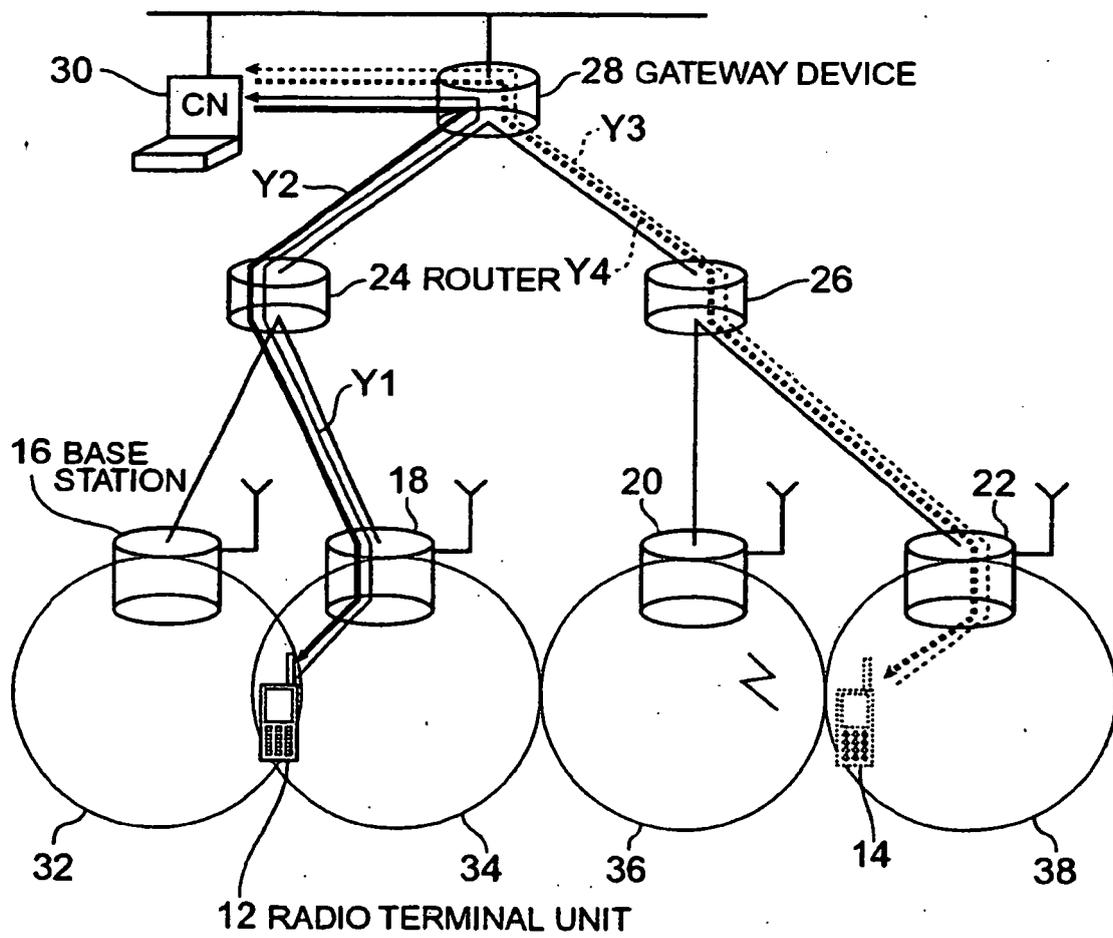


Fig.5

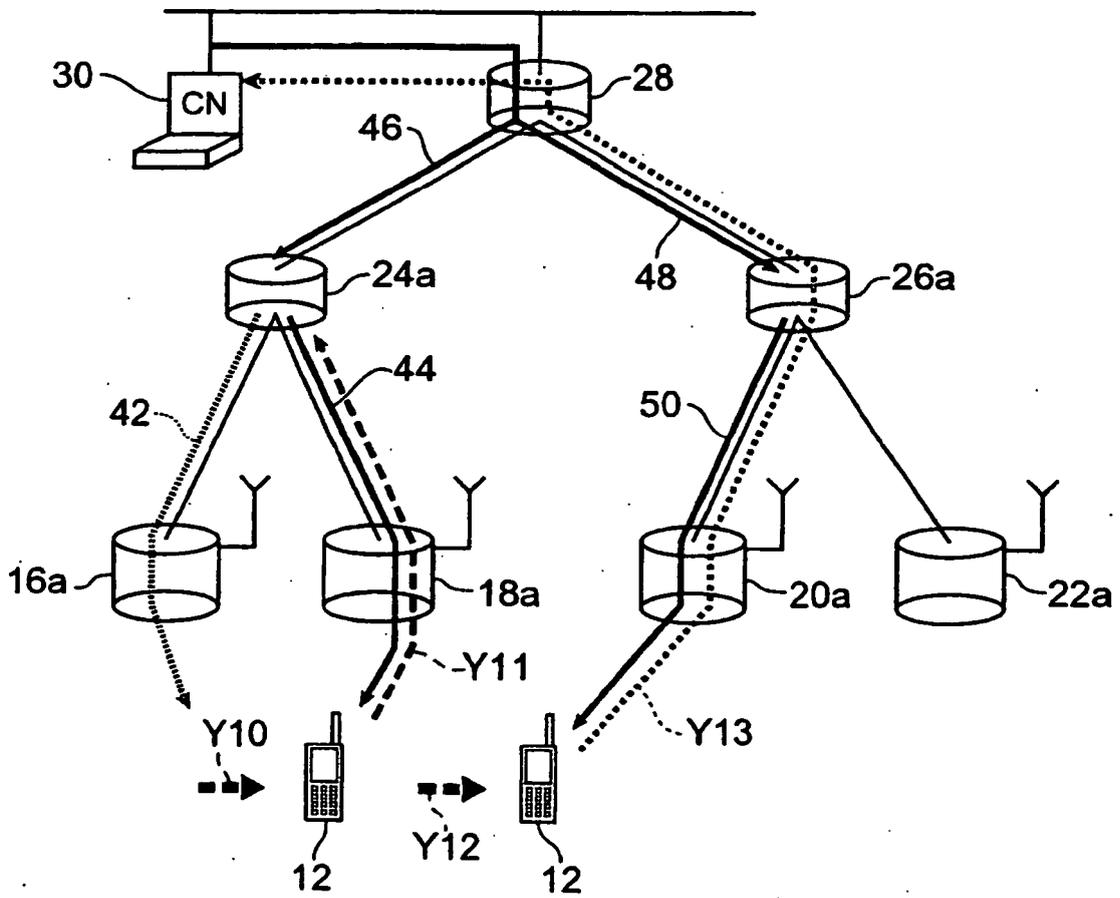

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1011243 A1 [0015]