



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 428 970 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:

16.06.2004 Bulletin 2004/25

(51) Int Cl.7: **E06B 9/302, E06B 9/386**

(21) Application number: **03004667.6**

(22) Date of filing: **03.03.2003**

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT SE SI SK TR**

Designated Extension States:

AL LT LV MK RO

(72) Inventor: **Nien, Ming**

Changhua Hsien, Taiwan 505 (TW)

(74) Representative: **Becker Kurig Straus**

Patentanwälte

Bavariastrasse 7


80336 München (DE)

(30) Priority: **13.12.2002 CN 02292706 U**

(71) Applicant: **NIEN MADE ENTERPRISE CO., LTD.
Taichung 408 (TW)**

(54) **Blind assembly having fabric blind slats**

(57) A fabric blind assembly is composed of a headrail, a bottom rail suspended below the headrail, a plurality of fabric blind slats arranged in parallel between the headrail and the bottom rail, each fabric blind slat having two opposite long sides and two rigid rod members respectively mounted in the long sides, each rod member having a plurality of coupling portions, and a plurality of braided ladders connected between the headrail and the bottom rail at two sides of the fabric blind slats, each braided ladder having a plurality of retaining members spaced apart from one another at a predetermined distance and respectively fastened to the coupling portions of the rod members to keep the fabric blind slats positioned between the headrail and the bottom rail and spaced apart from one another at the predetermined distance.

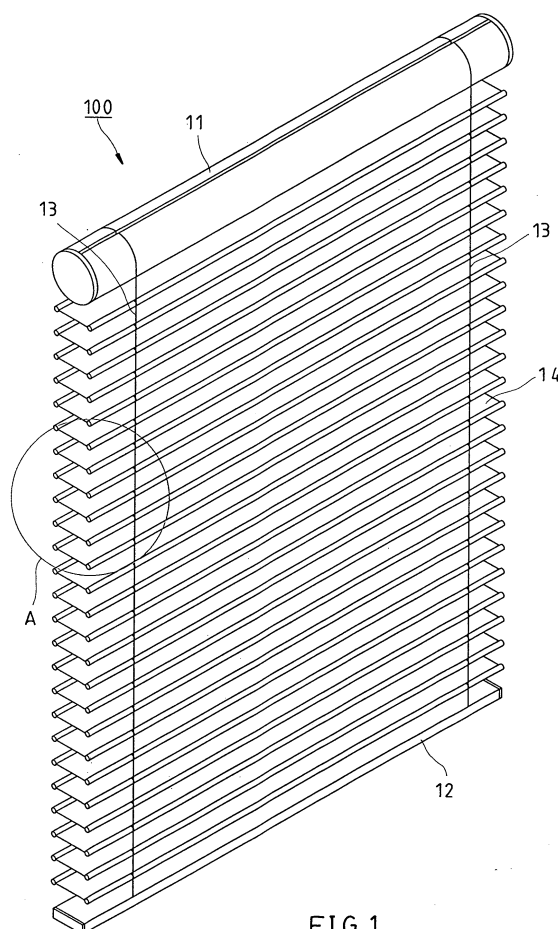

EP 1 428 970 A2

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates generally to blinds and, more particularly, to a blind assembly having fabric blind slats.

2. Description of the Related Art

[0002] A conventional fabric blind assembly regularly includes a headrail fixedly fastened to the top side of a window, a bottom rail suspended below the headrail, a plurality of fabric blind slats extended in transverse direction and arranged in parallel between the headrail and the bottom rail, and two ladder tapes longitudinally connected between the headrail and the bottom rail to connect the fabric blind slats. U.S. Pat. No. 6105657 discloses a fabric blind slat and a fabric Venetian blind assembly. The fabric blind slat includes an elongated strip of fabric. The strip of fabric has at least one longitudinally extending pocket on a longitudinal edge into which a relatively rigid support member is insertable. This design of fabric blind slat has drawbacks. When tilting the fabric blind slat, the fabric body of the fabric blind slat is relatively moved, thereby causing the upper part of the fabric blind slat to compress the lower part of the fabric blind slat, resulting in a wrinkle. In other words, supporting or stretching means must be provided so that the fabric body of the fabric blind slat can be maintained smooth under any operation status.

SUMMARY OF THE INVENTION

[0003] The present invention has been accomplished under the circumstances in view. It is the main object of the present invention to provide a fabric blind assembly, which has support means to hold the fabric blind slats constantly in a smooth status during the operation of the fabric blind assembly. It is another object of the present invention to provide a fabric blind assembly, which is detachable.

[0004] To achieve the foregoing objects of the present invention, the fabric blind assembly is composed of a headrail, a bottom rail suspended below the headrail, a plurality of fabric blind slats arranged in parallel between the headrail and the bottom rail, each fabric blind slat having two opposite long sides and two rigid rod members respectively mounted in the long sides, each rod member having a plurality of coupling portions, and a plurality of braided ladders connected between the headrail and the bottom rail at two sides of the fabric blind slats, each braided ladder having a plurality of retaining members spaced apart from one another at a predetermined distance and respectively fastened to the coupling portions of the rod members to keep the

fabric blind slats between the headrail and the bottom rail and spaced apart from one another at the predetermined distance.

5 BRIEF DESCRIPTION OF THE DRAWINGS

[0005]

10

FIG. 1 is a perspective view of a fabric blind assembly according to a first preferred embodiment of the present invention.

FIG. 2 is an exploded view of a part of the fabric blind assembly according to the first preferred embodiment of the present invention.

15

FIG. 3 is an enlarged view of part A in FIG. 1.

FIG. 4 is a side view of the fabric blind assembly according to the first preferred embodiment of the present invention.

20

FIG. 5 is a side view of the first preferred embodiment of the present invention at work.

FIG. 6 is a perspective view of a fabric blind assembly according to a second preferred embodiment of the present invention.

25

FIG. 7 is an exploded view in an enlarged scale of a part in FIG. 5.

FIG. 8 is a perspective view of a fabric blind assembly according to the third preferred embodiment of the present invention.

30

FIG. 9 is an exploded view in an enlarged scale of a part in FIG. 7.

DETAILED DESCRIPTION OF THE INVENTION

[0006] Referring to FIGS. 1-5, a fabric blind assembly **100** in accordance with the first preferred embodiment of the present invention is composed of a headrail **11** formed of a barrel, a bottom rail **12** extended in transverse direction and suspended below the headrail **11**, a plurality of fabric blind slats **14** arranged in parallel between the headrail **11** and the bottom rail **12**, and two pairs of braided ladders **13** vertically bilaterally connected between the headrail **11** and the bottom rail **12** to connect the fabric blind slats **14** and to hold the fabric blind slats **14** in parallel.

[0007] Each fabric blind slat **14** includes an elongated strip of fabric **141** and two rod members **142**. The strip of fabric **141** is a piece of opaque or semitransparent fabric capable of protecting from light, having two pockets **143** longitudinally extended along two opposite long sides thereof. The pockets **143** can be formed of a part of the strip of fabric **141** by stitching or bonding. Each pocket **143** has transversely extended crevices **144**. The rod members **142** are rigid members, having an outer diameter smaller than the inner diameter of the pockets **143**. The length of the rod members **142** is substantially equal to the longitudinal depth of the pockets **143**. When inserted into the pockets **143**, the rod members **142** can be slightly rotated in the pockets **143**. Further,

each rod member **142** has a plurality of coupling portion **145** corresponding to the crevices **144** (see FIG. 3).

[0008] The braided ladders **13** are vertically bilaterally connected between the headrail **11** and the bottom rail **12** at two sides of the fabric blind slats **14**, each having a plurality of equally vertically spaced retaining members **131** corresponding to the fabric blind slats **14**. The retaining members **131** according to this embodiment are C-shaped retainers formed of injection molding on the braided ladders **13**, having a proper toughness and resilience. After insertion of the rod members **142** into the pockets **143**, the retaining members **131** of the braided ladders **13** are respectively inserted into the crevices **144** and fastened to the coupling portions **145** of the rod members **142** (see FIG. 3).

[0009] According to the aforesaid fabric blind assembly **100**, the rigid rod members **142** support the fabric blind slats **14** in longitudinal direction, prohibiting the strip of fabric **141** of each fabric blind slat **14** from curving downwards, and the braided ladders **13** support the fabric blind slats **14** in transverse direction, keeping the fabric blind slats **14** in a smooth status.

[0010] Further, because the rod members **142** are fastened to the retaining members **131** of the braided ladders **13** to keep the fabric blind slats **14** secured to the braided ladders **13**, the fabric blind slats **14** can be removed from the braided ladders **13** for washing. Because the retaining members **131** are springy, they can easily be deformed with external forces and then fastened to or disconnected from the coupling portions **145** of the rod members **142** without causing damage.

[0011] The pitch of the retaining members **131** is substantially equal to the transverse width (the length of the short sides) of the fabric blind slats **14**. When wishing to enhance the light shading effect of the fabric blind assembly **100**, the user can rotate the headrail **11** through a predetermined angle to move the two opposite long sides of each fabric blind slat **14** toward the top and bottom sides in reversed directions relative to the respective retaining members **131** to change the fabric blind slats **14** from a horizontal position (see FIG. 4) to about a vertical position (see FIG. 5), thereby closing the gaps in between the fabric blind slats **14**.

[0012] Because the rod members **142** can be rotated relative to the retaining members **131** of the braided ladders **13**, rotating the headrail **11** to tilt the fabric blind slats **14** causes the retaining members **131** to be turned relative to the rod members **142**, thereby preventing uneven tension between the braided ladders **13** and the fabric blind slats **14**.

[0013] FIGS. 6 and 7 show a fabric blind assembly **200** constructed according to a second preferred embodiment of the present invention. According to this embodiment, the fabric blind assembly **200** is composed of a headrail **21**, a bottom rail **22**, a plurality of braided ladders **23**, and a plurality of fabric blind slats **24**. According to this embodiment, there are three braided ladders **23**. Two braided ladders **23** are vertical bilaterally connect-

ed between the headrail **21** and the bottom rail **22** at a long side of the fabric blind slats **24** and in proximity of the two opposite vertical lateral sides of the fabric blind assembly **200**. The other braided ladder **23** is vertically connected between the headrail **21** and the bottom rail **22** and at the middle of the other long side of the fabric blind slats **24**. Each of the braided ladders **23** has a plurality of equally vertically spaced retaining members **231**, embodied as loops, for fastening to the fabric blind slats **24**.

[0014] Each fabric blind slat **24** is composed of an elongated strip of fabric **241** and two rod members **242**. The strip of fabric **241** has two pockets **243** longitudinally extended along two opposite long sides thereof. One of the two pocket **243** of each fabric blind slat **24** is provided with two transversely extended crevices **244**, and the other pocket **243** of each fabric blind slat **24** is provided with a transversely extended crevice **244**. The rod members **242** are rigid and inserted into the pockets **243**. Each of the rod members **142** has at least one coupling portion **245**. Before insertion of the rod members **242** into the pockets **243**, the retaining members **231** of the braided ladders **23** are respectively inserted into the crevices **244** of the pockets **243** of the fabric blind slats **24**, and then the rod members **242** are respectively inserted into the pockets **243** and the retaining members **231**, enabling the coupling portions **245** of the rod members **242** to be respectively secured to the retaining members **243**.

[0015] FIGS. 8 and 9 show a fabric blind assembly **300** constructed according to a third preferred embodiment of the present invention. According to this embodiment, the fabric blind assembly **300** is composed of a headrail **31**, a bottom rail **32**, braided ladders **33**, and fabric blind slats **34**. The headrail **31** is a rectangular open frame fixedly fastened to the top side of a window in transverse direction, having a frequency control mechanism and an amplitude control mechanism (not shown) mounted therein and connected with the braided ladders **33** for controlling the tilting angle of the fabric blind slats **34** and the elevation of the bottom rail **32** respectively. The frequency control mechanism and the amplitude control mechanism are of prior arts and not within the scope of the claims of the present invention, no further detailed description is necessary in this regard. The strip of fabric **341** of each fabric blind slat **34** has two through holes **346** positioned at the fabric blind slat **34** and symmetrically spaced from the center of the fabric blind slat **34**.

[0016] The fabric blind assembly **300** further includes a cylindrical lift cord **35**. The lift cord **35** is inserted through the through holes **346** of the fabric blind slats **34** and has two distal ends respectively connected with the amplitude control mechanism and fixedly fastened to the bottom rail **32**. Therefore, operating the amplitude control mechanism causes the bottom rail **32** and the fabric blind slats **34** to be lifted or lowered to the desired elevation.

[0017] The retaining members **331** of the braided ladders **33** are cylindrical pins. Each the rod member **342** of the fabric blind slats **34** has two coupling portions **345** respectively disposed at two distal ends. The coupling portions **345** of the rod members **342** according to this embodiment are plug holes adapted to receive the cylindrical pins **331** of the braided ladders **33**.

Claims

1. A fabric blind assembly comprising:

a headrail;
a bottom rail located below said headrail;
a plurality of fabric blind slats arranged in parallel between said headrail and said bottom rail, each of said fabric blind slats having two opposite long sides and two rigid rod members respectively mounted in said long sides, each of said rod members having at least one coupling portion; and
a plurality of braided ladders connected between said headrail and said bottom rail at the two opposite long sides of each of said fabric blind slats, each of said braided ladders having a plurality of retaining members respectively spaced apart from one another at a predetermined distance and respectively fastened to the coupling portions of said rod members of said fabric blind slats to keep said fabric blind slats between said headrail and said bottom rail and spaced apart from one another at the predetermined distance.

2. The fabric blind assembly as claimed in claim 1, wherein said headrail is a barrel rotatable to roll up said braided ladders and said fabric blind slats.

3. The fabric blind assembly as claimed in claim 1, wherein said headrail is a rectangular open frame having a frequency control mechanism and an amplitude control mechanism mounted therein, said frequency control mechanism being connected to said braided ladders for driving said braided ladders to adjust the tilting angle of said fabric blind slats, said amplitude control mechanism being connected with a lift cord that is connected with said bottom rail for driving said lift cord to move said bottom rail and said fabric blind slats vertically to the desired elevation.

4. The fabric blind assembly as claimed in claim 1, wherein said fabric blind slats each comprise an elongated strip of fabric, said strip of fabric having two pockets respectively extended along two opposite long sides thereof and adapted to receive the rod members respectively, each of said pockets

each having at least one transversely extended crevice corresponding to said coupling portion of the respective rod member.

5. The fabric blind assembly as claimed in claim 4, wherein the retaining members of said braided ladders are loops respectively formed integral with said braided ladders and respectively inserted into the crevices of said pockets of said fabric blind slats and connected with the coupling portions of the rod members of said fabric blind slats.

6. The fabric blind assembly as claimed in claim 4, wherein the retaining members of said braided ladders are tough and springy C-shaped retainers respectively inserted into the crevices of the pockets of said fabric blind slats and clamped to the coupling portions of said rod members of said fabric blind slats.

7. The fabric blind assembly as claimed in claim 1, wherein said retaining members are cylindrical; wherein each said fabric blind slat comprises an elongated strip of fabric, said strip of fabric having two pockets respectively extended along two opposite long sides thereof and adapted to receive said rod members of the respective fabric blind slat respectively; wherein each said rod member comprises two coupling portions respectively formed in two distal ends thereof for said rod members inserted thereinto.

8. The fabric blind assembly as claimed in claim 1, wherein the number of said braided ladders is 4 arranged in two pairs bilaterally disposed at two sides of said fabric blind slats; wherein each said rod member has two coupling portions corresponding to said retaining members of said two pairs of braided ladders.

9. The fabric blind assembly as claimed in claim 1, wherein said braided ladders include a first braided ladder connected between said headrail and said bottom rail at the middle of a first side of said fabric blind slats, and two second braided ladders bilaterally connected between said headrail and said bottom rail at a side opposite to the first side and equally spaced from said first braided ladder; wherein said rod members of each said fabric blind slat include a first rod member and a second rod member, said first rod member having a coupling portion fastened to a retaining member of said first braided ladder, said second rod member having two coupling portions respectively fastened to a retaining member of each said second braided ladder.

10. A fabric blind slat comprising an elongated strip of fabric and two rod members, said strip of fabric hav-

ing two pockets longitudinally extended along two long sides thereof, each of said pockets having at least one transversely extended crevice, said rod members being inserted into said pockets of said strip of fabric and each having a plurality of coupling portions corresponding to said crevices of said pockets.

10

15

20

25

30

35

40

45

50

55

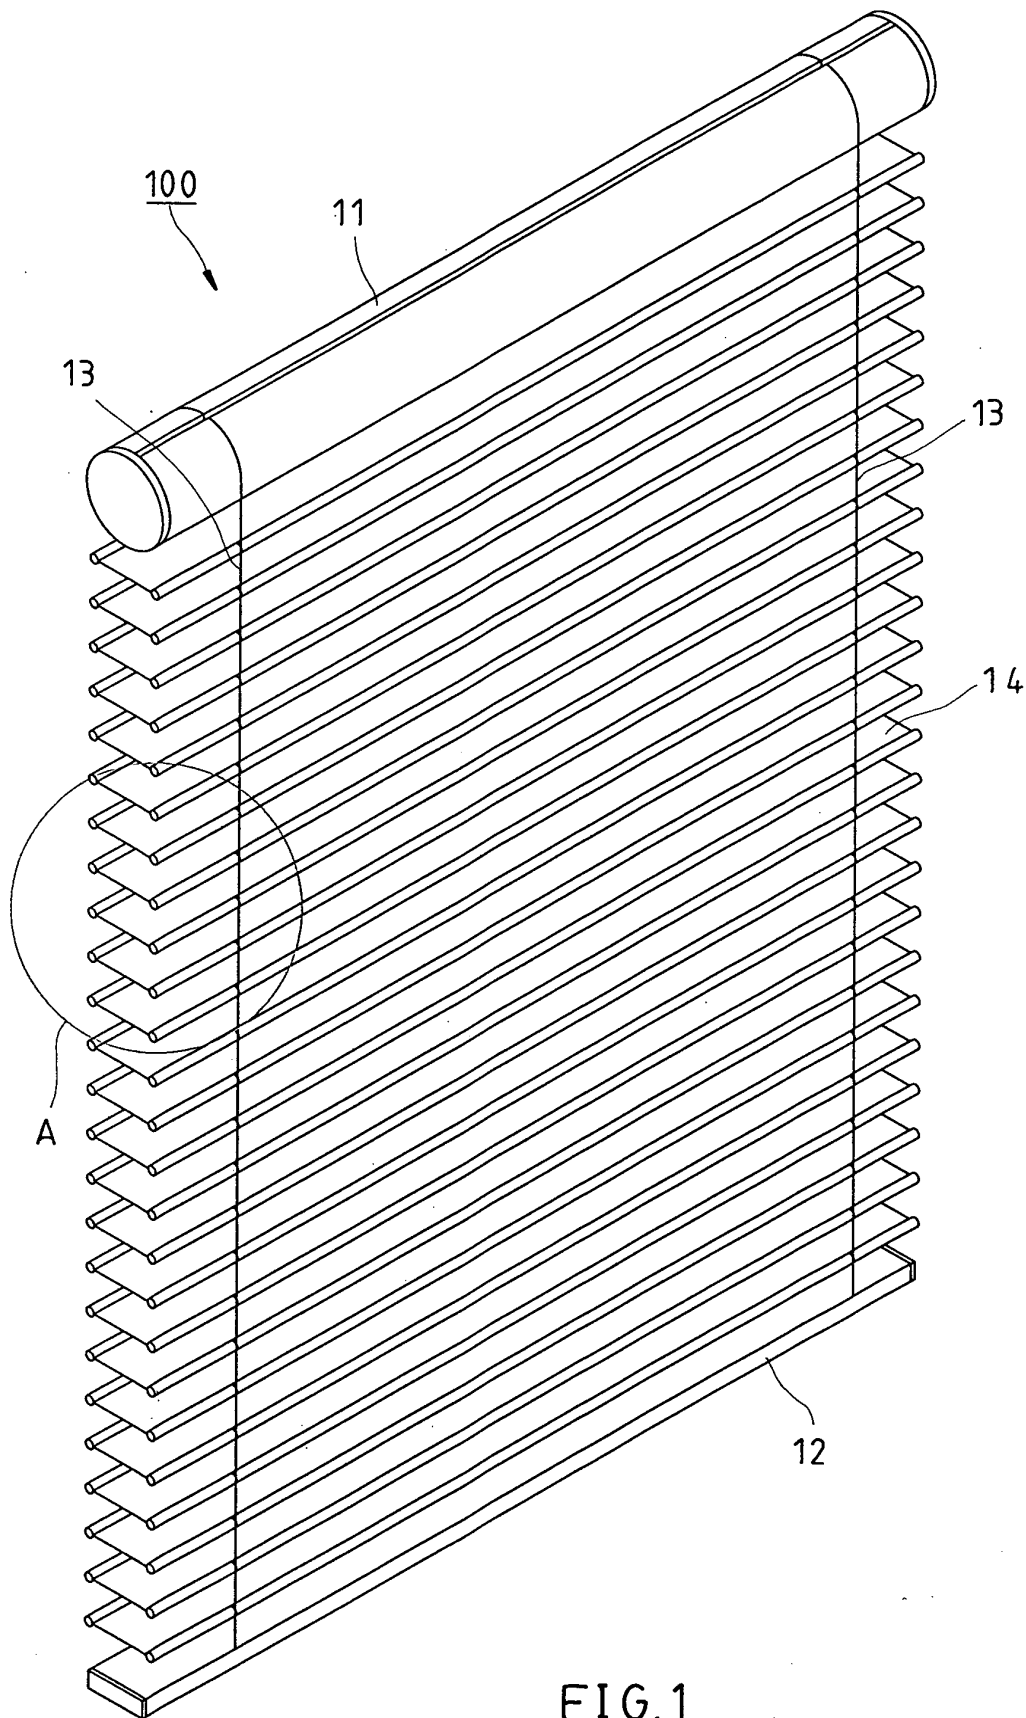


FIG. 1

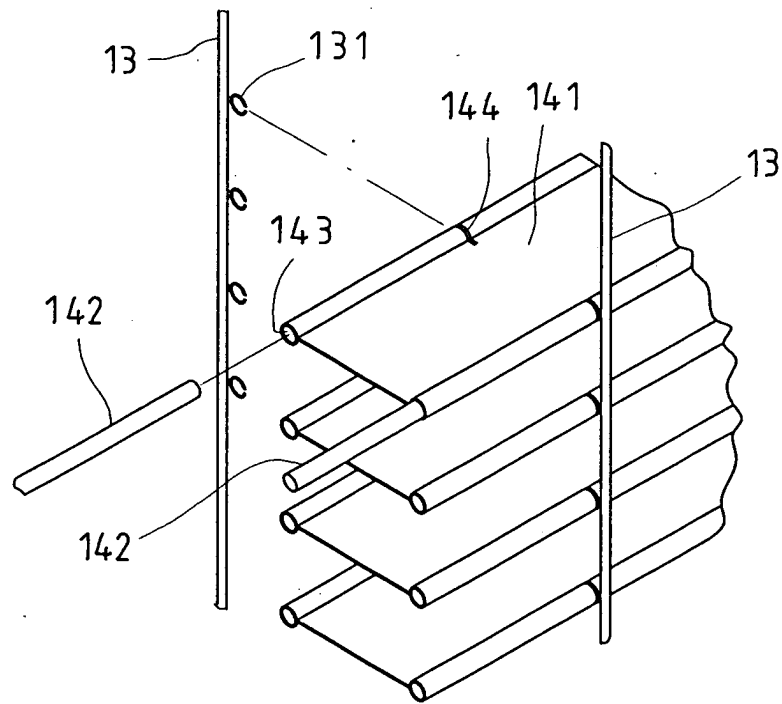


FIG. 2

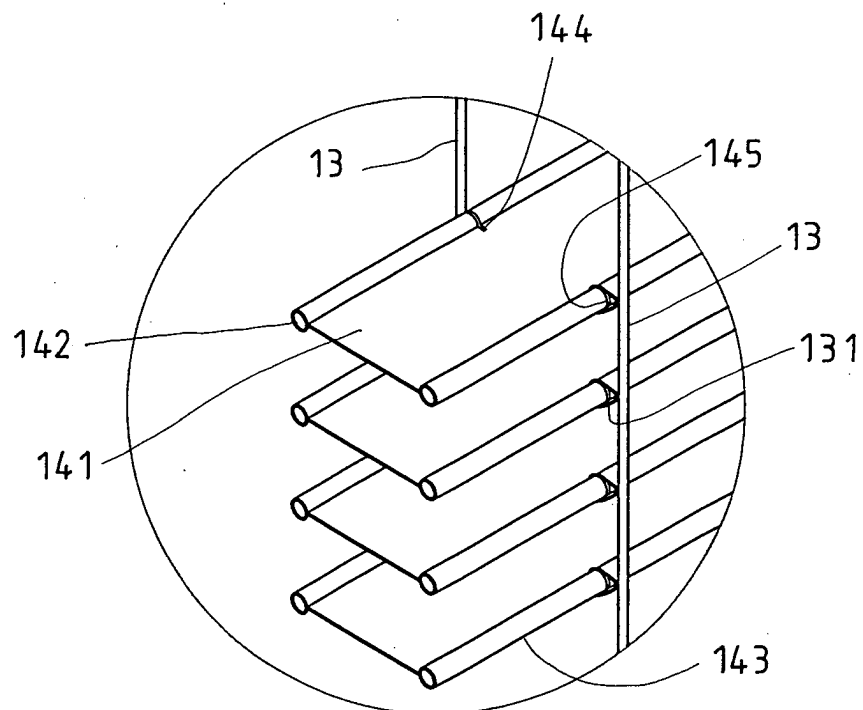


FIG. 3

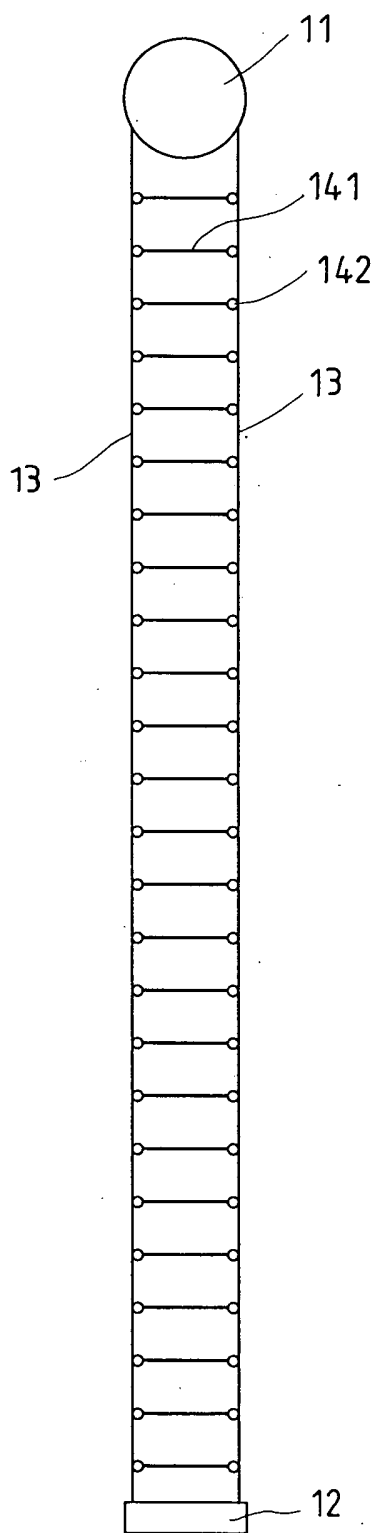


FIG. 4

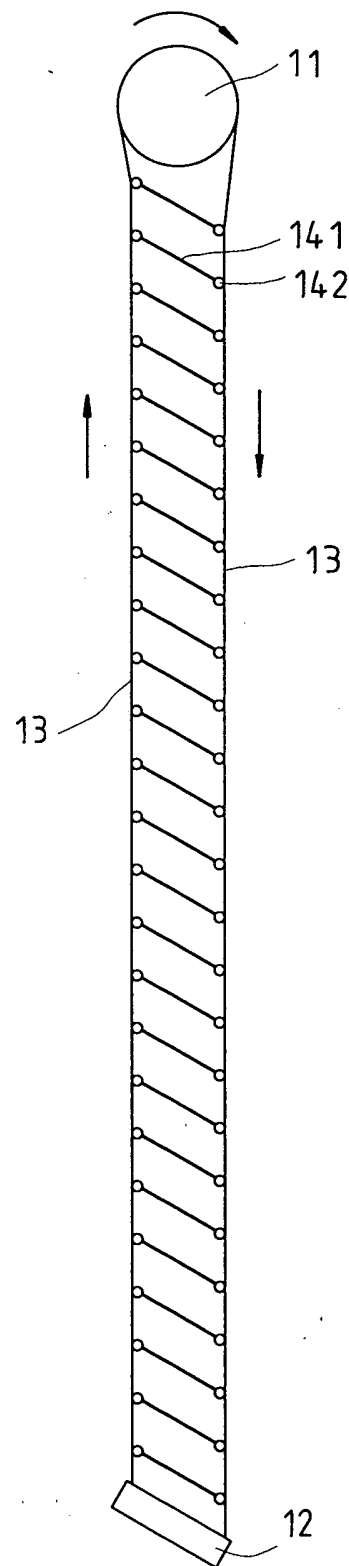


FIG. 5

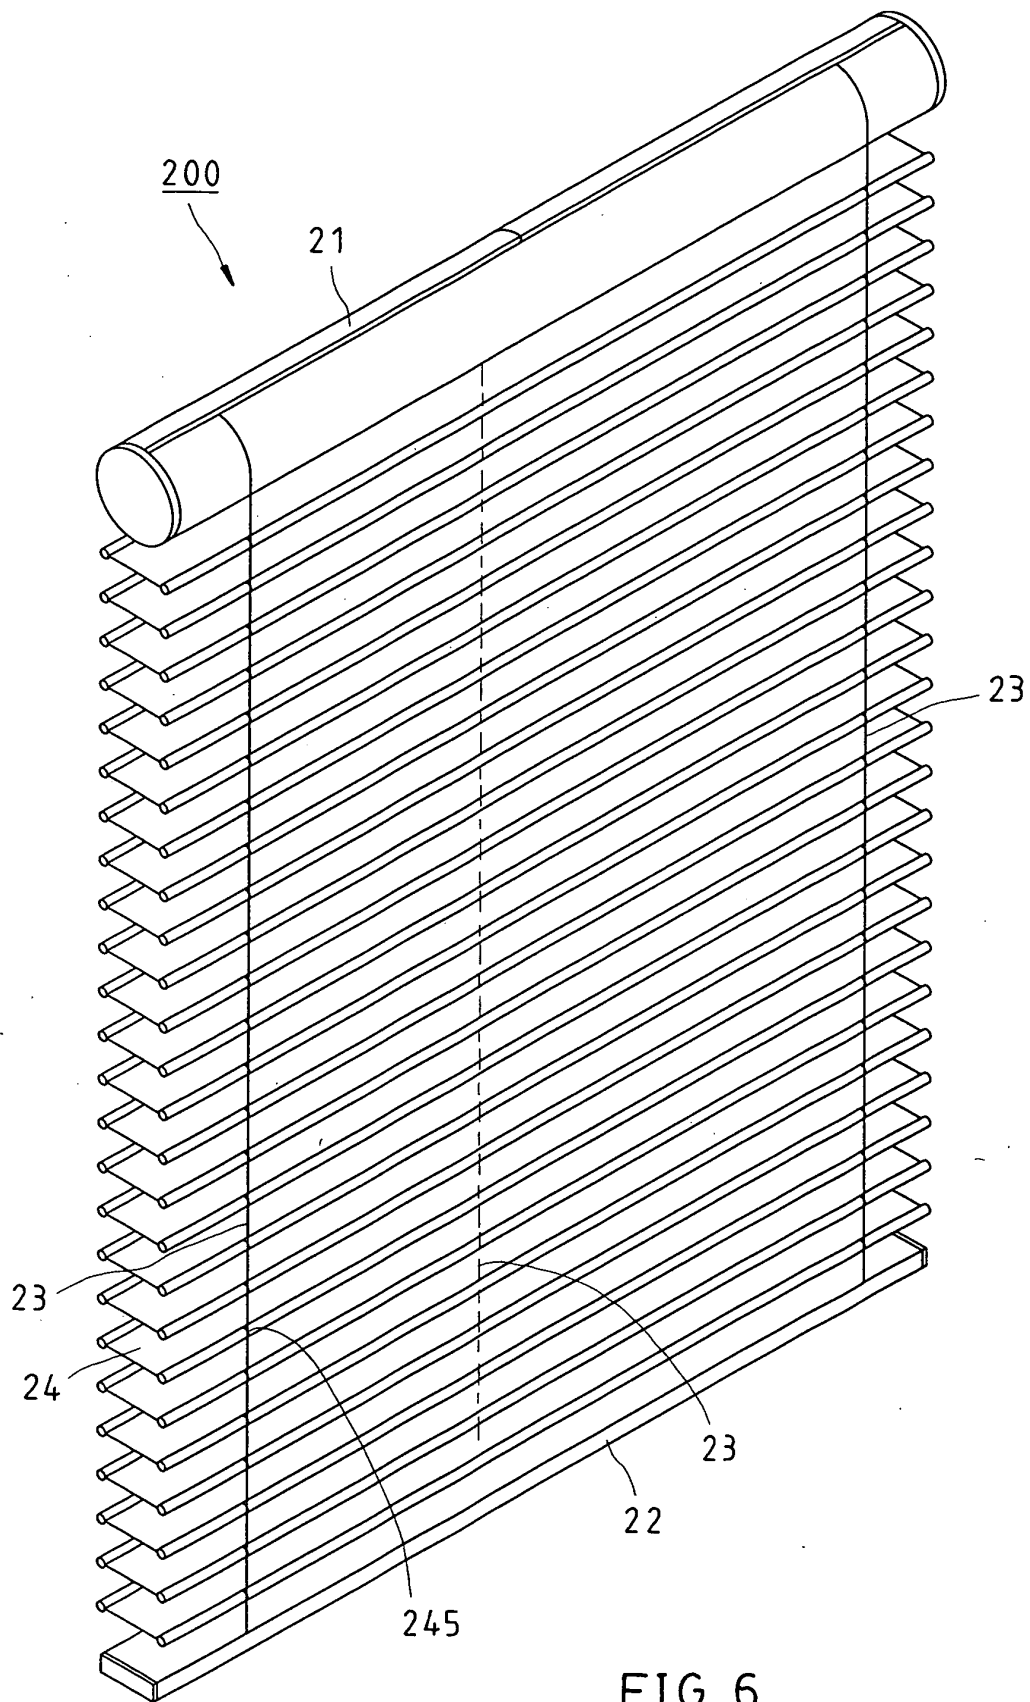
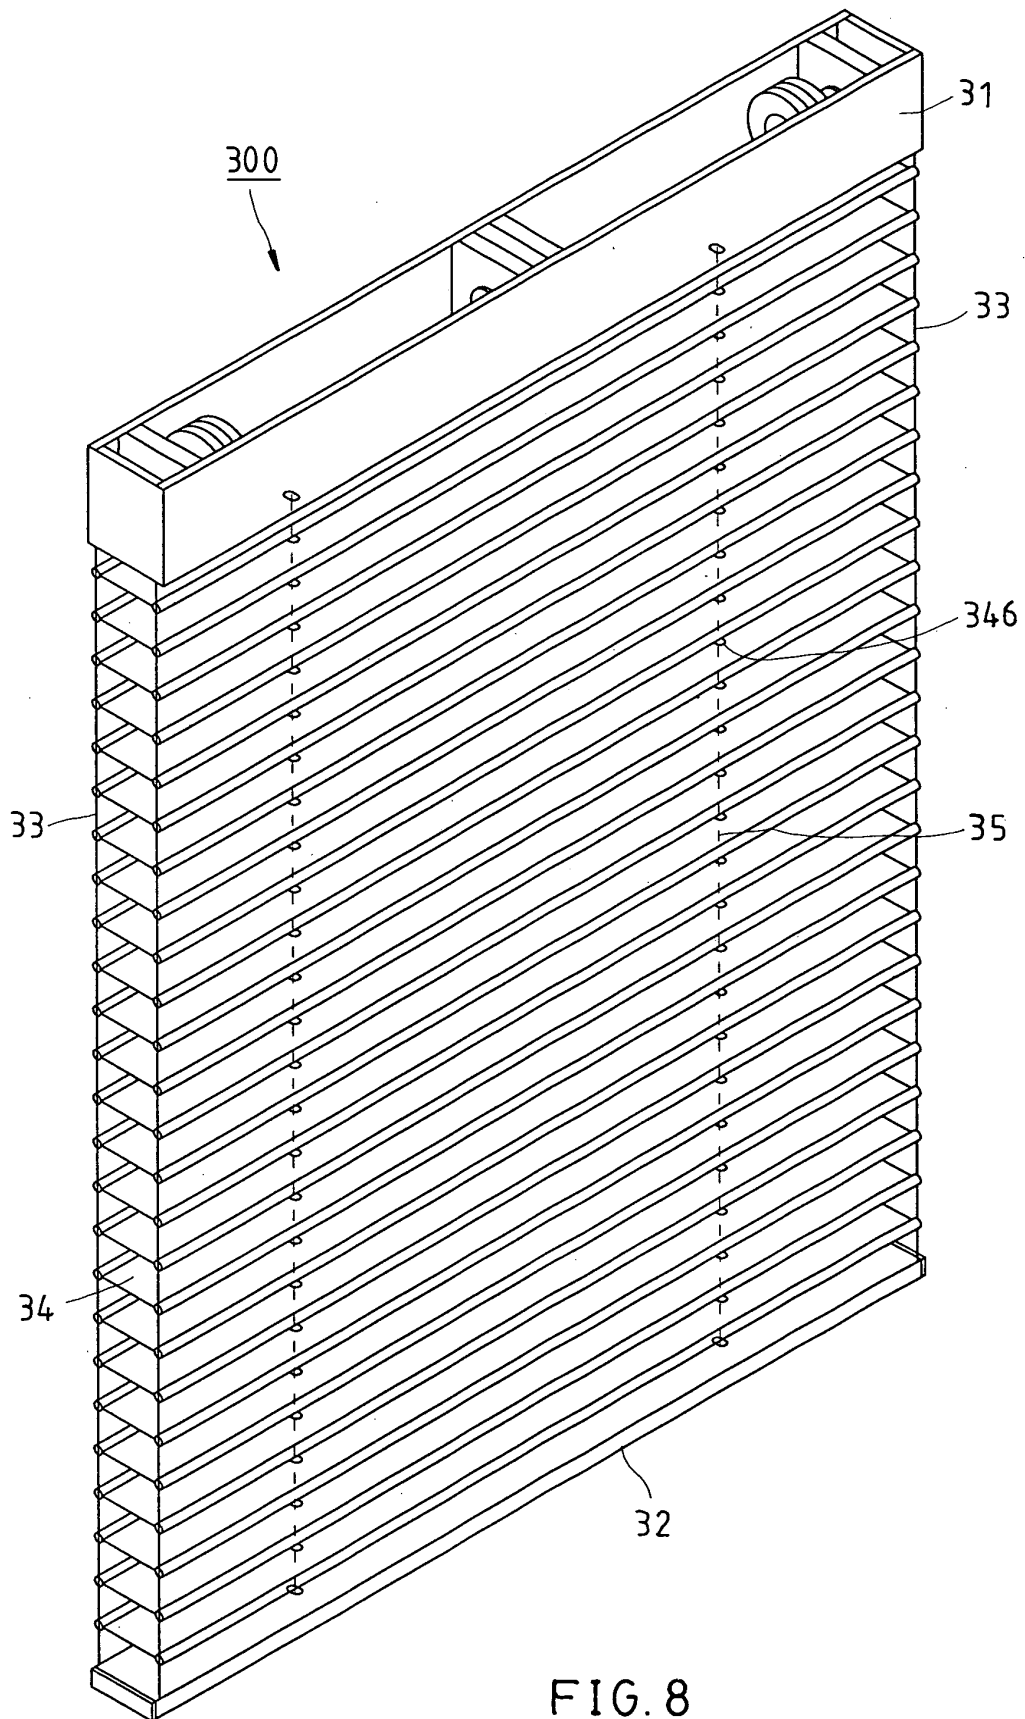


FIG. 6



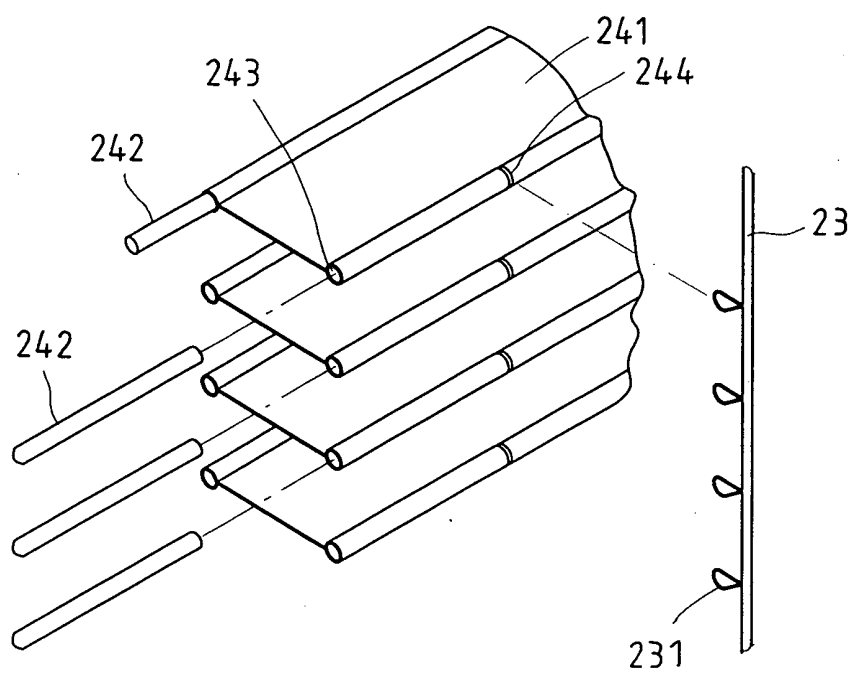


FIG. 7

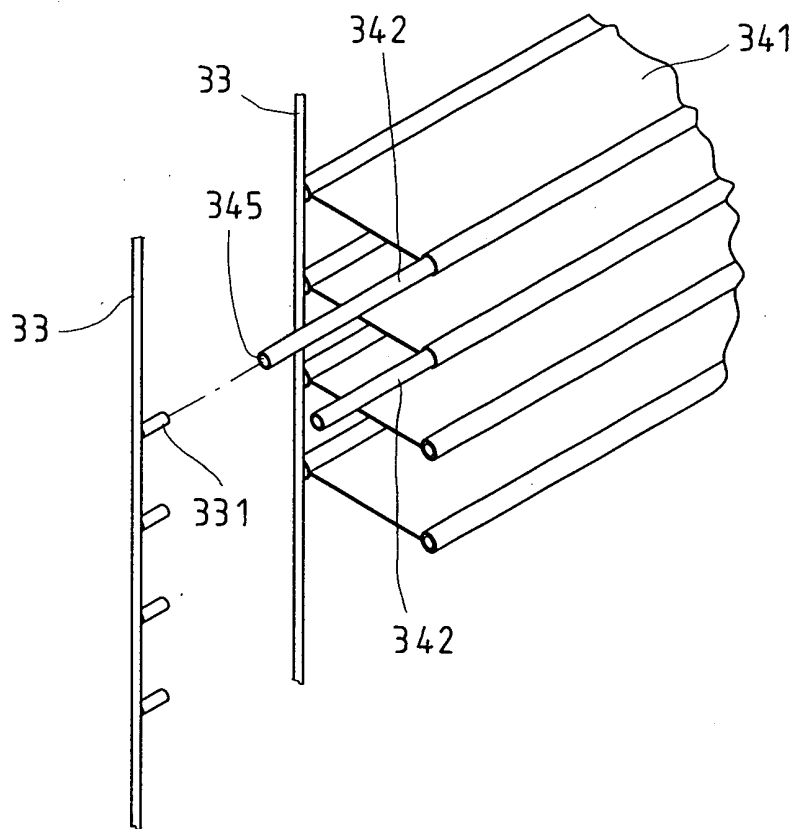


FIG. 9