



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 437 508 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:

14.07.2004 Bulletin 2004/29

(51) Int Cl.7: **F04B 39/00, F04B 53/12**

(21) Application number: **03000218.2**

(22) Date of filing: **07.01.2003**

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT SE SI SK TR**

Designated Extension States:

AL LT LV MK RO

(72) Inventor: **JHOU, WEN-SAN**

AN-DIN HSIANG, TAINAN HSIEN (TW)

(74) Representative: **Kador & Partner**

Corneliusstrasse 15

80469 München (DE)

(71) Applicant: **JHOU, WEN-SAN**

AN-DIN HSIANG, TAINAN HSIEN (TW)

(54) **Valved piston compressor**

(57) A compressor includes a piston slidably received in a chamber of a housing and having an annular groove for receiving a sealing ring, and having one or more conduits and having a number of openings communicating with the annular groove of the piston. The piston includes an inclined peripheral surface having a lower diameter greater the sealing ring for forcing the sealing ring to engage with the housing, and having an upper diameter less than that of the sealing ring for loosely receiving the sealing ring. A spring blade may selectively block the conduits of the piston.

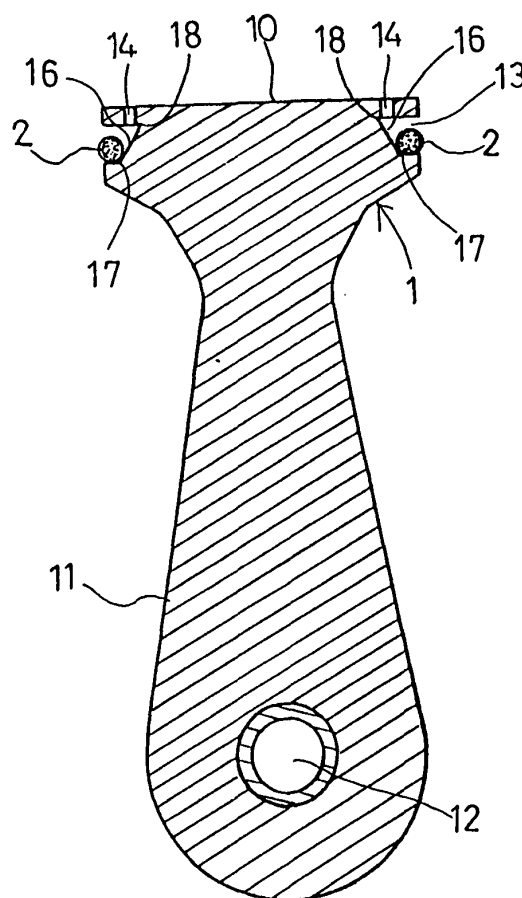


FIG. 2

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates to a compressor, and more particularly to a compressor having an improved valved piston device.

2. Description of the Prior Art

[0002] Typical compressors comprise a piston slidably received in a piston housing and a sealing ring solidly engaged on the piston and engaged between the piston and the piston housing. The pistons of the typical compressors have no valves provided therein, such that the typical piston or the sealing ring may be easily damaged. In addition, a number of valve members are required for controlling the air into and out of the piston housing.

[0003] The applicant had developed various kinds of valved pistons, and issued as U.S. Patent NO. 5,655,887, to Chou, and U.S. Patent NO. 6,095,758, to Chou, and U.S. Patent NO. 6,135,725, to Chou, and comprise a complicated valved piston device for the compressors that may not be easily manufactured and assembled together and that may not be effectively operated.

[0004] The present invention has arisen to mitigate and/or obviate the afore-described disadvantages of the conventional compressors.

SUMMARY OF THE INVENTION

[0005] The primary objective of the present invention is to provide a compressor including a piston device having a sealing ring loosely engaged therein for preventing the sealing ring from solidly engaging with the piston housing and for preventing the piston from being easily damaged.

[0006] The other objective of the present invention is to provide a compressor including a piston device having a number of openings and an annular groove formed therein for loosely receiving the sealing ring and for allowing the openings to be communicated with the environment when the sealing ring is loosely received in the annular groove of the piston device.

[0007] The further objective of the present invention is to provide a compressor including a piston device having a spring blade for blocking a conduit and for allowing the air to flow into the cylinder housing only and for preventing the air from flowing out of the cylinder housing.

[0008] The still further objective of the present invention is to provide a compressor including a piston device having a spring blade for blocking a number of conduits, and having a sealing ring received in an inclined outer annular groove of the piston, for forming a double security structure.

[0009] In accordance with one aspect of the invention, there is provided a valved piston device for a compressor, the valved piston device comprising a housing including a chamber formed therein, a piston slidably received in the chamber of the housing, the piston including an outer peripheral portion having an annular groove formed therein and defined by an inclined inner peripheral surface, and including an upper portion having a plurality of openings formed therein and communicating with the annular groove of the piston, and a sealing ring received in the annular groove of the piston. The inclined inner peripheral surface of the piston includes a lower portion having a diameter greater than that of the sealing ring for forming a lower portion of the annular groove of the piston and for forcing the sealing ring to engage with the housing, and includes an upper portion having a diameter less than that of the sealing ring for forming an upper portion of the annular groove of the piston and for loosely receiving the sealing ring in the upper portion of the annular groove of the piston, the openings of the piston are communicating with the annular groove of the piston and communicating with the chamber of the housing when the sealing ring is loosely received in the upper portion of the annular groove of the piston.

[0010] The housing includes a tube extended outward therefrom and includes a passage formed therein and communicating with the chamber of the housing and communicating with the tube, for allowing the air in the chamber of the housing to be forced to flow through the passage of piston and to flow through the tube when the piston is moved toward the tube.

[0011] The piston includes a plate disposed on top thereof, and means for securing the plate to the piston for defining the upper portion of the piston.

[0012] The piston further includes at least one conduit formed therein and communicating with the chamber of the housing with an environment, and a spring blade for selectively blocking the conduit of the piston and for allowing the air to flow through the conduit of the piston and to flow into the chamber of the housing when the piston is moved in a direction away from the housing.

[0013] The spring blade includes a first end or a middle or a center portion secured to the piston and includes at least one arm extended therefrom for blocking the conduit of the piston.

[0014] The conduits may be arranged in a circle in the piston. The spring blade includes a circular shape having a center portion secured to the piston and having a peripheral portion for blocking the conduits of the piston.

[0015] The openings of the piston may be opened toward a radially outer peripheral portion of the piston.

[0016] Further objectives and advantages of the present invention will become apparent from a careful reading of a detailed description provided hereinbelow, with appropriate reference to accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017]

FIG. 1 is a partial exploded view of a valved piston device for a compressor in accordance with the present invention;
 FIG. 2 is a cross sectional view taken along lines 2-2 of FIG. 3;
 FIG. 3 is a top plane schematic view of the valved piston;
 FIG. 4 is a partial cross sectional view showing a cylinder housing and a valved piston slidably engaged in the cylinder housing;
 FIG. 5 is a partial cross sectional view similar to FIG. 4, illustrating the sliding engagement of the valved piston in the cylinder housing;
 FIG. 6 is a partial exploded view illustrating another embodiment of the valved piston;
 FIG. 7 is a partial exploded view illustrating a further embodiment of the valved piston;
 FIGS. 8 and 9 are top plane schematic views illustrating two still further embodiments of the valved piston;
 FIG. 10 is a partial exploded view illustrating a still further embodiment of the valved piston;
 FIG. 11 is a cross sectional view taken along lines 11-11 of FIG. 12;
 FIG. 12 is a top plane schematic view of the valved piston as shown in FIGS. 10 and 11; and
 FIGS. 13, 14, 15, 16, 17, 18, 19 are top plane schematic views illustrating seven still further embodiments of the valved piston.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0018] Referring to the drawings, and initially to FIGS. 1-4, a valved piston device for a cylinder or an actuator or an air compressor in accordance with the present invention comprises a cylinder housing 3 including a chamber 30 (FIG. 4) formed therein for slidably receiving a piston 1 therein. The housing 3 includes a passage 31 formed therein for communicating the chamber 30 of the housing 3 with a tube 32 which may direct or guide or introduce the pressurized air or compressed air out of the cylinder housing 3. The piston 1 includes a rod 11 extended therefrom and extended outward of the housing 3 and having an orifice 12 formed therein for coupling to and for being driven by a motor (not shown), and for allowing the piston 1 to be moved along the housing 3 in a reciprocating action by the motor (not shown). The driving of the piston 1 along the housing 3 has been disclosed in U.S. Patent NO. 5,655,887, to Chou, and U.S. Patent NO. 6,095,758, to Chou, and U.S. Patent NO. 6,135,725, to Chou, which are taken as a reference for the present invention.

[0019] The piston 1 includes an annular groove 13

formed in the outer peripheral portion for receiving a sealing ring 2 therein, and formed or defined by an inner peripheral surface 16 that is inclined or tilted relative to the longitudinal direction or axis of the piston rod 11 and the piston 1. The sealing ring 2 is provided for making an air tight seal between the piston 1 and the housing 3. The inclined inner peripheral surface 16 of the piston 1 includes a lower peripheral portion having a diameter greater than that of the sealing ring 2, for forcing the sealing ring 2 radially outward to engage with the housing 3 and to make an air tight or a water tight seal with the housing 3 (FIG. 5). The inclined inner peripheral surface 16 of the piston 1 includes an upper peripheral portion 18 having a diameter less than that of the sealing ring 2 (FIG. 4), for loosely receiving the sealing ring 2, and for allowing the sealing ring 2 to be disengaged from the housing 3.

[0020] The piston 1 includes an upper portion 10 having three or more openings 14 formed therein and communicating the annular groove 13 of the piston 1 with the chamber 30 of the housing 3. Particularly, the three or more openings 14 are arranged in a circle that has a diameter less than that of the upper peripheral portion 18 of the inclined inner peripheral surface 16 of the piston 1, but has a diameter greater than that of the sealing ring 2, best shown in FIGS. 2, 4, 5, for allowing the air in the chamber 30 of the housing 3 to flow out through the openings 14 and the annular groove 13 of the piston 1 and to flow bypass the sealing ring 2 and then to flow out of the housing 3 when the sealing ring 2 is loosely received in the upper portion of the annular groove 13, best shown in FIG. 4. Relatively, the air may also flow through the annular groove 13 and the openings 14 of the piston 1 and then may flow bypass the sealing ring 2 and then may flow into the chamber 30 of the housing 3 when the sealing ring 2 is loosely received in the upper portion of the annular groove 13.

[0021] In operation, the piston 1 may be moved up and down along the housing 3 in a reciprocating action by the typical motor (not shown). When the piston 1 is moved in an active direction, i.e., moved toward the tube 32, the sealing ring 2 is forced toward the lower portion 17 of the inclined inner peripheral surface 16 of the piston 1 and thus may be forced to engage with the housing 3 such that the air in the chamber 30 of the housing 3 may be forced into the tube 32 through the passage 31 (FIG. 5). When the piston 1 moves downward or away from the tube 32, the air may flow into the chamber 30 of the housing 3 via the annular groove 13 of the piston 1 and the notches 14 of the piston 1. The air may then be forced into the tube 32 again when the piston 1 is forced toward the tube 32 again. The air may thus be effectively forced through the tube 32 without the other valve members.

[0022] It is to be noted that the formation or the provision of the openings 14 that are arranged in a circle in the piston 1 may facilitate the evenly flowing of the air bypass the sealing ring 2, even when the sealing ring 2

is unevenly received in the annular groove 13 of the piston 1 and when the sealing ring 2 blocks some of the openings 14 of the piston 1.

[0023] Referring next to FIG. 6, the piston 1 may include a screw hole 101 formed therein, and a plate 19 having the openings 14 formed therein and having an aperture 102 formed in the middle portion thereof for receiving a fastener 104 which may be threaded with the screw hole 101 of the piston 1 and which may secure the plate 19 onto the top of the piston 1, for forming the upper portion 10 of the piston 1. A washer 103 may be engaged between the plate 19 and the fastener 104.

[0024] Referring next to FIGS. 7-9, illustrated is another embodiment of the valved piston device which includes the openings 14 that are opened toward the radially outer peripheral portion of the upper portion 10 of the piston 1. The openings 14 may be arranged parallel to each other (FIG. 8) or arranged radially and opened radially outward (FIGS. 7, 9). The air may also flow through the annular groove 13 and the openings 14 of the piston 1 and then may flow bypass the sealing ring 2 and then may flow into the chamber 30 of the housing 3 when the sealing ring 2 is loosely received in the upper portion of the annular groove 13.

[0025] Referring next to FIGS. 10-19, illustrated are the other embodiments of the valved piston device. The piston 1 includes one conduit 20 (FIGS. 10, 11, 12, 16), or two conduits 20 (FIGS. 13, 17), or more conduits (FIGS. 14, 15, 18, 19) formed therein and formed through the piston 1 for communicating the chamber 30 of the housing 3 with the environment, and for allowing the air to flow into and outward of the chamber 30 of the housing 3. The piston 1 includes one or more projections 21 provided or extended from the upper portion 10 thereof. A valve blade or a spring blade 22 includes one end portion secured to the piston 1 with the projections 21 (FIGS. 10, 11, 12, 16), and the other end for biasing against the upper portion 10 of the piston 1 and for blocking the conduits 20 of the piston 1 respectively and for preventing the air to flow out of the cylinder housing 3 when the piston 1 is moved away from the tube 32 (FIGS. 4, 5) and for allowing the air to flow into the cylinder housing 3 when the piston 1 is moved toward the tube 32 (FIGS. 4, 5).

[0026] As shown in FIGS. 13-15 and 17-19, the spring blade 22 may include various kinds of shapes having a middle or a center portion secured to the piston 1 with the projections 21, and having the other portion, such as the peripheral portion for biasing against the upper portion 10 of the piston 1 and for blocking the conduits 20 of the piston 1 respectively. For example, the spring blade 22 may include a circular shape (FIGS. 15, 19), or may include two (FIGS. 13, 17) or more arms (FIGS. 14, 18) or extensions extended therefrom for blocking the conduits 20 of the piston 1. In addition to the conduits 20 of the piston 1, the piston 1 may further include a number of openings 14 formed in the outer peripheral portion thereof (FIGS. 16-19) for communicating with

the annular groove 13 of the piston 1 and for further communicating with the environment.

[0027] Accordingly, the compressor includes a piston having a loosely received sealing ring for preventing the piston from being easily damaged.

[0028] Although this invention has been described with a certain degree of particularity, it is to be understood that the present disclosure has been made by way of example only and that numerous changes in the detailed construction and the combination and arrangement of parts may be resorted to without departing from the spirit and scope of the invention as hereinafter claimed.

Claims


1. A valved piston device for a compressor, said valved piston device comprising:



- a) a housing including a chamber formed therein,
- b) a piston slidably received in said chamber of said housing, said piston including an outer peripheral portion having an annular groove formed therein, and including an upper portion having a plurality of openings formed therein and communicating with said annular groove of said piston, and
- c) a sealing ring received in said annular groove of said piston,

said openings of said piston being communicating with said annular groove of said piston and being communicating with said chamber of said housing when said sealing ring is loosely received in said upper portion of said annular groove of said piston.

2. The valved piston device according to claim 1, wherein said annular groove of said piston includes an inclined inner peripheral surface, said inclined inner peripheral surface of said piston including a lower portion having a diameter greater than that of said sealing ring for forming a lower portion of said annular groove of said piston and for forcing said sealing ring to engage with said housing, and including an upper portion having a diameter less than that of said sealing ring for forming an upper portion of said annular groove of said piston and for loosely receiving said sealing ring in said upper portion of said annular groove of said piston, said openings of said piston being communicating with said annular groove of said piston and being communicating with said chamber of said housing when said sealing ring is loosely received in said upper portion of said annular groove of said piston.

3. The valved piston device according to claim 1, wherein said openings of said piston are opened toward a radially outer peripheral portion of said piston.
4. A valved piston device for a compressor, said valved piston device comprising:
- a) a housing including a chamber formed therein,
 - b) a piston slidably received in said chamber of said housing, said piston including an outer peripheral portion having an annular groove formed therein, said piston further including at least one conduit formed therein and communicating with said chamber of said housing with an environment,
 - c) a sealing ring received in said annular groove of said piston,
 - d) a spring blade secured to said piston, said spring blade including at least one arm extended therefrom for blocking said at least one conduit of said piston and for allowing the air to flow through said at least one conduit of said piston and to flow into said chamber of said housing when said piston is moved in a direction away from said housing.
5. The valved piston device according to claim 4, wherein said spring blade includes a circular shape having a center portion secured to said piston and having a peripheral portion for blocking said at least one conduit of said piston.
6. The valved piston device according to claim 4, wherein piston includes an upper portion having a plurality of openings formed therein and communicating with said annular groove of said piston, and includes an inclined inner peripheral surface for defining said annular groove thereof, said inclined inner peripheral surface of said piston includes a lower portion having a diameter greater than that of said sealing ring for forming a lower portion of said annular groove of said piston and for forcing said sealing ring to engage with said housing, and includes an upper portion having a diameter less than that of said sealing ring for forming an upper portion of said annular groove of said piston and for loosely receiving said sealing ring in said upper portion of said annular groove of said piston, said openings of said piston are communicating with said annular groove of said piston and communicating with said chamber of said housing when said sealing ring is loosely received in said upper portion of said annular groove of said piston.
7. The valved piston device according to claim 6, wherein said openings of said piston are opened toward a radially outer peripheral portion of said piston.
8. A valved piston device for a compressor, said valved piston device comprising:
- a) a housing including a chamber formed therein,
 - b) a piston slidably received in said chamber of said housing, said piston including an outer peripheral portion having an annular groove formed therein, said piston further including a plate disposed on top thereof, and means for securing said plate to said piston for defining said upper portion of said piston,
 - c) a sealing ring received in said annular groove of said piston, said plate further including a plurality of openings formed therein and communicating with said annular groove of said piston, said openings of said plate being communicating with said annular groove of said piston and being communicating with said chamber of said housing and for allowing the air to flow through said openings of said plate and to flow into said chamber of said housing when said piston is moved in a direction away from said housing.

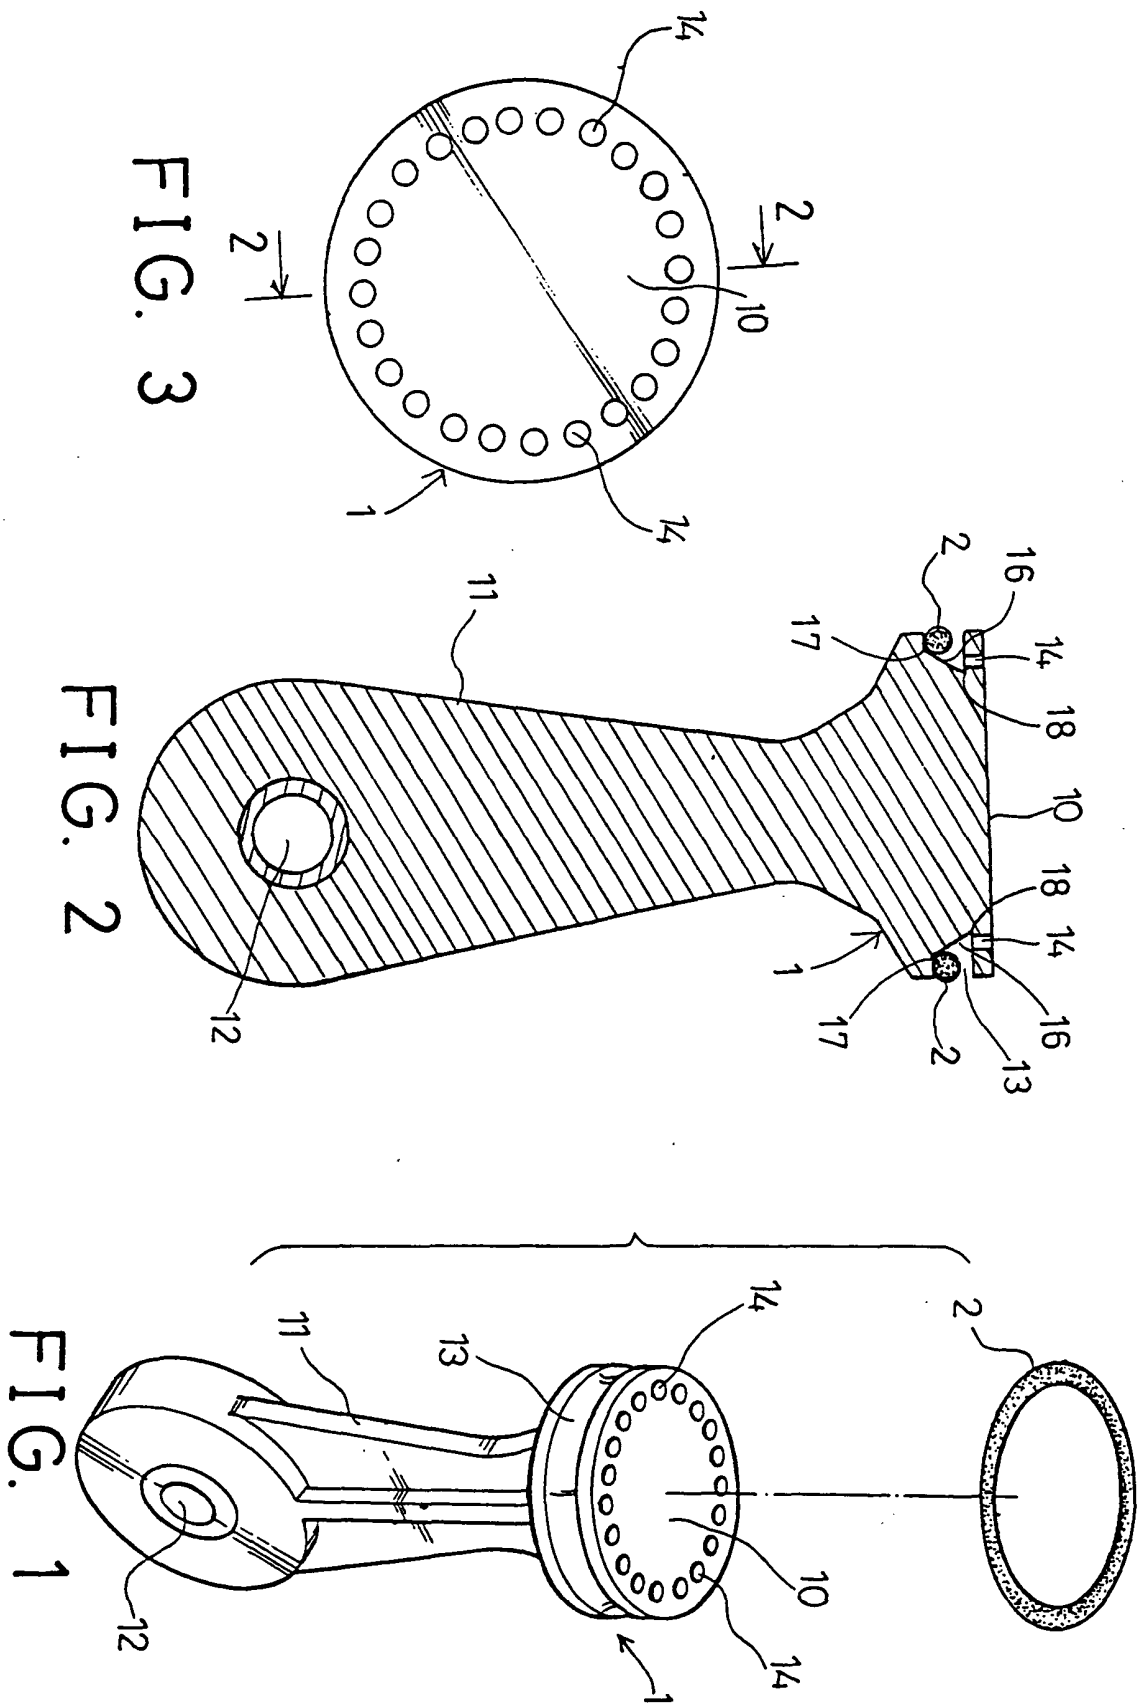

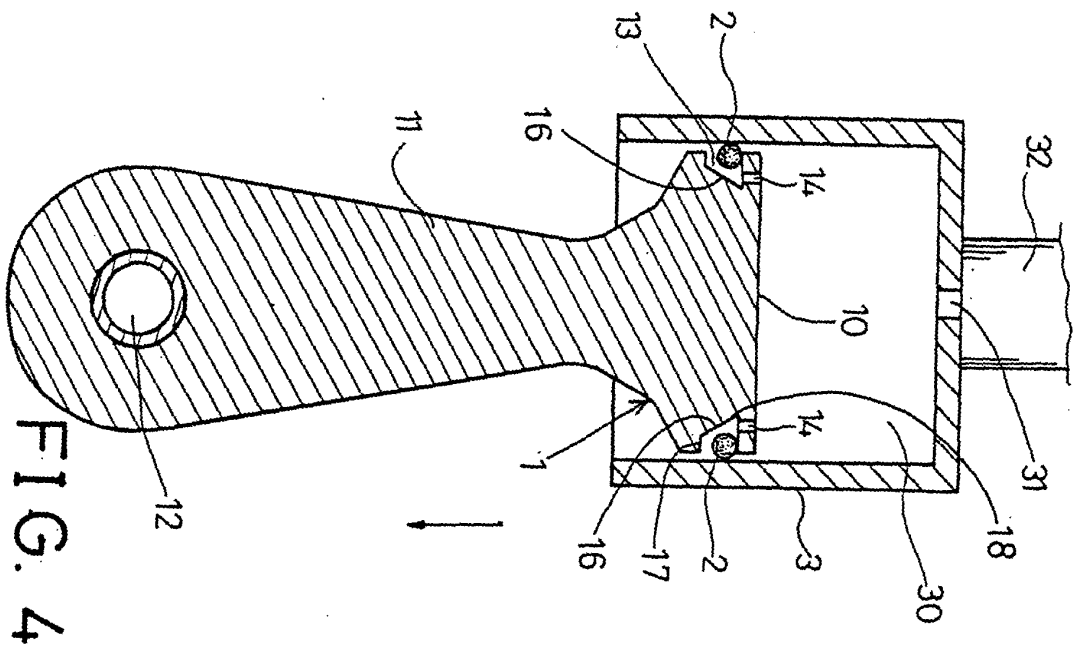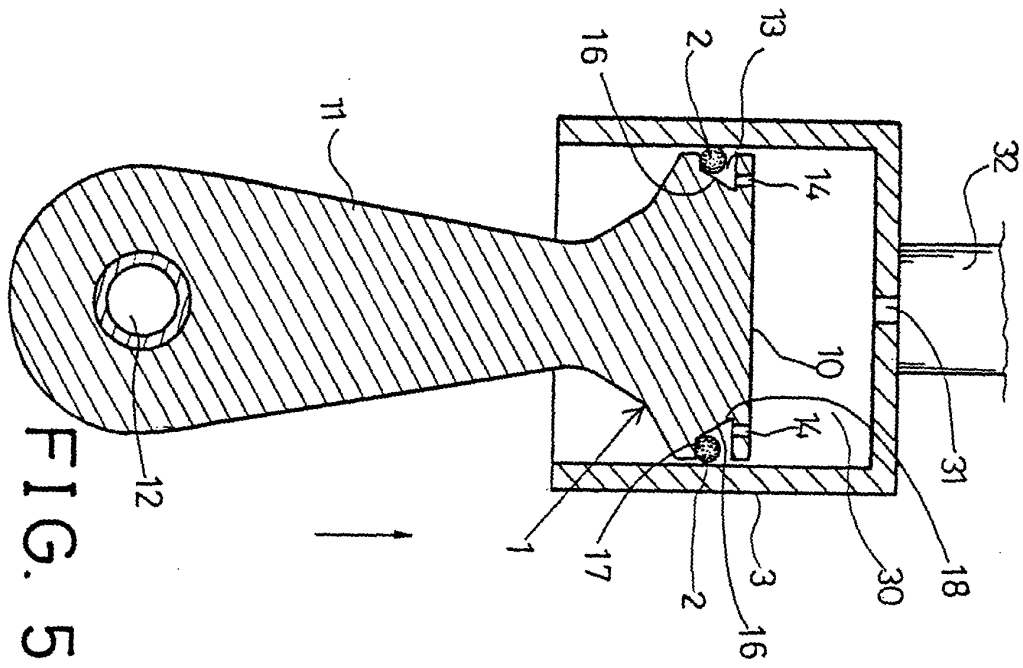

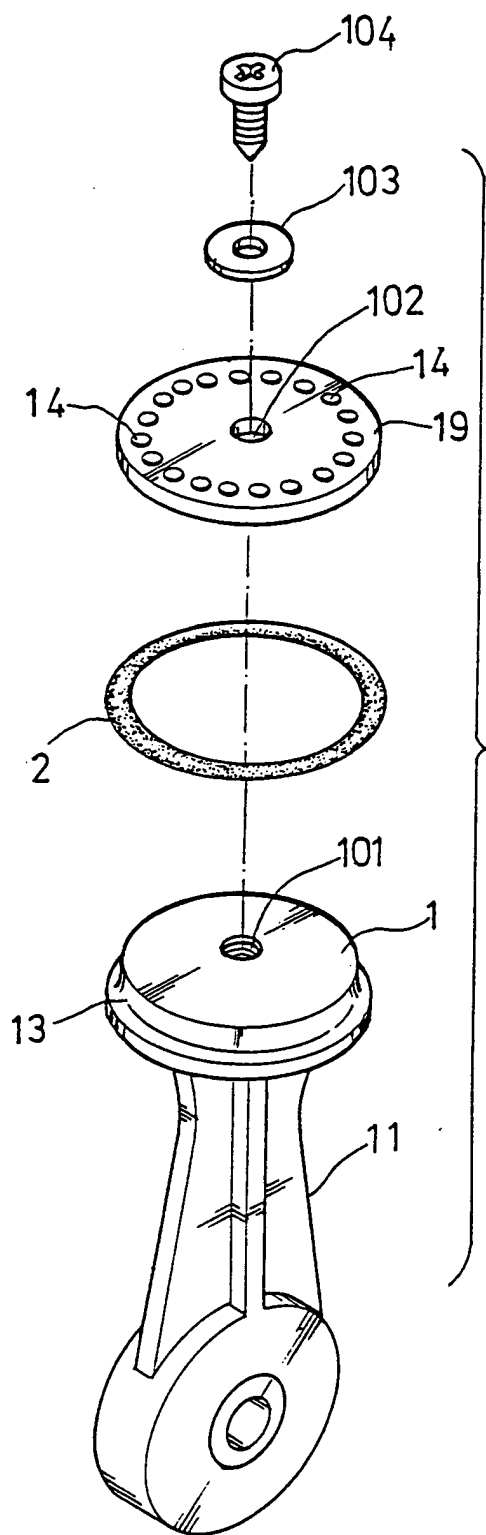


FIG. 6

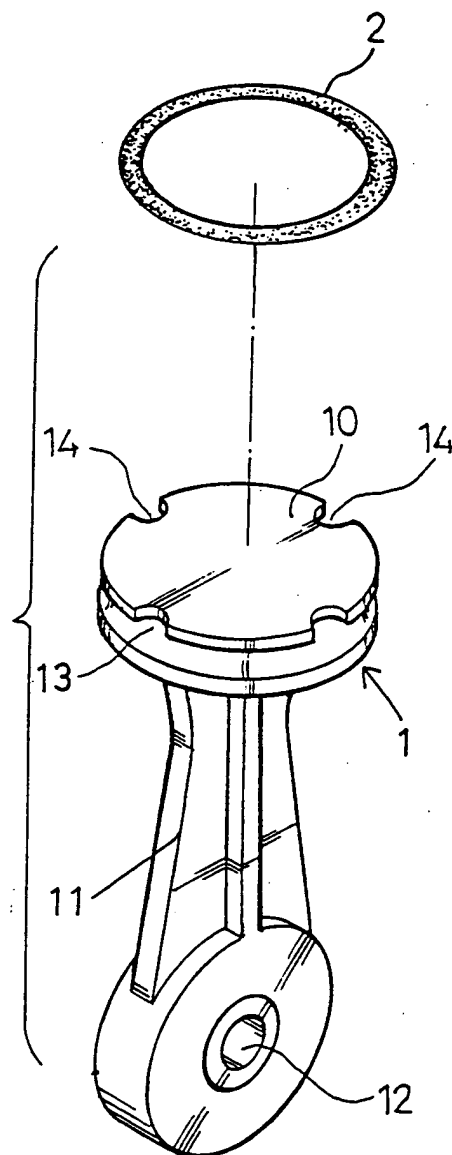


FIG. 7

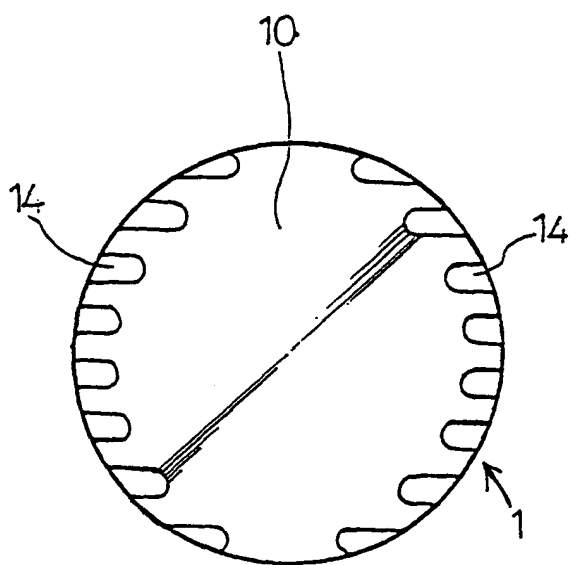


FIG. 8

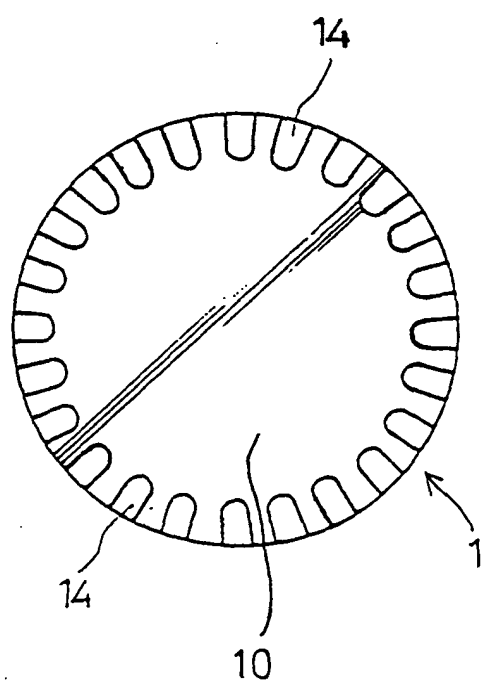


FIG. 9

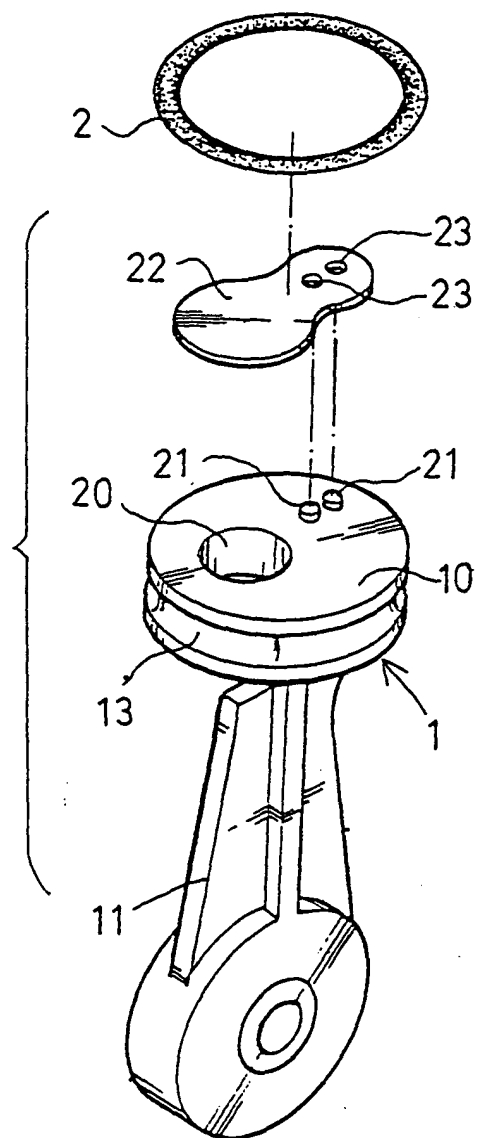


FIG. 10

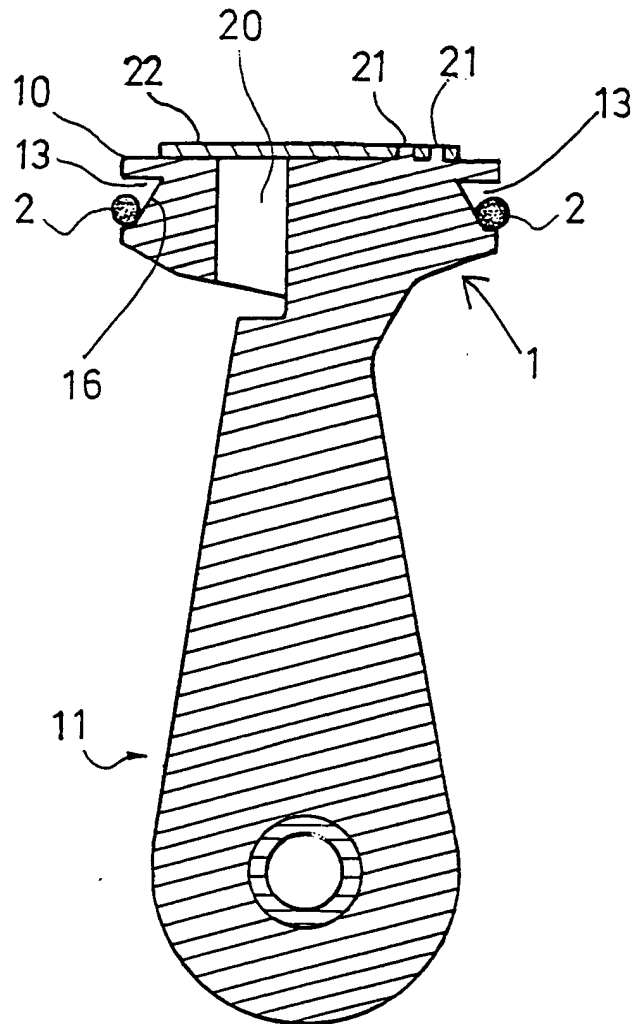


FIG. 11

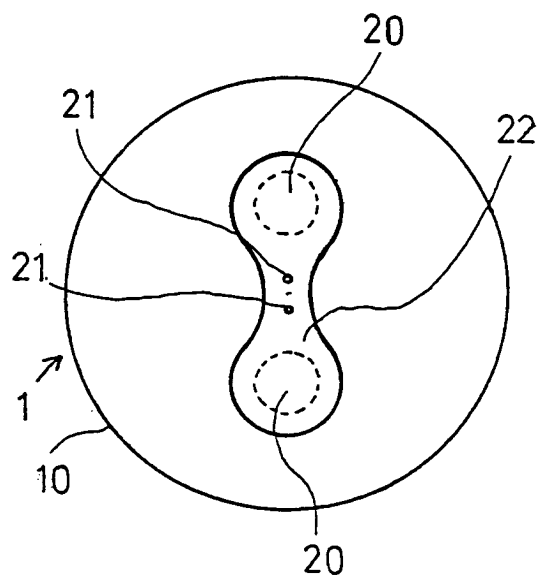


FIG. 13

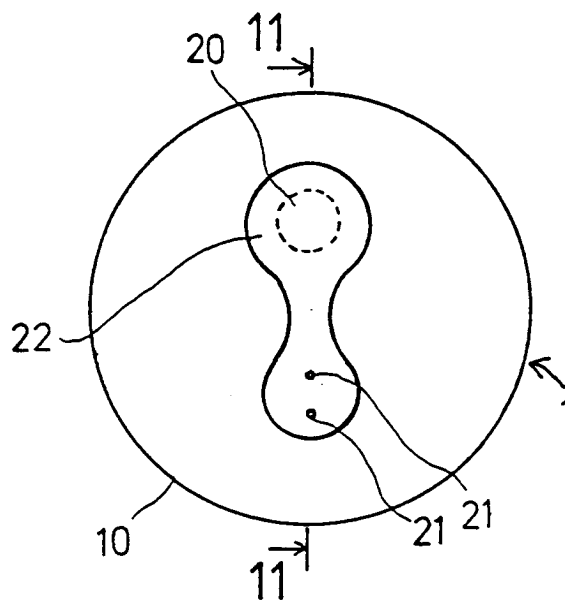


FIG. 12

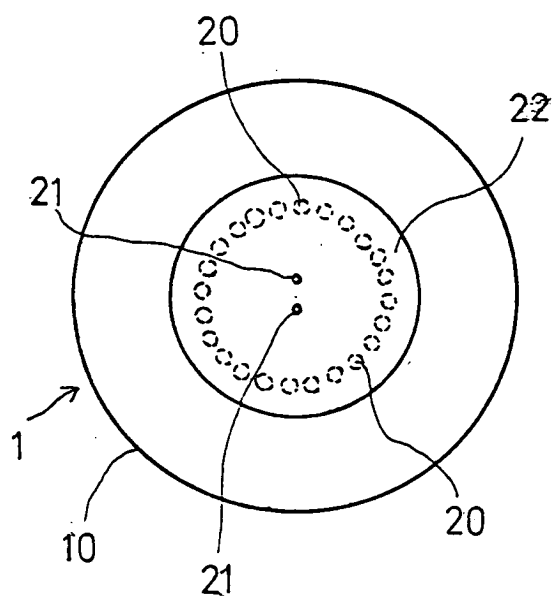


FIG. 15

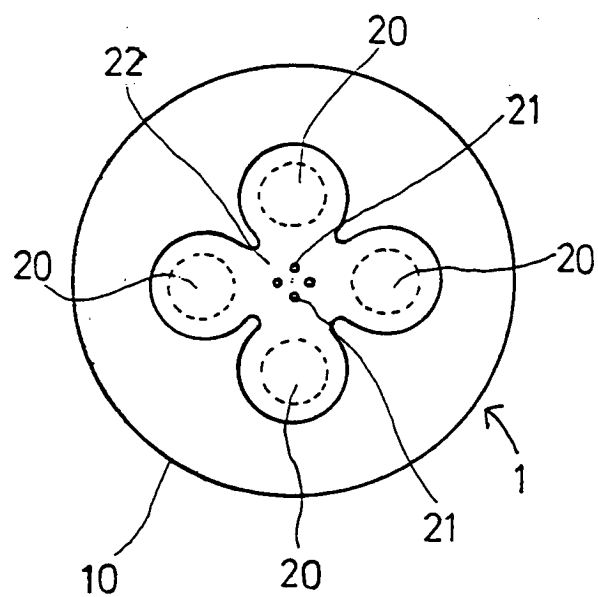


FIG. 14

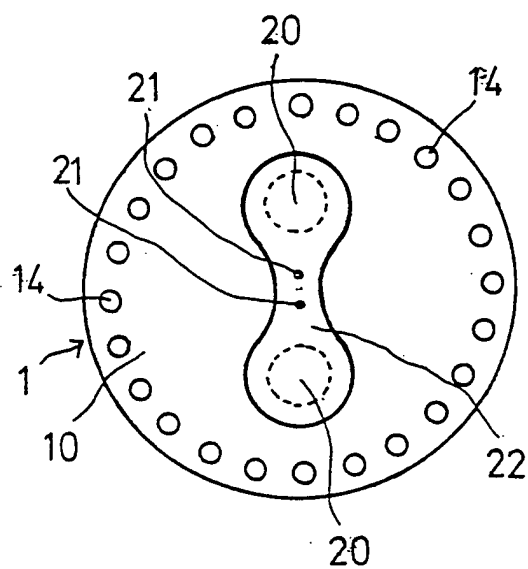


FIG. 17

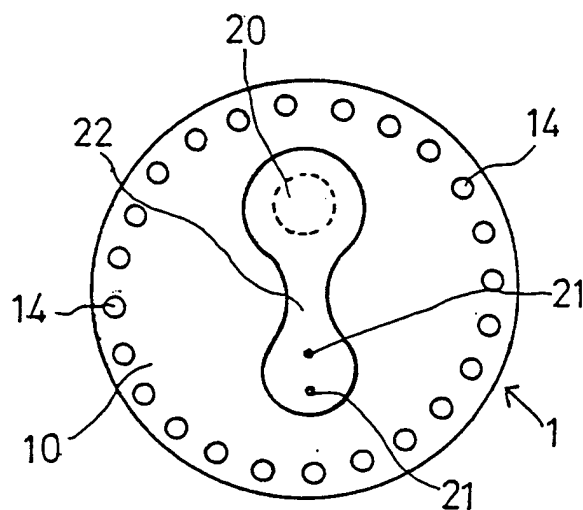


FIG. 16

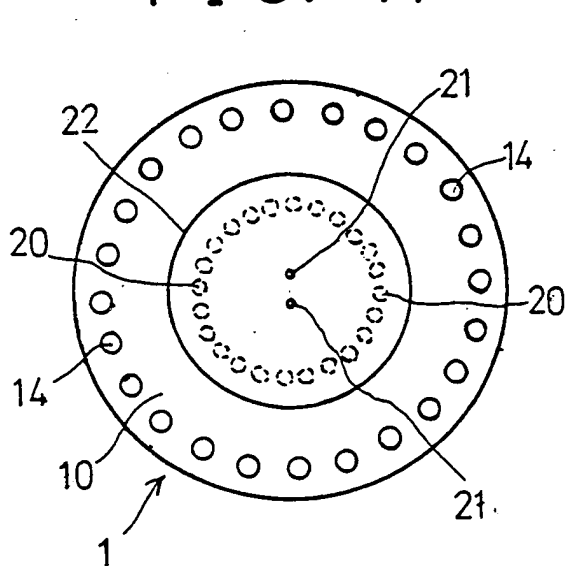


FIG. 19

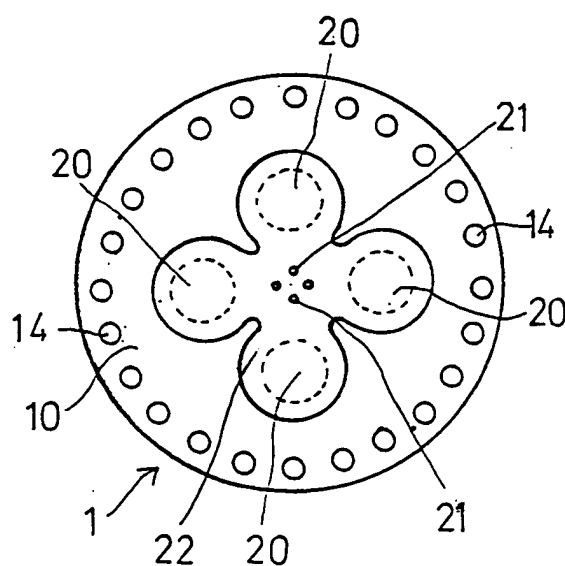


FIG. 18



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 00 0218

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	DE 975 469 C (MUELLER & CO SCHWELMER EISEN) 7 December 1961 (1961-12-07) * the whole document *	1-3	F04B39/00 F04B53/12
X	GB 572 095 A (TURNER MFG COMPANY LTD;WALTER ROBERT GROVES) 21 September 1945 (1945-09-21) * the whole document *	1,3	
X	DE 8 985 C (E.L.GUILLIÉ) 23 February 1880 (1880-02-23) * the whole document *	1,3	
A	EP 0 312 597 A (PROIZV OB Z IM M I KALININA) 26 April 1989 (1989-04-26) * the whole document *	2	
X	US 6 200 110 B1 (CHOU WEN SAN) 13 March 2001 (2001-03-13) * the whole document *	4,5	
X	US 5 171 135 A (GANNAWAY EDWIN L ET AL) 15 December 1992 (1992-12-15) * the whole document *	4,5	TECHNICAL FIELDS SEARCHED (Int.Cl.7) F04B
A	US 4 596 515 A (SIMON DECEASED DONALD J ET AL) 24 June 1986 (1986-06-24) * the whole document *	6,7	
X	US 2002/106293 A1 (CARLSON ROBERT T) 8 August 2002 (2002-08-08) * the whole document * * figure 5 *	8	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 16 June 2003	Examiner Ingelbrecht, P
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/82 (P44001)



European Patent
Office

Application Number

EP 03 00 0218

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☐ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☒ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent
Office

LACK OF UNITY OF INVENTION
SHEET B

Application Number
EP 03 00 0218

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims: 1-3

Annular valve integrated in compressor piston

2. Claims: 4-7

Spring blade valve integrated in compressor piston

3. Claim : 8

specific modular design for annular valve integrated in a a
compressor piston

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 00 0218

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-06-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 975469	C	07-12-1961	NONE	
GB 572095	A	21-09-1945	NONE	
DE 8985	C		NONE	
EP 0312597	A	26-04-1989	WO 8808489 A1 EP 0312597 A1 FI 885854 A RO 102342 B1	03-11-1988 26-04-1989 19-12-1988 26-06-1992
US 6200110	B1	13-03-2001	NONE	
US 5171135	A	15-12-1992	CA 2074584 A1 CA 2074584 C FR 2689572 A1	26-01-1993 08-11-1994 08-10-1993
US 4596515	A	24-06-1986	NONE	
US 2002106293	A1	08-08-2002	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82