

(19)



(11)

EP 1 439 677 B9

(12)

CORRECTED EUROPEAN PATENT SPECIFICATION

Note: Bibliography reflects the latest situation

(15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see
Claims EN

(51) Int Cl.:
H04L 27/26 ^(2006.01)

(48) Corrigendum issued on:
07.11.2007 Bulletin 2007/45

(45) Date of publication and mention
of the grant of the patent:
13.06.2007 Bulletin 2007/24

(21) Application number: **04002920.9**

(22) Date of filing: **22.02.1999**

(54) **Synchronisation symbol structure for an OFDM system**

Synchronisierungssymbolstruktur für ein OFDM-System

Structure de symboles synchronisation pour un système MDFO

(84) Designated Contracting States:
AT DE FI FR GB SE

(30) Priority: **08.01.1999 EP 99100263**

(43) Date of publication of application:
21.07.2004 Bulletin 2004/30

(60) Divisional application:
05002279.7 / 1 530 336
06014693.3 / 1 722 527
06014694.1 / 1 705 852

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
99103379.6 / 1 018 827

(73) Proprietor: **Sony Deutschland GmbH**
10785 Berlin (DE)

(72) Inventors:
• **Böhnke, Ralf,**
c/o Sony Technology Center
70327 Stuttgart (DE)
• **Dölle, Thomas,**
85540 Haar (DE)

• **Puch, Tino**
53227 Bonn (DE)

(74) Representative: **Rupp, Christian et al**
Mitscherlich & Partner
Patent- und Rechtsanwälte
Sonnenstrasse 33
80331 München (DE)

(56) References cited:
EP-A- 0 836 303 **EP-A- 0 869 646**
WO- A- 98/00946GB-A- 2 320 868
US-A- 5 450 456

• **DINIS R ET AL: "CARRIER SYNCHRONIZATION
WITH CEPB-OFDM" 1997 IEEE 47TH.
VEHICULAR TECHNOLOGY CONFERENCE,
PHOENIX, MAY 4 - 7, 1997, vol. 3, no. CONF. 47,
4 May 1997 (1997-05-04), pages 1370-1374,
XP000738586 INSTITUTE OF ELECTRICAL AND
ELECTRONICS ENGINEERS**
• **BAUML R W ET AL: "REDUCING THE PEAK-TO-
AVERAGE POWER RATIO OF MULTICARRIER
MODULATION BY SELECTED MAPPING"
ELECTRONICS LETTERS, vol. 32, no. 22, 24
October 1996 (1996-10-24), page 2056/2057
XP000643915**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 439 677 B9

Description

[0001] The present invention relates to a telecommunication system and a method for synchronizing a OFDM receiver.

[0002] The present invention relates generally to the technical field of synchronizing wireless OFDM (orthogonal frequency division multiplexing) systems. Thereby it is known to use a synchronization burst constructed using especially designed OFDM symbols and time domain repetitions.

[0003] Particularly from the document IEEE P802.11a/d2.0 "Draft supplement to a standard for telecommunications and information exchange between systems - LAN/MAN specific requirements - part 1: wireless medium access control (MAC) and physical layer (PHY) specifications: high-speed physical layer in the 5 GHz band" a synchronization scheme for OFDM systems is proposed. This document is herewith included by reference as far as it concerns the synchronization including the proposed implementation. Said known scheme will now be explained with reference to fig. 6 to 8 of the enclosed drawings.

[0004] Fig. 6 shows the structure of the known synchronization field. As shown in Fig. 6 the synchronization field consists of so-called short symbols t_1, t_2, \dots, t_6 and two long symbols T_1, T_2 . In view of the present invention particularly the short symbols t_1, t_2, \dots, t_6 are of interest. Among the short symbols t_1, t_2, \dots, t_6 used for the amplifier gain control (t_1, t_2, t_3) and the coarse frequency offset and timing control only the symbols t_1, t_2, t_3 and t_4 are actually generated, whereas the symbols t_5, t_6 are cyclic extensions (copies of the symbols t_1 and t_2 , respectively). It is to be noted that fig. 5 shows only the synchronization preamble structure as the structure of the following signal field indicating the type of baseband modulation and the coding rate as well as the structure of further following data fields are not of interest in view of the present invention. For further details reference is made to said prior art document.

[0005] The symbols t_1, t_2, t_3, t_4 are generated by means of an OFDM modulation using selected subcarriers from the entire available subcarriers. The symbols used for the OFDM modulation as well as the mapping to the selected subcarriers will now be explained with reference to fig. 6.

[0006] Each of the short OFDM symbols t_1, \dots, t_6 is generated by using 12 modulated subcarriers phase-modulated by the elements of the symbol alphabet:

$$S = \sqrt{2}(\pm 1 \pm j)$$

[0007] The full sequence used for the OFDM modulation can be written as follows:

$$S_{-24, 24} = \sqrt{2} \{ 1+j, 0,0,0, 1+j, 0,0,0, -1-j, 0,0,0, -1-j, 0,0,0, 1-j, 0,0,0, -1-j, 0,0,0, 0, 0,0,0, 1+j, 0,0,0, 1+j, 0,0,0, -1-j, 0,0,0, 1+j, 0,0,0, -1-j, 0,0,0, 1+j \}$$

[0008] The multiplication by a factor of $\sqrt{2}$ is in order to normalize the average power of the resulting OFDM symbol.

[0009] The signal can be written as:

$$r_{SHORT}(t) = w_{SHORT}(t) \sum_{k=-N/2}^{N/2} S_k \exp(j2\pi k \Delta_f t)$$

[0010] The fact that only spectral lines of $S_{-24, 24}$ with indices which are a multiple of 4 have nonzero amplitude results in a periodicity of $T_{FFT}/4 = 0.8 \mu\text{sec}$. The interval T_{SHORT1} is equal to nine $0.8 \mu\text{sec}$ periods, i.e. $7.2 \mu\text{sec}$.

[0011] Applying a 64-point IFFT to the vector S , where the remaining 15 values are set to zero, four short training symbols t_1, t_2, t_3, t_4 (in the time domain) can be generated. The IFFT output is cyclically extended to result in 6 short symbols $t_1, t_2, t_3, \dots, t_6$. The mapping scheme is depicted in fig. 7. The so called virtual subcarriers are left unmodulated.

[0012] The way to implement the inverse Fourier transform is by an IFFT (Inverse Fast Fourier Transform) algorithm. If, for example, a 64 point IFFT is used, the coefficients 1 to 24 are mapped to same numbered IFFT inputs, while the coefficients -24 to -1 are copied into IFFT inputs 40 to 63. The rest of the inputs, 25 to 39 and the 0 (DC) input, are set to zero. This mapping is illustrated in Fig. 7. After performing an IFFT the output is cyclically extended to the desired length.

[0013] With the proposed inverse fast Fourier transform (IFFT) mapping as shown in fig. 7 the resulting time domain

signal consists of 4 periodically repeated short symbols t_1 , t_2 , t_3 , t_4 , and cyclically extended by a copy of t_1 , t_2 , which copy is depicted in fig.5 as t_5 , t_6 . Note that in the present case only spectral lines with indices which are a multiple of 4 have nonzero amplitude. Other periodic natures can be generated by setting other multiples of the spectral lines to nonzero amplitudes.

[0014] Though the known synchronization scheme is very effective, it provides for disadvantage regarding the time domain signal properties.

[0015] For OFDM (or in general multicarrier signals) the signal envelope fluctuation (named Peak-to-Average-Power-Ratio=PAPR) is of great concern. A large PAPR results in poor transmission (due to nonlinear distortion effects of the power amplifier) and other signal limiting components in the transmission system (e.g. limited dynamic range of the AD converter).

[0016] For synchronization sequences it is even more desirable to have signals with a low PAPR in order to accelerate the receiver AGC (automatic gain control) locking and adjusting the reference signal value for the A/D converter (the whole dynamic range of the incoming signal should be covered by the A/D converter resolution without any overflow/underflow).

[0017] Figures 8a, 8b show the "absolute" ($\sqrt{\text{In}^2 + \text{Quad}^2}$) value of the resulting time domain signal waveform with the sequences proposed by Lucent Technologies. Oversampling (8^*) was considered in order to ensure the peak was captured correctly using the limited 64-point IFFT.

[0018] Figures 8c, 8d show the real and imaginary part of the resulting transmitted time domain waveform. The resulting PAPR is 2.9991 dB (no oversampling) and 3.0093 dB (with 8 times oversampling).

[0019] WO 98/00946 discloses a timing and frequency synchronization of OFDM signals.

[0020] Therefore it is the object of the present invention to provide for a synchronization technique which bases on the known synchronization technique but which presents improved time domain signal properties to reduce the requirements for the hardware.

[0021] The above object is achieved by means of the features of the independent claims. The dependent claims develop further the central idea of the present invention.

[0022] According to the present invention therefore a telecommunications system comprising a OFDM transmitter is provided. Symbols of a predefined symbol sequence are mapped according to a predefined mapping scheme on subcarriers of the OFDM system wherein the symbols of the predefined symbol sequence represent subcarriers with nonzero amplitudes. A synchronization burst is generated by inverse fast Fourier transforming the subcarriers mapped with a predefined symbol sequence. According to the present invention the predefined symbol sequence is optimized such that the envelope fluctuation of the time domain signal (Peak-to-average-power-ratio) is minimized.

[0023] The predefined symbol sequence can be chosen such that the following equations are satisfied for all symbols of the predefined symbol sequence:

$$n=2m,$$

$$C_{i-1} = \pm C_{1-i},$$

n being the number of symbols of the predefined symbol sequence,
 m being an integer larger than one,
 C being the symbol value, and
 i being an integer running from 1 to m .

[0024] The mapping of the symbols of the predefined symbol sequence and the Inverse Fast Fourier Transform can be set such that the resulting time domain signal of the synchronization burst represents a periodic nature.

[0025] Alternatively the mapping of the symbols of the predefined symbol sequence and the Inverse Fast Fourier Transform is set such that one burst part of the synchronization burst in the time domain is generated and the periodic nature of the synchronization burst in the time domain is achieved by copying the one burst part.

[0026] The number of symbols of a symbol sequence (n) can for example be 12.

[0027] According to the present invention furthermore a method for synchronizing wireless OFDM systems is provided, wherein a synchronization burst is generated according to a method as set forth above and the synchronization burst is transmitted respectively before the transmission of data fields.

[0028] Thereby the time domain signals of the synchronization burst can be precomputed and stored in a memory, such that the computation of the time domain signal of the burst is only effected once.

[0029] According to the present invention furthermore a OFDM transmitter is provided comprising a mapping unit for mapping the symbols of a predefined symbols sequence according to a predefined mapping scheme on subcarriers of the OFDM system, wherein the symbols of a predefined symbols sequence represent the subcarriers of the OFDM

system with nonzero amplitudes. Furthermore an inverse fast Fourier transforming unit is provided for generating a synchronization burst by inverse fast Fourier transforming the subcarriers of the OFDM mapped with said predefined symbols sequence. The mapping unit thereby is designed such that the resulting time domain signal of the synchronization burst represents a periodic nature. The mapping unit according to the present invention uses a predefined symbol

sequence which is such that the envelope fluctuation of the time domain signal of the synchronization burst is minimized.

[0030] According to the present invention furthermore a mobile communications device such as set forth above is used.

[0031] With reference to the figures of the enclosed drawings referred embodiments of the present invention will now be explained.

Fig. 1 shows schematically a transmitter according to the present invention,

Fig. 2 shows an alternative embodiment for a transmitter according to the present invention,

Fig. 3 shows an alternative mapping scheme according to the present invention,

Fig. 4a to 4d show the time domain signal properties achieved with the synchronization symbol structure using OFDM based transmission according to the present invention,

Fig. 5a to 5d show the time domain signal properties of synchronization symbol structures according to alternative embodiments of the present invention,

Fig. 6 shows a synchronization preamble structure known from the prior art,

Fig. 7 shows an IFFT mapping according to the prior art, and

Fig. 8a to 8d show the time domain properties of the synchronization symbol structure according to the prior art,

Fig. 9a and 9b show the time domain properties, particularly the dynamic range of the synchronization symbol structure according to the prior art, and

Fig. 10a and 10b show the time domain properties of the synchronization symbol structure according to further alternative embodiments of the present invention,

[0032] According to the present invention the time domain synchronization burst structure as shown in Fig. 6 is maintained. The IFFT mapping as shown in Fig. 7 can be maintained or alternatively the IFFT mapping according to figure 3 can be used. The symbol sequences mapped to the subcarriers are optimized to sequences which result in a lower PAPR.

[0033] According to the present invention a short OFDM symbol (t_1, \dots, t_6) consists of 12 phase-modulated subcarriers.

[0034] Generally the predefined symbol sequence therefore is chosen such that the envelope fluctuation of the time domain signal of the synchronization burst is minimized.

[0035] Therefore generally the predefined symbol sequence is set such that the following equations are satisfied for all symbols for the predefined symbol sequence:

$$n = 2m,$$

$$C_{i-1} = \pm C_{n-i}$$

wherein n is a number of symbols of the predefined symbol sequence,

m is an integer larger than 1,

c is the symbol value, and

i is an integer value running from 1 to m .

[0036] In the following the time domain signal properties of the new sequences according to the present invention will be shown with reference to Fig. 4a to 4d and Fig. 5a to 5d.

[0037] For simplicity we use in our demonstration the classical quadriphase symbol alphabet,

$$S = \sqrt{\frac{1}{2}} (\pm 1 \pm j),$$

(this corresponds to $\phi_A = 0.125$)

Table 1: Complex symbol mapping

Symbol		
A	$\exp(j\frac{\pi}{4})$	$\sqrt{\frac{1}{2}} (+1+j)$
-A	$-\exp(j\frac{\pi}{4}) = \exp(j\frac{5\pi}{4})$	$\sqrt{\frac{1}{2}} (-1-j)$
B	$\exp(j\frac{\pi}{4} + j\frac{\pi}{2}) = \exp(j\frac{3\pi}{4})$	$\sqrt{\frac{1}{2}} (-1+j)$
-B	$-\exp(j\frac{3\pi}{4}) = \exp(j\frac{7\pi}{4})$	$\sqrt{\frac{1}{2}} (+1-j)$

[0038] Fig. 5a and 5b thereby show the time domain signal (magnitude) when using the optimized sequence according to the present invention in the case of no oversampling/8-times oversampling is effected.

[0039] PAPR (in decibel) is limited to 2.059 (even when using a time domain oversampling to capture the actual peak).

[0040] Fig. 5c and 5d show the in-phase and quadrature-phase component, respectively, of the resulting wave form. It is clearly visible that the full symbol consists of four repetitions of a short sequence.

[0041] Fig. 5a to 5d show graphics corresponding to Fig. 4a to 4d for the other proposed sequences S1, S2 and S3.

[0042] Further simulations have shown that not only the PAPR can be optimized but also the dynamic range of the signal should be minimized. Therefore another four sequences, with achieve a small PAPR and at the same time a small overall dynamic range are proposed further below.

[0043] Using the sequence as proposed in the state of the art the PAPR is 3.01 dB and the dynamic range (defined as the ratio of the peak power to the minimum power) is 30.82 dB (see figures 9a and 9b).

[0044] Using the sequences according to the present invention and as described above the PAPR is reduced to 2.06 dB, however, the dynamic range is increased as the signal power is '0' at some points.

[0045] Therefore the following four sequences are proposed as a further embodiment of the present invention:

[0046] The symbol sequence is C0, C1, ..., C11 and the mapping is:

$$S = 2 * \{ C00, 0, 0, 0, C01, 0, 0, 0, C02, 0, 0, 0, C03, 0, 0, 0, C04, 0, 0, 0, \\ C05, 0, 0, 0, 0, 0, 0, 0, C06, 0, 0, 0, C07, 0, 0, 0, C08, 0, 0, 0, C09, 0, 0, 0, \\ C10, 0, 0, 0, C11 \}$$

	C00	C01	C02	C03	C04	C05	C06	C07	C08	C09	C10	C11
Seq-Alt0	A	A	A	A	-A	-A	A	-A	-A	A	-A	A
Seq-Alt1	A	-A	A	-A	-A	A	-A	-A	A	A	A	A

(continued)

	C00	C01	C02	C03	C04	C05	C06	C07	C08	C09	C10	C11
Seq-Alt2	A	B	-A	-B	-A	-B	-B	-A	-B	-A	B	A
Seq-Alt3	A	-B	-A	B	-A	B	B	-A	B	-A	-B	A

with $A = \exp(j \cdot 2 \cdot \pi \cdot \varphi_A)$ and $B = A * \exp(j \frac{\pi}{2}) = \exp(j 2 \pi \varphi_A + j \frac{\pi}{2})$ and $0.0 \leq \varphi_A < 1.0$.

Note: The invention relates to Seq-Alt1 only.

[0047] Using these sequences the PAPR is reduced to 2.24 dB and the dynamic range is limited to 7.01 dB as it is shown in figures 10 a and 10b.

[0048] The advantages are the same as described before, however, the clipping problem is further reduced due to the very limited dynamic range of the signal.

[0049] With reference to Fig. 1 and 2 possible implementations of a transmitter according to the present invention will now be explained.

[0050] In the transmitter the sync symbol data 1 are prepared and mapped in a IFFT mapping unit 2 to the appropriate IFFT points. The subcarriers of the OFDM system are transformed by a IFFT unit 3 and then the time domain signal is extended in a time extension unit 4 by copying parts of the signals (for example, t1, t2 are copied to t5, t6). The time extended signal is then sent to the I/Q modulator 5.

[0051] As shown in Fig. 2 alternatively the time domain signal can be precomputed once in a computation unit 7 and then be stored in a memory 6 for the precomputed sample for the time signal. Then the time domain signal of the synchronization burst can be sent to the modulator 5 directly from the memory 6.

[0052] With reference to figure 3 a modified IFFT mapping scheme will now be explained. According to this scheme, the principle of setting only every fourth subcarrier of the OFDM system to a non-zero amplitude (see figure 7) is abandoned. Therefore the time domain signal achieved according to the mapping scheme of figure 3 will not present a periodic nature.

[0053] The IFFT size is now only 16 (instead of 64 as it is the case in figure 7). Only one of the bursts t1, t2, ..., t6 will be generated. The other bursts can be generated by copying to retain the periodic nature of the synchronization time domain signal necessary for the correlation and synchronization on the receiving side. Therefore for example the time extension unit 4 can perform the copying of the 16-sample burst t1 generated by the IFFT 16 according to figure 7 to the other burst t2, t3, ..., t6. Obviously the mapping scheme according to figure 3 reduces the computing effort necessary for the IFFT. The periodic nature of the time domain signal of the SYNCH bursts is therefore no longer achieved by the IFFT step, but by copying the burst t1 generated with the simplified IFFT mapping scheme.

[0054] The mapping scheme shown in figure 3 is also advantageous in combination with the precomputing technique shown in figure 2.

[0055] According to the present invention therefore a synchronization burst structure to be used in high speed wireless transmission systems is proposed. The synchronization burst is constructed using especially designed OFDM symbols and time domain repetitions. The resulting synchronization burst achieves a high timing detection and frequency offset estimation accuracy. Furthermore the burst is optimized to achieve a very low envelope fluctuation (Low peak-to-average-power-ratio) to reduce the complexity on the receiver and to reduce time and frequency acquisition time at the receiver.

[0056] Therefore the synchronization performance can further be improved. As with the scheme according to the present invention the envelope of the OFDM based synchronization burst in the time domain is reduced, the AGC pool-in speed at the receiver can be improved and an accurate time and frequency synchronization can be achieved. Furthermore the synchronization complexity on the receiver side can be reduced due to the reduced resolution requirements necessary due to reduced envelope fluctuation.

[0057] The advantages of the present invention can be set forth as following:

- An OFDM based SYNCH symbol with a reduced Peak-to-Average-Power-Ratio (PARP) is proposed,
- Improved synchronization performance (compared to the state of the art proposal),
- Reduced AGC (automatic gain control) pull-in time due to reduced dynamic range of the SYNCH burst,
- Improved AGC settlement (AGC has to adjust to a incoming signal level that later on now overflow/underflow in the AD happens. The reduced dynamic range of the SYNCH burst help to find this reference level more accurate),
- Reduced synchronization detection complexity on the receiver (reduced resolution necessary due to reduced envelope fluctuation).

Claims

1. A telecommunications system, comprising
a OFDM transmitter for generating a synchronization signal and comprising

- means for mapping (2) the symbols of a predefined symbol sequence according to a predefined mapping scheme on subcarriers S of the OFDM system, wherein the symbols of the predefined symbol sequence represent subcarriers of the OFDM system with non-zero-amplitude, and
- means for generating a synchronization burst by Inverse Fourier Transforming (3) the subcarriers S of the OFDM system mapped with the symbols of said predefined symbol sequence, wherein the symbols of the predefined symbols sequence are expressed as

$$A \ -A \ A \ -A \ -A \ A \ -A \ -A \ A \ A \ A \ A$$

A being a complex value, and
a OFDM receiver adapted to be synchronized by receiving and processing said synchronization signal.

2. A method for synchronizing a OFDM receiver,
the method comprising the steps of generating a synchronization signal by

- mapping (2) the symbols of a predefined symbol sequence according to a predefined mapping scheme on subcarriers S of the OFDM system, wherein the symbols of the predefined symbol sequence represent subcarriers of the OFDM system with non-zero-amplitude,
- generating a synchronization burst by Inverse Fourier Transforming (3) the subcarriers S of the OFDM system mapped with the symbols of said predefined symbol sequence, wherein the symbols of the predefined symbols sequence are expressed as

$$A \ -A \ A \ -A \ -A \ A \ -A \ -A \ A \ A \ A \ A$$

A being a complex value,

- transmitting the synchronization signal, and
- receiving said synchronization signal and synchronizing a receiver.

3. A method according to claim 2,
wherein a AGC in the receiver is locked in using the received synchronization signal.

4. A method according to claim 2 or 3,
wherein a reference value of a A/D converter in the receiver is adjusted using the received synchronization signal.

Patentansprüche

1. Telekommunikationssystem, welches aufweist:

einen OFDM-Übertrager zum Erzeugen eines Synchronisationssignals, und der aufweist:

eine Einrichtung zum Abbilden (2) der Symbole einer vorher festgelegten Symbolsequenz gemäß einem vorher festgelegten Abbildungsschema auf Hilfsträgern S der OFDM-Systems, wobei die Symbole der vorher festgelegten Symbolsequenz Hilfsträger des OFDM-System mit Nicht-Null-Amplitude zeigen, und eine Einrichtung zum Erzeugen eines Synchronisationsbursts durch inverse Fourier-Transformation (3) der Hilfsträgern S des OFDM-Systems, welche mit den Symbolen der vorher festgelegten Symbolsequenz abgebildet sind, wobei die Symbole der vorher festgelegten Symbolsequenz ausgedrückt werden als

$$A \ -A \ A \ -A \ -A \ A \ -A \ -A \ A \ A \ A \ A$$

wobei A ein komplexer Wert ist, und

einen OFDM-Empfänger, der eingerichtet ist, durch Empfangen und Verarbeiten des Synchronisationssignals synchronisiert zu werden.

2. Verfahren zum Synchronisieren eines OFDM-Empfängers,

wobei das Verfahren folgende Schritte zum Erzeugen eines Synchronisationssignals aufweist:

Abbilden (2) der Symbole einer vorher festgelegten Symbolsequenz gemäß einem vorher festgelegten Abbildungsschema auf Hilfsträgern S des OFDM-Systems, wobei die Symbole der vorher festgelegten Symbolsequenz

Erzeugen eines Synchronisationsbursts durch inverse Fourier-Transformation (3) der Hilfsträger S des OFDM-Systems, welche mit den Symbolen der vorher festgelegten Symbolsequenz abgebildet sind, wobei die Symbole der vorher festgelegten Symbolsequenz ausgedrückt werden als:

$A -A A -A -A A -A A A A A$

wobei A ein komplexer Wert ist,

Übertragen des Synchronisationssignals, und

Empfangen des Synchronisationssignals und Synchronisieren eines Empfängers.

3. Verfahren nach Anspruch 2,

wobei eine AGC im Empfänger bei Verwendung des empfangenen Synchronisationssignals verriegelt wird.

4. Verfahren nach Anspruch 2 oder 3,

wobei ein Referenzwert eine A/D-Umsetzers im Empfänger unter Verwendung des empfangenen Synchronisationssignals eingestellt wird.

Revendications

1. Système de télécommunications, comprenant

un émetteur MDFO destiné à générer un signal de synchronisation et comprenant

- des moyens pour mapper (2) les symboles d'une séquence de symboles prédéfinie selon un schéma de mappage prédéfini sur les sous-porteuses S du système MDFO, dans lesquels les symboles de la séquence de symboles prédéfinie représentent les sous-porteuses du système MDFO avec une amplitude non nulle, et

- des moyens pour générer une salve de synchronisation par une transformée de Fourier inverse (3) des sous-porteuses S du système MDFO mappées avec les symboles de ladite séquence de symboles prédéfinie, dans lesquels les symboles de la séquence de symboles prédéfinie sont exprimés comme suit

$A -A A -A -A A -A A A A A$

A étant une valeur complexe, et

un récepteur MDFO adapté pour être synchronisé en recevant et en traitant ledit signal de synchronisation.

2. Procédé de synchronisation d'un récepteur MDFO,

le procédé comprenant les étapes consistant à générer un signal de synchronisation en

- mappant (2) les symboles d'une séquence de symboles prédéfinie selon un schéma de mappage prédéfini sur les sous-porteuses S du système MDFO, où les symboles de la séquence de symboles prédéfinie représentent les sous-porteuses du système MDFO avec une amplitude non nulle,

- générant une salve de synchronisation par une transformée de Fourier inverse (3) des sous-porteuses S du système MDFO mappées avec les symboles de ladite séquence de symboles prédéfinie, où les symboles de la séquence de symboles prédéfinie sont exprimés comme suit

$A A A A -A A -A -A A A A A$

A étant une valeur complexe,

- transmettant le signal de synchronisation, et

- en recevant ledit signal de synchronisation et en synchronisant un récepteur.

3. Procédé selon la revendication 2,

dans lequel une CAG située dans le récepteur est bloquée lors de l'utilisation du signal de synchronisation reçu.

4. Procédé selon la revendication 2 ou 3,

dans lequel une valeur de référence d'un convertisseur analogique/numérique situé dans le récepteur est ajustée en utilisant le signal de synchronisation reçu.

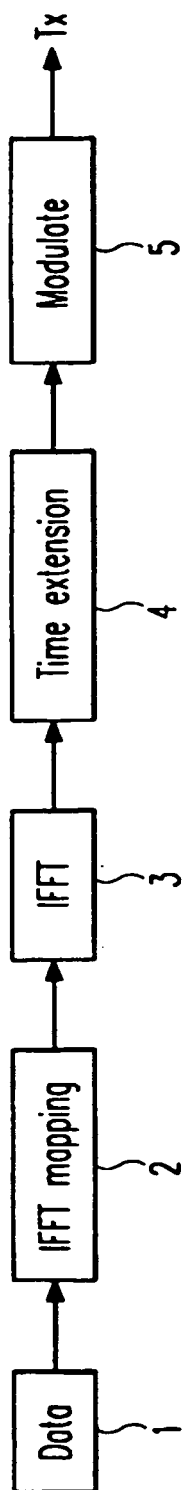


Fig. 1

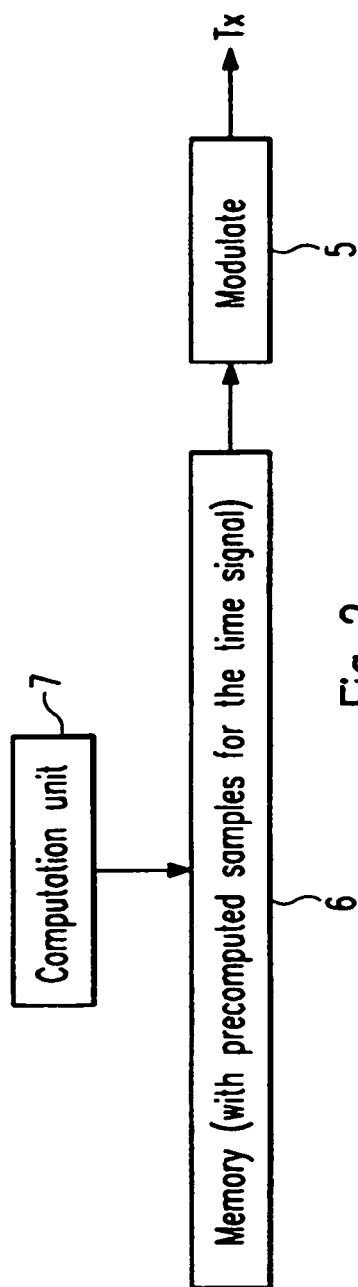


Fig. 2

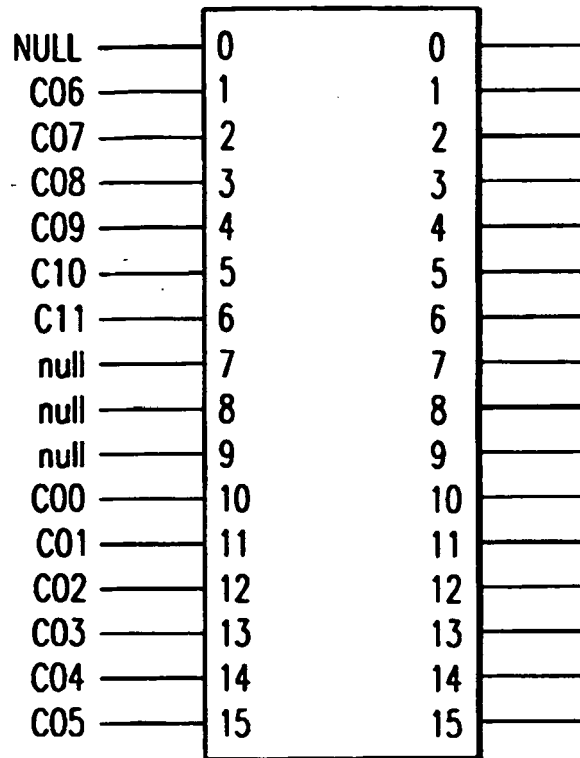


Fig. 3

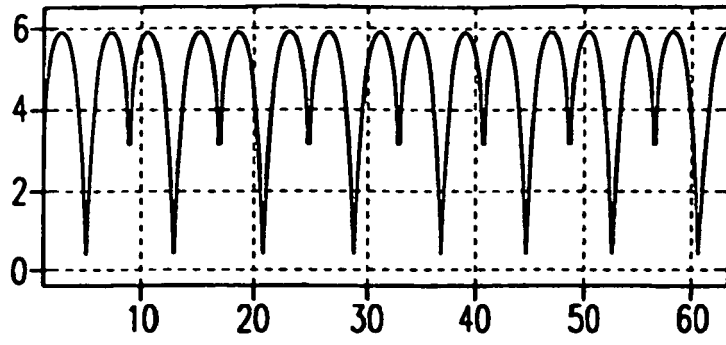


Fig. 4a

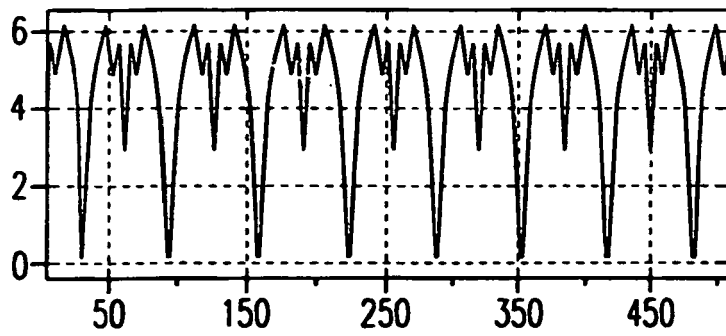


Fig. 4b

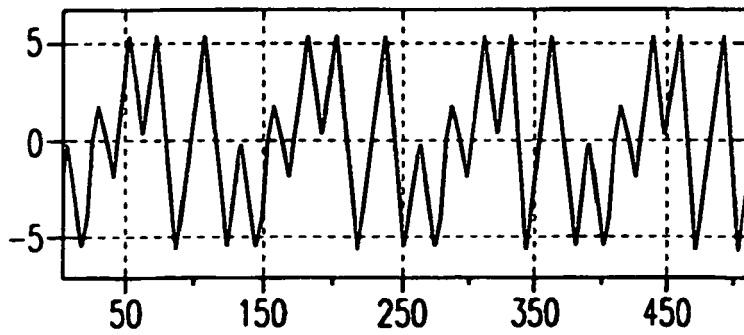


Fig. 4c


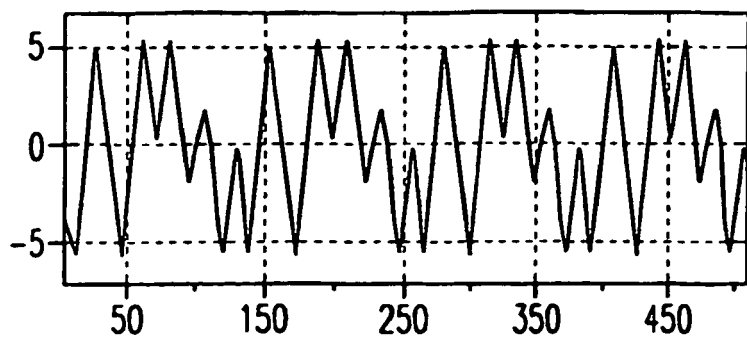



Fig. 4d

Fig. 5a

Seq S1

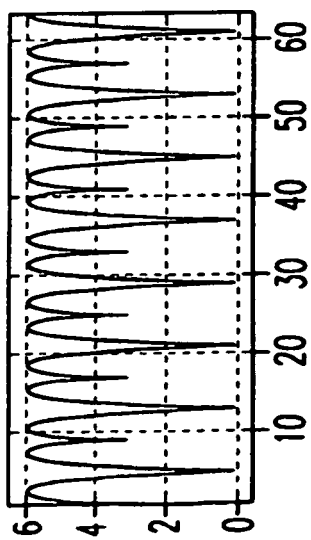

Seq S2

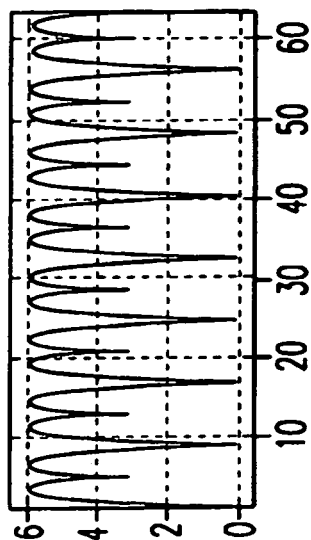

Seq S3

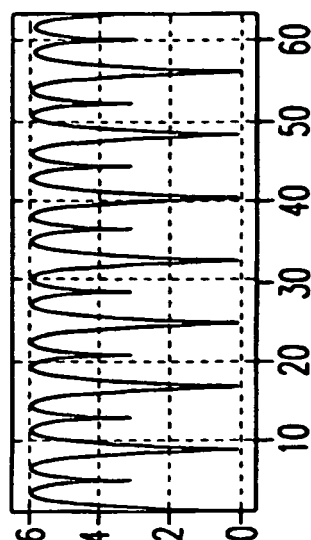


Fig. 5b





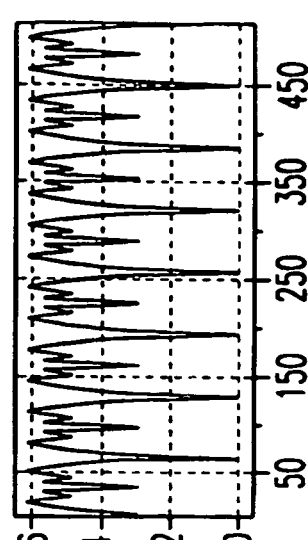


Fig. 5c

Seq S1

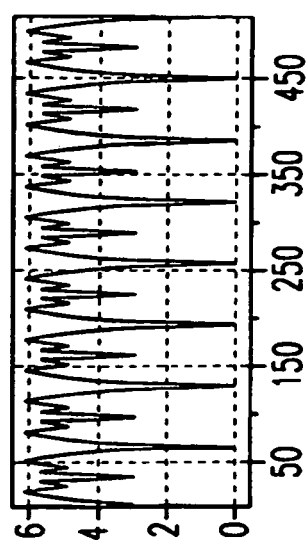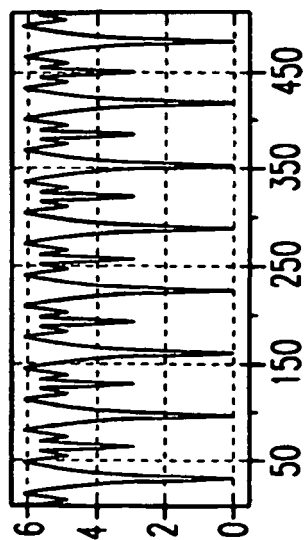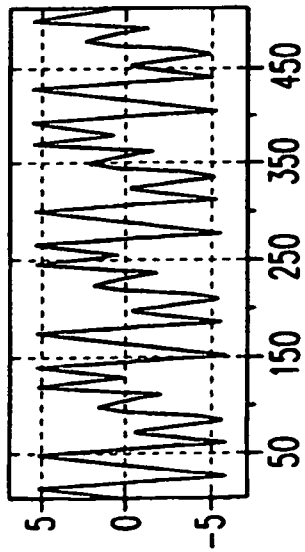

Seq S2

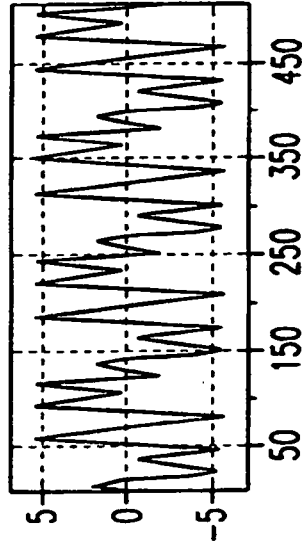

Seq S3

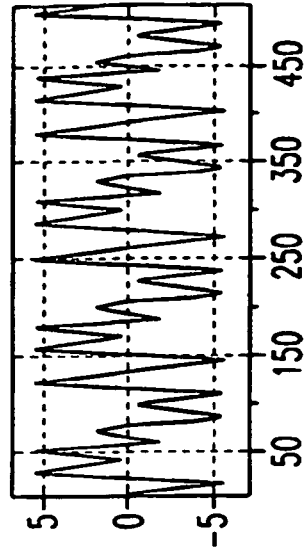
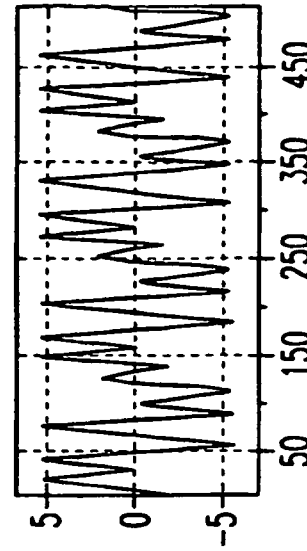
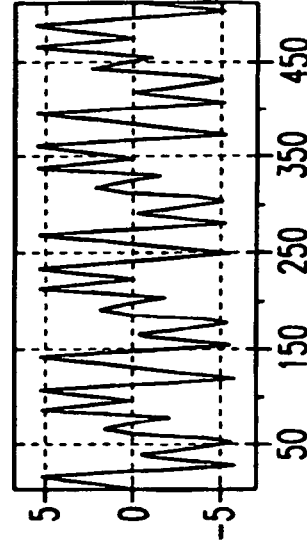
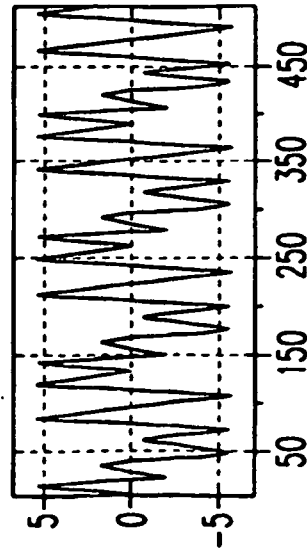


Fig. 5d



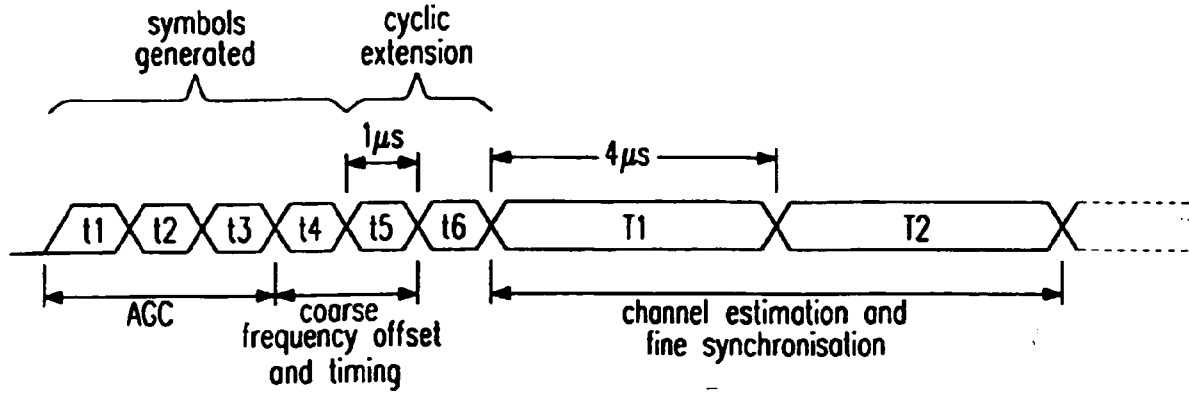


Fig. 6

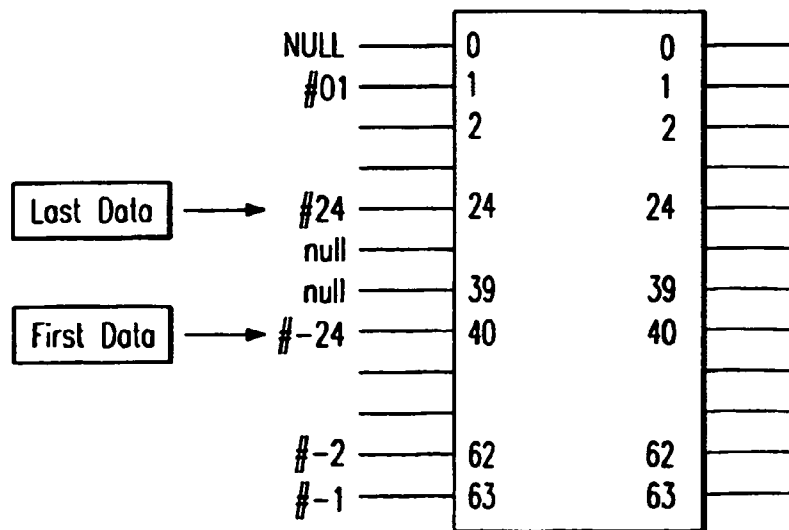


Fig. 7

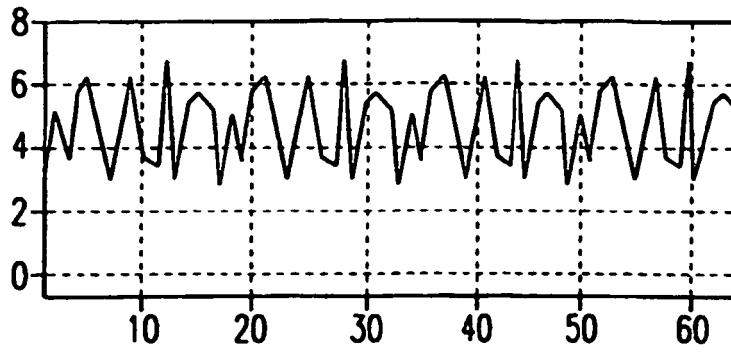


Fig. 8a

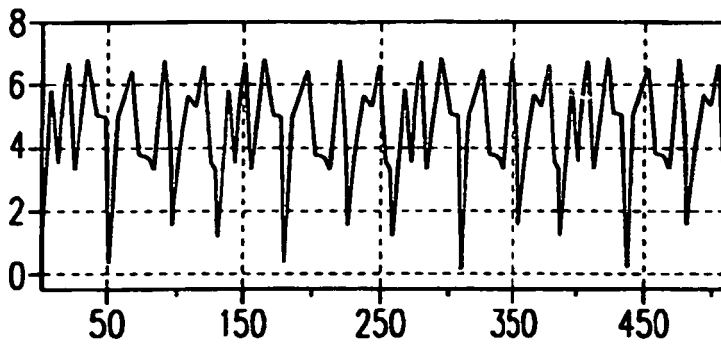


Fig. 8b

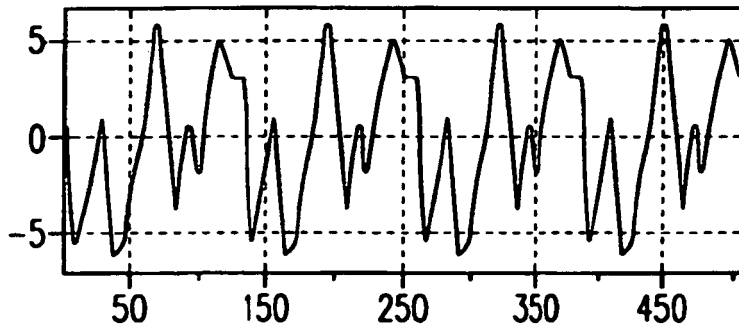


Fig. 8c



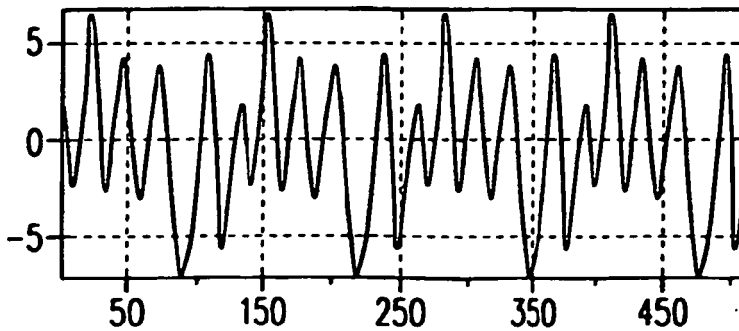


Fig. 8d

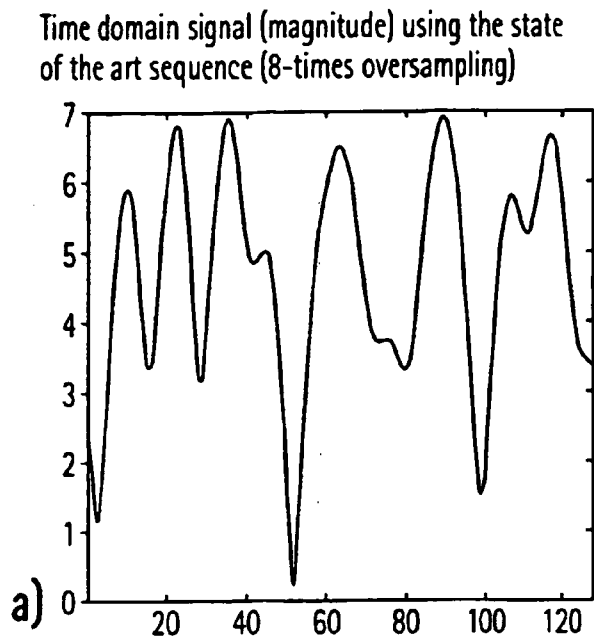


Signal (In and Quad part) using the state of the art sequence (8-times oversampling)

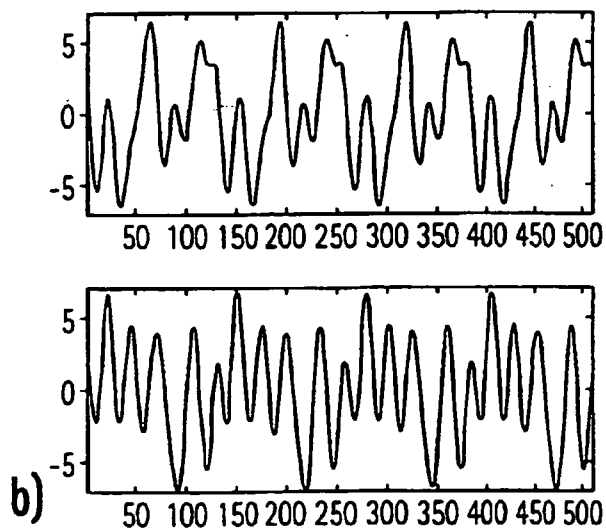


PAPR: 3.01 dB
Dynamic Range: 30.82 dB

Fig. 9

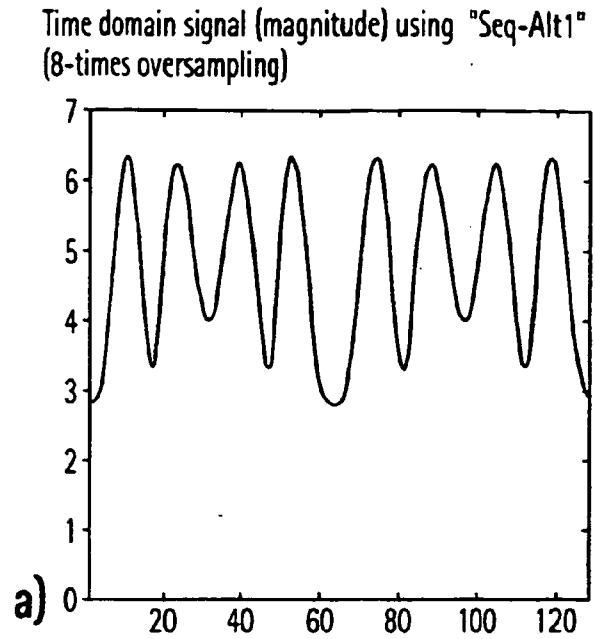

Signal (In and Quad part) using "Seq-Alt1" (8-times oversampling)

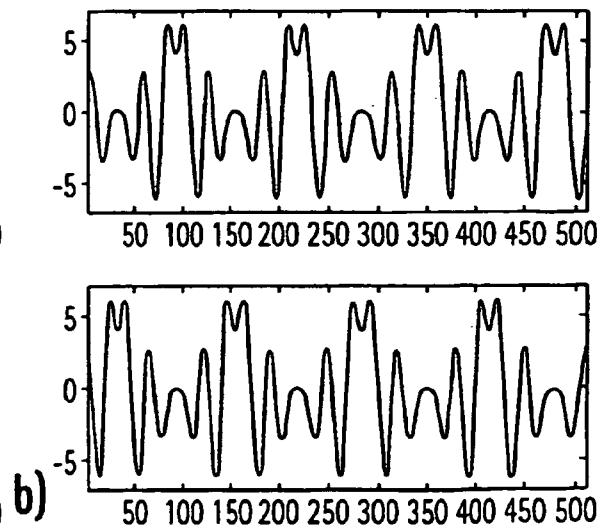

PAPR: 2.24 dB
Dynamic Range: 7.01 dB

Fig. 10

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 9800946 A [0019]