

(19)



(11)

EP 1 440 907 B2

(12)

NEW EUROPEAN PATENT SPECIFICATION

After opposition procedure

(45) Date of publication and mention
of the opposition decision:
13.02.2013 Bulletin 2013/07

(51) Int Cl.:
B65D 81/00 (2006.01) A47J 31/40 (2006.01)

(45) Mention of the grant of the patent:
14.03.2007 Bulletin 2007/11

(21) Application number: **04250364.9**

(22) Date of filing: **23.01.2004**

(54) Cartridge for the preparation of beverages

Kartusche zur Zubereitung von Getränken

Cartouche pour la préparation de boissons

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**

(30) Priority: **24.01.2003 GB 0301739**

(43) Date of publication of application:
28.07.2004 Bulletin 2004/31

(73) Proprietor: **Kraft Foods R&D, Inc.
81737 Munich (DE)**

(72) Inventors:
• **Halliday, Andrew
Banbury OX16 7QU (GB)**
• **Ballard, Colin
Banbury OX16 7QU (GB)**

• **Panesar, Satwinder
Banbury OX16 7QU (GB)**
• **Gomez, Maria
Banbury OX16 7QU (GB)**

(74) Representative: **Thomson, Neil David et al
Boult Wade Tennant
Verulam Gardens
70 Gray's Inn Road
London WC1X 8BT (GB)**

(56) References cited:
**EP-A- 0 638 486 WO-A-01/58786
WO-A-02/074661 WO-A-02/087400
US-A1- 2003 222 089**

EP 1 440 907 B2

Description

[0001] The present invention relates to a cartridge for the preparation of beverages and, in particular, using sealed cartridges which are formed from substantially air- and water-impermeable materials and which contain one or more ingredients for the preparation of beverages.

[0002] It has previously been proposed to seal beverage preparation ingredients in individual air-impermeable packages. For example, cartridges or capsules containing compacted ground coffee are known for use in certain coffee preparation machines which are generally termed "espresso" machines. In the production of coffee using these preparation machines the coffee cartridge is placed in a brewing chamber and hot water is passed through the cartridge at relatively high pressures, thereby extracting the aromatic coffee constituents from the ground coffee to produce the coffee beverage. Typically, such machines operate at a pressure of greater than 6×10^5 Pa. The preparation machines of the type described have to date been relatively expensive since components of the machine, such as the water pumps and seals, must be able to withstand the high pressures.

[0003] In WO01/58786 there is described a cartridge for the preparation of beverages which operates at a pressure generally in the range 0.7 to 2.0×10^5 Pa. However, the cartridge is designed for use in a beverage preparation machine for the commercial or industrial market and is relatively expensive. Hence, there remains a requirement for a cartridge for the preparation of beverages wherein the cartridges and beverage preparation machine are suitable, in particular, for the domestic market in terms of cost, performance and reliability.

[0004] Another cartridge comprising means for choosing the strength of the beverage to be obtained is known from WO 02/074661 A1.

[0005] It is known to provide dairy-based beverage ingredients in cartridges in the form of a powder or other dehydrated form. However, consumers consistently indicate that the use of such powdered dairy-based products adversely affects the taste, colour and texture of the final beverage. It has proven difficult to provide liquid dairy-based products in a cartridge due to the requirement to sterilise the cartridge components. Further, it has been found to be difficult to control the dilution and dispensing of the liquid milk products to arrive at a consistent and acceptable final beverage.

[0006] Accordingly, the present invention provides a sealed cartridge as defined in claim 1 of the claims appended hereto.

[0007] It will be understood that by the term "cartridge" as used herein is meant any package, container, sachet or receptacle which contains one or more beverage ingredients in the manner described. The cartridge may be rigid, semi-rigid or flexible.

[0008] The cartridge of the present invention contains one or more liquid beverage ingredients suitable for the formation of a beverage product. The beverage product may be, for example, one of coffee, tea, chocolate, carbonated beverages, or a dairy-based beverage including milk.

[0009] Advantageously, the cartridge of the present invention provides superior dilution and dispensing of liquid beverage ingredients by ensuring that the liquid beverage ingredients are dispensed more evenly over the operating cycle rather than being dispensed all at the start of the operating cycle followed by substantially pure aqueous medium, which is, for example, water. This steady dispensation of the liquid beverage ingredients leads to improved homogeneity of the dispensed liquid beverage. In addition, where the diluted liquid beverage is subsequently subjected to foaming, by for example, jetting through an orifice, the improved homogeneity of the liquid leads to a greater consistency of foaming and improved quality and quantity of foam produced per unit volume of liquid beverage.

[0010] In one embodiment the partition comprises one or more apertures for controllably releasing the at least a proportion of the one or more liquid beverage ingredients into the aqueous medium flow path. Four apertures may be provided.

[0011] The partition may comprise a cup-shaped member having an open mouth directed away from the aqueous medium flow path. The cup-shaped member is preferably annular. The one or more apertures are preferably provided at or near a base of the cup-shaped member. The at least a proportion of the liquid beverage ingredients in the cup-shaped member, for example, drain by gravity through the one or more apertures in use.

[0012] In one embodiment, the cup-shaped member is spaced from a bottom of the cartridge, such that the aqueous medium flow path passes between the cup-shaped member and the bottom of the cartridge. Consequently, the at least a proportion of the liquid beverage ingredients in the cup-shaped member drains by gravity through the one or more apertures in use vertically downwards into the aqueous medium flow path.

[0013] Preferably, the cartridge comprises an inner member and an outer member, wherein the inner member comprises the cup-shaped member. The components of the inner member and the outer member may more easily be sterilised prior to assembly when they are separated. Once the components are conjoined a number of small-apertured, tortuous pathways are created which cannot effectively be sterilised using known methods. The ability to sterilise the components is a particularly advantageous feature where the cartridges are used for dispensing dairy-based beverages such as milk.

[0014] Preferably, the cartridge further comprises means for producing a jet of the beverage, wherein said means for

producing the jet of the beverage comprises an aperture in the aqueous medium flow path. The aperture may be delimited by an interface between the inner member and the outer member.

[0015] Preferably, the cartridge further comprises at least one inlet for air and means for generating a pressure reduction of the jet of beverage, whereby, in use, air from the at least one air inlet is incorporated into the beverage as a plurality of small bubbles. At least one air inlet may be provided in the inner member downstream of the aperture.

[0016] In one embodiment the at least one air inlet and means for producing a pressure reduction in the jet of beverage produces a foaming of the one or more liquid beverage ingredients of greater than 40%. Preferably, greater than 70%. Preferably, the cartridge is disc-shaped. The outer member and/or inner member are formed, for example, from polypropylene.

[0017] In one example, the liquid beverage ingredient is a concentrated liquid milk composition. Preferably, the concentrated liquid milk contains between 25 and 40% total solids. More preferably, the concentrated liquid milk contains 30% total solids. Also preferably, the concentrated liquid milk contains between 0.1 and 12% fat. Alternatively, the one or more liquid beverage ingredients are selected from the group of cocoa solids, coffee, tea, sweeteners, cordials, flavourings, alcoholic beverages, flavoured milk, fruit juices, squashes, sauces and desserts.

[0018] In the following description the terms "upper" and "lower" and equivalents will be used to describe the relational positioning of features of the invention. The terms "upper" and "lower" and equivalents should be understood to refer to the cartridge (or other components) in its normal orientation for insertion into a beverage preparation machine and subsequent dispensing as shown, for example, in Figure 4. In particular, "upper" and "lower" refer, respectively, to relative positions nearer or further from a top surface 11 of the cartridge. In addition, the terms "inner" and "outer" and equivalents will be used to describe the relational positioning of features of the invention. The terms "inner" and "outer" and equivalents should be understood to refer to relative positions in the cartridge (or other components) being, respectively, nearer or further from a centre or major axis X of the cartridge 1 (or other component).

[0019] Embodiments will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 is cross-sectional drawing of an outer member of first and second embodiments of cartridge;
Figure 2 is a cross-sectional drawing of a detail of the outer member of Figure 1 showing an inwardly directed cylindrical extension;

Figure 3 is a cross-sectional drawing of a detail of the outer member of Figure 1 showing a slot;

Figure 4 is a perspective view from above of the outer member of Figure 1;

Figure 5 is a perspective view from above of the outer member of Figure 1 in an inverted orientation;

Figure 6 is a plan view from above of the outer member of Figure 1;

Figure 7 is a cross-sectional drawing of an inner member of the first embodiment of cartridge;

Figure 8 is a perspective view from above of the inner member of Figure 7;

Figure 9 is a perspective view from above of the inner member of Figure 7 in an inverted orientation;

Figure 10 is a plan view from above of the inner member of Figure 7;

Figure 11 is a cross-sectional drawing of the first embodiment of cartridge in an assembled condition;

Figure 12 is a cross-sectional drawing of an inner member of the second embodiment of cartridge;

Figure 13 is a cross-sectional drawing of a detail of the inner member of Figure 12 showing an aperture;

Figure 14 is a perspective view from above of the inner member of Figure 12;

Figure 15 is a perspective view from above of the inner member of Figure 12 in an inverted orientation;

Figure 16 is another cross-sectional drawing of the inner member of Figure 12;

Figure 17 is a cross-sectional drawing of another detail of the inner member of Figure 12 showing an air inlet;

Figure 18 is a cross-sectional drawing of the second embodiment of cartridge in an assembled condition;

Figure 19 is cross-sectional drawing of an outer member of third and fourth embodiments of cartridge, the fourth embodiment being according to the present invention;

Figure 20 is a cross-sectional drawing of a detail of the outer member of Figure 19 showing an inwardly directed cylindrical extension;

Figure 21 is a plan view from above of the outer member of Figure 19;

Figure 22 is a perspective view from above of the outer member of Figure 19;

Figure 23 is a perspective view from above of the outer member of Figure 19 in an inverted orientation;

Figure 24 is a cross-sectional drawing of an inner member of the third embodiment of cartridge;

Figure 25 is a plan view from above of the inner member of Figure 24;

Figure 26 is a cross-sectional drawing of a detail of the inner member of Figure 24 showing an in-turned upper rim;

Figure 27 is a perspective view from above of the inner member of Figure 24;

Figure 28 is a perspective view from above of the inner member of Figure 24 in an inverted orientation;

Figure 29 is a cross-sectional drawing of the third embodiment of cartridge in an assembled condition;

Figure 30 is a cross-sectional drawing of an inner member of the fourth embodiment of cartridge according to the

present invention;

Figure 31 is a plan view from above of the inner member of Figure 30;

Figure 32 is a perspective view from above of the inner member of Figure 30;

Figure 33 is a perspective view from above of the inner member of Figure 30 in an inverted orientation;

Figure 34 is a cross-sectional drawing of the fourth embodiment of cartridge in an assembled condition;

Figure 35a is a graph of concentration vs. operating cycle time;

Figure 35b is a graph of foamability vs. operating cycle time; and

Figure 35c is a graph of temperature vs. operating cycle time.

[0020] As shown in Figure 11, the cartridge 1 generally comprises an outer member 2, an inner member 3 and a laminate 5. The outer member 2, inner member 3 and laminate 5 are assembled to form the cartridge 1 which has an interior 120 for containing one or more beverage ingredients, an inlet 121, an outlet 122 and a beverage flow path linking the inlet 121 to the outlet 122 and which passes through the interior 120. The inlet 121 and outlet 122 are initially sealed by the laminate 5 and are opened in use by piercing or cutting of the laminate 5. The beverage flow path is defined by spatial inter-relationships between the outer member 2, inner member 3 and laminate 5 as discussed below. Other components may optionally be included in the cartridge 1, such as a filter 4, as will be described further below.

[0021] A first version of cartridge 1 which will be described for background purposes is shown in Figures 1 to 11. The first version of the cartridge 1 is particularly designed for use in dispensing filtered products such as roast and ground coffee or leaf tea. However, this version of the cartridge 1 and the other versions described below may be used with other products such as chocolate, coffee, tea, sweeteners, cordials, flavourings, alcoholic beverages, flavoured milk, fruit juices, squashes, sauces and desserts.

[0022] As can be seen from Figure 5, the overall shape of the cartridge 1 is generally circular or disc-shaped with the diameter of the cartridge 1 being significantly greater than its height. A major axis X passes through the centre of the outer member as shown in Figure 1. Typically the overall diameter of the outer member 2 is 74.5 mm $\pm$ 6mm and the overall height is 16 mm $\pm$ 3mm. Typically the volume of the cartridge 1 when assembled is 30.2 ml $\pm$ 20%.

[0023] The outer member 2 generally comprises a bowl-shaped shell 10 having a curved annular wall 13, a closed top 11 and an open bottom 12. The diameter of the outer member 2 is smaller at the top 11 compared to the diameter at the bottom 12, resulting from a flaring of the annular wall 13 as one traverses from the closed top 11 to the open bottom 12. The annular wall 13 and closed bottom 11 together define a receptacle having an interior 34.

[0024] A hollow inwardly directed cylindrical extension 18 is provided in the closed top 11 centred on the major axis X. As more clearly shown in Figure 2, the cylindrical extension 18 comprises a stepped profile having first, second and third portions 19, 20 and 21. The first portion 19 is right circular cylindrical. The second portion 20 is frusto-conical in shape and is inwardly tapered. The third portion 21 is another right circular cylinder and is closed off by a lower face 31. The diameter of the first, second and third portion 19, 20 and 21 incrementally decreases such that the diameter of the cylindrical extension 18 decreases as one traverses from the top 11 to the closed lower face 31 of the cylindrical extension 18. A generally horizontal shoulder 32 is formed on the cylindrical extension 18 at the junction between the second and third portions 20 and 21.

[0025] An outwardly extending shoulder 33 is formed in the outer member 2 towards the bottom 12. The outwardly extending shoulder 33 forms a secondary wall 15 co-axial with the annular wall 13 so as to define an annular track forming a manifold 16 between the secondary wall 15 and the annular wall 13. The manifold 16 passes around the circumference of the outer member 2. A series of slots 17 are provided in the annular wall 13 level with the manifold 16 to provide gas and liquid communication between the manifold 16 and the interior 34 of the outer member 2. As shown in Figure 3, the slots 17 comprise vertical slits in the annular wall 13. Between 20 and 40 slots are provided. In the embodiment shown thirty-seven slots 17 are provided generally equi-spaced around the circumference of the manifold 16. The slots 17 are preferably between 1.4 and 1.8 mm in length. Typically the length of each slot is 1.6 mm representing 10% of the overall height of the outer member 2. The width of each slot is between 0.25 and 0.35 mm. Typically, the width of each slot is 0.3 mm. The width of the slots 17 is sufficiently narrow to prevent the beverage ingredients passing therethrough into the manifold 16 either during storage or in use.

[0026] An inlet chamber 26 is formed in the outer member 2 at the periphery of the outer member 2. A cylindrical wall 27 is provided, as most clearly shown in Figure 5, which defines the inlet chamber 26 within, and partitions the inlet chamber 26 from the interior 34 of the outer member 2. The cylindrical wall 27 has a closed upper face 28 which is formed on a plane perpendicular to the major axis X and an open lower end 29 co-planar with the bottom 12 of the outer member 2. The inlet chamber 26 communicates with the manifold 16 via two slots 30 as shown in Figure 1. Alternatively, between one and four slots may be used to communicate between the manifold 16 and the inlet chamber 26.

[0027] A lower end of the outwardly extending shoulder 33 is provided with an outwardly extending flange 35 which extends perpendicularly to the major axis X. Typically the flange 35 has a width of between 2 and 4 mm. A portion of the flange 35 is enlarged to form a handle 24 by which the outer member 2 may be held. The handle 24 is provided with an upturned rim 25 to improve grip.

[0028] The outer member 2 is formed as a single integral piece from high density polyethylene, polypropylene, polystyrene, polyester, or a laminate of two or more of these materials. A suitable polypropylene is the range of polymers available from DSM UK Limited (Redditch, United Kingdom). The outer member may be opaque, transparent or translucent. The manufacturing process may be injection moulding.

[0029] The inner member 3 as shown in Figures 7 to 10, comprises an annular frame 41 and a downwardly extending cylindrical funnel 40. A major axis X passes through the centre of the inner member 3 as shown in Figure 7.

[0030] As best shown in Figure 8, the annular frame 41 comprises an outer rim 51 and an inner hub 52 joined by ten equi-spaced radial spokes 53. The inner hub 52 is integral with and extends from the cylindrical funnel 40. Filtration apertures 55 are formed in the annular frame 41 between the radial spokes 53. A filter 4 is disposed on the annular frame 41 so as to cover the filtration apertures 55. The filter is preferably made from a material with a high wet strength, for example a non-woven fibre material of polyester. Other materials which may be used include a water-impermeable cellulosic material, such as a cellulosic material comprising woven paper fibres. The woven paper fibres may be admixed with fibres of polypropylene, polyvinyl chloride and/or polyethylene. The incorporation of these plastic materials into the cellulosic material renders the cellulosic material heat-sealable. The filter 4 may also be treated or coated with a material which is activated by heat and/or pressure so that it can be sealed to the annular frame 41 in this way.

[0031] As shown in the cross-sectional profile of Figure 7, the inner hub 52 is located at a lower position than the outer rim 51, resulting in the annular frame 41 having a sloping lower profile.

[0032] The upper surface of each spoke 53 is provided with an upstanding web 54 which divides a void space above the annular frame 41 into a plurality of passages 57. Each passage 57 is bounded on either side by a web 54 and on a lower face by the filter 4. The passages 57 extend from the outer rim 51 downwardly towards, and open into, the cylindrical funnel 40 at openings 56 defined by the inner extremities of the webs 54.

[0033] The cylindrical funnel 40 comprises an outer tube 42 surrounding an inner discharge spout 43. The outer tube 42 forms the exterior of the cylindrical funnel 40. The discharge spout 43 is joined to the outer tube 42 at an upper end of the discharge spout 43 by means of an annular flange 47. The discharge spout 43 comprises an inlet 45 at an upper end which communicates with the openings 56 of the passages 57 and an outlet 44 at a lower end through which the prepared beverage is discharged into a cup or other receptacle. The discharge spout 43 comprises a frusto-conical portion 48 at an upper end and a cylindrical portion 58 at a lower end. The cylindrical portion 58 may have a slight taper such that it narrows towards the outlet 44. The frusto-conical portion 48 helps to channel beverage from the passages 57 down towards the outlet 44 without inducing turbulence to the beverage. An upper surface of the frusto-conical portion 48 is provided with four support webs 49 equi-spaced around the circumference of the cylindrical funnel 40. The support webs 49 define channels 50 therebetween. The upper edges of the support webs 49 are level with one another and perpendicular to the major axis X.

[0034] The inner member 3 may be formed as a single integral piece from polypropylene or a similar material as described above and by injection moulding in the same manner as the outer member 2.

[0035] Alternatively, the inner member 3 and/or the outer member 2 may be made from a biodegradable polymer. Examples of suitable materials include degradable polyethylene (for example, SPITEK supplied by Symphony Environmental, Borehamwood, United Kingdom), biodegradable polyester amide (for example, BAK 1095 supplied by Symphony Environmental), poly lactic acids (PLA supplied by Cargil, Minnesota, USA), starch-based polymers, cellulose derivatives and polypeptides.

[0036] The laminate 5 is formed from two layers, a first layer of aluminium and a second layer of cast polypropylene. The aluminium layer is between 0.02 and 0.07 mm in thickness. The cast polypropylene layer is between 0.025 and 0.065 mm in thickness. In one embodiment the aluminium layer is 0.06 mm and the polypropylene layer is 0.025 mm thick. This laminate is particularly advantageous as it has a high resistance to curling during assembly. As a result the laminate 5 may be pre-cut to the correct size and shape and subsequently transferred to the assembly station on the production line without undergoing distortion. Consequently, the laminate 5 is particularly well suited to welding. Other laminate materials may be used including PET/Aluminium/PP, PE/EVOH/PP, PET/metallised/PP and Aluminium/PP laminates. Roll laminate stock may be used instead of die cut stock.

[0037] The cartridge 1 may be closed by a rigid or semi-rigid lid instead of a flexible laminate.

[0038] Assembly of the cartridge 1 involves the following steps:

- a) the inner member 3 is inserted into the outer member 2;
- b) the filter 4 is cut to shape and placed onto the inner member 3 so to be received over the cylindrical funnel 40 and come to rest against the annular frame 41;
- c) the inner member 3, outer member 2 and filter 4 are joined by ultrasonic welding;
- d) the cartridge 1 is filled with one or more beverage ingredients;
- e) the laminate 5 is affixed to the outer member 2.

[0039] These steps will be discussed in greater detail below.

[0040] The outer member 2 is oriented with the open bottom 12 directed upwards. The inner member 3 is then inserted into the outer member 2 with the outer rim 51 being received as a loose fit in an axial extension 14 at top 11 of the cartridge 1. The cylindrical extension 18 of the outer member 2 is at the same time received in the upper portion of the cylindrical funnel 40 of the inner member 3. The third portion 21 of the cylindrical extension 18 is seated inside the cylindrical funnel 40 with the closed lower face 31 of the cylindrical extension 18 bearing against the support webs 49 of the inner member 3. The filter 4 is then placed over the inner member 3 such that the filter material contacts the annular rim 51. An ultrasonic welding process is then used to join the filter 4 to the inner member 3 and at the same time, and in the same process step, the inner member 3 to the outer member 2. The inner member 3 and filter 4 are welded around the outer rim 51. The inner member 3 and outer member 2 are joined by means of weld lines around the outer rim 51 and also the upper edges of the webs 54.

[0041] As shown most clearly in Figure 11, the outer member 2 and inner member 3 when joined together define a void space 130 in the interior 120 below the annular flange 41 and exterior the cylindrical funnel 40 which forms a filtration chamber. The filtration chamber 130 and passages 57 above the annular frame 41 are separated by the filter paper 4.

[0042] The filtration chamber 130 contains the one or more beverage ingredients 200. The one or more beverage ingredients are packed into the filtration chamber 130. For a filtered style beverage the ingredient is typically roast and ground coffee or leaf tea. The density of packing of the beverage ingredients in the filtration chamber 130 can be varied as desired. Typically, for a filtered coffee product the filtration chamber contains between 5.0 and 10.2 grams of roast and ground coffee in a filtration bed of thickness of typically 5 to 14 mm. Optionally, the interior 120 may contain one or more bodies, such as spheres, which are freely movable within the interior 120 to aid mixing by inducing turbulence and breaking down deposits of beverage ingredients during discharge of the beverage.

[0043] The laminate 5 is then affixed to the outer member 2 by forming a weld 126 around the periphery of the laminate 5 to join the laminate 5 to the lower surface of the outwardly extending flange 35. The weld 126 is extended to seal the laminate 5 against the lower edge of the cylindrical wall 27 of the inlet chamber 26. Further, a weld 125 is formed between the laminate 5 and the lower edge of the outer tube 42 of the cylindrical funnel 40. The laminate 5 forms the lower wall of the filtration chamber 130 and also seals the inlet chamber 26 and cylindrical funnel 40. However, a small gap 123 exists prior to dispensation between the laminate 5 and the lower edge of the discharge spout 43. A variety of welding methods may be used, such as heat and ultrasonic welding, depending on the material characteristics of the laminate 5.

[0044] Advantageously, the inner member 3 spans between the outer member 2 and the laminate 5. The inner member 3 is formed from a material of relative rigidity, such as polypropylene. As such, the inner member 3 forms a load-bearing member that acts to keep the laminate 5 and outer member 2 spaced apart when the cartridge 1 is compressed. It is preferred that the cartridge 1 is subjected to a compressive load of between 130 and 280N in use. The compressive force acts to prevent the cartridge failing under internal pressurisation and also serves to squeeze the inner member 3 and outer member 2 together. This ensures that the internal dimensions of passageways and apertures in the cartridge 1 are fixed and unable to change during pressurisation of the cartridge 1.

[0045] To use the cartridge 1 it is first inserted into a beverage preparation machine and the inlet 121 and outlet 122 are opened by piercing members of the beverage preparation machine which perforate and fold back the laminate 5. An aqueous medium, typically water, under pressure enters the cartridge 1 through the inlet 121 into the inlet chamber 26 at a pressure of between 0.1-2.0 bar. From there the water is directed to flow through the slots 30 and round the manifold 16 and into the filtration chamber 130 of the cartridge 1 through the plurality of slots 17. The water is forced radially inwardly through the filtration chamber 130 and mixes with the beverage ingredients 200 contained therein. The water is at the same time forced upwardly through the beverage ingredients. The beverage formed by passage of the water through the beverage ingredients passes through the filter 4 and filtration apertures 55 into the passages 57 lying above the annular frame 41. The sealing of the filter 4 onto the spokes 53 and the welding of the rim 51 with the outer member 2 ensures that there are no short-circuits and all the beverage has to pass through the filter 4.

[0046] The beverage then flows downwardly along the radial passages 57 formed between the webs 54 and through the openings 56 and into the cylindrical funnel 40. The beverage passes along the channels 50 between the support webs 47 and down the discharge spout 43 to the outlet 44 where the beverage is discharged into a receptacle such as a cup.

[0047] Preferably, the beverage preparation machine comprises an air purge facility, wherein compressed air is forced through the cartridge 1 at the end of the operating cycle to flush out the remaining beverage into the receptacle.

[0048] A second version of cartridge 1 will now be described for background purposes with reference to Figures 12 to 18. The second version of the cartridge 1 is particularly designed for use in dispensing espresso-style products such as roast and ground coffee where it is desirable to produce a beverage having a froth of tiny bubbles known as a crema. Many of the features of the second version of the cartridge 1 are the same as in the first version and like numerals have been used to reference like features. In the following description the differences between the first and second versions will be discussed. Common features which function in the same manner will not be discussed in detail.

[0049] The outer member 2 is of the same construction as in the first version of cartridge 1 and as shown in Figures 1 to 6.

[0050] The annular frame 41 of the inner member 3 is the same as in the first version. Also, a filter 4 is disposed on

the annular frame 41 so as to cover the filtration apertures 55. The outer tube 42 of the cylindrical funnel 40 is also as before. However, there are a number of differences in the construction of the inner member 2 of the second version compared to the first version. As shown in Figure 16, the discharge spout 43 is provided with a partition 65 which extends part way up the discharge spout 43 from the outlet 44. The partition 65 helps to prevent the beverage spraying and/or

splashing as it exits the discharge spout 43. The profile of the discharge spout 43 is also different and comprises a stepped profile with a distinct dog-leg 66 near an upper end of the tube 43.

[0051] A rim 67 is provided upstanding from the annular flange 47 joining the outer tube 42 to the discharge spout 43. The rim 67 surrounds the inlet 45 to the discharge spout 43 and defines an annular channel 69 between the rim 67 and the upper portion of the outer tube 42. The rim 67 is provided with an inwardly directed shoulder 68. At one point around the circumference of the rim 67 an aperture 70 is provided in the form of a slot which extends from an upper edge of rim 67 to a point marginally below the level of the shoulder 68 as most clearly shown in Figures 12 and 13. The slot has a width of 0.64 mm.

[0052] An air inlet 71 is provided in annular flange 47 circumferentially aligned with the aperture 70 as shown in Figures 16 and 17. The air inlet 71 comprises an aperture passing through the flange 47 so as to provide communication between a point above the flange 47 and the void space below the flange 47 between the outer tube 42 and discharge spout 43. Preferably, and as shown, the air inlet 71 comprises an upper frusto-conical portion 73 and a lower cylindrical portion 72. The air inlet 71 is typically formed by a mould tool such as a pin. The tapered profile of the air inlet 71 allows the mould tool to be more easily removed from the moulded component. The wall of the outer tube 42 in the vicinity of the air inlet 71 is shaped to form a chute 75 leading from the air inlet 71 to the inlet 45 of the discharge spout 43. As shown in Figure 17, a canted shoulder 74 is formed between the air inlet 71 and the chute 75 to ensure that the jet of beverage issuing from the slot 70 does not immediately foul on the upper surface of the flange 47 in the immediate vicinity of the air inlet 71.

[0053] The assembly procedure for the second version of cartridge 1 is similar to the assembly of the first version. However, there are certain differences. As shown in Figure 18, the third portion 21 of the cylindrical extension 18 is seated inside the support rim 67 rather than against support webs. The shoulder 32 of the cylindrical extension 18 between the second portion 20 and third portion 21 bears against the upper edge of the support rim 67 of the inner member 3. An interface zone 124 is thus formed between the inner member 3 and the outer member 2 comprising a face seal between the cylindrical extension 18 and the support rim 67 which extends around nearly the whole circumference of the cartridge 1. The seal between the cylindrical extension 18 and the support rim 67 is not fluid-tight though since the slot 70 in the support rim 67 extends through the support rim 67 and downwardly to a point marginally below the shoulder 68. Consequently the interface fit between the cylindrical extension 18 and the support rim 67 transforms the slot 70 into an aperture 128, as most clearly shown in Figure 18, providing gas and liquid communication between the annular channel 69 and the discharge spout 43. The aperture is typically 0.64 mm wide by 0.69 mm long.

[0054] Operation of the second version of cartridge 1 to dispense a beverage is similar to the operation of the first version but with certain differences. Beverage in the radial passages 57 flows downwardly along the passages 57 formed between the webs 54 and through the openings 56 and into the annular channel 69 of the cylindrical funnel 40. From the annular channel 69 the beverage is forced under pressure through the aperture 128 by the back pressure of beverage collecting in the filtration chamber 130 and passages 57. The beverage is thus forced through aperture 128 as a jet and into an expansion chamber formed by the upper end of the discharge spout 43. As shown in Figure 18, the jet of beverage passes directly over the air inlet 71. As the beverage enters the discharge spout 43 the pressure of the beverage jet drops. As a result air is entrained into the beverage stream in the form of a multitude of small air bubbles as the air is drawn up through the air inlet 71. The jet of beverage issuing from the aperture 128 is funnelled downwards to the outlet 44 where the beverage is discharged into a receptacle such as a cup where the air bubbles form the desired crema. Thus, the aperture 128 and the air inlet 71 together form an eductor which acts to entrain air into the beverage. Flow of beverage into the eductor should be kept as smooth as possible to reduce pressure losses. Advantageously, the walls of the eductor should be made concave to reduce losses due to 'wall effect' friction. The dimensional tolerance of the aperture 128 is small. Preferably the aperture size is fixed plus or minus 0.02 mm². Hairs, fibrils or other surface irregularities can be provided within or at the exit of the eductor to increase the effective cross-sectional area which has been found to increase the degree of air entrainment.

[0055] A third version of cartridge 1 will now be described for background purposes and is shown in Figures 19 to 29. The third version of the cartridge 1 is particularly designed for use in dispensing soluble products which may be in powdered, liquid, syrup, gel or similar form. The soluble product is dissolved by or forms a suspension in, an aqueous medium such as water when the aqueous medium is passed, in use, through the cartridge 1. Examples of beverages include chocolate, coffee, milk, tea, soup or other rehydratable or aqueous-soluble products. Many of the features of the third version of the cartridge 1 are the same as in the previous versions and like numerals have been used to reference like features. In the following description the differences between the third and previous versions will be discussed. Common features which function in the same manner will not be discussed in detail.

[0056] Compared to the outer member 2 of the previous versions, the hollow inwardly directed cylindrical extension

18 of the outer member 2 of the third version has a larger overall diameter as shown in Figure 20. In particular the diameter of the first portion 19 is typically between 16 and 18 mm compared to 13.2 mm for the outer member 2 of the previous versions. In addition, the first portion 19 is provided with a convex outer surface 19a, or bulge, as most clearly shown in Figure 20, the function of which will be described below. The diameter of the third portions 21 of the cartridges 1 are however the same resulting in the area of the shoulder 32 being greater in this, the third version of the cartridge 1. Typically the volume of the cartridge 1 when assembled is 32.5 ml $\pm$ 20%.

[0057] The number and positioning of the slots in the lower end of the annular wall 13 is also different. Between 3 and 5 slots are provided. In the embodiment as shown in Figure 23, four slots 36 are provided equi-spaced around the circumference of the manifold 16. The slots 36 are slightly wider than in the previous versions of the cartridge 1 being between 0.35 and 0.45 mm, preferably 0.4 mm wide.

[0058] In other respects the outer members 2 of the cartridges 1 are the same.

[0059] The construction of the cylindrical funnel 40 of the inner member 3 is the same as in the first version of cartridge 1 with an outer tube 42, discharge spout 45, annular flange 47 and support webs 49 being provided. The only difference is that the discharge spout 45 is shaped with an upper frusto-conical section 92 and a lower cylindrical section 93.

[0060] In contrast to the previous versions and as shown in Figures 24 to 28, the annular frame 41 is replaced by a skirt portion 80 which surrounds the cylindrical funnel 40 and is joined thereto by means of eight radial struts 87 which adjoin the cylindrical funnel 40 at or near the annular flange 47. A cylindrical extension 81 of the skirt portion 80 extends upwardly from the struts 87 to define a chamber 90 with an open upper face. An upper rim 91 of the cylindrical extension 81 has an in-turned profile as shown in Figure 26. An annular wall 82 of the skirt portion 80 extends downwardly from the struts 87 to define an annular channel 86 between the skirt portion 80 and the outer tube 42.

[0061] The annular wall 82 comprises at a lower end an exterior flange 83 which lies perpendicular to the major axis X. A rim 84 depends downwardly from a lower surface of the flange 83 and contains five apertures 85 which are circumferentially equi-spaced around the rim 84. Thus, the rim 84 is provided with a castellated lower profile.

[0062] Apertures 89 are provided between the struts 87 allowing communication between the chamber 90 and the annular channel 86.

[0063] The assembly procedure for the third version of cartridge 1 is similar to the assembly of the first version but with certain differences. The outer member 2 and inner member 3 are push-fitted together as shown in Figure 29 and retained by means of a snap-fit arrangement rather than welded together. On joining the two members the inwardly directed cylindrical extension 18 is received inside the upper cylindrical extension 81 of the skirt portion 80. The inner member 3 is retained in the outer member 2 by frictional interengagement of the convex outer surface 19a of the first portion 19 of the cylindrical extension 18 with the in-turned rim 91 of the upper cylindrical extension 81. With the inner member 3 located in the outer member 2 a mixing chamber 134 is defined located exterior to the skirt portion 80. The mixing chamber 134 contains the beverage ingredients 200 prior to dispensation. It should be noted that the four inlets 36 and the five apertures 85 are staggered circumferentially with respect to one another. The radial location of the two parts relative to each other need not be determined or fixed during assembly since the use of four inlets 36 and five apertures 85 ensures that misalignment occurs between the inlets and apertures whatever the relative rotational positioning of the components.

[0064] The one or more beverage ingredients are packed into the mixing chamber 134 of the cartridge. The density of packing of the beverage ingredients in the mixing chamber 134 can be varied as desired.

[0065] The laminate 5 is then affixed to the outer member 2 and inner member 3 in the same manner as described above in the previous versions.

[0066] In use, water enters the mixing chamber 134 through the four slots 36 in the same manner as previous versions of the cartridge. The water is forced radially inwardly through the mixing chamber and mixes with the beverage ingredients contained therein. The product is dissolved or mixed in the water and forms the beverage in the mixing chamber 134 and is then driven through the apertures 85 into the annular channel 86 by back pressure of beverage and water in the mixing chamber 134. The circumferential staggering of the four inlet slots 36 and the five apertures 85 ensures that jets of water are not able to pass radially directly from the inlet slots 36 to the apertures 85 without first circulating within the mixing chamber 134. In this way the degree and consistency of dissolution or mixing of the product is significantly increased. The beverage is forced upwardly in the annular channel 86, through the apertures 89 between the struts 87 and into the chamber 90. The beverage passes from chamber 90 through the inlets 45 between the support webs 49 into the discharge spout 43 and towards the outlet 44 where the beverage is discharged into a receptacle such as a cup. The cartridge finds particular application with beverage ingredients in the form of viscous liquids or gels. In one application a liquid chocolate ingredient is contained in the cartridge 1 with a viscosity of between 1700 and 3900mPa at ambient temperature and between 5000 and 10000mPa at 0°C and a refractive solids of 67 Brix $\pm$ 3. In another application liquid coffee is contained in the cartridge 1 with a viscosity of between 70 and 2000mPa at ambient and between 80 and 5000mPa at 0°C where the coffee has a total solids level of between 40 and 70%. The liquid coffee ingredient may contain between 0.1 and 2.0% by weight sodium bicarbonate, preferably between 0.5 and 1.0% by weight. The sodium bicarbonate acts to maintain the pH level of the coffee at or below 4.8 enabling a shelf-life for coffee-

filled cartridges of up to 12 months.

[0067] A fourth version of cartridge 1 embodying the present invention is shown in Figures 30 to 34. The fourth version of the cartridge 1 is particularly designed for use in dispensing liquid products such as concentrated liquid milk. Many of the features of the fourth version of the cartridge 1 are the same as in the previous versions and like numerals have been used to reference like features. In the following description the differences between the fourth and previous versions will be discussed. Common features which function in the same manner will not be discussed in detail.

[0068] The outer member 2 is the same as in the third version of cartridge 1 and as shown in Figures 19 to 23.

[0069] The cylindrical funnel 40 of the inner member 3 is similar to that shown in the second version of cartridge 1 but with certain differences. As shown in Figure 30 the discharge spout 43 is shaped with an upper frusto-conical section 106 and a lower cylindrical section 107. Three axial ribs 105 are provided on the inner surface of the discharge spout 43 to direct the dispensed beverage downwards towards the outlet 44 and prevent the discharged beverage from spinning within the spout. Consequently, the ribs 105 act as baffles. As in the second version of cartridge 1, an air inlet 71 is provided through the annular flange 47. However, the chute 75 beneath the air inlet 71 is more elongated than in the second version.

[0070] A skirt portion 80 is provided similar to that shown in the third version of the cartridge 1 described above. Between 5 and 12 apertures 85 are provided in the rim 84. Typically ten apertures are provided rather than the five provided in the third version of cartridge 1.

[0071] An annular bowl 100 is provided extending from and integral with the flange 83 of the skirt portion 80. The annular bowl 100 comprises a flared body 101 with an open upper mouth 104 which is directed upwards. Four feed apertures 103 shown in Figures 30 and 31 are located in the body 101 at or near the lower end of the bowl 100 where it joins the skirt portion 80. Preferably, the feed apertures are equi-spaced around the circumference of the bowl 100. The bowl 100 joins the skirt portion 80 part-way up its length such that a discrete gap is provided between the bowl 100 and the laminate 5 when the cartridge is assembled. Thus, the apertures 85 are located below the level of the bowl 100. As can be seen from Figure 34, when the cartridge 1 is assembled and filled the bowl 100 contains a proportion of the liquid beverage ingredients therein, effectively partitioning that proportion of the beverage ingredients from the apertures 85.

[0072] The laminate 5 is of the type described above in the previous embodiments.

[0073] The assembly procedure for the fourth version of cartridge 1 is the same as that for the third version.

[0074] Operation of the fourth version of cartridge is similar to that of the third version. The water enters the cartridge 1 and the mixing chamber 134 in the same manner as before. There the water mixes with and dilutes the liquid product which is then forced out below the bowl 100 and through the apertures 85 towards the outlet 44 as described above. The proportion of the liquid product initially contained within the annular bowl 100 as shown in Figure 34 is not subject to immediate dilution by the water entering the mixing chamber 134. Rather, the diluted liquid product in the lower part of the mixing chamber 134 will tend to exit through apertures 85 rather than be forced up and into the annular bowl 100 through upper mouth 104. Consequently, the liquid product in the annular bowl 100 will remain relatively concentrated during the initial stages of the operating cycle compared to the product in the lower part of the mixing chamber 134. The liquid product in the annular bowl 100 drips through the feed apertures 103 under gravity into the stream of product exiting the mixing chamber 134 through the apertures 85 and below the bowl 100. The annular bowl 100 acts to even out the concentration of the diluted liquid product entering the cylindrical funnel 40 by holding back a proportion of the concentrated liquid product and releasing it into the exiting liquid stream flow path steadily throughout the operating cycle as illustrated in Figure 35a where the concentration of the milk measured as a percentage of the total solids present is shown during an operating cycle of approximately 15 seconds. Line a illustrates the concentration profile with the bowl 100 whilst line b illustrates a cartridge without the bowl 100. As can be seen the concentration profile with the cup 100 is more even during the operating cycle and there is no immediate large drop in concentration as occurs without the bowl 100. The initial concentration of the milk is typically 30-35% SS and at the end of the cycle 10% SS. This results in a dilution ratio of around 3 to 1, although dilution ratios of between 1 to 1 and 6 to 1 are possible with the present invention. For other liquid beverage ingredients the concentrations may vary. For example for liquid chocolate the initial concentration is approximately 67% SS and at the end of the cycle 12-15% SS. This results in a dilution ratio (ratio of aqueous medium to beverage ingredient in dispensed beverage) of around 5 to 1, although dilution ratios of between 2 to 1 and 10 to 1 are possible with the present invention. For liquid coffee the initial concentration is between 40-67% and the concentration at the end of dispense 1-2% SS. This results in a dilution ratio of between 20 to 1 and 70 to 1, although dilution ratios of between 10 to 1 and 100 to 1 are possible with the present invention.

[0075] From the annular channel 86 the beverage is forced under pressure through the aperture 128 by the back pressure of beverage collecting in the filtration chamber 134 and chamber 90. The beverage is thus forced through aperture 128 as a jet and into an expansion chamber formed by the upper end of the discharge spout 43. As shown in Figure 34, the jet of beverage passes directly over the air inlet 71. As the beverage enters the discharge spout 43 the pressure of the beverage jet drops. As a result air is entrained into the beverage stream in the form of a multitude of small air bubbles as the air is drawn up through the air inlet 71. The jet of beverage issuing from the aperture 128 is

funnelled downwards to the outlet 44 where the beverage is discharged into a receptacle such as a cup where the air bubbles form the desired frothy appearance.

[0076] Advantageously, the inner member 3, outer member 2, laminate 5 and filter 4 can all be readily sterilised due to the components being separable and not individually comprising tortuous passageways or narrow crevices. Rather, it is only after conjoining the components, after sterilisation, that the necessary passageways are formed. This is particularly important where the beverage ingredient is a dairy-based product such as liquid milk concentrate.

[0077] The fourth embodiment of beverage cartridge is particularly advantageous for dispensing a concentrated dairy-based liquid product such as liquid milk. Previously, powdered milk products have been provided in the form of sachets for adding to a pre-prepared beverage. However, for a cappuccino-style beverage it is necessary to foam the milk. This has been achieved previously by passing steam through a liquid milk product. However this necessitates the provision of a steam supply which increases the cost and complexity of the machine used to dispense the beverage. The use of steam also increases the risk of injury during operation of the cartridge. Accordingly the present invention provides for a beverage cartridge having a concentrated dairy-based liquid product therein. It has been found that by concentrating the milk product a greater amount of foam can be produced for a particular volume of milk when compared to fresh or UHT milk. This reduces the size required for the milk cartridge. Fresh semi-skimmed milk contains approximately 1.6% fat and 10% total solids. The concentrated liquid milk preparations of the present invention contain between 0.1 and 12% fat and 25 to 40% total solids. In a typical example, the preparation contains 4% fat and 30% total solids. The concentrated milk preparations are suitable for foaming using a low pressure preparation machine as will be described below. In particular, foaming of the milk is achieved at pressures below 2 bar, preferably approximately 1.5 bar using the cartridge of the fourth embodiment described above.

[0078] The foaming of the concentrated milk is particularly advantageous for beverages such as cappuccinos and milk shakes. Preferably the passing of the milk through the aperture 128 and over the air inlet 71 and the optional use of the bowl 100 enables foaming levels of greater than 40%, preferably greater than 70% for milk. For liquid chocolate foaming levels of greater than 70% are possible. For liquid coffee foaming levels of greater than 70% are possible. The foamability level is measured as the ratio of the volume of the foam produced to the volume of liquid beverage ingredient dispensed. For example, where 138.3ml of beverage is dispensed, of which 58.3ml is foam the foamability is measured as $[58.3/(138.3-58.3)] \times 100 = 72.9\%$. The foamability of the milk (and other liquid ingredients) is enhanced by the provision of the bowl 100 as can be seen in Figure 35b. The foamability of the milk dispensed with the bowl 100 present (line a) is greater than that of milk dispensed without the bowl present (line b). This is because the foamability of the milk is positively correlated to the concentration of the milk and as shown in Figure 35a the bowl 100 maintains a higher concentration of the milk a larger part of the operating cycle. It is also known that foamability of the milk is positively correlated to temperature of the aqueous medium as shown in Figure 35c. Thus the bowl 100 is advantageous since more of the milk remains in the cartridge until near the end of the operating cycle when the aqueous medium is at its hottest. This again improves foamability.

[0079] The cartridge of the fourth embodiment is also advantageous in dispensing liquid coffee products.

[0080] It has been found that the embodiments of beverage cartridge advantageously provide an improved consistency of the brewed beverage when compared to prior art cartridges. Reference is made to Table 1 below which shows the results of brew yields for twenty samples each of cartridges A and B containing roast and ground coffee. Cartridge A is a beverage cartridge according to the first embodiment. Cartridge B is a prior art beverage cartridge as described in the applicant's document WO01/58786. The refractive index of the brewed beverage is measured in Brix units and converted to a percentage of soluble solids (%SS) using standard tables and formulae. In the examples below:

$$\%SS = 0.7774 * (\text{Brix value}) + 0.0569.$$

$$\% \text{ Yield} = (\%SS * \text{Brew Volume (g)}) / (100 * \text{Coffee Weight (g)})$$

Table 1

CARTRIDGE A					
Sample	Brew Volume (g)	Coffee Weight (g)	Brix	% SS (*)	% Yield
1	105.6	6.5	1.58	1.29	20.88

EP 1 440 907 B2

(continued)

CARTRIDGE A					
Sample	Brew Volume (g)	Coffee Weight (g)	Brix	% SS (*)	% Yield
2	104.24	6.5	1.64	1.33	21.36
3	100.95	6.5	1.67	1.36	21.05
4	102.23	6.5	1.71	1.39	21.80
5	100.49	6.5	1.73	1.40	21.67
6	107.54	6.5	1.59	1.29	21.39
7	102.70	6.5	1.67	1.36	21.41
8	97.77	6.5	1.86	1.50	22.61
9	97.82	6.5	1.7	1.38	20.75
10	97.83	6.5	1.67	1.36	20.40
11	97.6	6.5	1.78	1.44	21.63
12	106.64	6.5	1.61	1.31	21.47
13	99.26	6.5	1.54	1.25	19.15
14	97.29	6.5	1.59	1.29	19.35
15	101.54	6.5	1.51	1.23	19.23
16	104.23	6.5	1.61	1.31	20.98
17	97.5	6.5	1.73	1.40	21.03
18	100.83	6.5	1.68	1.36	21.14
19	101.67	6.5	1.67	1.36	21.20
20	101.32	6.5	1.68	1.36	21.24
				AVERAGE	20.99
CARTRIDGE B					
Sample	Brew Volume (g)	Coffee Weight (g)	Brix	% SS (*)	% Yield
1	100.65	6.5	1.87	1.511	23.39
2	95.85	6.5	1.86	1.503	22.16
3	98.4	6.5	1.8	1.456	22.04
4	92.43	6.5	2.3	1.845	26.23
5	100.26	6.5	1.72	1.394	21.50
6	98.05	6.5	2.05	1.651	24.90
7	99.49	6.5	1.96	1.581	24.19
8	95.62	6.5	2.3	1.845	27.14
9	94.28	6.5	2.17	1.744	25.29
10	96.13	6.5	1.72	1.394	20.62
11	96.86	6.5	1.81	1.464	21.82
12	94.03	6.5	2.2	1.767	25.56
13	96.28	6.5	1.78	1.441	21.34

(continued)

CARTRIDGE B					
Sample	Brew Volume (g)	Coffee Weight (g)	Brix	% SS (*)	% Yield
14	95.85	6.5	1.95	1.573	23.19
15	95.36	6.5	1.88	1.518	22.28
16	92.73	6.5	1.89	1.526	21.77
17	88	6.5	1.59	1.293	17.50
18	93.5	6.5	2.08	1.674	24.08
19	100.88	6.5	1.75	1.417	22.00
20	84.77	6.5	2.37	1.899	24.77
				AVERAGE	23.09

[0081] Performing a t-test statistical analysis on the above data gives the following results:

Table 2

t-Test: Two-Sample Assuming Equal Variances		
	% Yield (Cartridge A)	% Yield (Cartridge B)
Mean	20.99	23.09
Variance	0.77	5.04
Observations	20	20
Pooled Variance	2.90	
Hypothesized Mean Difference	0	
df	38	
t Stat	-3.90	
P(T<=t) one-tail	0.000188	
t Critical one-tail	1.686	
P(T<=t) two-tail	0.000376	
t Critical two-tail	2.0244	
Standard Deviation	0.876	2.245

[0082] The analysis shows that the consistency of % yield, which equates to brew strength, for cartridge A is significantly better (at a 95% confidence level) than the prior art cartridges, with a standard deviation of 0.88% compared to 2.24%. This means that beverages brewed with cartridge A have a more repeatable and uniform strength. This is preferred by consumers who like their drinks to taste the same time after time and do not want arbitrary changes in brew strength.

[0083] The materials of the cartridges described above may be provided with a barrier coating to improve their resistance to oxygen and/or moisture and/or other contaminant ingress. The barrier coating may also improve the resistance to leakage of the beverage ingredients from within the cartridges and/or reduce the degree of leaching of extractibles from the cartridge materials which might adversely affect the beverage ingredients. The barrier coating may be of a material selected from the group of PET, Polyamide, EVOH, PVDC or a metallised material. The barrier coating may be applied by a number of mechanisms including but not limited to vapour deposition, vacuum deposition, plasma coating, co-extrusion, in-mould labelling and two/multi-stage moulding.

Claims

1. A sealed cartridge (1) containing one or more liquid beverage ingredients (200) and being formed from substantially air- and water-impermeable materials, the cartridge comprising an inlet (121) for the introduction of an aqueous medium into the cartridge, a compartment (134) containing the one or more liquid beverage ingredients and an

outlet (122) for a beverage produced by dilution of the one or more liquid beverage ingredients by the aqueous medium, the compartment including means for controlling dilution of at least a proportion of the one or more liquid beverage ingredients on introduction of the aqueous medium into the compartment,

characterized in that the means for controlling dilution delays dilution of at least a proportion of the one or more liquid beverage ingredients on introduction of the aqueous medium into the compartment containing the one or more liquid beverage ingredients, wherein in use, an aqueous medium flow path is established from the inlet through the compartment containing the one or more liquid beverage ingredients to the outlet, the means for delaying dilution comprising a partition (100) in the compartment which hinders, within the compartment, entry of at least a proportion of the one or more liquid beverage ingredients into the aqueous medium flow path.

2. A cartridge (1) as claimed in claim 1 wherein the partition (100) comprises one or more apertures (103) for controllably releasing the at least a proportion of the one or more liquid beverage ingredients into the aqueous medium flow path.
3. A cartridge (1) as claimed in claim 2 wherein four apertures (103) are provided.
4. A cartridge (1) as claimed in any preceding claim wherein the partition comprises a cup-shaped member having an open mouth (104) directed away from the aqueous medium flow path.
5. A cartridge (1) as claimed in claim 4 wherein the cup-shaped member is annular.
6. A cartridge (1) as claimed in claim 4 or claim 5 wherein one or more apertures (103) are provided at or near a base of the cup-shaped member.
7. A cartridge (1) as claimed in claim 6 wherein the at least a proportion of the liquid beverage ingredients in the cup-shaped member (100) drain by gravity through the one or more apertures (103) in use.
8. A cartridge (1) as claimed in claim 7 wherein the cup-shaped member is spaced from a bottom of the cartridge, such that the aqueous medium flow path passes between the cup-shaped member and the bottom of the cartridge.
9. A cartridge (1) as claimed in claim 8 wherein the at least a proportion of the liquid beverage ingredients in the cup-shaped member (100) drain by gravity through the one or more apertures (103) in use vertically downwards into the aqueous medium flow path.
10. A cartridge (1) as claimed in any of claims 4 to 7 comprising an inner member (3) and an outer member (2), wherein the inner member comprises the cup-shaped member.
11. A cartridge as claimed in any preceding claim further comprising means for producing a jet of the beverage, wherein said means for producing the jet of the beverage comprises an aperture (128) in the aqueous medium flow path.
12. A cartridge as claimed in claim 11 as dependent on claim 9 wherein the aperture (128) is delimited by an interface between the inner member and the outer member.
13. A cartridge as claimed in claim 11 or claim 12 further comprising at least one inlet (71) for air and means for generating a pressure reduction of the jet of beverage, whereby, in use, air from the at least one air inlet is incorporated into the beverage as a plurality of small bubbles.
14. A cartridge (1) as claimed in claim 13 wherein the at least one air inlet (71) is provided in the inner member downstream of the aperture (128).
15. A cartridge (1) as claimed in claim 14 wherein the at least one air inlet (71) and means for producing a pressure reduction in the jet of beverage produces a foaming of the one or more liquid beverage ingredients of greater than 40%.
16. A cartridge (1) as claimed in claim 15 wherein the foaming is greater than 70%.
17. A cartridge (1) as claimed in any preceding claim wherein the cartridge is disc-shaped.
18. A cartridge (1) as claimed in any preceding claim wherein the outer member and/or inner member are formed from polypropylene.

19. A cartridge (1) as claimed in any preceding claim wherein the outer member and/or inner member is formed by injection moulding.
20. A cartridge (1) as claimed in any preceding claim wherein the liquid beverage ingredient is a concentrated liquid milk composition.
21. A cartridge (1) as claimed in claim 20 wherein the concentrated liquid milk contains between 25 and 40% total solids.
22. A cartridge (1) as claimed in claim 21 wherein the concentrated liquid milk contains 30% total solids.
23. A cartridge (1) as claimed in any of claims 20 to 22 wherein the concentrated liquid milk contains between 0.1 and 12% fat.
24. A cartridge (1) as claimed in any of claims 1 to 19 wherein the one or more liquid beverage ingredients are selected from the group of cocoa solids, coffee, tea, sweeteners, cordials, flavourings, alcoholic beverages, flavoured milk, fruit juices, squashes, sauces and desserts.

Patentansprüche

1. Abgedichtete Kartusche (1), die einen oder mehrere flüssige Getränkebestandteile (200) enthält und aus im Wesentlichen luft- und wasserdichten Materialien besteht, wobei die Kartusche einen Einlass (121) zum Einleiten eines wässrigen Mediums in die Kartusche, einen Behälter (134), welcher den einen oder die mehreren Getränkebestandteile enthält, sowie einen Auslass (122) für ein durch Verdünnung des einen oder der mehreren Getränkebestandteile mit dem wässrigen Medium erzeugtes Getränk aufweist, wobei der Behälter eine Einrichtung zur Steuerung der Verdünnung zumindest eines Teils des einen oder der mehreren flüssigen Getränkebestandteile bei Einleitung des wässrigen Mediums in den Behälter umfasst,
dadurch gekennzeichnet, dass
die Einrichtung zur Regulierung der Verdünnung die Verdünnung zumindest eines Teils des einen oder mehreren flüssigen Getränkebestandteile bei Einleitung des wässrigen Mediums in den Behälter, der den einen oder die mehreren flüssigen Getränkebestandteile enthält, verzögert, wobei sich bei Gebrauch ein Durchflussweg des wässrigen Mediums von dem Einlass durch den Behälter, der den einen oder die mehreren flüssigen Getränkebestandteile enthält, zu dem Auslass bildet, und die Einrichtung zur Verzögerung der Verdünnung eine Trennwand (100) in dem Behälter umfasst, welche innerhalb des Behälters den Zulauf zumindest eines Teils des einen oder der mehreren flüssigen Getränkebestandteile in den Durchflussweg des wässrigen Mediums verhindert.
2. Kartusche (1) nach Anspruch 1, wobei die Trennwand (100) eine oder mehrere Öffnungen (103) zum regulierbaren Freisetzen zumindest eines Teils des einen oder der mehreren flüssigen Getränkebestandteile in den Durchflussweg des wässrigen Mediums umfasst.
3. Kartusche (1) nach Anspruch 2, bei der vier Öffnungen (103) vorgesehen sind.
4. Kartusche (1) nach einem der vorhergehenden Ansprüche, wobei die Trennwand ein tassenförmiges Element mit einer offenen Mündung (104) umfasst, die von dem Durchflussweg des wässrigen Mediums weg gerichtet ist.
5. Kartusche (1) nach Anspruch 4, wobei das tassenförmige Element ringförmig ist.
6. Kartusche (1) nach Anspruch 4 oder Anspruch 5, wobei eine oder mehrere Öffnungen (103) am oder nahe des Unterteils des tassenförmigen Elements vorgesehen sind.
7. Kartusche (1) nach Anspruch 6, wobei bei Gebrauch zumindest ein Teil der flüssigen Getränkebestandteile in dem tassenförmigen Element (100) mit Hilfe der Schwerkraft durch die eine oder die mehreren Öffnungen (103) abfließt.
8. Kartusche (1) nach Anspruch 7, wobei das tassenförmige Element einen solchen Abstand zu dem Boden der Kartusche aufweist, dass der Durchflussweg des wässrigen Mediums zwischen dem tassenförmigen Element und dem Boden der Kartusche hindurchführt.
9. Kartusche (1) nach Anspruch 8, wobei bei Gebrauch zumindest ein Teil der flüssigen Getränkebestandteile in dem

tassenförmigen Element (100) mit Hilfe der Schwerkraft durch die eine oder die mehreren Öffnungen (103) senkrecht abwärts in den Durchflussweg des wässrigen Mediums abfließt.

10. Kartusche (1) nach den Ansprüchen 4 bis 7, umfassend ein inneres Element (3) und ein äußeres Element (2), wobei das innere Element das tassenförmige Element umfasst.

11. Kartusche nach einem der vorhergehenden Ansprüche, weiterhin umfassend eine Einrichtung zur Erzeugung eines Getränkestrahls, wobei die Einrichtung zur Erzeugung des Getränkestrahls eine Öffnung (128) in dem Durchflussweg des wässrigen Mediums umfasst.

12. Kartusche nach Anspruch 11, soweit abhängig von Anspruch 9, wobei die Öffnung (128) von einer Grenzfläche zwischen dem inneren Element und dem äußeren Element begrenzt wird.

13. Kartusche nach Anspruch 11 oder Anspruch 12, weiterhin umfassend zumindest einen Einlass (71) für Luft und eine Einrichtung zur Erzeugung einer Druckminderung des Getränkestrahls, wobei bei Gebrauch die Luft aus zumindest einem Lufteinlass in das Getränk als eine Vielzahl kleiner Blasen eingebracht wird.

14. Kartusche (1) nach Anspruch 13, wobei zumindest ein Lufteinlass (71) in dem inneren Element stromabwärts der Öffnung (128) vorgesehen ist.

15. Kartusche (1) nach Anspruch 14, wobei der mindestens eine Lufteinlass (71) und eine Einrichtung zur Erzeugung einer Druckminderung in dem Getränkestrahl ein Aufschäumen des einen oder der mehreren flüssigen Getränkebestandteile von mehr als 40 % verursachen.

16. Kartusche (1) nach Anspruch 15, wobei das Aufschäumen mehr als 70 % beträgt.

17. Kartusche (1) nach einem der vorhergehenden Ansprüche, wobei die Kartusche scheibenförmig ist.

18. Kartusche (1) nach einem der vorhergehenden Ansprüche, wobei das äußere Element und/oder das innere Element aus Polypropylen geformt sind.

19. Kartusche (1) nach einem der vorhergehenden Ansprüche, wobei das äußere Element und/oder das innere Element mit Hilfe des Spritzgussverfahrens geformt werden.

20. Kartusche (1) nach einem der vorhergehenden Ansprüche, wobei der flüssige Getränkebestandteil ein konzentriertes, flüssiges Milchpräparat ist.

21. Kartusche (1) nach Anspruch 20, wobei das flüssige Milchkonzentrat zwischen 25 und 40 % Gesamttrockenmasse enthält.

22. Kartusche (1) nach Anspruch 21, wobei das flüssige Milchkonzentrat 30 % Gesamttrockenmasse enthält.

23. Kartusche (1) nach einem der Ansprüche 20 bis 22, wobei das flüssige Milchkonzentrat zwischen 0,1 und 12 % Fett enthält.

24. Kartusche (1) nach einem der Ansprüche 1 bis 19, wobei der eine oder die mehreren flüssigen Getränkebestandteile aus der Gruppe Kakaofeststoffe, Kaffee, Tee, Süßungsmittel, Fruchtsirupe, Aromastoffe, alkoholische Getränke, aromatisierte Milch, Fruchtsäfte, Fruchtzubereitungen, Saucen und Süßspeisen ausgewählt sind.

Revendications

1. Cartouche scellée (1) contenant un ou plusieurs ingrédients liquides (200) pour boisson et formée de matières sensiblement imperméables à l'air et à l'eau, la cartouche comportant une entrée (121) pour l'introduction d'un milieu aqueux dans la cartouche, un compartiment (134) contenant le ou les ingrédients liquides pour boisson et une sortie (122) pour une boisson produite par dilution du ou des ingrédients liquides pour boisson par le milieu aqueux, le compartiment comprenant un moyen pour commander la dilution d'au moins une proportion du ou des ingrédients liquides pour boisson lors de l'introduction du milieu aqueux dans le compartiment,

caractérisée en ce que le moyen pour commander la dilution retarde la dilution d'au moins une proportion du ou des ingrédients liquides pour boisson lors de l'introduction du milieu aqueux dans le compartiment contenant le ou les ingrédients liquides pour boisson, dans laquelle, lors de l'utilisation, un trajet d'écoulement du milieu aqueux est établi de l'entrée, à travers le compartiment contenant le ou les ingrédients liquides pour boisson, à la sortie, le moyen pour retarder la dilution comportant une cloison (100) dans le compartiment qui fait obstacle à l'intérieur du compartiment, à l'entrée d'au moins une proportion du ou des ingrédients liquides pour boisson dans le trajet d'écoulement du milieu aqueux.

2. Cartouche (1) selon la revendication 1, dans laquelle la cloison (100) présente une ou plusieurs ouvertures (103) pour libérer de façon réglable la au moins une proportion du ou des ingrédients liquides pour boisson dans le trajet d'écoulement du milieu aqueux.

3. Cartouche (1) selon la revendication 2, dans laquelle quatre ouvertures (103) sont prévues.

4. Cartouche (1) selon l'une quelconque des revendications précédentes, dans laquelle la cloison comporte un élément en forme de coupelle ayant une embouchure ouverte (104) dirigée à l'écart du trajet d'écoulement du milieu aqueux.

5. Cartouche (1) selon la revendication 4, dans laquelle l'élément en forme de coupelle est annulaire.

6. Cartouche (1) selon la revendication 4 ou la revendication 5, dans laquelle une ou plusieurs ouvertures (103) sont prévues à, ou à proximité de, une base de l'élément en forme de coupelle.

7. Cartouche (1) selon la revendication 6, dans laquelle la au moins une proportion des ingrédients liquides pour boisson dans l'élément (100) en forme de coupelle s'écoule par gravité à travers la ou les ouvertures (103) lors de l'utilisation.

8. Cartouche (1) selon la revendication 7, dans laquelle l'élément en forme de coupelle est espacé d'un fond de la cartouche, de manière que le trajet d'écoulement du milieu aqueux passe entre l'élément en forme de coupelle et le fond de la cartouche.

9. Cartouche (1) selon la revendication 8, dans laquelle la au moins une proportion des ingrédients liquides pour boisson dans l'élément (100) en forme de coupelle s'écoule par gravité à travers la ou les ouvertures (103) lors de l'utilisation, en descendant verticalement jusque dans le trajet d'écoulement du milieu aqueux.

10. Cartouche (1) selon l'une quelconque des revendications 4 à 7, comportant un élément intérieur (3) et un élément extérieur (2), dans laquelle l'élément intérieur comprend l'élément en forme de coupelle.

11. Cartouche selon l'une quelconque des revendications précédentes, comportant en outre un moyen destiné à produire un jet de la boisson, dans laquelle ledit moyen destiné à produire un jet de la boisson présente une ouverture (128) dans le trajet d'écoulement du milieu aqueux.

12. Cartouche selon la revendication 11 lorsqu'elle dépend de la revendication 9, dans laquelle l'ouverture (128) est délimitée par une interface entre l'élément intérieur et l'élément extérieur.

13. Cartouche selon la revendication 11 ou la revendication 12, comportant en outre une entrée (71) pour de l'air et un moyen destiné à générer une baisse de pression du jet de boisson, grâce à quoi, lors de l'utilisation, de l'air provenant de la au moins une entrée d'air est incorporé dans la boisson sous la forme de multiples petites bulles d'air.

14. Cartouche (1) selon la revendication 13, dans laquelle la au moins une entrée d'air (71) est située dans l'élément intérieur en aval de l'ouverture (128).

15. Cartouche (1) selon la revendication 14, dans laquelle la au moins une entrée d'air (71) et un moyen destiné à produire une baisse de pression dans le jet de boisson produisent un moussage du ou des ingrédients liquides pour boisson de plus de 40 %.

16. Cartouche (1) selon la revendication 15, dans laquelle le moussage est supérieur à 70 %.

17. Cartouche (1) selon l'une quelconque des revendications précédentes, dans laquelle la cartouche est en forme de

disque.

18. Cartouche (1) selon l'une quelconque des revendications précédentes, dans laquelle l'élément extérieur et/ou l'élément intérieur sont formés de polypropylène.

5

19. Cartouche (1) selon l'une quelconque des revendications précédentes, dans laquelle l'élément extérieur et/ou l'élément intérieur sont formés par moulage par injection.

20. Cartouche (1) selon l'une quelconque des revendications précédentes, dans laquelle l'ingrédient liquide pour boisson est une composition de lait liquide concentré.

10

21. Cartouche (1) selon la revendication 20, dans laquelle le lait liquide concentré contient entre 25 et 40 % de matière solide au total.

15

22. Cartouche (1) selon la revendication 21, dans laquelle le lait liquide concentré contient 30 % au total de matière solide.

23. Cartouche (1) selon l'une quelconque des revendications 20 à 22, dans laquelle le lait liquide concentré contient entre 0,1 et 12 % de matière grasse.

20

24. Cartouche (1) selon l'une quelconque des revendications 1 à 19, dans laquelle le ou les ingrédients liquides pour boisson sont choisis dans le groupe constitué de matières solides de cacao, du café, du thé, des édulcorants, des cordiaux, des parfums, des boissons alcoolisées, du lait aromatisé, des jus de fruits, des sirops, des sauces et des desserts.

25

30

35

40

45

50

55

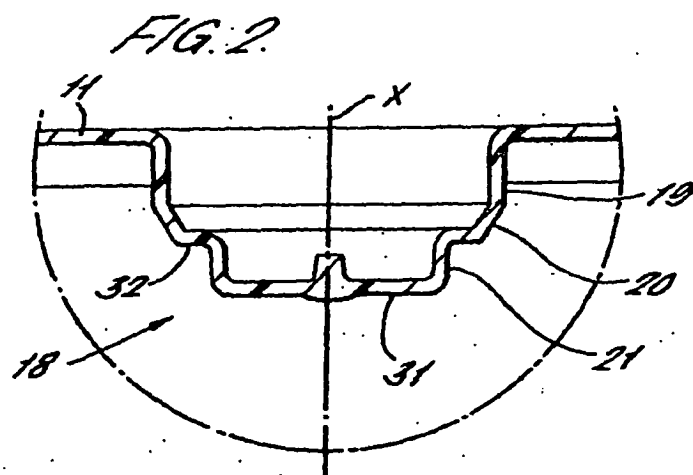
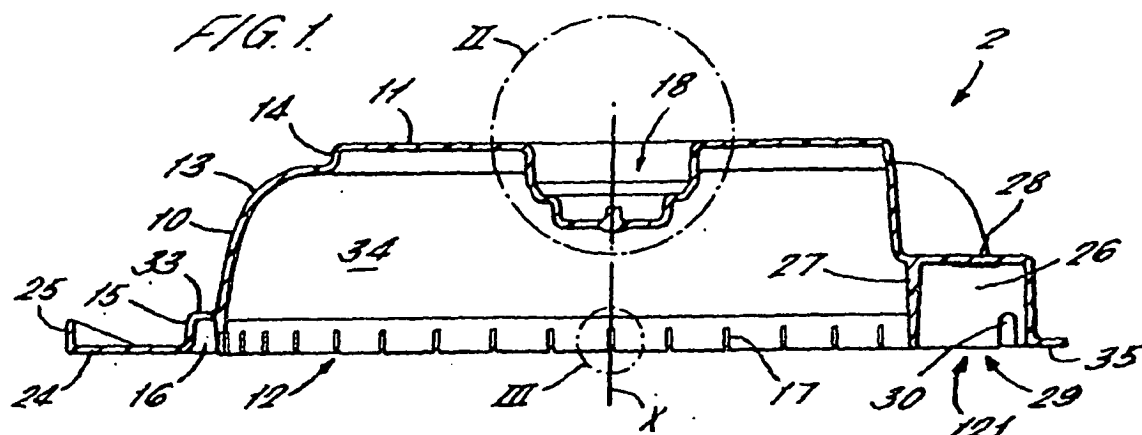

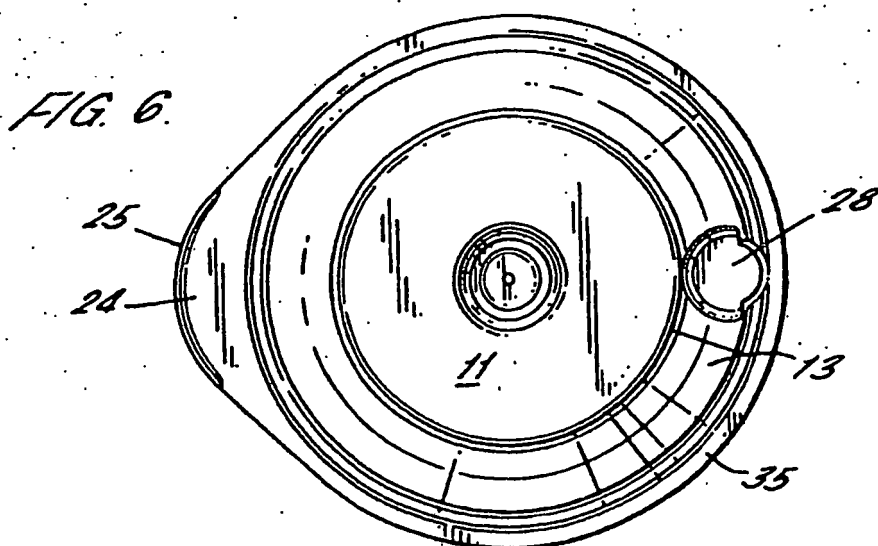
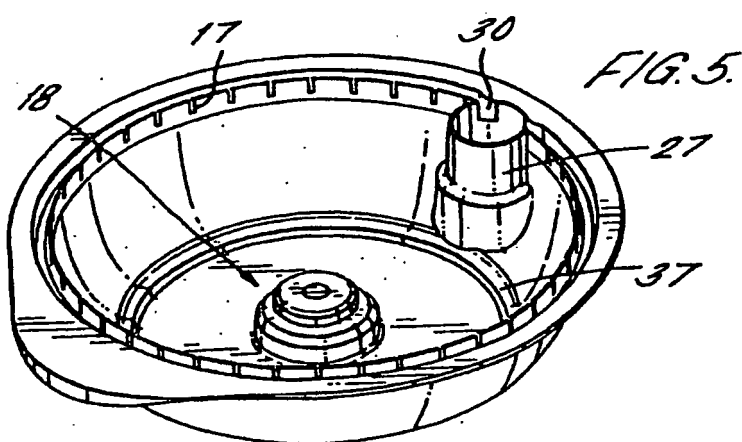
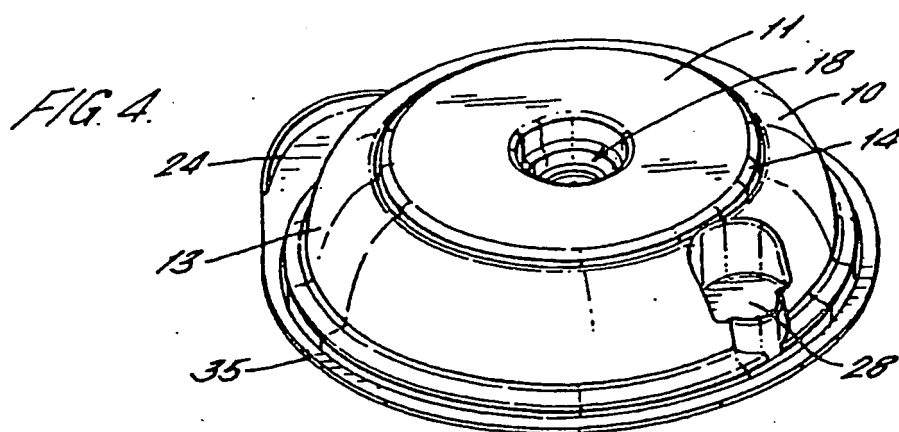


FIG. 3





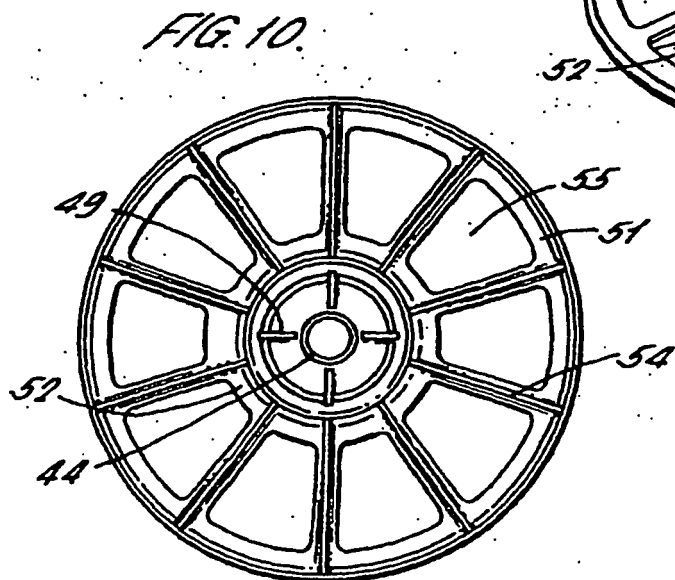
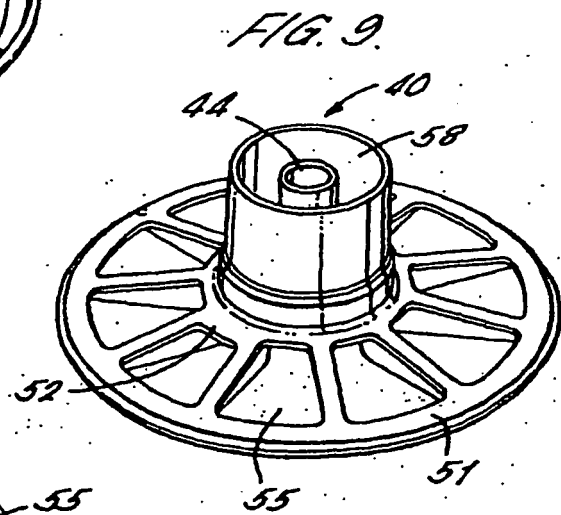
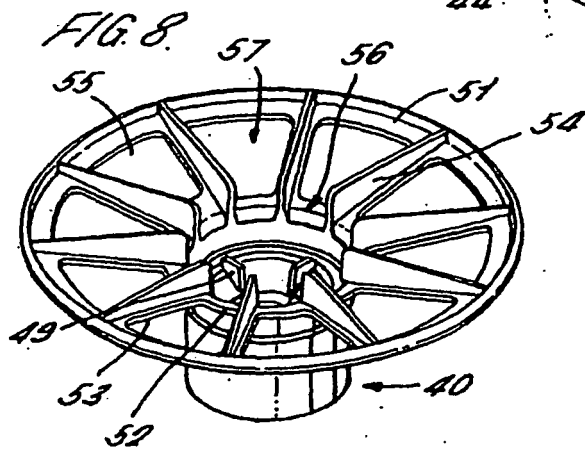
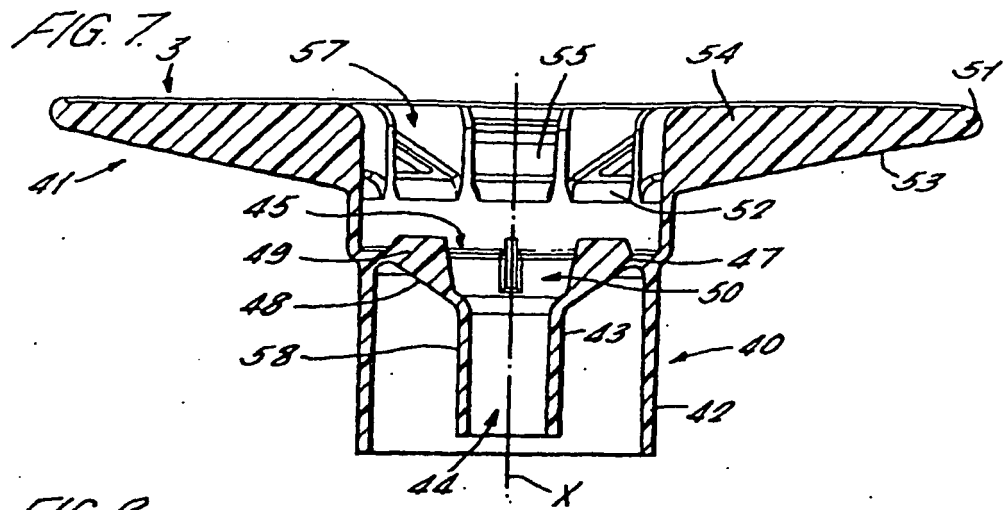
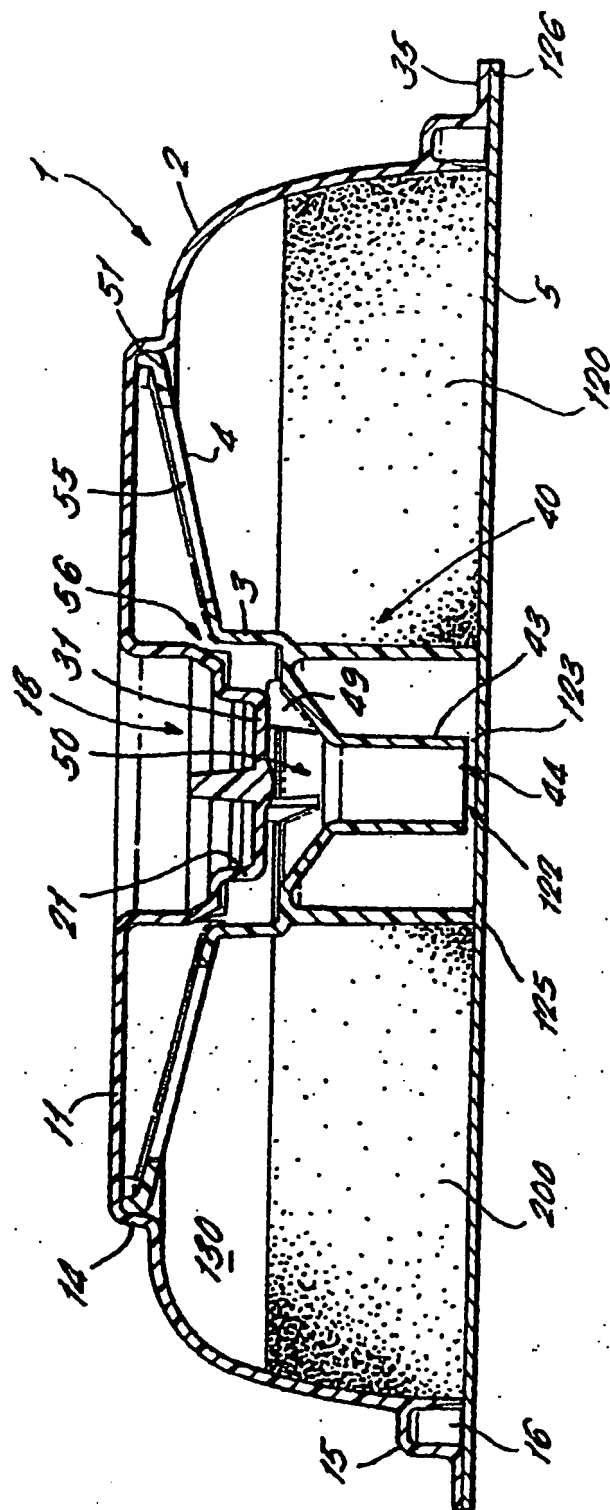
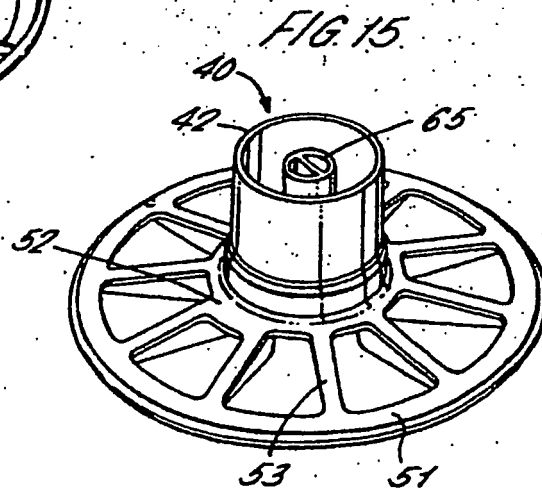
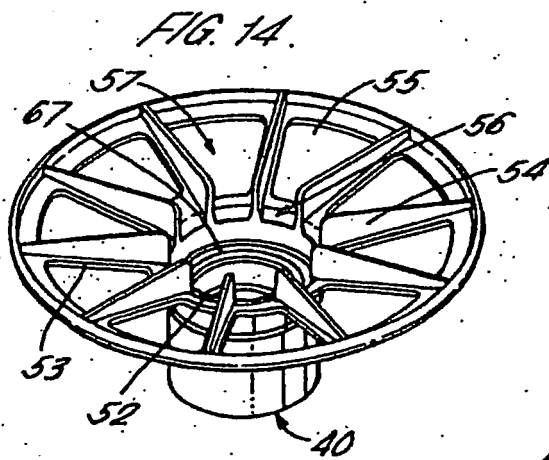
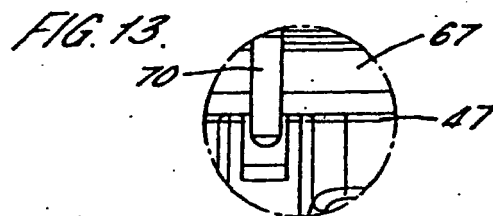
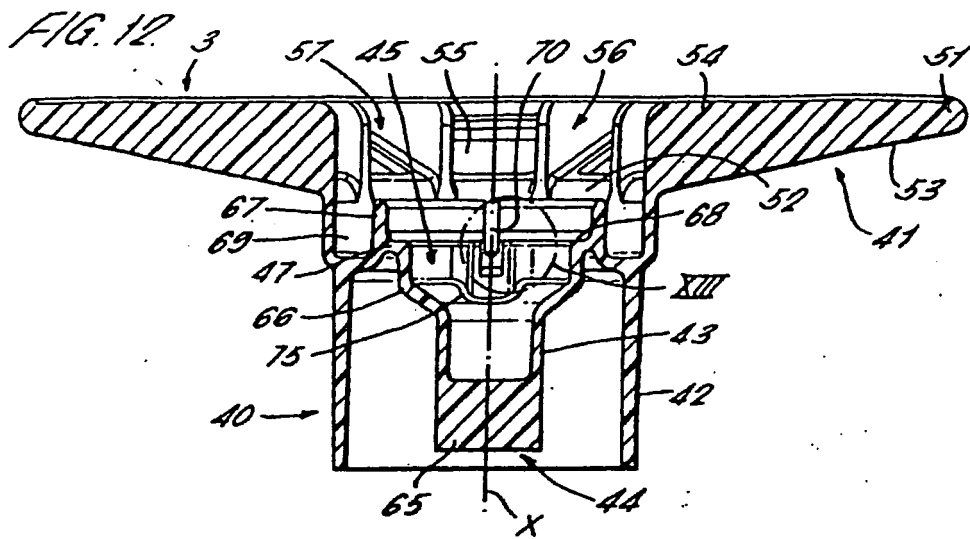


FIG. 11





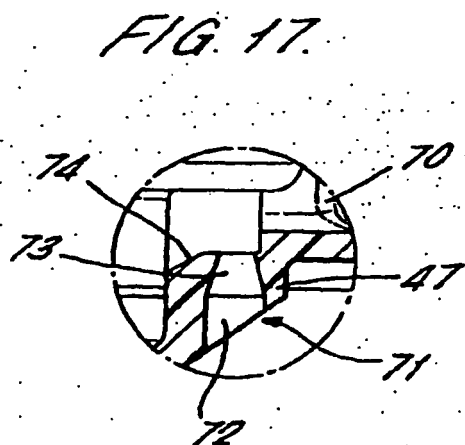
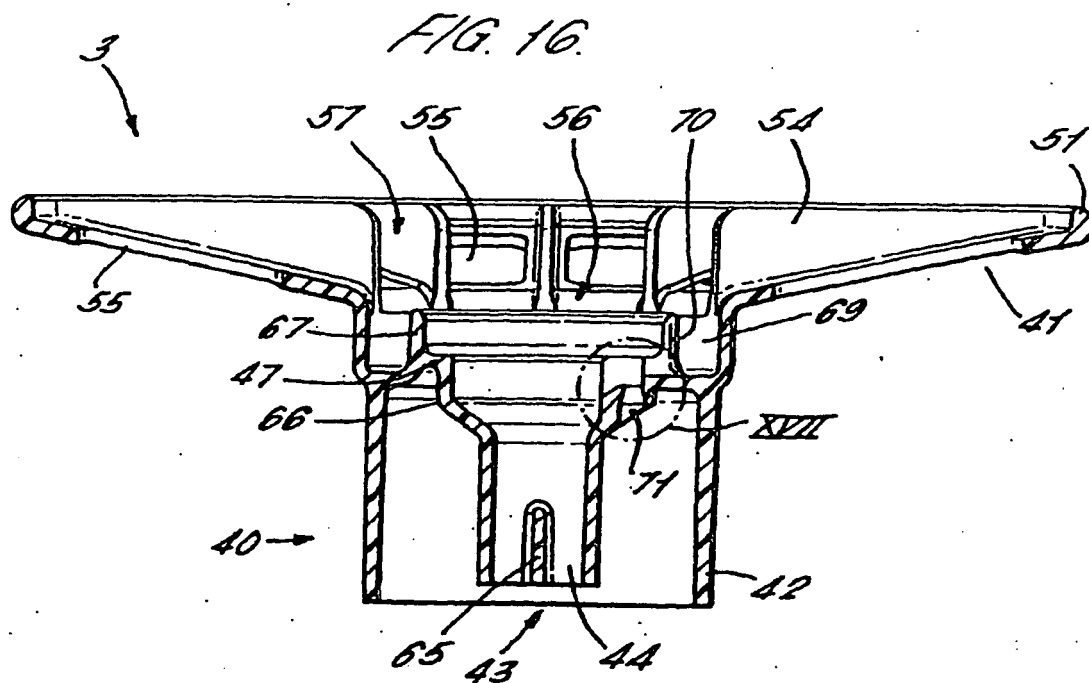
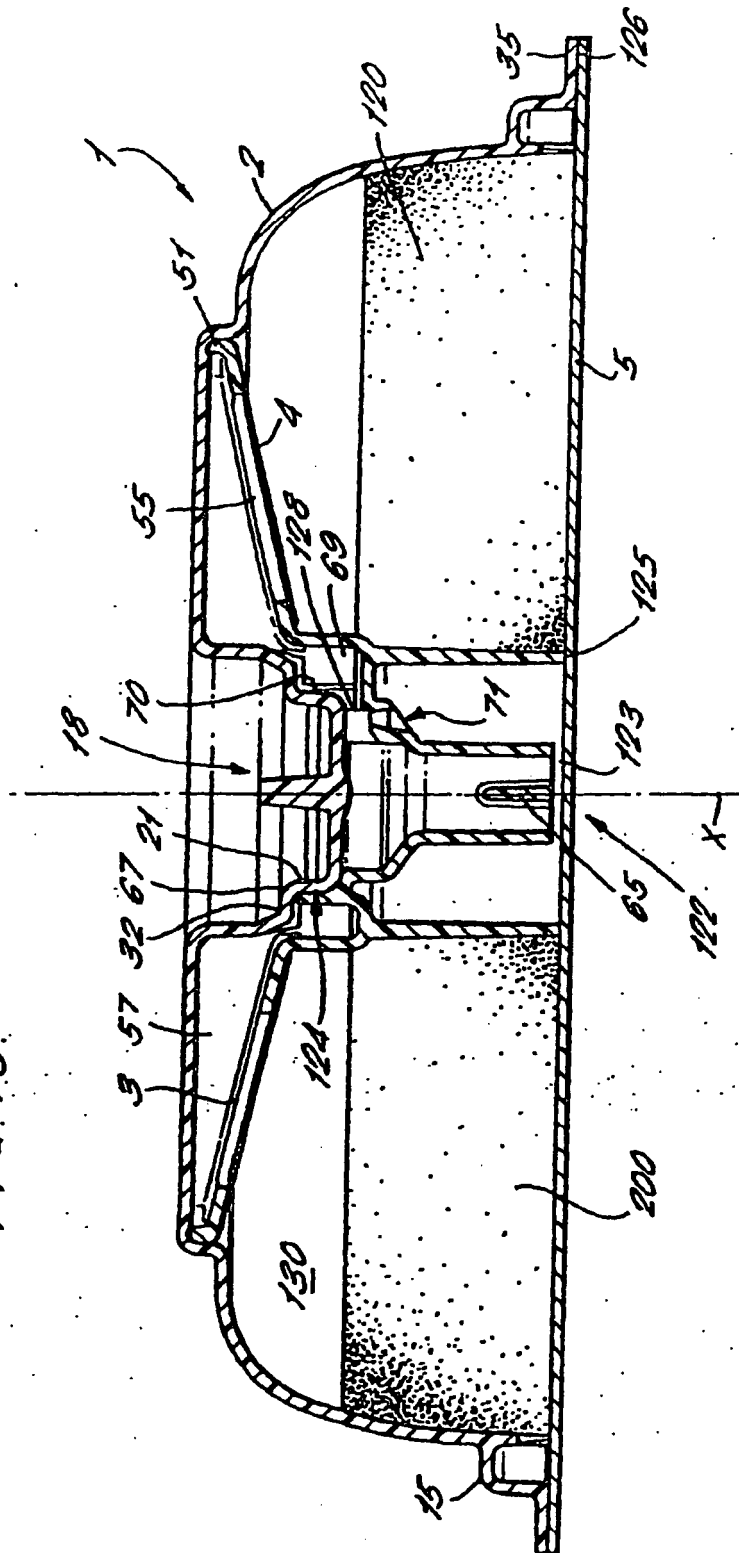


FIG. 18



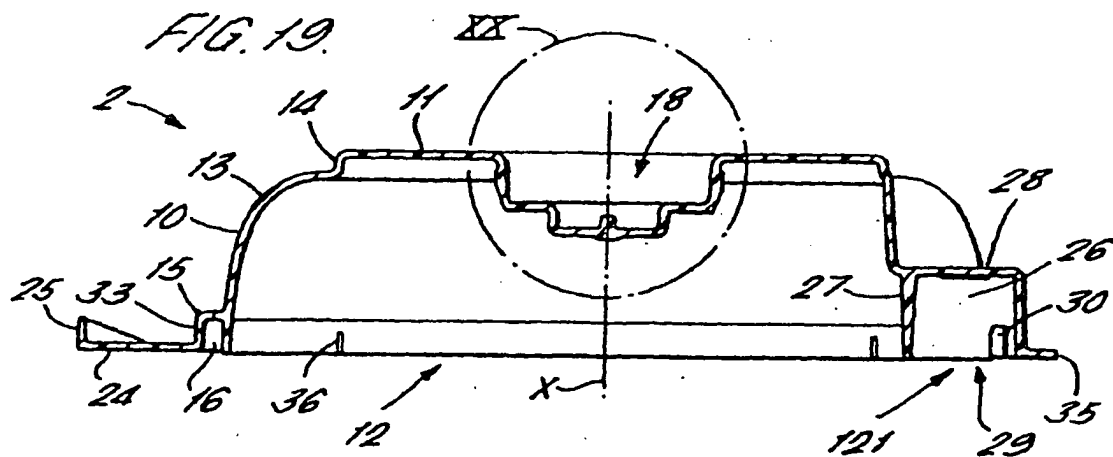


FIG. 20.

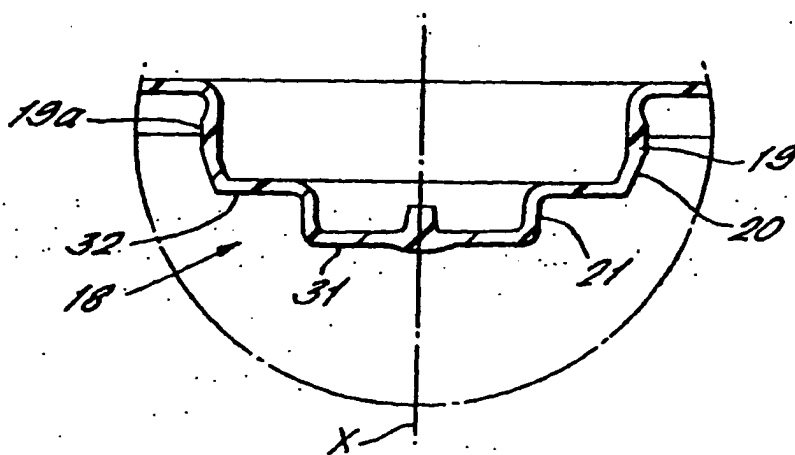


FIG. 21.

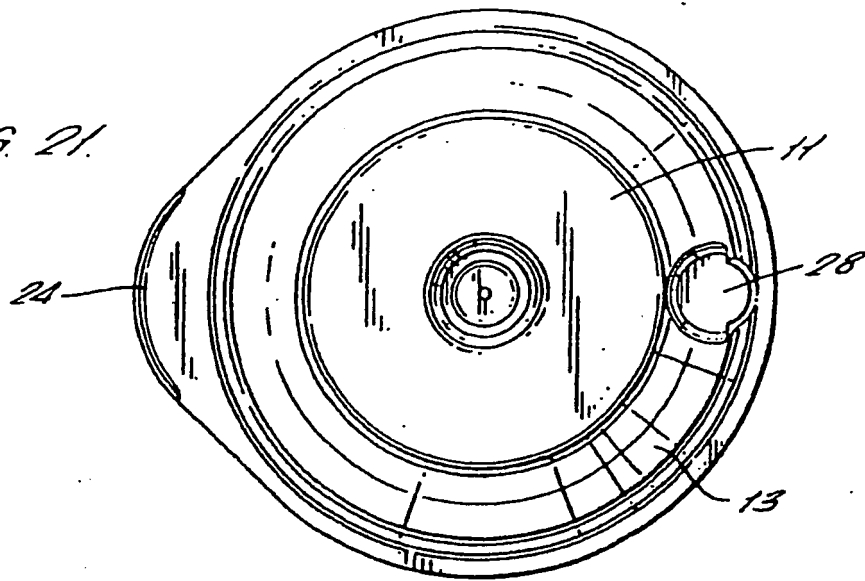


FIG. 22.

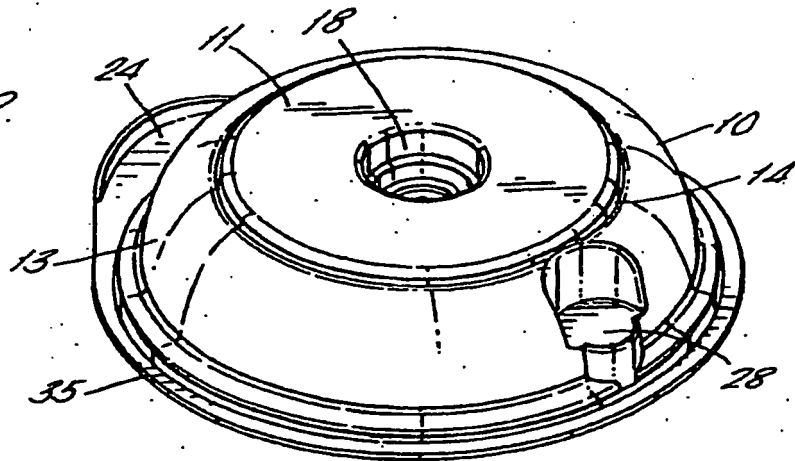
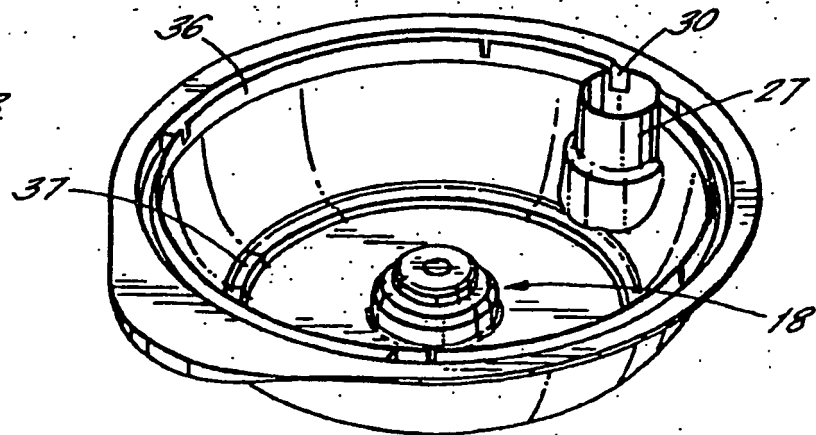


FIG. 23.



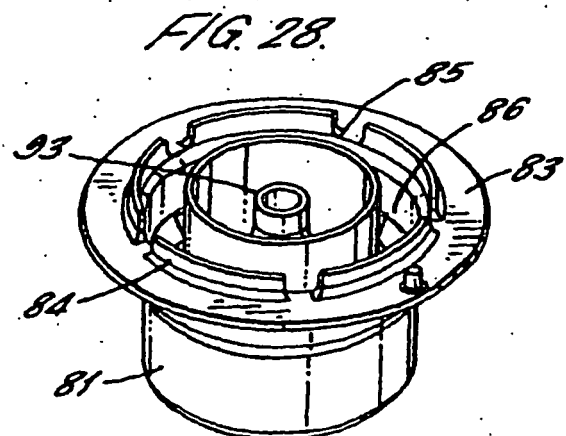
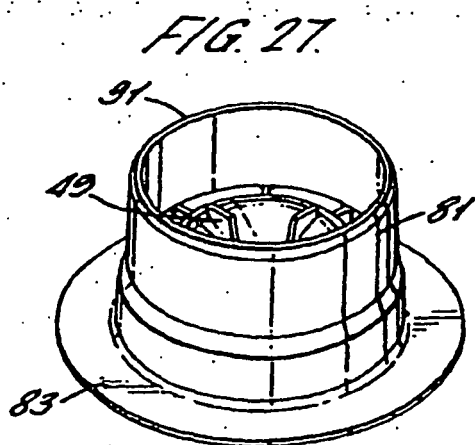

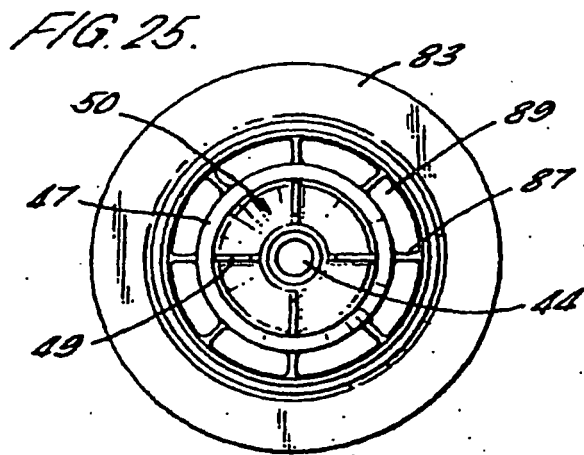
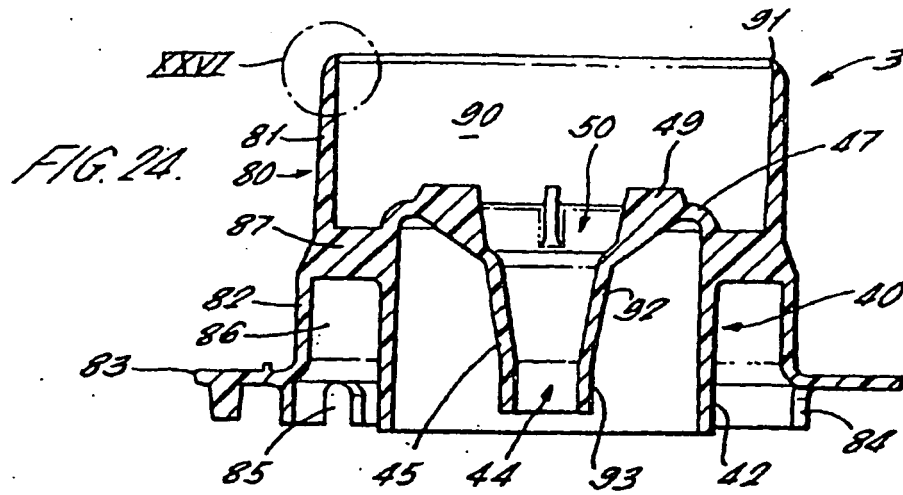
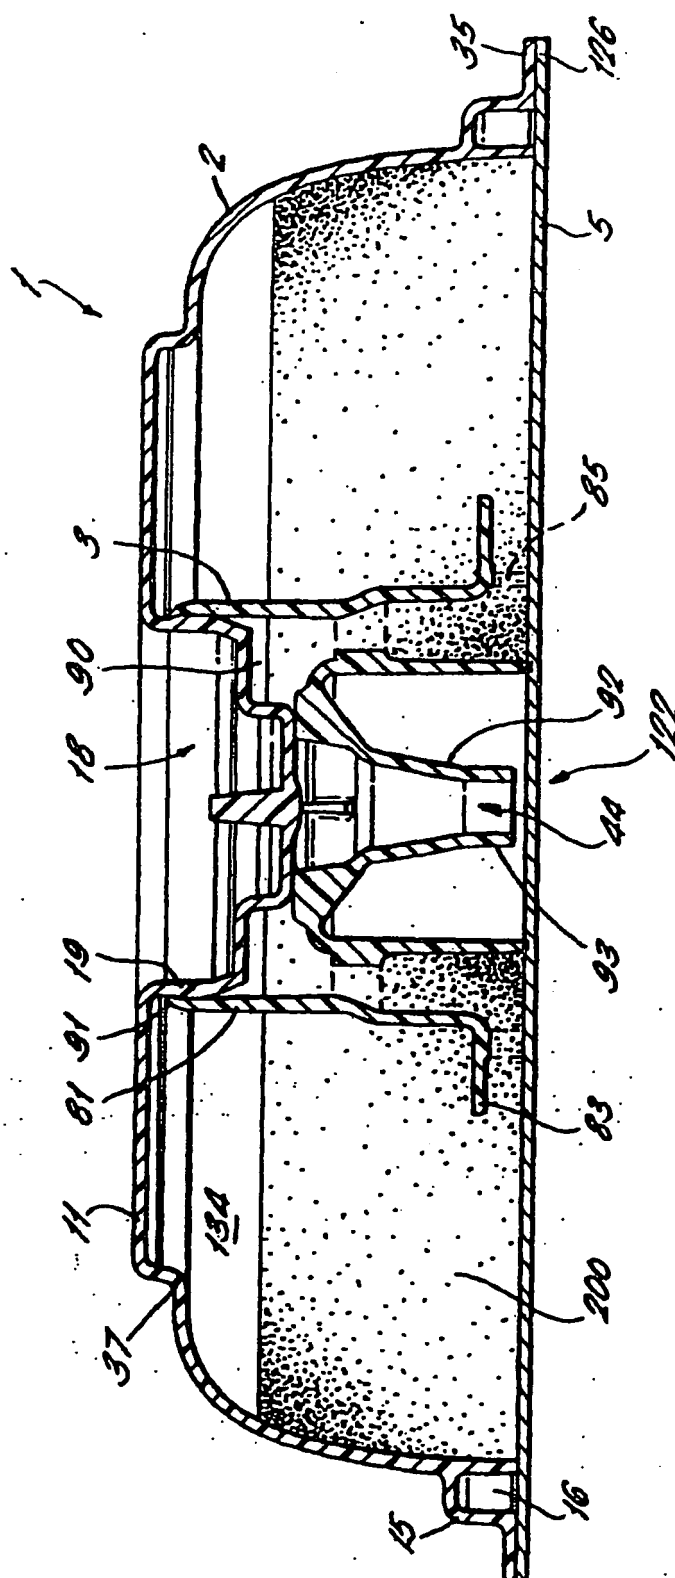


FIG. 29



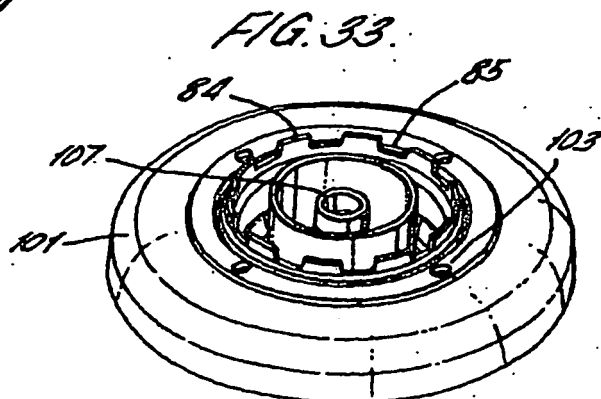
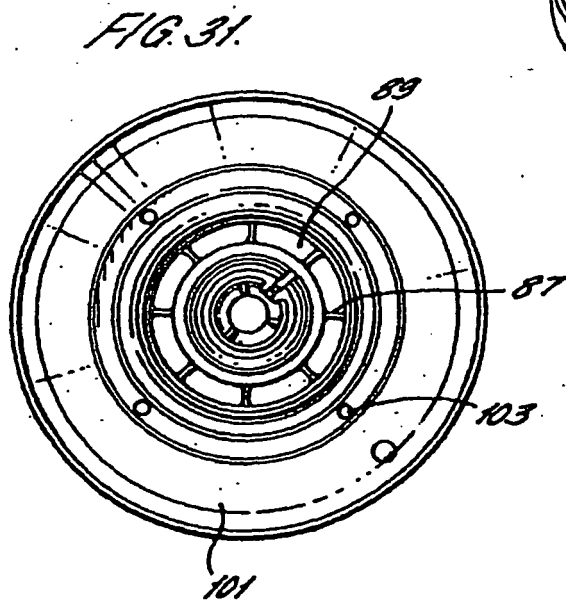
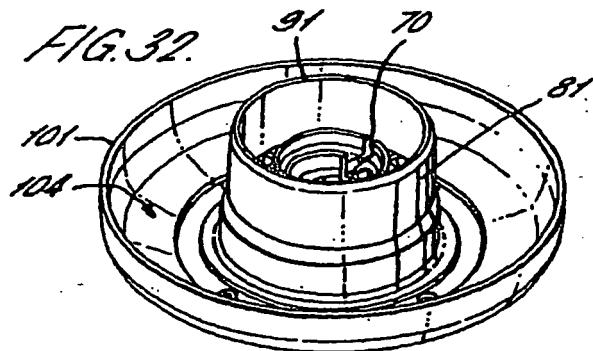
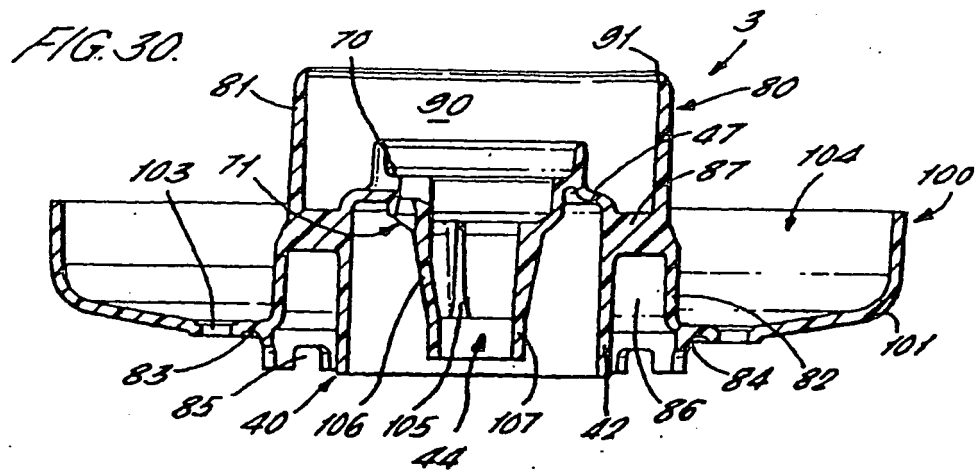


FIG. 34.

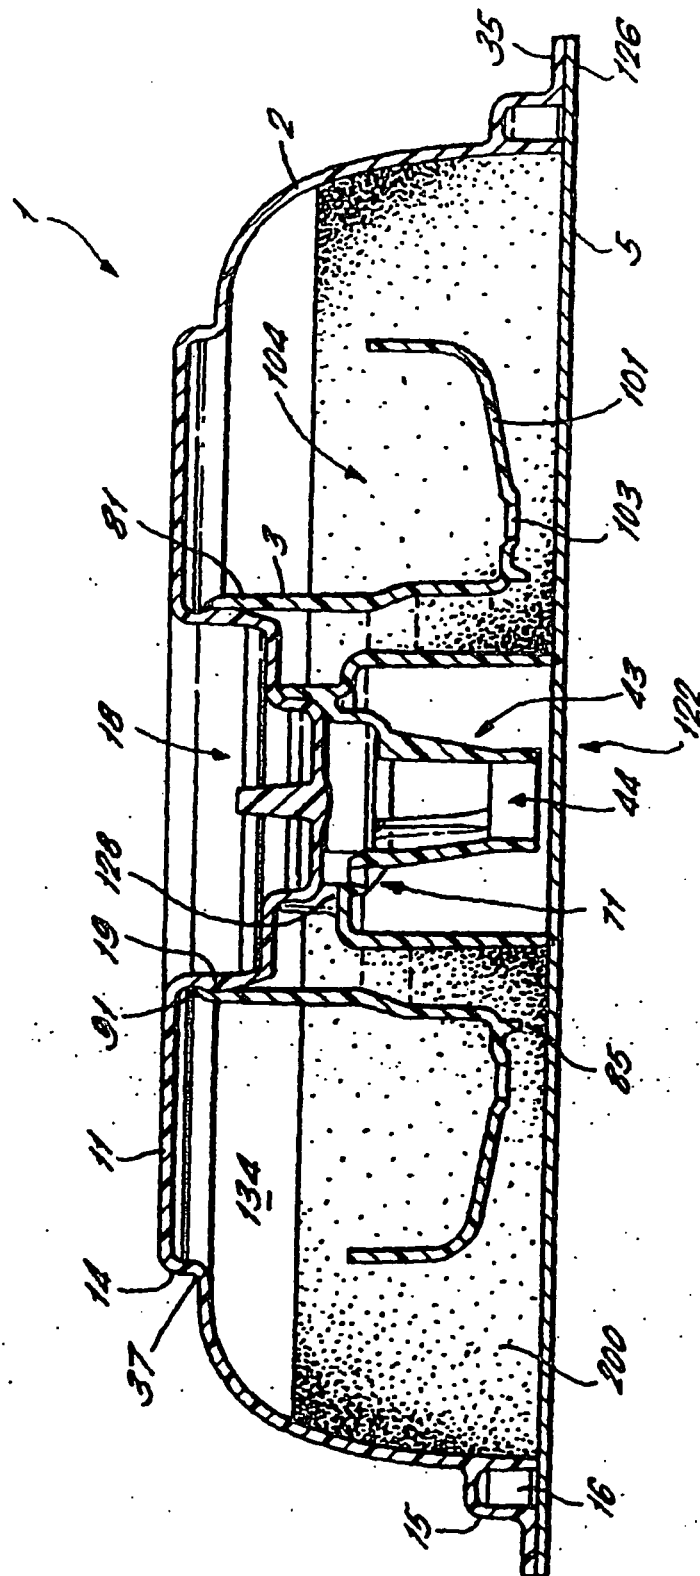


FIG. 35a.

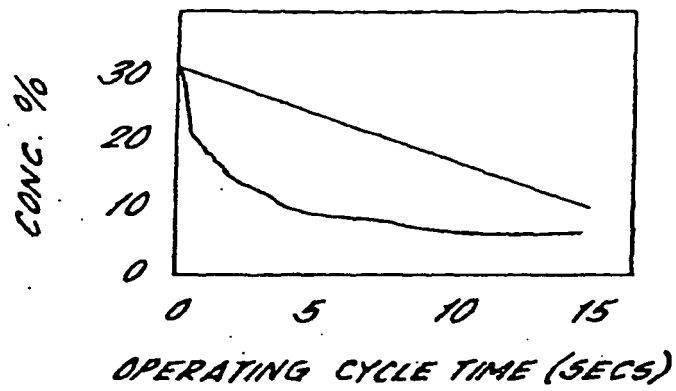


FIG. 35b.


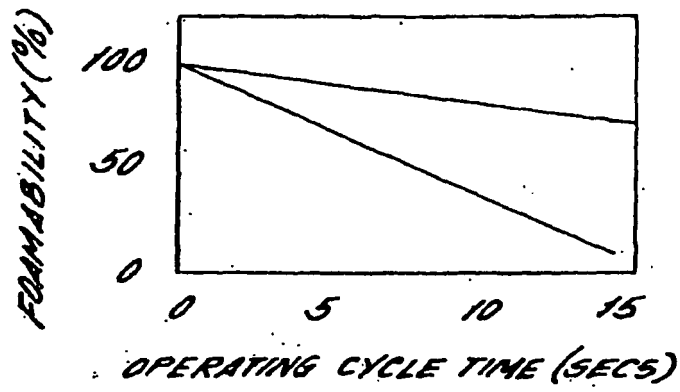


FIG. 35c.

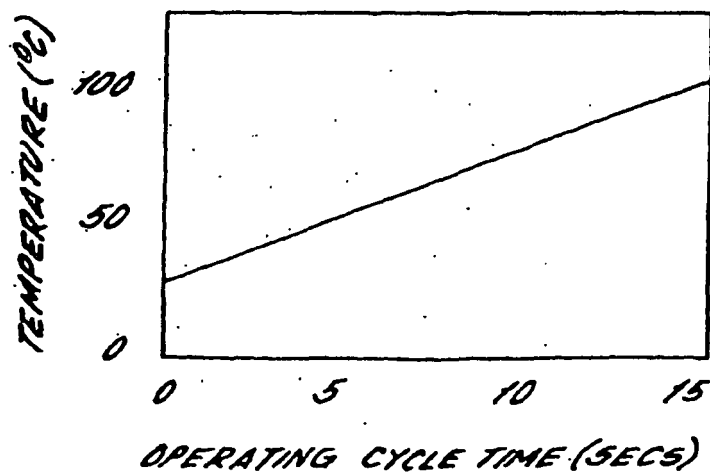

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 0158786 A [0003] [0080]
- WO 02074661 A1 [0004]