



(11) **EP 1 457 445 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
18.01.2012 Bulletin 2012/03

(51) Int Cl.:
B65H 29/14 (2006.01)

(21) Application number: **04251424.0**

(22) Date of filing: **11.03.2004**

(54) **Sheet feeder in image reading apparatus**

Bogenzuführvorrichtung in einer Bildauslesevorrichtung

Dispositif d'alimentation de feuilles dans un appareil de lecture d'images

(84) Designated Contracting States:
DE FR GB

(30) Priority: **14.03.2003 JP 2003070679**

(43) Date of publication of application:
15.09.2004 Bulletin 2004/38

(73) Proprietor: **Brother Kogyo Kabushiki Kaisha**
Nagoya-shi, Aichi-ken 467-8561 (JP)

(72) Inventors:
• **Ohama, Takashi**
Brother Kogyo Kabushiki Kaisha
Nagoya-shi,
Aichi-ken 467-8561 (JP)

• **Matsushima, Ryoichi**
Brother Kogyo Kabushiki Kaisha,
Nagoya-shi,
Aichi-ken 467-8561 (JP)

(74) Representative: **Smith, Samuel Leonard**
J.A. Kemp & Co.
14 South Square
Gray's Inn
London WC1R 5JJ (GB)

(56) References cited:
EP-A- 1 335 575 EP-A2- 0 919 878
JP-A- 2001 310 857 US-A- 5 579 099
US-B1- 6 254 078

EP 1 457 445 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

1. Field of Invention

[0001] The invention relates to a sheet feeder that feeds a sheet, such as a document, in an image reading apparatus, and, more particularly, to a structure to prevent image reading failures caused by a sheet to be fed being instantaneously stopped at a reading part when a leading edge of the sheet collides with a roller disposed at a downstream position of the reading part.

2. Description of Related Art

[0002] Conventionally, in a facsimile, scanner or copier, a plurality of documents are stacked at one place, and fed one by one by an auto sheet feeder to read images on the documents at a reading part where a line-type CCD image pickup device or a line-type contact image sensor (CIS) is disposed. In this case, a sheet feeder, which comprises a roller pair, that is, a drive roller and a driven roller used in pair, is provided at a downstream side of the reading part.

[0003] If axes of the drive roller and the driven roller are set in a direction perpendicular to a sheet feed direction, a nip portion between the drive roller and the driven roller extends in an axial direction of the rollers and is parallel to the direction perpendicular to the sheet feed direction. Thus, at the instant when the leading edge of the sheet collides against the nip portion along the length of the nip portion and width of the sheet, a load at the collision is great, and the feeding of the sheet is instantaneously stopped, resulting in a problem that the movement of images being read on the sheet is disrupted at the reading part and image data can not be accurately obtained.

[0004] On the other hand, when a sheet to be passed through a paper sheet discharging mechanism is not stiff (rigidity is not sufficient), as a structure to reinforce the stiffness, Japanese Laid-Open Patent Publication No. 2001-30857 (FIGS. 1 to 5) (upon which the precharacterising portion of appended claim 1 is based) discloses a paper sheet discharging mechanism formed of pairs of rollers, which are driving rollers and driven rollers, that press against the driving rollers, for discharging the paper sheets from the inside of the device. Axes of the driven rollers that press the paper sheets to the driving rollers, that convey the paper sheets in the sheet discharging direction, are disposed on planes parallel to the axes of the driving rollers, and arranged symmetrically with respect to a centerline of the sheets to be discharged and inclined with respect to the axes of the driving rollers.

[0005] According to this structure, the sheets to be discharged are deflected at a center of the width, the deflection continues in the direction of travel, which produces a shape based stiffness in the sheets, thereby making

the sheets stiff. Thus, this prevents the sheets from drooping downstream of the roller feeding, and jamming during discharge.

[0006] However, if the sheet feeder, made up of the pairs of the rollers with the structure disclosed in the former publication, is provided at the downstream side of the reading part, the deflection protruding substantially in the center of the document may continue up to the upstream side of the feeding. Thus, the deflection may be curved approaching or going away from the reading part, resulting in the distance from the document to the reading part may change between a part with the deflection and a part without the deflection. Thus, the degree of approach of the document to the reading part in its width direction varies greatly. As a result, image data of correct size cannot be obtained.

[0007] EP 0 919 878A describes an image forming apparatus aimed at eliminating a possibility of causing deterioration in conveying and scratching off toners on a recording medium by smoothly rotating a driven roller corresponding to rotations of a driving roller. Rubber rings spaced away in an axial direction from the driving roller are fitted to a shaft of a driven roller brought into contact with the driving roller. A record sheet conveyed with rotations of the driving roller rotates the rubber rings, whereby the driven roller can be surely rotated.

SUMMARY OF THE INVENTION

[0008] The invention provides a sheet feeder as defined in appended claim 1.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] An embodiment of the invention will be described in detail with reference to the following figures, wherein:

[0010] FIG. 1 is a perspective view of a multifunction device including a document reader having an auto sheet feeder according to the invention;

[0011] FIG. 2 is perspective view where a cover of the document reader having the auto sheet feeder is open from a main body case;

[0012] FIG. 3 is side sectional view showing essential parts of the document reader having the auto sheet feeder;

[0013] FIG. 4 is a top view of a pair of ejection rollers disposed on a downstream side from a document reading part with respect to a sheet feed direction;

[0014] FIG. 5A is a top view of driven rollers except for drive rollers;

[0015] FIG. 5B is an enlarged perspective view of a guide groove for a support shaft of a driven roller;

[0016] FIG. 5C is an enlarged sectional view taken along line Vc-Vc of FIG. 5A;

[0017] FIG. 6 is a pictorial view showing an embodiment of the invention.

[0018] DETAILED DESCRIPTION OF PREFERRED

EMBODIMENTS

[0019] An exemplary embodiment of the invention will be described in detail with reference to the accompanying drawings.

[0020] As shown in FIG. 1, the embodiment is applied to a document reader 2 with an auto sheet feeder 6 in a multifunction device 1 including a facsimile function, a scanner function, a copier function, and a printer function.

[0021] A large-sized glass plate 4 for placing a document thereon is fixed in a horizontal state on a top surface of a main body case 3 of the multifunction device 1. An operation panel portion 5 is provided in a front part of the top surface of the main body case 3. The operation panel portion 5 includes a ten keypad for executing the facsimile function, the scanner function, and the copier function, buttons for issuing directives for various operations, and a liquid crystal display.

[0022] As shown in FIGS. 1 and 2, the document reader 2, with the auto sheet feeder 6, is made up of a cover assembly 7, the auto sheet feeder 6, and a reading element 9. The cover assembly 7 is attached to a rear edge of the top surface of the main body case 3 via hinges 8 so as to swing up and down. The auto sheet feeder 6 is provided on one end of a top surface of the cover assembly 7, and the reading element 9 includes a line-type CCD image pickup device, which is arranged at one end of a lower surface of a side-edge 4a of the glass plate 4. The glass plate 4 is fixed to the upper surface of the main body case 3. In the embodiment, the document reader 2 is structured such that a document is placed face down on the large-sized glass plate 4 and is held by a holding member 7a. The holding member 7a is, for example, a sponge pad provided on a lower surface of the cover assembly 7. Images on the document are read by the reading element 9 that moves on a guide rail 10 disposed along the lower surface of the large-sized glass plate 4 on the basis of an image reading instruction.

[0023] With reference to FIGS. 1 to 3, the structure of the auto sheet feeder 6 in the document reader 2 will be described. As shown in FIG. 1, a case portion 11 of the auto sheet feeder 6 is fixed on one end of the cover assembly 7, and a document tray 12 is disposed on one end of the case portion 11 at an inclined angle so that its free end extends upwardly. Below the document tray 12, a discharge paper tray 13 is formed on the top surface of the cover assembly 7 where a document P is discharged.

[0024] As shown in FIG. 3, in the case portion 11, a beginning 14a of the upper path plate 14 is located in close proximity to the document tray 12. A separation roller 15 that feeds documents P, while separating them one by one, stacked on the document tray 12, a sheet sensor 16, with a detection lever 16a that pivots by contact with a leading edge of the document P, and a pair of paper feed rollers 17a, 17b are provided on the upper path plate 14. A downward curved end 14b of the upper path plate 14 and a beginning 18a of a lower path plate 18 partially overlap. An end 18b of the lower path plate

18 extends toward ejection rollers 19, 20 arranged proximate the discharge paper tray 13. A pair of conveying rollers 21a, 21b are disposed close to the beginning 18a of the lower path plate 18 at an upstream side of a reading point 23a. A rear sensor 22, with a detection lever 22a, is provided in close proximity to the conveying rollers 21a, 21b. The detection lever 22a detects the leading and trailing edges of a document P to find its length and to determine the occurrence of a paper jam. The lower path plate 18 is curved downwardly in the middle portion with respect to a feed direction, and includes a reading window 23 at its lowest position. The reading window 23 has a rectangular shape, in plan view, and opens above the reading device 9 when at the stop position. The reading window 23 is formed such that a length L_o , in the sheet feed direction, is short and a length in a direction perpendicular to the sheet feed direction is long (with reference to FIGS. 1 and 3). A plurality of ribs 24 are arranged above the lower path plate 18 with such a narrow spacing that a document P can pass so that a lower surface (from which the image is read) of the document P can slide on a surface of the reading point 23a. A guide piece 25, that leads the document P passing through the reading point 23a to the downstream side of the upper surface of the lower path plate 18, is fixed to an edge of the side-edge glass plate 4a.

[0025] A cover 26 is pivotable about a shaft 27 at its proximal end on one end of the case portion 11 (opposite from the document tray 12), and is structured so as to expose the upper portion of the upper path plate 14 when a paper jam occurs.

[0026] The following will describe the structure of the pair of ejection rollers 19, 20, which are a drive roller 19 and a driven roller 20, that function as a sheet feeder on the ejection side of the feed direction with reference to FIGS. 3, 4, and 5. The drive roller 19 and the driven roller 20 are disposed at a downstream side from the reading point 23a. Both the drive roller 19 and the driven roller 20 comprise a plurality of roller segments. The drive roller 19, disposed on an upper side, is fixed to a drive shaft 29 that is parallel to a direction perpendicular to the sheet feed direction (X-axis direction in FIG. 4). The drive shaft 29 is rotated by a drive motor and a transmission gear (not shown) in sheet feed direction. At least a peripheral layer of the drive roller 19 is made from rubber having a large coefficient of friction with respect to the document P. Pairs of segments of the drive roller 19 and the driven roller 20 are provided in a plurality of places on drive shaft 29 and support shafts 30, respectively (four places, or pairs in the embodiment), and symmetrically on each side of a centerline O of the document P with respect to its width (a sheet dimension in Y-axis direction in FIG. 4).

[0027] On the other hand, at least a peripheral layer of each segment of the driven roller 20 is made from a synthetic material, such as polyacetal, having a lower coefficient of friction with respect to the document P than that of the segments of the drive roller 19.

[0028] To control the sheet feed direction using only

the drive roller 19 to prevent sheet skewing, the driven roller 20 preferably has a minimal coefficient of friction. That is, the driven roller 20 must have a coefficient of friction lower than, at least, that of the drive roller 19.

[0029] The segments of the driven roller 20 are fitted on a pair of support shafts 30 so as to press against the corresponding segments of drive roller 19. In the embodiment as shown in FIGS. 4 and 5, the segments of the driven roller 20 are arranged symmetrically with two segments on each side of the centerline O and axes 20a of the driven roller 20 segments (axes of the support shafts 30) are arranged so they are not perpendicular to the sheet feed direction (X-axis direction), i.e., not parallel to the Y-axis direction, but are inclined at an angle of q degrees (1 to 3 degrees in the embodiment, for example and exaggerated in Figure 5A for purposes of illustration) with respect to the Y-axis. The driven roller 20 segments are disposed on a slant such that the driven roller 20 segments close to the centerline O are on the downstream side of the sheet feed direction and the driven roller 20 segments far from the centerline O are on the upstream side (refer to FIG. 5A). The support shafts 30 are supported in guide grooves 31, which are open upwardly in the case portion 11, so as to be movable vertically (FIG. 5B). The support shafts 30 are urged by urging members 33, such as coil springs, plate springs, and elastic members made from rubber, mounted in recessed receiving portions 32 formed adjacent each of the guide grooves 31 so that the driven roller 20 segments are pressed against the drive roller 19 segments (FIG. 5C).

[0030] The guide grooves 31 that support the respective support shafts 30 are formed as pairs and at positions out of alignment such that the inner guide grooves 31 (disposed on a side close to the centerline O) are, with respect to the drive shaft 29, on the downstream side of the sheet feed direction and outer guide grooves 31 (disposed distant from the centerline O) are, with respect to the drive shaft 29, on the upstream side of the sheet feed direction. Thereby, the support shafts 30 are inclined at the angle of q degrees.

[0031] According to the above-described structure, as shown in FIGS. 4 and 6, a leading edge P1 of the document P, which is conveyed from the upstream side of the sheet feed direction, first collides against nip portions N1, N 1 between the drive roller 19 segments and the driven roller 20 segments. The nip portions N1, N 1 are closest to the upstream side in the sheet feed direction (FIG. 6), of the driven roller 20 segments which are arranged on a slant, and contact the leading edge P1 of the document P substantially at points, so that impact is minute. Thus, when the document P is fed from the conveying rollers 21a, 21b and passes through the reading point 23a, and the leading edge P1 of the document P collides against the nip portions N1, N1, the impact (an entry resistance of the leading edge P1) is greatly reduced. The minute impact does not cause phenomena such as the advance of the document P being temporarily stopped, or the document P being bent at the reading point 23a. Thus, the

problem that image reading data, at the reading point 23a, is distorted does not occur, and the reading operation can be maintained with stability.

[0032] As another embodiment, the drive roller 19 segments may be combined into one or two roller segments that are continuously long in the Y-axis direction, and the plurality of segments of the driven roller 20 may be arranged to press the one or two rollers at intervals. Alternatively, the urging members 33 may be provided for each segment of the driven roller 20 to urge the segments individually.

[0033] Further, of the driven roller 22 segments, the axis 20a of one segment of the driven roller 20 only may be disposed on a slant toward the upstream or downstream side of the sheet feed direction in keeping with the concept of the embodiment.

[0034] As the urging members 33, that urge the driven roller 20 segments into contact with the drive roller 19, are provided on each axis 20a disposed symmetrically with respect to the center of the width of the document, the number of locations of the urging members 33 is decreased and, thus, costs can be reduced.

[0035] If a sheet feed path from a nip portion between the conveying rollers 21 a, 21b, located at the upstream side from the reading point 23 a, to the nip portion N1 between the ejection rollers 19, 20 located at the downstream side from the reading point 23a is formed to be curved in a top to bottom direction, the document P loses its stiffness compared when a sheet feed path is straight. Thus, when the leading edge P1 of the document P strikes the nip portion N1 between the ejection rollers 19, 20, the document P is likely to stop for a moment or deflect at the reading point 23a because of the impact (the resistance). However, with the above structure, it is possible to prevent problems, such as deflection, from occurring. Further, in FIG. 3, the direction of the sheet (the document P) may be changed in a path from the reading point 23a to just before the nip portion between the ejection rollers 19, 20 such that the sheet can be substantially parallel to the glass plate 4, and then the leading edge P1 may be inserted into the nip portion. With this structure, the impact at the nip portion can be reduced, thereby preventing the document P, being fed, from deflecting at the reading point 23a.

[0036] The invention may be applied to not only an auto sheet feeder but also to a sheet ejection part located on a downstream side from a device that feeds sheets (documents P) one by one and executes reading while conveying.

Claims

1. A sheet feeder (6) that feeds a sheet in an image reading apparatus (9) with an image reading part (23a), the sheet feeder (6) comprising:

a drive roller unit (19, 29) that is disposed at a

downstream side from the reading part (23a) in a sheet feed direction and includes a drive roller (19); and

a driven roller unit (20, 30) that includes a driven roller (20) that presses against the drive roller (19); wherein

an axis (29) of the drive roller (19) is disposed perpendicular to the sheet feed direction, and an axis (30) of the driven roller (20) is disposed on a slant with respect to the sheet feed direction; **characterised in that:**

a coefficient of friction of an outer layer of the driven roller (20) to a sheet to be fed is smaller than a coefficient of friction of an outer layer of the drive roller (19) to the sheet;

the driven roller unit (20, 30) includes a plurality of driven roller segments (20) that are arranged symmetrically on both sides of a center of a width of the sheet to be fed;

the axes (30) of the segments of the driven roller (20) are arranged and inclined symmetrically on both sides of the center of the width of the sheet to be fed; and

the axes (30) of the segments of the driven roller (20) are arranged such that an end portion of each axis that is far from the center of the width of the sheet to be fed is on an upstream side in the sheet feed direction and an end portion of each axis that is close to the center of the width of the sheet to be fed is on a downstream side in the sheet feed direction.

2. The sheet feeder (6) according to claim 1, wherein in the driven roller unit (20, 30), a plurality of the segments (20) of the driven roller is arranged on each side of the center of the width of the sheet to be fed.
3. The sheet feeder (6) according to claim 2, wherein the axes (30) of the segments of the driven roller (20) arranged on one side of the center of the width of the sheet to be fed are aligned on each side of the center of the width of the sheet to be fed.
4. The sheet feeder (6) according to claim 2 or 3, wherein the plurality of the segments of the driven roller (20) is placed out of alignment such that the segments of the driven roller (20) on a side far from the center of the width of the sheet are arranged on an upstream side in the sheet feed direction, and the segments of the driven roller (20) on a side close to the center of the width of the sheet are arranged on the downstream side in the sheet feed direction.
5. The sheet feeder (6) according to any one of claims 1 to 4, wherein the driven roller unit (20, 30, 33) in-

cludes an urging member (33) that urges the segments of the driven roller (20) toward the drive roller (19), and the urging member (33) urges the segments of the driven roller (20) independently at least on both sides of the center of the width of the sheet to be fed.

6. The sheet feeder (6) according to any one of claims 1 to 5, wherein the drive roller unit (19, 29) has a plurality of segments of the drive roller (19) in the same number as the segments of the driven roller (20).
7. The sheet feeder (6) according to any preceding claim, further comprising a conveying roller pair (21 a, 21 b) at an upstream side from the image reading part (23a) in the sheet feed direction, wherein a sheet conveying path from the conveying roller pair (21 a, 21b) to a pairing of the drive roller (19) and the driven roller (20) is curved.
8. The sheet feeder (6) according to any preceding claim, wherein the axis (30) of the driven roller (20) is inclined at an angle of 1° to 3° with respect to a leading edge of the sheet to be fed.

Patentansprüche

1. Blattvorschubvorrichtung (6), die ein Blatt in einem Bildlesegerät (9) mit einem Bildleseteil (23a) vorschiebt, wobei die Blattvorschubvorrichtung (6) Folgendes aufweist:

eine Antriebswalzeneinheit (19, 29), die an einer stromabwärtigen Seite von dem Leseteil (23a) in einer Blattvorschubrichtung angeordnet ist und eine Antriebswalze (19) aufweist; und eine Mitnehmerwalzeneinheit (20, 30), die eine Mitnehmerwalze (20) aufweist, die gegen die Antriebswalze (19) drückt; wobei eine Achse (29) der Antriebswalze (19) senkrecht zu der Blattvorschubrichtung angeordnet ist und eine Achse (30) der Mitnehmerwalze (20) schräg hinsichtlich der Blattvorschubrichtung angeordnet ist; **dadurch gekennzeichnet, dass:**

ein Reibungskoeffizient einer Außenlage der Mitnehmerwalze (20) zu einem vorzuschiebenden Blatt kleiner ist als ein Reibungskoeffizient einer Außenlage der Antriebswalze (19) zu dem Blatt;

die Mitnehmerwalzeneinheit (20, 30) viele Mitnehmerwalzensegmente (20) aufweist, die an beiden Seiten einer Mitte einer Breite des vorzuschiebenden Blatts symmetrisch angeordnet sind;

die Achsen (30) der Segmente der Mitnehmer-

walze (20) an beiden Seiten der Mitte der Breite des vorzuschiebenden Blatts angeordnet und symmetrisch geneigt sind; und die Achsen (30) der Segmente der Mitnehmerwalze (20) so angeordnet sind, dass ein Endabschnitt von jeder Achse, der von der Mitte der Breite des vorzuschiebenden Blatts entfernt ist, an einer stromaufwärtigen Seite in der Blattvorschubrichtung ist, und dass ein Endabschnitt von jeder Achse, der nahe an der Mitte der Breite des vorzuschiebenden Blatts ist, an einer stromabwärtigen Seite in der Blattvorschubrichtung ist.

2. Blattvorschubvorrichtung (6) gemäß Anspruch 1, wobei in der Mitnehmerwalzeneinheit (20, 30) viele der Segmente (20) der Mitnehmerwalze an jeder Seite der Mitte der Breite des vorzuschiebenden Blatts angeordnet sind.
3. Blattvorschubvorrichtung (6) gemäß Anspruch 2, wobei die Achsen (30) der Segmente der Mitnehmerwalze (20), die an einer Seite der Mitte der Breite des vorzuschiebenden Blatts angeordnet sind, an jeder Seite der Mitte der Breite des vorzuschiebenden Blatts ausgerichtet sind.
4. Blattvorschubvorrichtung (6) gemäß Anspruch 2 oder 3, wobei die vielen Segmente der Mitnehmerwalze (20) derart unausgerichtet platziert sind, dass die Segmente der Mitnehmerwalze (20) an einer Seite, die von der Mitte der Breite des Blatts entfernt ist, an einer stromaufwärtigen Seite in der Blattvorschubrichtung angeordnet sind, und dass die Segmente der Mitnehmerwalze (20) an einer Seite nahe der Mitte der Breite des Blatts an der stromabwärtigen Seite in der Blattvorschubrichtung angeordnet sind.
5. Blattvorschubvorrichtung (6) gemäß einem der Ansprüche 1 bis 4, wobei die Mitnehmerwalzeneinheit (20, 30, 33) ein Drückelement (33) aufweist, das die Segmente der Mitnehmerwalze (20) zu der Antriebswalze (19) drückt, und wobei das Drückelement (33) die Segmente der Mitnehmerwalze (20) unabhängig an zumindest beiden Seiten der Mitte der Breite des vorzuschiebenden Blatts drückt.
6. Blattvorschubvorrichtung (6) gemäß einem der Ansprüche 1 bis 5, wobei die Antriebswalzeneinheit (19, 29) viele Segmente der Antriebswalze (19) in derselben Anzahl wie die Segmente der Mitnehmerwalze (20) hat.
7. Blattvorschubvorrichtung (6) gemäß einem der vorherigen Ansprüche, des Weiteren mit einem Förderwalzenpaar (21a, 21b) an einer stromaufwärtigen Seite von dem Bildleseteil (23a) in der Blattvorschub-

richtung, wobei ein Blattförderpfad von dem Förderwalzenpaar (21a, 21b) zu einem Paar bestehend aus der Antriebswalze (19) und der Mitnehmerwalze (20) gekrümmt ist.

8. Blattvorschubvorrichtung (6) gemäß einem der vorherigen Ansprüche, wobei die Achse (30) der Mitnehmerwalze (20) in einem Winkel von 1° bis 3° hinsichtlich einer voreilenden Kante des vorzuschiebenden Blatts geneigt ist.

Revendications

1. Margeur (6) qui alimente une feuille dans un appareil de lecture d'image (9) avec une partie de lecture d'image (23a), le margeur (6) comprenant :

une unité (19, 29) de rouleau d'entraînement qui est disposée à un côté aval par rapport à la partie de lecture (23a) dans une direction d'alimentation de feuilles et comprend un rouleau d'entraînement (19) ; et

une unité de rouleau entraîné (20, 30) qui comporte un rouleau entraîné (20) qui s'appuie contre le rouleau d'entraînement (19) ; dans lequel un axe (29) du rouleau d'entraînement (19) est disposé perpendiculairement à la direction d'alimentation de feuilles, et un axe (30) du rouleau entraîné (20) est disposé incliné par rapport à la direction d'alimentation de feuilles ; **caractérisé en ce que :**

un coefficient de frottement d'une couche extérieure du rouleau entraîné (20) par rapport à une feuille devant être alimentée est plus petit qu'un coefficient de frottement d'une couche externe du rouleau d'entraînement (19) par rapport à la feuille ; l'unité de rouleau entraîné (20, 30) comporte une pluralité de tronçons (20) de rouleaux entraînés qui sont disposés de manière symétrique sur les deux côtés d'un centre d'une largeur de la feuille à alimenter ; les axes (30) des tronçons du rouleau entraîné (20) sont disposés et inclinés de manière symétrique sur les deux côtés du centre de la largeur de la feuille à alimenter ; et les axes (30) des tronçons du rouleau entraîné (20) sont agencés de sorte qu'une partie d'extrémité de chaque axe qui est éloigné du centre de la largeur de la feuille à alimenter se trouve sur un côté amont dans la direction d'alimentation de feuilles et qu'une partie d'extrémité de chaque axe qui est proche du centre de la largeur de la feuille à alimenter se trouve sur un côté aval dans la direction d'alimentation de feuilles.

2. Margeur (6) selon la revendication 1, dans lequel dans l'unité de rouleau entraîné (20, 30), une pluralité de tronçons (20) du rouleau entraîné est agencée sur chaque côté du centre de la largeur de la feuille à alimenter. 5

3. Margeur (6) selon la revendication 2, dans lequel les axes (30) des tronçons du rouleau entraîné (20) agencés sur un côté du centre de la largeur de la feuille à alimenter sont alignés sur chaque côté du centre de la largeur de la feuille à alimenter. 10

4. Margeur (6) selon la revendication 2 ou 3, dans lequel les plusieurs tronçons du rouleau entraîné (20) sont placés désaxés de sorte que les tronçons du rouleau entraîné (20) sur un côté éloigné du centre de la largeur de la feuille soient agencés sur un côté amont dans la direction d'alimentation de feuilles, et les tronçons du rouleau entraîné (20) sur un côté proche du centre de la largeur de la feuille soient agencés sur le côté aval dans la direction d'alimentation de feuilles. 15
20

5. Margeur (6) selon l'une quelconque des revendications 1 à 4, dans lequel l'unité de rouleau entraîné (20, 30, 33) comporte un élément de sollicitation (33) qui sollicite les tronçons du rouleau entraîné (20) vers le rouleau d'entraînement (19), et l'élément de sollicitation (33) sollicite les tronçons du rouleau entraîné (20) indépendamment sur les deux côtés au moins du centre de la largeur de la feuille à alimenter. 25
30

6. Margeur (6) selon l'une quelconque des revendications 1 à 5, dans lequel l'unité de rouleau d'entraînement (19, 29) a une pluralité de tronçons du rouleau d'entraînement (19) du même nombre que les tronçons du rouleau entraîné (20). 35

7. Margeur(6) selon l'une quelconque des revendications précédentes, comprenant en outre une paire de rouleaux de transport (21a, 21b) à un côté amont de la partie de lecture d'image (23a) dans la direction d'alimentation de feuilles, où un chemin de transport de feuilles de la paire de rouleaux de transport (21a, 21b) jusqu'à la paire formée par le rouleau d'entraînement (19) et le rouleau entraîné (20) est incurvé. 40
45

8. Margeur (6) selon l'une quelconque des revendications précédentes, où l'axe (30) du rouleau entraîné (20) est incliné à un angle de 1° à 3° par rapport à un bord d'attaque de la feuille à alimenter. 50

55

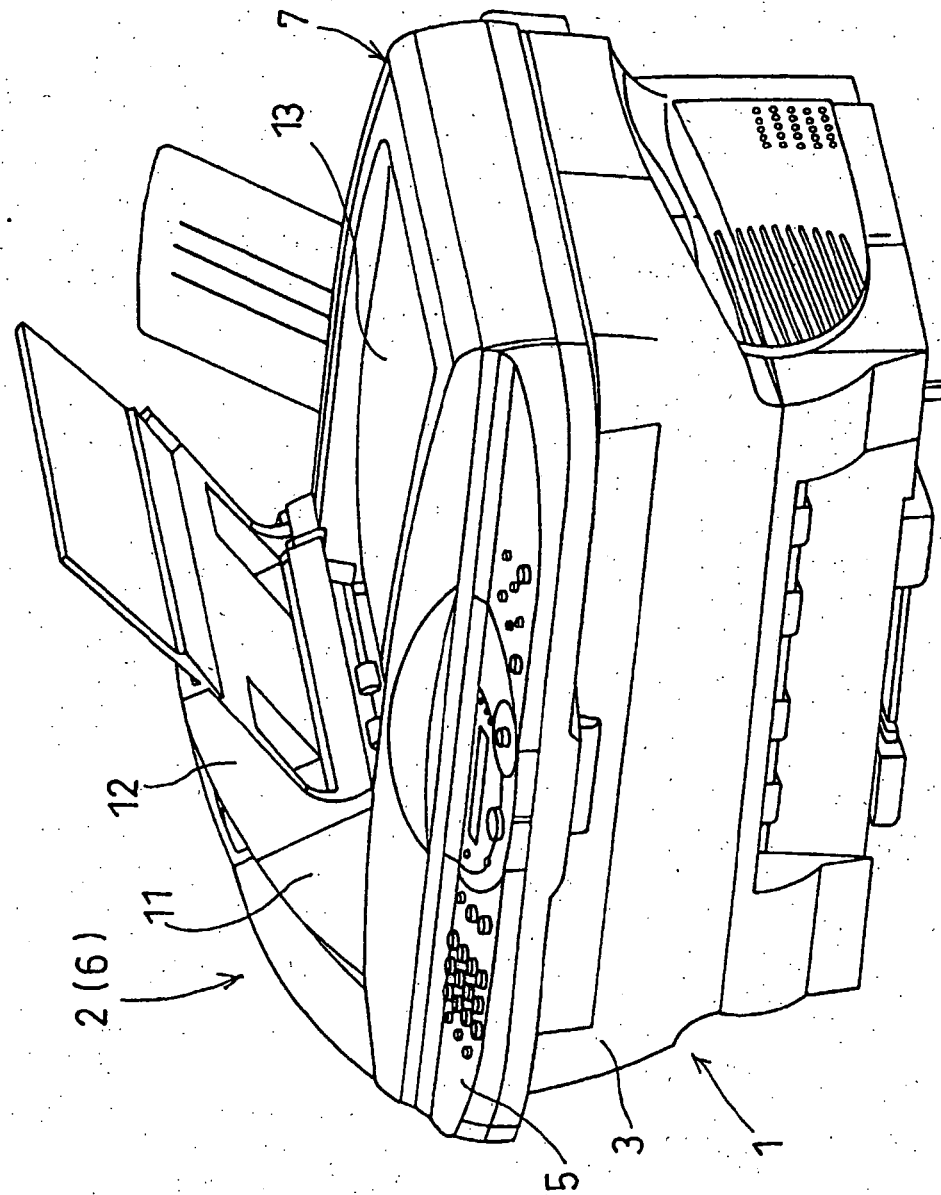


FIG. 1

FIG.2

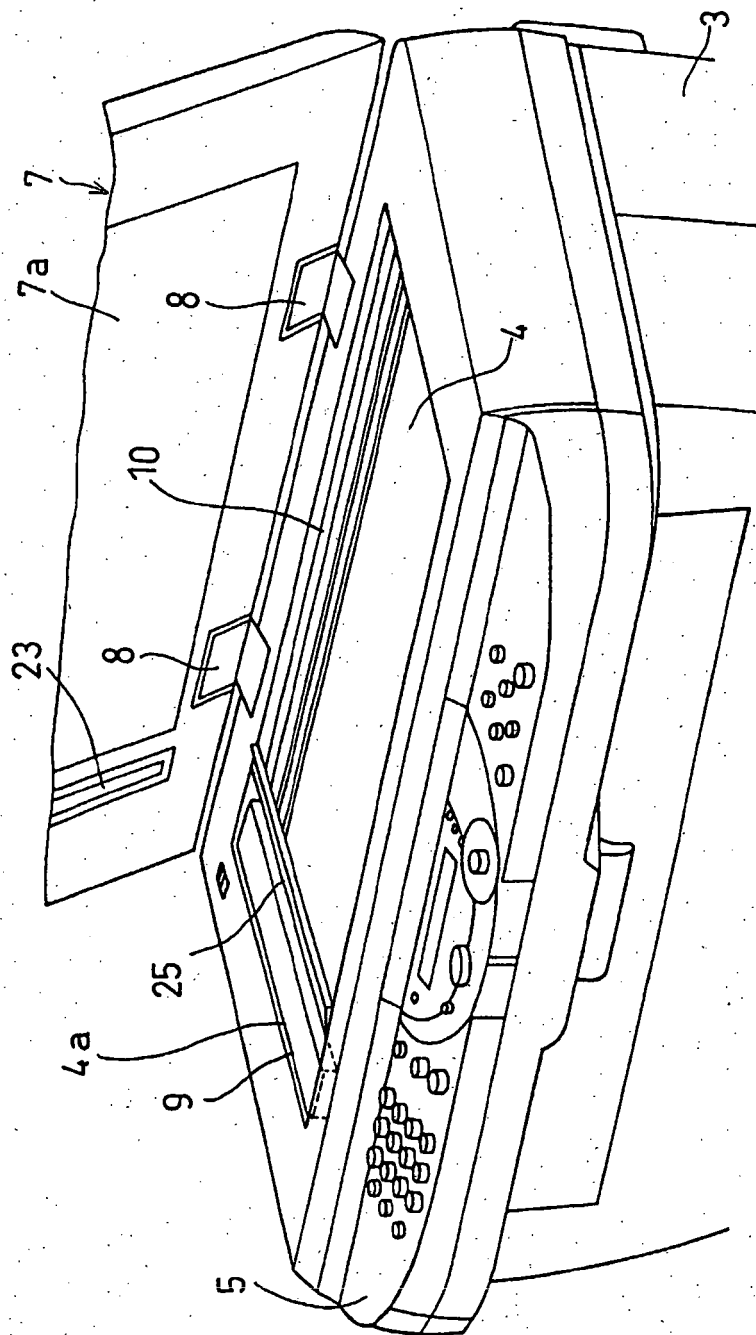


FIG. 3

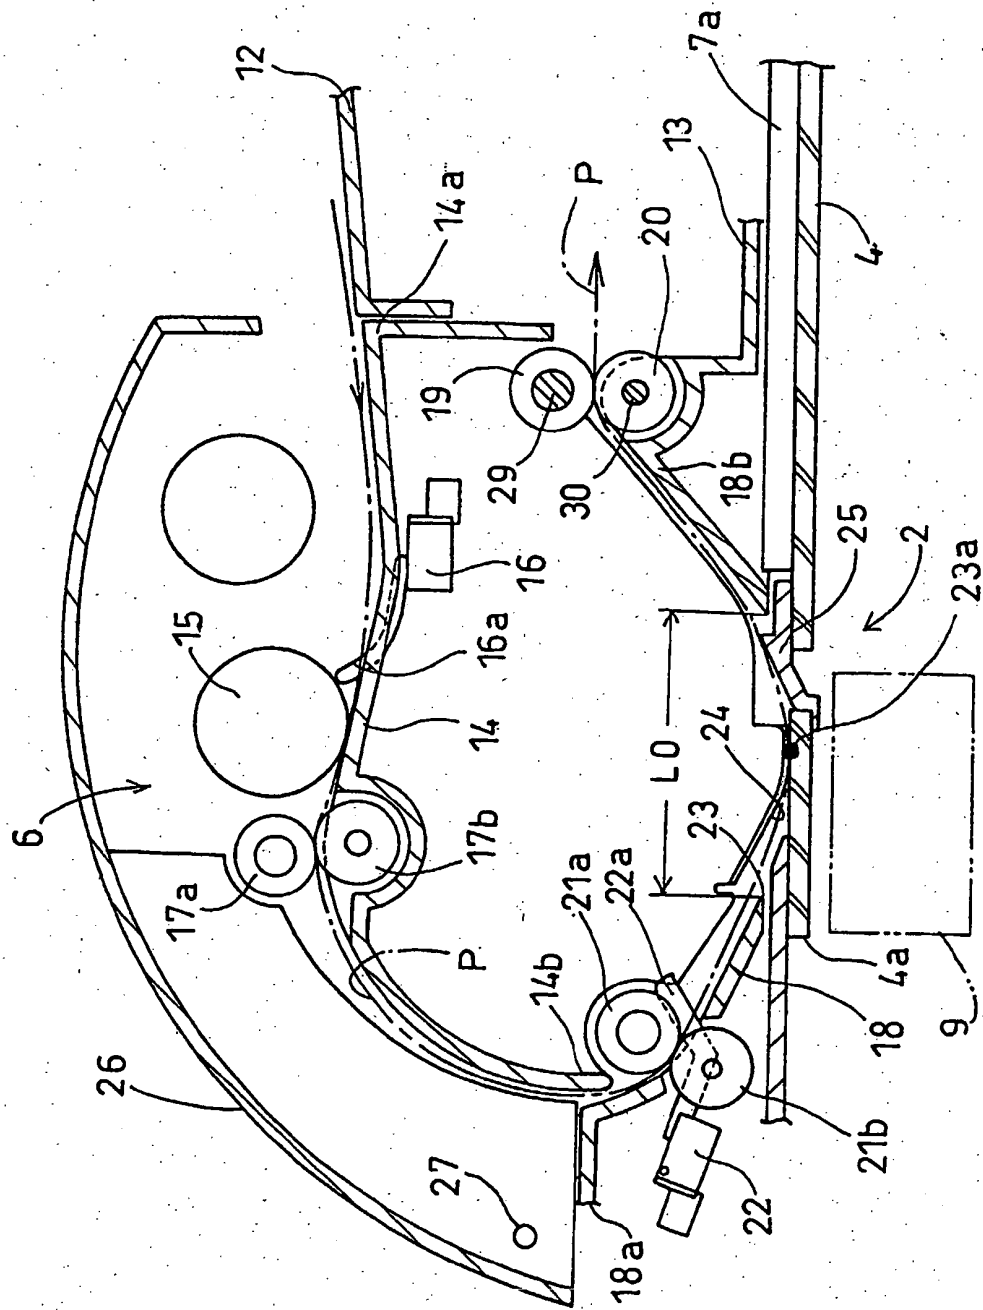


FIG.4

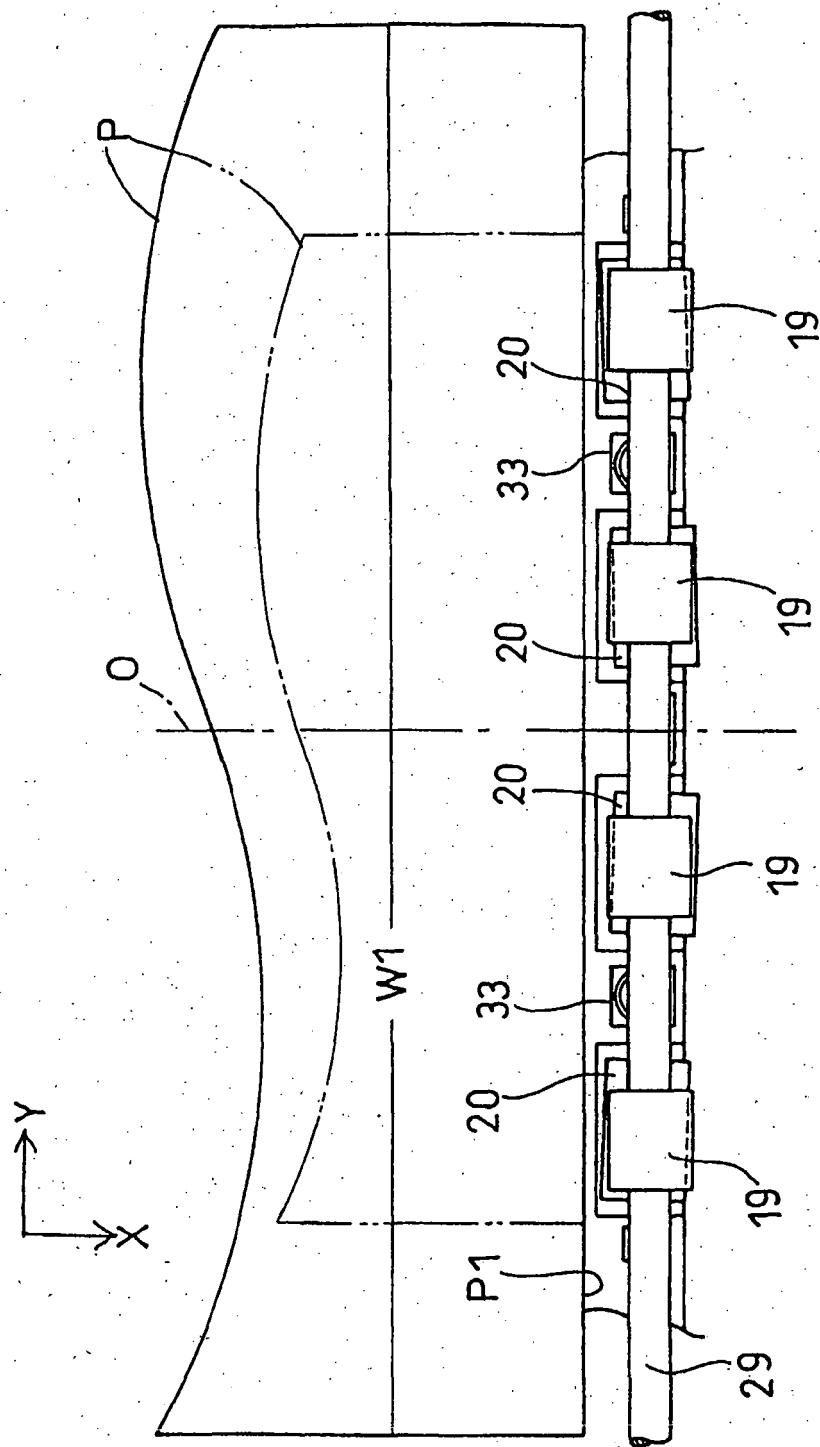


FIG.5A

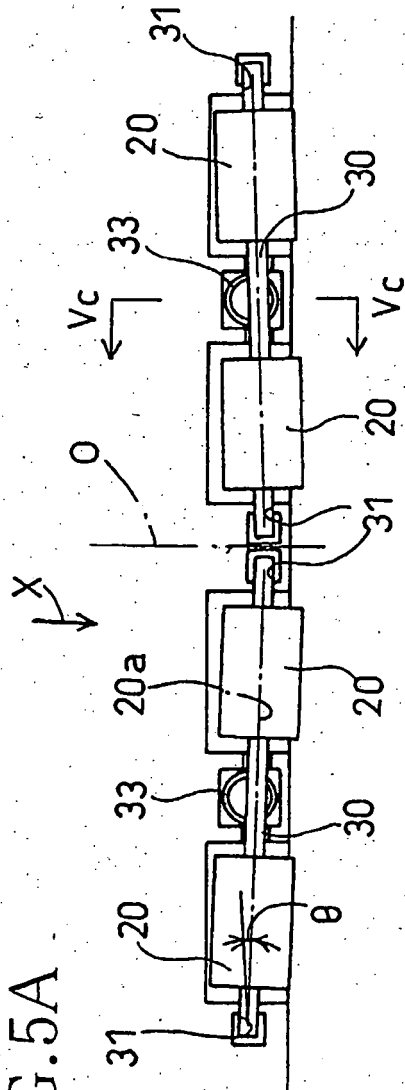


FIG.5B



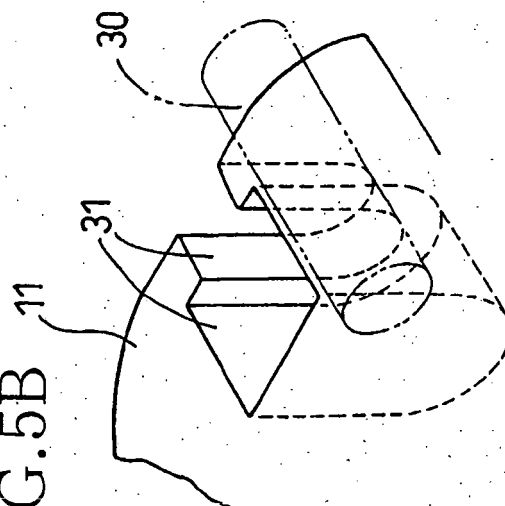


FIG.5C

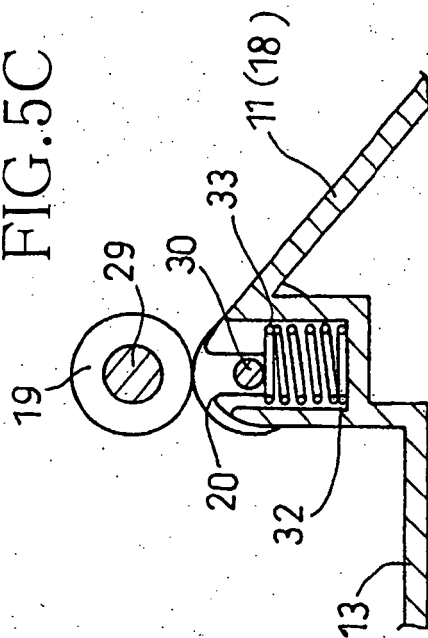

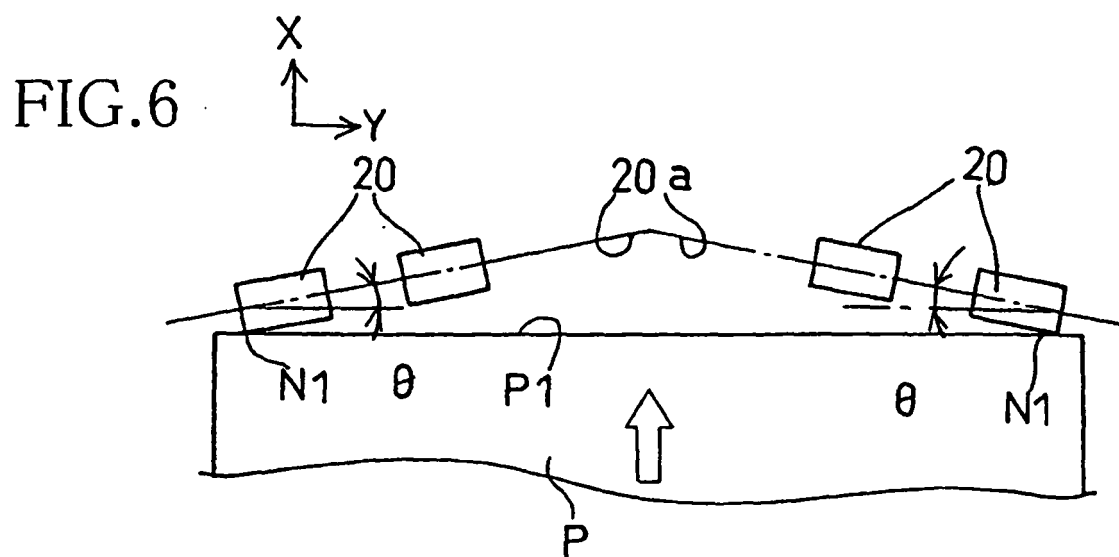

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2001030857 A [0004]
- EP 0919878 A [0007]