



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 462 653 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
29.09.2004 Bulletin 2004/40

(51) Int Cl.7: **F04C 2/08, F04C 2/10**

(21) Application number: **04251636.9**

(22) Date of filing: **22.03.2004**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR**
Designated Extension States:
AL HR LT LV MK

- **Inui, Naoki**
Itami-shi, Hyogo (JP)
- **Arinaga, Shinya**
Itami-shi, Hyogo (JP)
- **Sasaki, Harumitsu**
Itami-shi, Hyogo (JP)

(30) Priority: **25.03.2003 JP 2003083028**
07.05.2003 JP 2003129339
30.01.2004 JP 2004024200

(74) Representative:
Cross, Rupert Edward Blount et al
BOULT WADE TENNANT,
Verulam Gardens
70 Gray's Inn Road
London WC1X 8BT (GB)

(71) Applicant: **Sumitomo Electric Sintered Alloy, Ltd.**
Kawakami-gun, Okayama 716-0192 (JP)

(72) Inventors:

- **Ogata, Daisuke**
Itami-shi, Hyogo (JP)

(54) **Internal gear pump**

(57) A noise-reduced internal gear pump incorporating an inner rotor having an addendum formed by a smooth curve and a dedendum formed by a hypocycloid. The tooth profile of the outer rotor is determined by the following steps. The center O_i of an inner rotor 1 is revolved around the center O_o of the outer rotor so as to form a circle S having a diameter of $2e + t$, where "e" is the amount of eccentricity between the inner and outer rotors and "t" is the maximum value of the inter-

tor clearance between the outer rotor and the inner rotor pressed against it. The inner rotor 1 is rotated on its axis $1/n$ times while its center O_i makes one revolution in the circular orbit S , where "n" is the number of teeth of the inner rotor. The envelope of the group of the tooth profile-curves of the inner rotor formed by its revolution is used as the tooth profile of the outer rotor.

EP 1 462 653 A1

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates to a noise-reduced internal gear pump that incorporates an inner rotor having an addendum formed by a smooth curve and a dedendum formed by a hypocycloid.

Description of the Background Art

[0002] The published Japanese patent application *Tokuhyouhei* 11-811935 has disclosed an internal gear pump that is intended to reduce the noise, improve the mechanical efficiency, and increase the pump life.

[0003] Figure 11 shows the profile of the gear tooth of the internal gear pump disclosed in the *Tokuhyouhei* 11-811935. The pump combines an inner rotor having an addendum formed by an epicycloid and a dedendum formed by a hypocycloid (the tooth profile is shown in a dotted line) and an outer rotor having an addendum formed by a hypocycloid and a dedendum formed by an epicycloid (the tooth profile is shown in a solid line). An epicycloidal profile fh1 of the dedendum of the outer rotor is formed by the locus of one point on a first formation circle re1 that is circumscribed on a pitch circle P and rolls without slipping on the circle P from a starting point zO. An epicycloidal profile fh2 of the addendum of the inner rotor is formed by the locus of one point on a second formation circle re2 that is circumscribed on the pitch circle P and rolls without slipping on the circle P from a starting point zO'. A hypocycloidal profile fr1 of the addendum of the outer rotor is formed by the locus of one point on a third formation circle rh1 that is inscribed in the pitch circle P and rolls without slipping on the circle P from the starting point zO. A hypocycloidal profile fr2 of the dedendum of the inner rotor is formed by the locus of one point on a fourth formation circle rh2 that is inscribed in the pitch circle P and rolls without slipping on the circle P from the starting point zO'. The formation circles re1, re2, rh1, and rh2 have a different diameter. A clearance CR between the addendum of the outer rotor and the corresponding dedendum of the inner rotor is equal to the difference in diameter between the third and fourth formation circles rh 1 and rh2. A clearance CR' between the dedendum of the outer rotor and the corresponding addendum of the inner rotor is equal to the difference in diameter between the first and second formation circles re1 and re2. When the amount of eccentricity between the outer and inner rotors is "e," the clearance between the two rotors at the position where the two rotors interlock with each other most closely is nearly equal to the clearance between the two rotors at the position where the two rotors interlock with each other most loosely.

[0004] An internal gear pump is required to have a

clearance between the outer rotor and the inner rotor to enable the rotors to rotate smoothly. In the pump disclosed in the *Tokuhyouhei* 11-811935, the clearance is created by providing the difference in diameter between the first and second formation circles re1 and re2 and between the third and fourth formation circles rh1 and rh2. In this case, when the inner rotor is pressed against the outer rotor at the engaging portion, there exists a minimum clearance between each tooth of the inner rotor and the opposed-tooth of the-outer rotor. Hereinafter his minimum clearance is referred to as an "interrotor clearance" including the expression in the section "Claims." The present inventors found that when the pump is operated, the interrotor clearance increases abruptly from zero at the engaging portion, causing the noise.

SUMMARY OF THE INVENTION

[0005] An object of the present invention is to offer an internal gear pump in which an abrupt change in the interrotor clearance is eliminated to reduce the noise further.

[0006] According to the present invention, the foregoing object is attained by offering the following internal gear pump. The internal gear pump comprises:

- (a) an inner rotor having an addendum formed by a smooth curve and a dedendum formed by a hypocycloid; and
- (b) an outer rotor.

[0007] The tooth profile of the outer rotor is determined by the following steps.

(b1) The center of the inner rotor is revolved around the center of the outer rotor so as to form a circle having a diameter of $2e + t$, where "e" is the amount of eccentricity between the center of the inner rotor and the center of the outer rotor and "t" is the maximum value of the interrotor clearance between the outer rotor and the inner rotor pressed against the outer rotor.

(b2) The inner rotor is rotated on its own axis $1/n$ times while the center of the inner rotor makes one revolution in the circular orbit, where "n" is the number of teeth of the inner rotor.

(b3) The envelope of the group of the tooth-profile curves of the inner rotor formed by its revolution is drawn.

(b4) The envelope is used as the tooth profile of the outer rotor.

[0008] The above-described smooth curve forming the addendum of the inner rotor may be an epicycloid or a curve constituting a major portion of the upper half of an ellipse when its major axis is horizontally positioned.

[0009] According to one aspect of the present invention, the present invention offers the following internal gear pump. The internal gear pump comprises:

- (a) an inner rotor having an addendum formed by a smooth curve and a dedendum formed by a hypocycloid; and
- (b) an outer rotor.

[0010] The smooth curve forming the addendum is modified by the following steps (in the following description, the same definition of the "e," "t," and "n" as above is applied, and hereinafter the same definition is applied).

- (a1a) The center of a tentative inner rotor is revolved around the center of a tentative outer rotor so as to form a circle having a diameter of $2e + t$.
- (a1b) The tentative inner rotor is rotated on its own axis $1/n$ times while the center of the tentative inner rotor makes one revolution in the circular orbit.
- (a1c) The envelope of the group of the tooth-profile curves of the tentative inner rotor formed by its revolution is drawn.
- (a1d) The envelope is used as the tooth profile of the tentative outer rotor.
- (a1e) By the use of the tooth profiles of the tentative inner and outer rotors, the position of the trailing end of a tooth face, necessary to close up the pump chamber, in the addendum of the tentative inner rotor is determined. The tooth face has the leading end at the top of the addendum.
- (a1f) The position of the tooth-engaging point where the tentative inner rotor engages the tentative outer rotor is determined.
- (a1g) The position of another tooth face lying at the location from the position of the above-described trailing end to the tooth-engaging point is shifted to a place inside the curve forming the original tooth profile.
- (a1h) The profile after the position modification is used as the tooth profile of the addendum of the inner rotor.

[0011] In the above description, the tooth-engaging point is the point nearest to the top of the addendum of the inner rotor in the inner rotor's tooth face that is pressed against the outer rotor to give the rotary force to it when the inner rotor forces the outer rotor to rotate.

[0012] The tooth profile of the outer rotor is determined by the following steps.

- (b1) The center of the inner rotor, whose addendum has the tooth profile finally determined through the above-described steps, is revolved around the center of the outer rotor, whose tooth profile is to be finally determined, so as to form a circle having a diameter of $2e + t$.

(b2) The inner rotor is rotated on its own axis $1/n$ times while the center of the inner rotor makes one revolution in the circular orbit.

(b3) The envelope of the group of the tooth-profile curves of the inner rotor formed by its revolution is drawn.

(b4) The envelope is used as the tooth profile of the outer rotor.

[0013] The above-described smooth curve forming the addendum of the inner rotor may be an epicycloid or a curve constituting a major portion of the upper half of an ellipse when its major axis is horizontally positioned.

[0014] As described above, the tooth profile of the outer rotor is formed through the following procedure. The inner rotor is revolved on the circle having a diameter of $2e + t$. While the inner rotor makes one revolution, it is rotated on its own axis $1/n$ times. This operation produces a group of tooth-profile curves of the inner rotor. The envelope of the group is used to form the tooth profile of the outer rotor. In this case, the interrotor clearance increases gradually from zero to the maximum clearance produced between the top of the addendum of the outer rotor and the top of the addendum of the inner rotor. In other words, the amount of relative movement between the two rotors during the rotation is small. Consequently, the two rotors can rotate smoothly, producing only suppressed vibrations. As a result, the operation noise of the pump can be reduced in comparison with conventional pumps. The reduced vibration increases the pump life.

[0015] As one aspect of the invention, the present invention offers the following internal gear pump. The pump has an inner rotor whose tooth profile is modified by the following procedure. The envelope of the group of the tooth-profile curves of a tentative inner rotor formed by its revolution is used as the tooth profile of a tentative outer rotor. The use of the tooth profiles of the tentative inner and outer rotors determines the position to modify the tooth face of the addendum of the inner rotor. The pump has an outer rotor whose tooth profile is formed by the same procedure as described above by using the inner rotor whose tooth face is position-modified. The pump suppresses the mutual collision of the teeth of the outer and inner rotors at the non-engaging portion when the pump is operated. As a result, the pump further reduces the noise.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016]

Figure 1 is a schematic diagram showing an embodiment of the pump of the present invention, in which the cover of the pump is removed.

Figure 2 is a diagram showing a shift of the tooth profile of the inner rotor when it is revolved while it

is rotated on its own axis.

Figure 3 is a diagram showing the tooth profile of the outer rotor formed by the envelope of the group of the tooth-profile curves of the inner rotor.

Figure 4 is an enlarged diagram showing the difference in tooth profile between the outer rotor of the present invention and that of a prior art.

Figure 5A is a diagram showing an example of the shift of the interrotor clearance of the pump having the tooth profile of the present invention, and Fig. 5B is a diagram showing another example of the shift.

Figure 6A is a diagram showing an example of the shift of the interrotor clearance of the pump having the tooth profile of a prior art, and Fig. 6B is a diagram showing another example of the shift.

Figure 7A is a chart showing the waveform of the vibration in the pump case of the pump having the tooth profile of the present invention while the rotors are rotating under a certain condition, and, for-comparison, Fig. 7B is of the pump having the tooth profile of a prior art while the rotors are rotating under the same condition as in Fig. 7A.

Figure 8A is a chart showing the waveform of the vibration in the pump case of the pump having the tooth profile of the present invention while the rotors are rotating under another condition, and, for comparison, Fig. 8B is of the pump having the tooth profile of a prior art while the rotors are rotating under the same condition as in Fig. 8A.

Figure 9A is a chart showing the waveform of the vibration in the pump case of the pump having the tooth profile of the present invention while the rotors are rotating under yet another condition, and, for comparison, Fig. 9B is of the pump having the tooth profile of a prior art while the rotors are rotating under the same condition as in Fig. 9A.

Figure 10A is a chart showing the waveform of the vibration in the pump case of the pump having the tooth profile of the present invention while the rotors are rotating under yet another condition, and, for comparison, Fig. 10B is of the pump having the tooth profile of a prior art while the rotors are rotating under the same condition as in Fig. 10A.

Figure 11 is a diagram showing the method of forming the profile of the gear tooth of the internal gear pump of a prior art.

Figure 12 is a diagram showing the tooth profile of the inner rotor having the addendum formed by a curve constituting a major portion of the upper half of an ellipse, in which the diagram shows the tooth face before it is modified.

Figure 13 is a diagram showing the tooth profile of the inner rotor having the addendum formed by a curve constituting a major portion of the upper half of an ellipse, in which the diagram shows the tooth face after it is modified.

Figure 14 is a diagram showing the tooth profile of

the inner rotor in which the tooth face is modified in two locations: one location is ahead of the center of the curve forming the addendum when the rotor is rotated and the other is behind the center.

Figure 15A is a diagram showing an example of the shift of the interrotor clearance before the tooth face is modified, and Fig. 15B is a diagram showing another example of the shift.

Figure 16A is a diagram showing an example of the shift of the interrotor clearance after the tooth face is modified, and Fig. 16B is a diagram showing another example of the shift.

DETAILED DESCRIPTION OF THE INVENTION

[0017] An embodiment of the present invention is explained below by referring to Figs. 1 to 3. As shown in Fig. 1, an internal gear pump 10 comprises an inner rotor 1 of which the number of teeth is "n," an outer rotor 2 of which the number of teeth is "n + 1," and a pump case (housing) 3 housing the two rotors. The pump case 3 is provided with a suction port 4 and a delivery port 5.

[0018] In the pump 10, the inner rotor 1 is a driving gear and the outer rotor 2 is a driven gear. The inner rotor 1 has a rotating center O_i , and the outer rotor 2 has a rotating center O_o . The centers O_o and O_i are eccentric to each other by the amount of "e."

[0019] The inner rotor 1 has a tooth profile explained by referring to Fig. 11. More specifically, the addendum has an epicycloidal profile formed by the locus of one point on the formation circle re_2 that is circumscribed on the pitch circle P and rolls on the circle. The dedendum has a hypocycloidal profile formed by the locus of one point on the formation circle rh_2 that is inscribed in the pitch circle P and rolls on the circle.

[0020] On the other hand, the outer rotor 2 has a tooth profile determined by the method illustrated in Figs. 2 and 3. As shown in Fig. 2, the center O_i of the inner rotor 1 is revolved around the center O_o of the outer rotor 2 so as to form a circle S having a diameter of $2e + t$, where "t" is the maximum value of the interrotor clearance between the outer rotor 2 and the inner rotor 1 pressed against the outer rotor 2 (see Figs. 5A and 6A).

[0021] While the center O_i of the inner rotor 1 makes one revolution in the circular orbit S, the inner rotor 1 is rotated on its own axis $1/n$ times. ($(360/n)$ degrees). Alternate long and short dashed lines in Fig. 2 show a tooth-profile curve of the inner rotor at the position when the center O_i of the inner rotor 1 revolves by an angle of θ degree around the center O_o of the outer rotor to shift to a point O_i' and concurrently the inner rotor 1 is rotated on its own axis by an angle of (θ/n) degrees. As shown in Fig. 3, the tooth-profile curve varies according to the revolution accompanied by the rotation. The group of the tooth-profile curves has an envelope 6, which is used to form the tooth profile of the outer rotor 2.

[0022] Figure 4 is an enlarged diagram showing the difference in tooth profile between the outer rotor of the

present invention formed by the envelope of the group of the tooth-profile curves of the inner rotor as explained by referring to Figs. 2 and 3 and the outer rotor of a prior art formed by the method explained by referring to Fig. 11. In Fig. 4, the solid line shows the tooth profile of the pump of the present invention and the broken line shows that of a prior art. The two profiles differ with each other obviously in the vicinity of the boundary between the addendum and the dedendum.

[0023] Figures 5A and 5B show shifts of the interrotor clearance of the pump of the present invention when the inner rotor 1 and the outer rotor 2 each having the following features are combined:

Inner rotor:

Number of teeth: 10
Pitch circle: diameter: 62.00 (unit is mm, hereinafter the same is applied.)
Epicycloid formation circle: diameter: 3.10
Hypocycloid formation circle: diameter: 3.10

Outer rotor:

Number of teeth: 11
Amount of eccentricity between the two rotors: 3.10
Maximum value of the interrotor clearance: 0.12

[0024] Figures 6A and 6B show shifts of the interrotor clearance of the pump of a prior art having the tooth profile formed by the method explained by referring to Fig. 11. The pump has the following features:

Inner rotor:

Number of teeth: 10
Pitch circle: diameter: 62.00 (unit is mm, hereinafter the same is applied.)
Epicycloid formation circle: diameter: 3.10
Hypocycloid formation circle: diameter: 3.10

Outer rotor:

Number of teeth: 11
Pitch circle: diameter: 68.20
Epicycloid formation circle: diameter: 3.04
Hypocycloid formation circle: diameter: 3.16
Amount of eccentricity between the two rotors: 3.10

[0025] Figures 5A and 6A show examples in which the position of zero interrotor clearance occurs at the position where the top of the addendum of the inner rotor 1 is coincident with the bottom of the dedendum of the outer rotor 2. Figures 5B and 6B show examples in which the position of zero interrotor clearance occurs at the

position where the bottom of the dedendum of the inner rotor 1 is coincident with the top of the addendum of the outer rotor 2.

[0026] In the case of the tooth profile of the prior art, as shown in Fig. 6A, the interrotor clearance varies in the following order: 0 → 0.114 → 0.113 → 0.118 → 0.120 → 0.120 (unit is mm, hereinafter the same is applied). In Fig. 6B, the interrotor clearance varies in the following order: 0 → 0.105 → 0.116 → 0.117 → 0.120 → 0.120. In both cases, the interrotor clearance increases abruptly from zero.

[0027] In contrast, with the tooth profile of the present invention, as shown in Fig. 5A, the interrotor clearance varies in the following order: 0 → 0.045 → 0.075 → 0.099 → 0.115 → 0.120. In Fig. 5B, the interrotor clearance varies in the following order: 0 → 0.029 → 0.060 → 0.088 → 0.108 → 0.118. In both cases, the interrotor clearance varies mildly.

[0028] Figures 7A to 10B show the results of the measurement to compare the performance of the pump having the tooth profile of the present invention and the pump having the tooth profile of a prior art. The results are shown by the waveform of the vibration in the pump case while the rotors are rotating. Figures 7A to 10A show the waveform for the tooth profile of the present invention, and Figs. 7B to 10B show that of the prior art. The pumps used in the comparison test combine the inner rotor 1 with 10 teeth and the outer rotor 2 with 11 teeth, whose tooth profiles are shown in Figs. 5A to 6B.

[0029] Figures 7A and 7B show the test results under the following conditions: oil temperature: 40 °C, delivery pressure: 0.3 MPa, and number of rotations: 3,000 rpm.

[0030] Figures 8A and 8B show the test results under the following conditions: oil temperature: 40 °C, delivery pressure: 0.4 MPa, and number of rotations: 3,000 rpm.

[0031] Figures 9A and 9B show the test results under the following conditions: oil temperature: 100 °C, delivery pressure: 0.3 MPa, and number of rotations: 3,000 rpm.

[0032] Figures 10A and 10B show the test results under the following conditions: oil temperature: 100 °C, delivery pressure: 0.4 MPa, and number of rotations: 3,000 rpm.

As can be seen from these results, the pump having the tooth profile of the present invention produces a smaller vibration under any of these conditions. As the vibration decreases, the produced noise decreases and the pump life is increased.

[0033] As explained above, the foregoing structure of the present invention eliminates the abrupt change in the interrotor clearance, so that the noise originated from the abrupt clearance change can be suppressed. However, the interrotor clearance increases gradually from zero to the maximum clearance produced by the top of the addendum of the outer rotor and the top of the addendum of the inner rotor. As a result, the teeth of the inner and outer rotors may collide against each other at the non-engaging portion, particularly at a portion where

the interrotor clearance is small. It is possible that this collision will become a new source of noise.

[0034] Accordingly, the present invention also offers a measure to suppress the noise resulting from the collision (hereinafter referred to as "hitting") of the teeth at the non-engaging portion. The measure is effective even when the inner rotor has a tooth profile other than the cycloid.

[0035] The measure to suppress the hitting of the teeth at the non-engaging portion is explained below by referring to a concrete example. Figure 12 shows the tooth profile of an inner rotor 1. The tooth profile has an addendum 7 formed by a curve constituting a major portion of the upper half of an ellipse when its major axis is horizontally positioned and a dedendum 8 formed by a hypocycloidal curve created by a formation circle (internally rolling circle) rh (diameter: B) that is inscribed in the pitch circle (base circle) P (diameter: A) and rolls on the circle P without slipping. The curve of the addendum 7 is center-symmetric, and its one end is connected to the trailing end of the curve of the dedendum 8 at a point C on the pitch circle P and the other end is connected to the starting end of the curve of the dedendum 8 at a point D on the pitch circle P.

[0036] When the inner rotor 1 has the tooth profile as shown in Fig. 12, the tooth profile of the outer rotor is formed through the following procedure. As explained by referring to Figs. 2 and 3, the center of the inner rotor is revolved around the center of the outer rotor so as to form a circle having a diameter of $2e + t$. While the center of the inner rotor makes one revolution in the circular orbit, the inner rotor is rotated on its own axis $1/n$ times. This operation produces a group of tooth-profile curves of the inner rotor. When the envelope of the group is used to form the tooth profile of the outer rotor, interrotor clearances at some non-engaging portions between the zero clearance and the maximum clearance produced by the top of the addendum of the outer rotor and the top of the addendum of the inner rotor can be made slightly wider than the original maximum clearance.

[0037] As a result, the noise originated from the abrupt change in interrotor clearance can be suppressed. In addition, the hitting of the teeth of the inner and outer rotors can also be suppressed because the interrotor clearance is increased at the non-engaging portion between the zero clearance and the maximum clearance produced by the two tops. However, the outer rotor has a sliding clearance with the pump case. Consequently, the center of the outer rotor tends to oscillate during the rotation. If the magnitude of the oscillation is greater than the interrotor clearance at some non-engaging portions, the hitting of the teeth of the two rotors cannot be suppressed sufficiently.

[0038] To further prevent the foregoing tooth hitting, the following arrangement is employed. As shown in Fig. 13, a point F is determined as the trailing end of a tooth face 7a necessary to close up the pump chamber. A point G is determined as the tooth-engaging point. A

tooth face 7c lying at the location from the point F to the point G is position-modified to a place shown in a solid line, which is located inside the original elliptical curve shown in alternate long and short dashed lines. The profile after the position modification is used as the tooth profile of the inner rotor. In Fig. 13, a point E is the top of the addendum, and points G and D are the leading end and the trailing end, respectively, of a tooth face 7b necessary to engage the outer rotor. As can be seen from Fig. 13, the position-modified tooth face 7c has a radius of curvature larger than that of the original elliptical curve. However, the radius is not limited to the one shown in Fig. 13.

[0039] The above-described modification of the tooth profile of the inner rotor and the subsequent determination of the tooth profile of the outer rotor to be combined with the tooth profile-modified inner rotor are performed by the following procedure.

[0040] First, the tooth profile of a tentative outer rotor is formed by using the envelope of the group of tooth-profile curves of a tentative inner rotor formed by its revolution. This formation method is explained below.

[0041] A tentative inner rotor whose tooth profile is unmodified is revolved around the center of a tentative outer rotor so as to form a circle having a diameter of $2e + t$. While the center of the tentative inner rotor makes one revolution in the circular orbit, the tentative inner rotor is rotated on its own axis $1/n$ times. This operation produces a group of tooth-profile curves of the tentative inner rotor. The envelope of the group is used to determine the tooth profile of the tentative outer rotor.

[0042] Next, the tooth profiles of the tentative inner and outer rotors are used to determine the position of the trailing end of the tooth face 7a of the inner rotor necessary to close up the pump chamber (the position is denoted as the point F in Figs. 12 to 14).

[0043] The tooth face 7c lying at the location from the trailing-end position, the point F, to the tooth-engaging point (the point G in Figs. 12 to 14) is position-modified by shifting it to a place inside the curve forming the original tooth profile. The profile after the position modification is used as the tooth profile of the addendum of the inner rotor.

[0044] Subsequently, the center of the inner rotor whose addendum has the finally determined tooth profile is revolved around the center of the outer rotor whose tooth profile is to be finally determined so as to form a circle having a diameter of $2e + t$. While the center of the inner rotor makes one revolution in the circular orbit, the inner rotor is rotated on its own axis $1/n$ times. This operation produces a group of tooth-profile curves of the inner rotor. The envelope of the group is used to finally determine the tooth profile of the outer rotor.

[0045] The modification of the position of the tooth face 7c is performed in at least one of the two locations: one location is ahead of the center of the curve forming the addendum 7 when the rotor is rotated and the other is behind the center. Figure 14 shows the case in which

the modification is performed in both locations.

[0046] The trailing end position F of the tooth face 7a needed to close up the pump chamber varies according to the position at which the pump chamber is disconnected from the suction port and the delivery port. There are two methods for the disconnection: one method disconnects the pump chamber from the suction port and the delivery port at the position where the pump chamber reaches the maximum volume and the other method disconnects the pump chamber from the suction port and the delivery port at the position where the volume of the pump chamber begins to decrease from the maximum value. The tooth face 7a has a smaller region in the latter case than in the former case.

[0047] Figures 15A and 15B show shifts of the interrotor clearance of the pump before the tooth profile of the inner rotor is modified. Figures 16A and 16B show shifts of the interrotor clearance of the pump after the tooth profile of the inner rotor is modified. The measurement of the shifts was performed by using the inner and outer rotors that have the following features:

Inner rotor:

Number of teeth: 10
 Addendum circle: diameter: 68.20
 Pitch circle: diameter: 62.00
 Ellipse used for forming the addendum: half of the minor axis: 4.17655, half of the major axis: 4.91633
 Hypocycloid formation circle for forming the dedendum: diameter: 3.10
 Radius of curvature of the modified tooth face: 5.3

Outer rotor:

Number of teeth: 11
 Amount of eccentricity between the two rotors: 3.10
 Maximum value of the interrotor clearance: 0.12

[0048] Figures 15A and 16A show examples in which the position of zero clearance occurs at the position where the top of the addendum of the inner rotor is coincident with the bottom of the dedendum of the outer rotor. Figures 15B and 16B show examples in which the position of zero clearance occurs at the position where the bottom of the dedendum of the inner rotor is coincident with the top of the addendum of the outer rotor.

[0049] In the case of the tooth profile before it is modified, as shown in Fig. 15A, the interrotor clearance varies in the following order: 0 → 0.013 → 0.106 → 0.148 → 0.136 → 0.122 → 0.120. In Fig. 15B, the interrotor clearance varies in the following order: 0 → 0.052 → 0.137 → 0.144 → 0.128 → 0.120.

[0050] In contrast, with the tooth profile after it is mod-

ified, as shown in Fig. 16A, the interrotor clearance varies in the following order: 0 → 0.013 → 0.114 → 0.238 → 0.210 → 0.120 → 0.120. In Fig. 16B, the interrotor clearance varies in the following order: 0 → 0.050 → 0.194 → 0.239 → 0.163 → 0.121. As can be seen from these data, the clearance at the engaging portion and the interrotor clearance at the maximum clearance portion between the two tops have only a negligible difference from those shown in Figs. 15A and 15B. However, the interrotor clearance at the other portions are considerably larger than those shown in Figs. 15A and 15B. As a result, the modified tooth profile can not only prevent the abrupt increase in the interrotor clearance from the zero clearance in the engaging portion (and accompanying noise generation) but also suppress the tooth hitting in the non-engaging portion (and accompanying noise generation).

[0051] In the above-described embodiment, the inner rotor has the addendum with the profile formed by a curve constituting a major portion of the upper half of an ellipse. However, the profile is not limited to this type. Any profile having a smooth curve may be used, such as an epicycloidal curve, a trochoidal curve, or a spline curve.

Claims

1. An internal gear pump comprising:

- (a) an inner rotor having an addendum formed by a smooth curve and a dedendum formed by a hypocycloid; and
- (b) an outer rotor having a tooth profile determined by the steps of:

(b1) revolving the center of the inner rotor around the center of the outer rotor so as to form a circle having a diameter of $2e + t$, where "e" is the amount of eccentricity between the center of the inner rotor and the center of the outer rotor and "t" is the maximum value of the interrotor clearance between the outer rotor and the inner rotor pressed against the outer rotor;

(b2) rotating the inner rotor on its own axis $1/n$ times while the center of the inner rotor makes one revolution in the circular orbit, where "n" is the number of teeth of the inner rotor;

(b3) drawing the envelope of the group of the tooth-profile curves of the inner rotor formed by its revolution; and

(b4) using the envelope as the tooth profile of the outer rotor (hereinafter the same definition of the "e," "t," and "n" as above is applied).

2. An internal gear pump as defined by claim 1, wherein the smooth curve forming the addendum of the inner rotor is an epicycloid.

3. An internal gear pump as defined by claim 1, wherein the smooth curve forming the addendum of the inner rotor is a curve constituting a major portion of the upper half of an ellipse when its major axis is horizontally positioned.

4. An internal gear pump comprising:

(a) an inner rotor having:

(a1) an addendum formed by a smooth curve modified by the steps of:

(a1a) revolving the center of a tentative inner rotor around the center of a tentative outer rotor so as to form a circle having a diameter of $2e + t$;

(a1b) rotating the tentative inner rotor on its own axis $1/n$ times while the center of the tentative inner rotor makes one revolution in the circular orbit;

(a1c) drawing the envelope of the group of the tooth-profile curves of the tentative inner rotor formed by its revolution;

(a1d) using the envelope as the tooth profile of the tentative outer rotor;

(a1e) by using the tooth profiles of the tentative inner and outer rotors, determining the position of the trailing end of a tooth face, necessary to close up the pump chamber, in the addendum of the tentative inner rotor;

the tooth face having the leading end at the top of the addendum;

(a1f) determining the position of the tooth-engaging point where the tentative inner rotor engages the tentative outer rotor;

(a1g) shifting the position of another tooth face lying at the location from the position of the above-described trailing end to the tooth-engaging point to a place inside the curve forming the original tooth profile; and

(a1h) using the profile after the position modification as the tooth profile of the addendum of the inner rotor; and

(a2) a dedendum formed by a hypocycloid; and

(b) an outer rotor having a tooth profile deter-

mined by the steps of:

(b1) revolving the center of the inner rotor, whose addendum has the tooth profile finally determined through the above-described steps, around the center of the outer rotor, whose tooth profile is to be finally determined, so as to form a circle having a diameter of $2e + t$;

(b2) rotating the inner rotor on its own axis $1/n$ times while the center of the inner rotor makes one revolution in the circular orbit;

(b3) drawing the envelope of the group of the tooth-profile curves of the inner rotor formed by its revolution; and

(b4) using the envelope as the tooth profile of the outer rotor.

5. An internal gear pump as defined by claim 4, wherein the smooth curve forming the addendum of the inner rotor is an epicycloid.

6. An internal gear pump as defined by claim 4, wherein the smooth curve forming the addendum of the inner rotor is a curve constituting a major portion of the upper half of an ellipse when its major axis is horizontally positioned.

FIG. 1

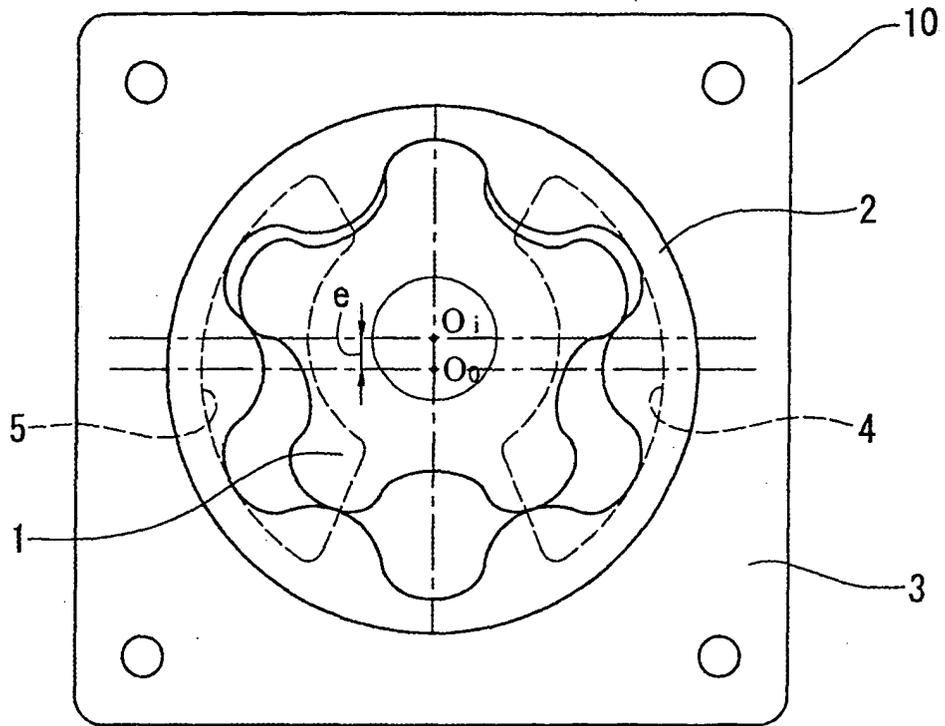


FIG. 2

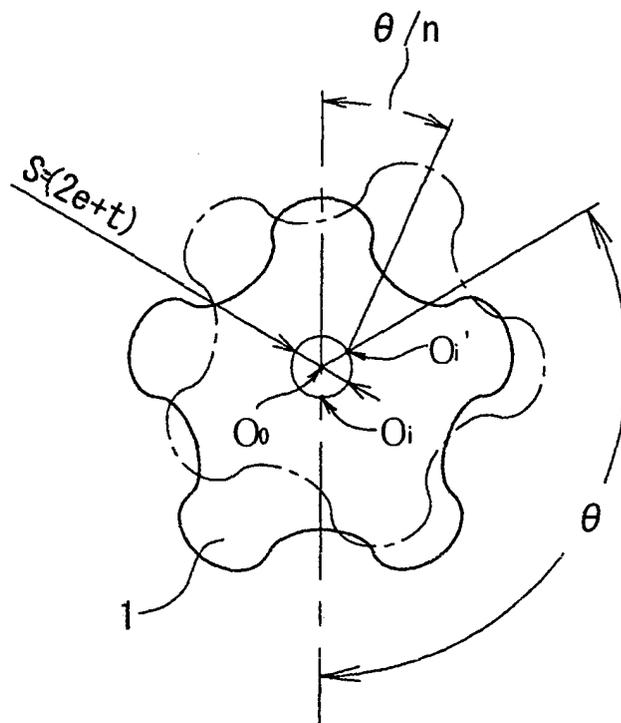
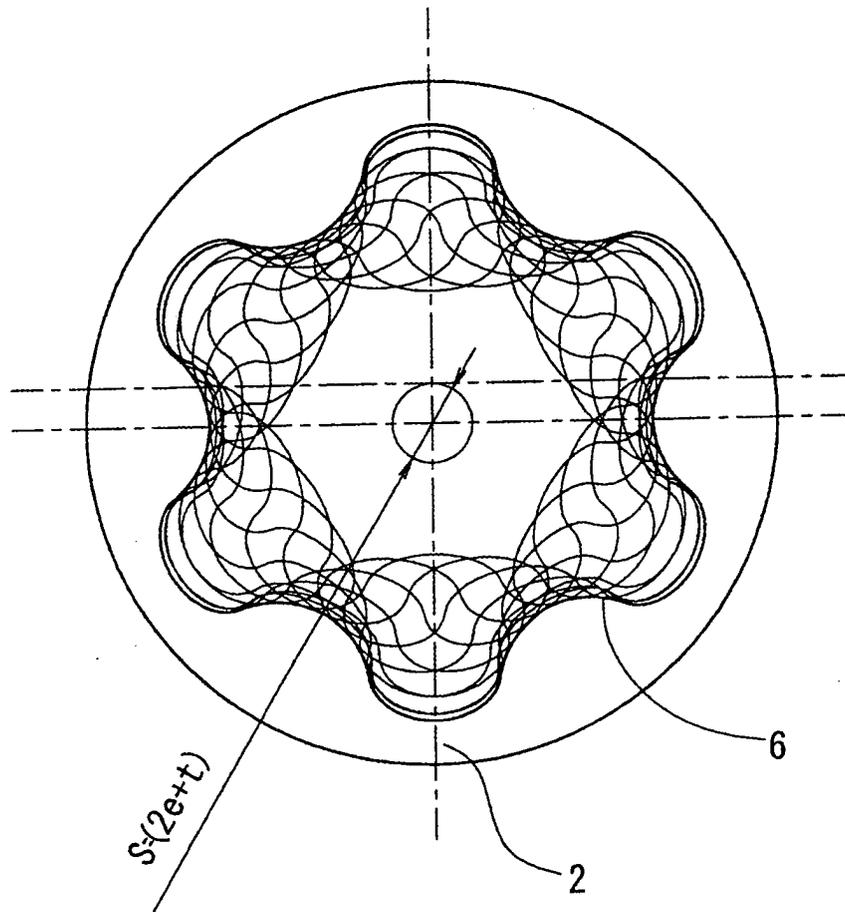


FIG. 3



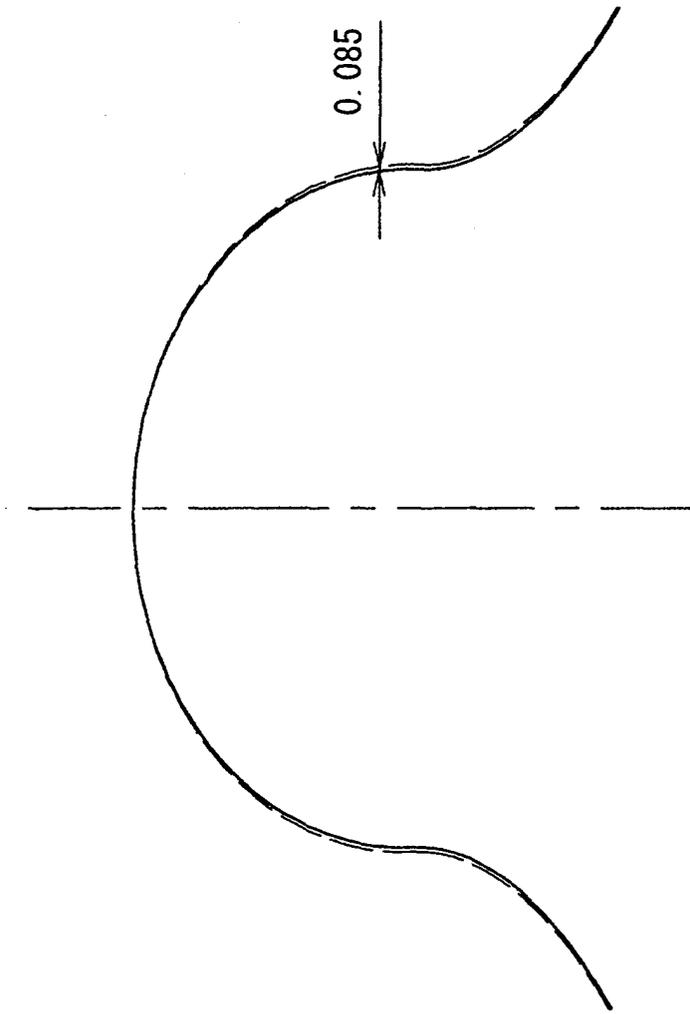


FIG. 4

FIG. 5B

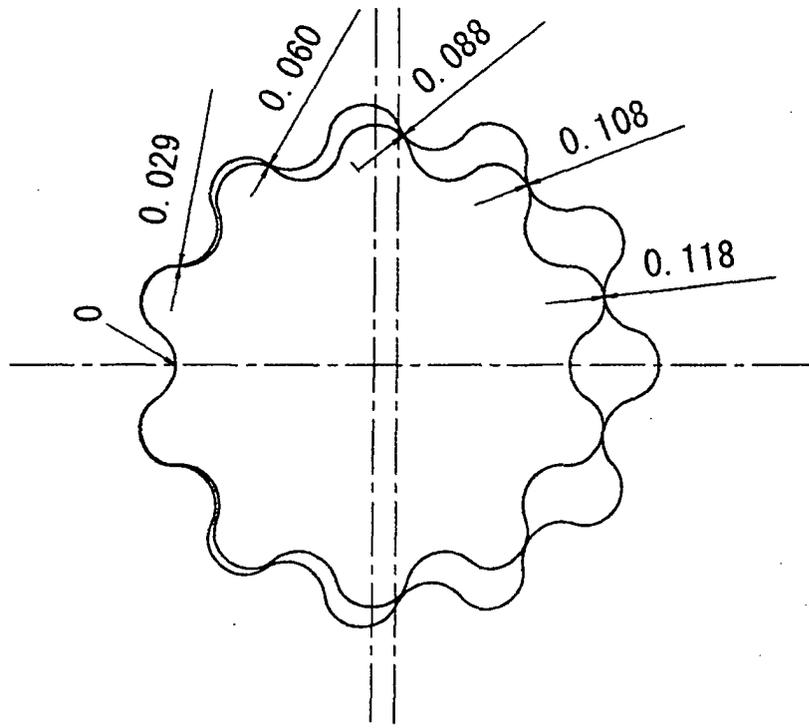


FIG. 5A

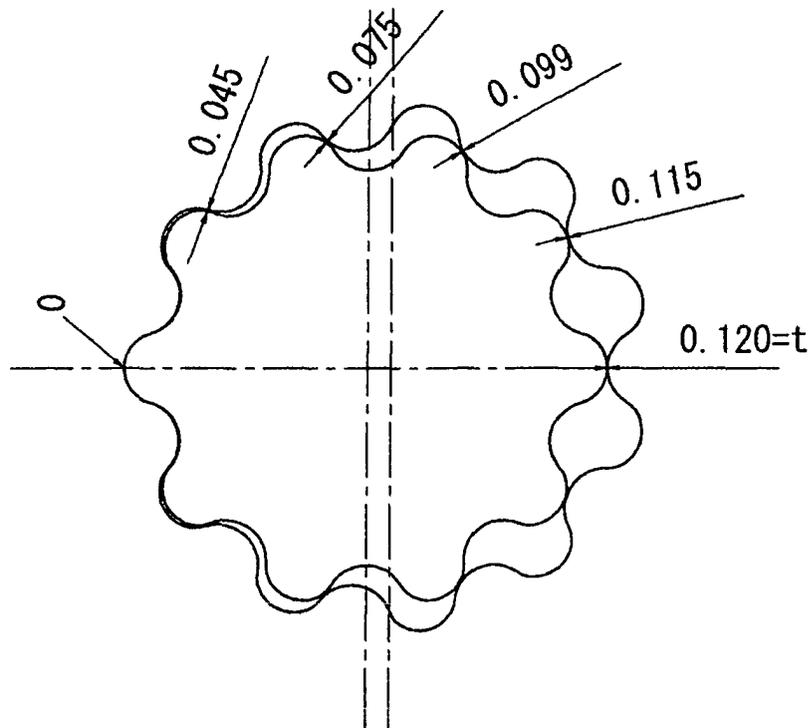


FIG. 6B

PRIOR ART


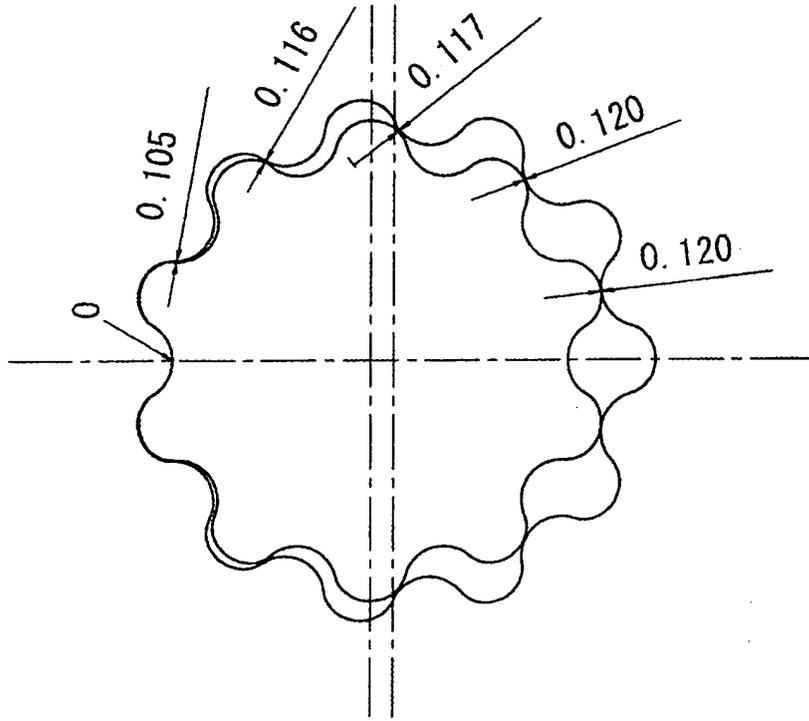


FIG. 6A

PRIOR ART

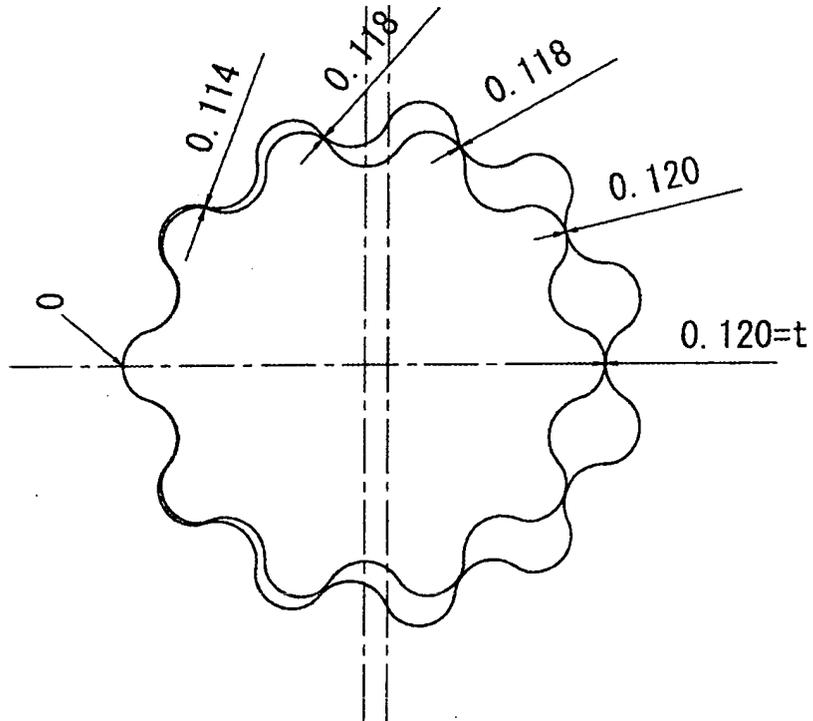

Oil temperature: 40°C
Delivery pressure: 0.3MPa
Number of rotations: 3000rpm

FIG. 7B


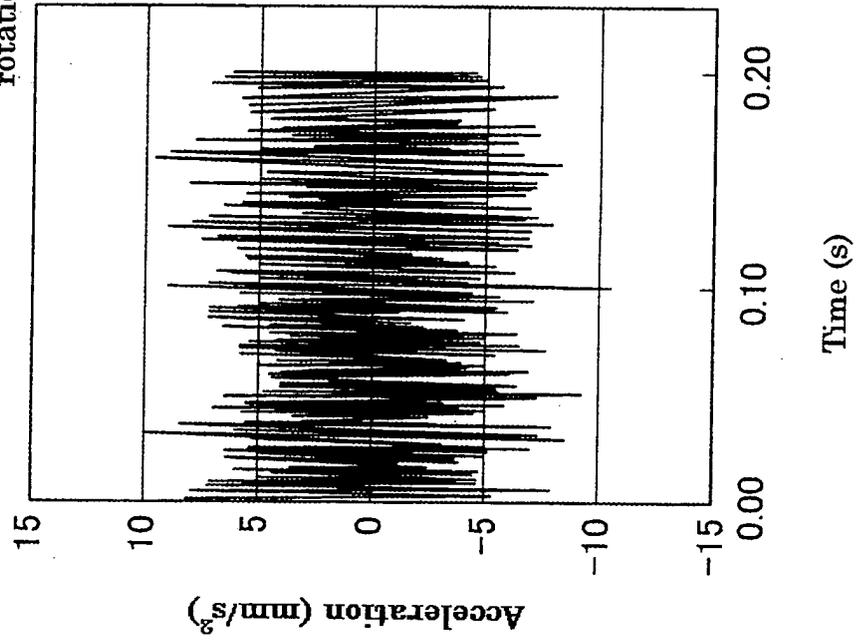


FIG. 7A

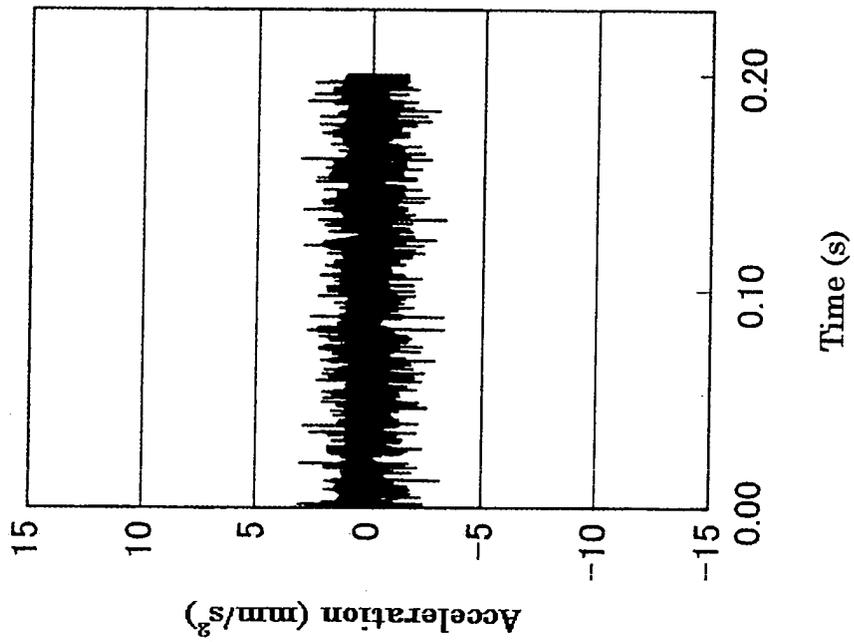

Oil temperature: 40°C
Delivery pressure: 0.4MPa
Number of
rotations: 3000rpm

FIG. 8B


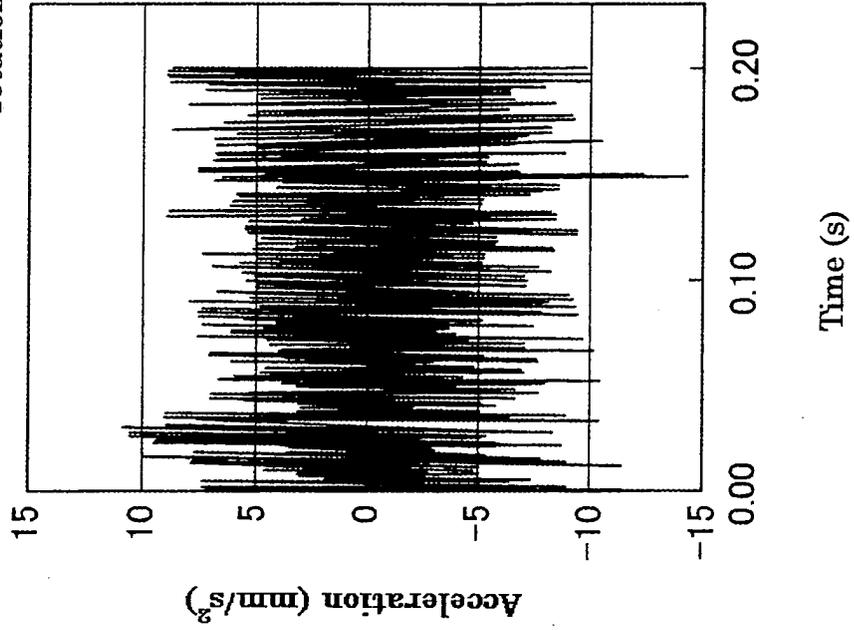


FIG. 8A

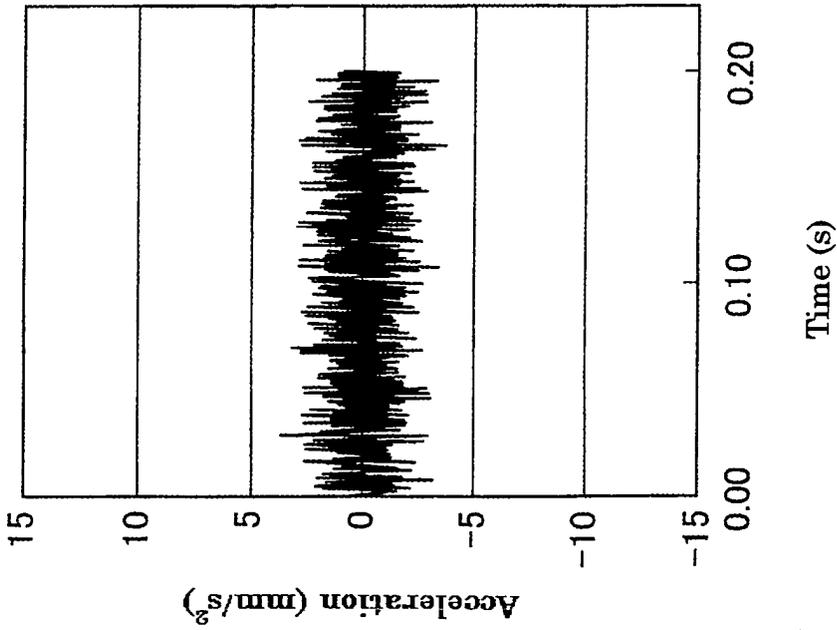

Oil temperature: 100°C
Delivery pressure: 0.3MPa
Number of rotations: 3000rpm

FIG. 9A


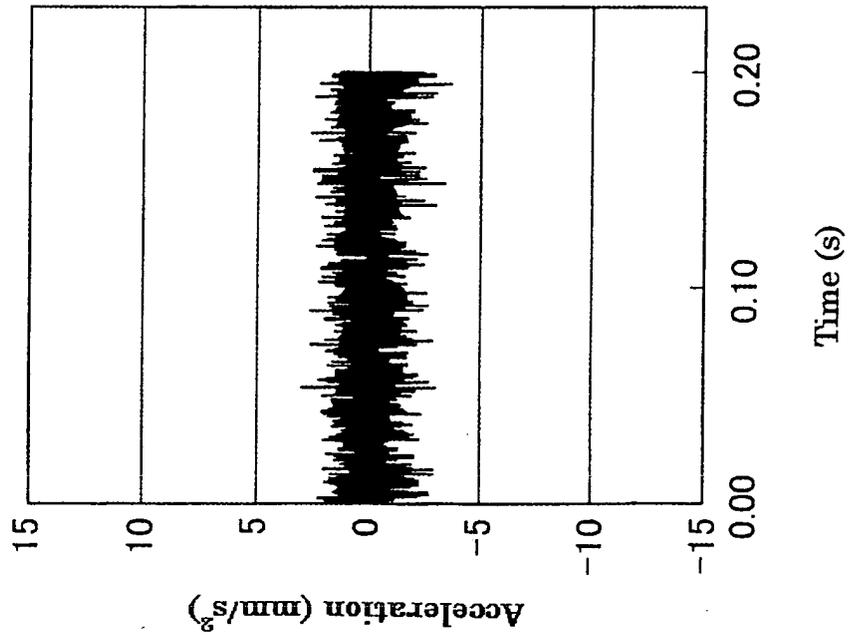


FIG. 9B

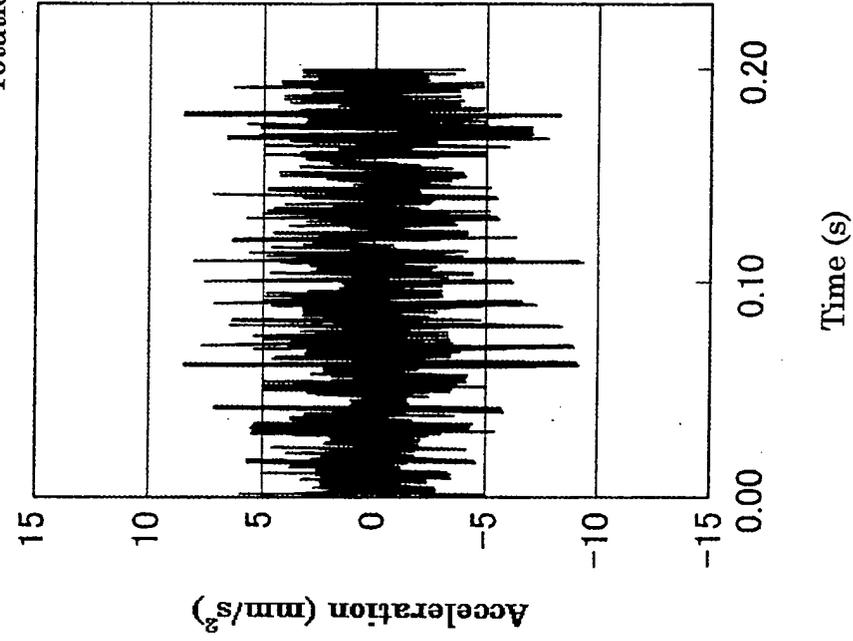

Oil temperature: 100°C
Delivery pressure: 0.4MPa
Number of rotations: 3000rpm

FIG. 10B

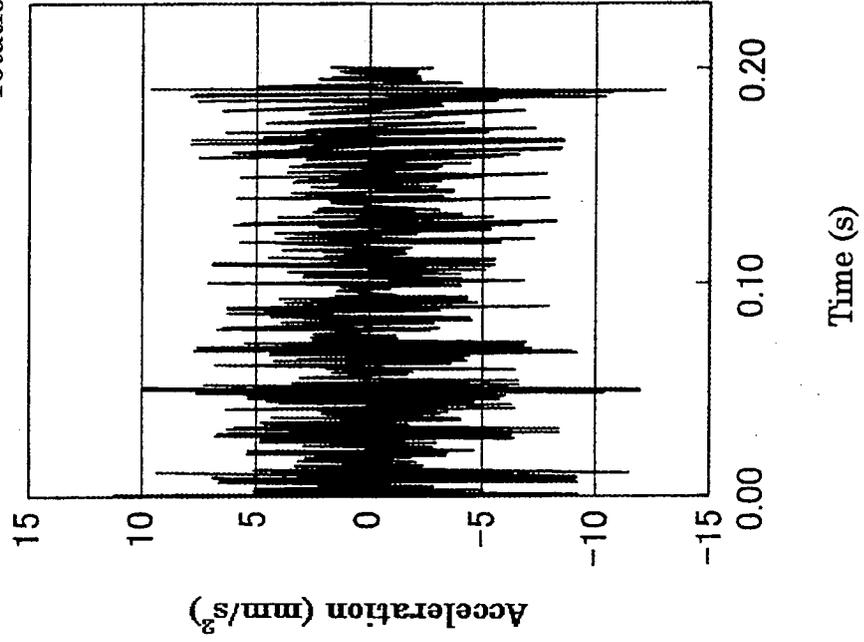


FIG. 10A

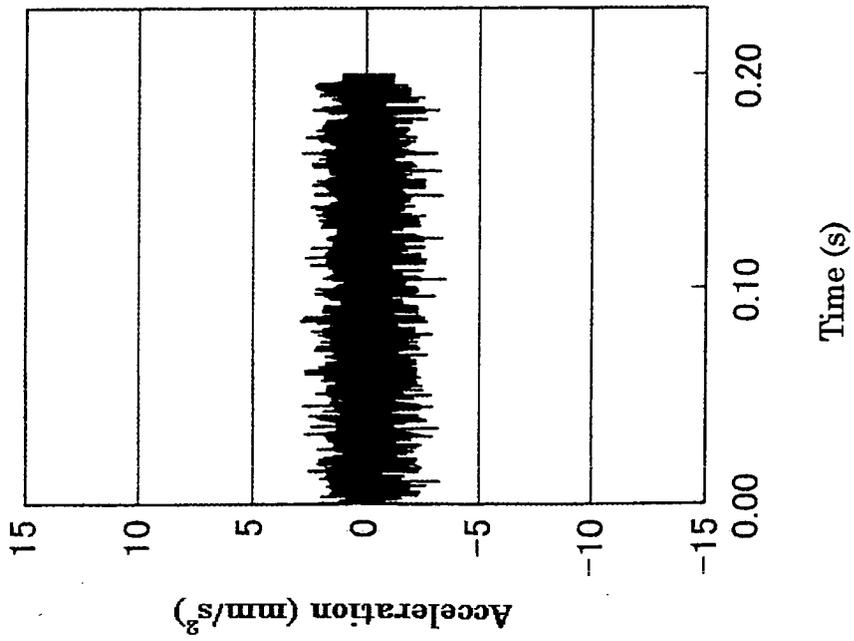
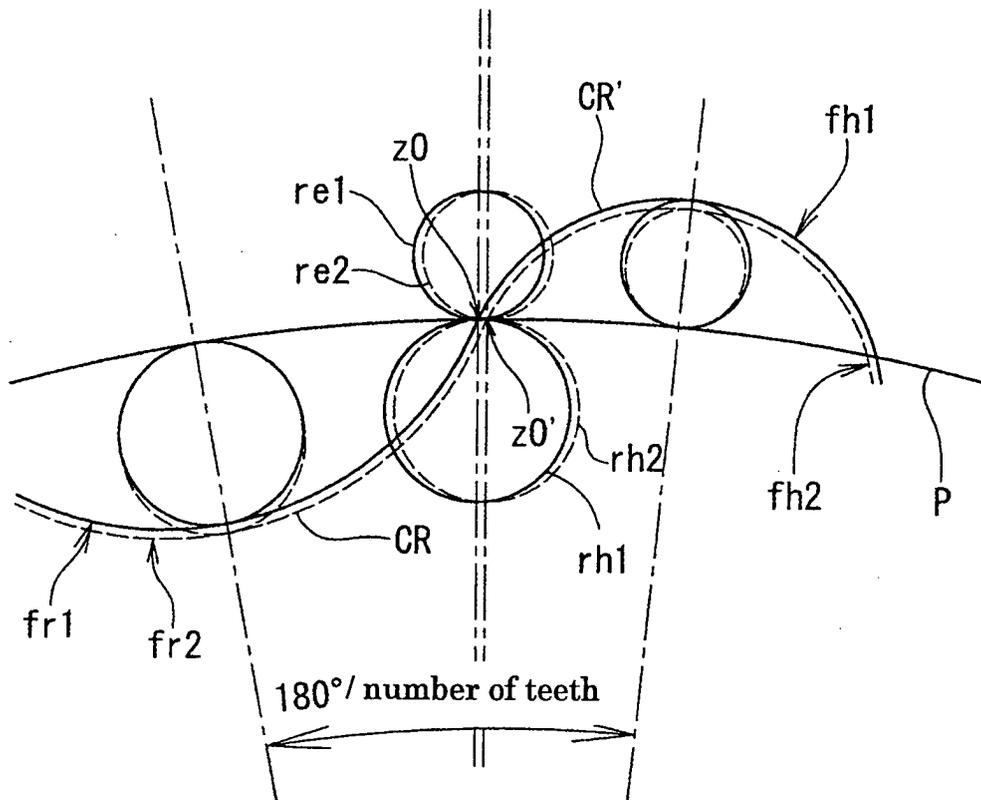
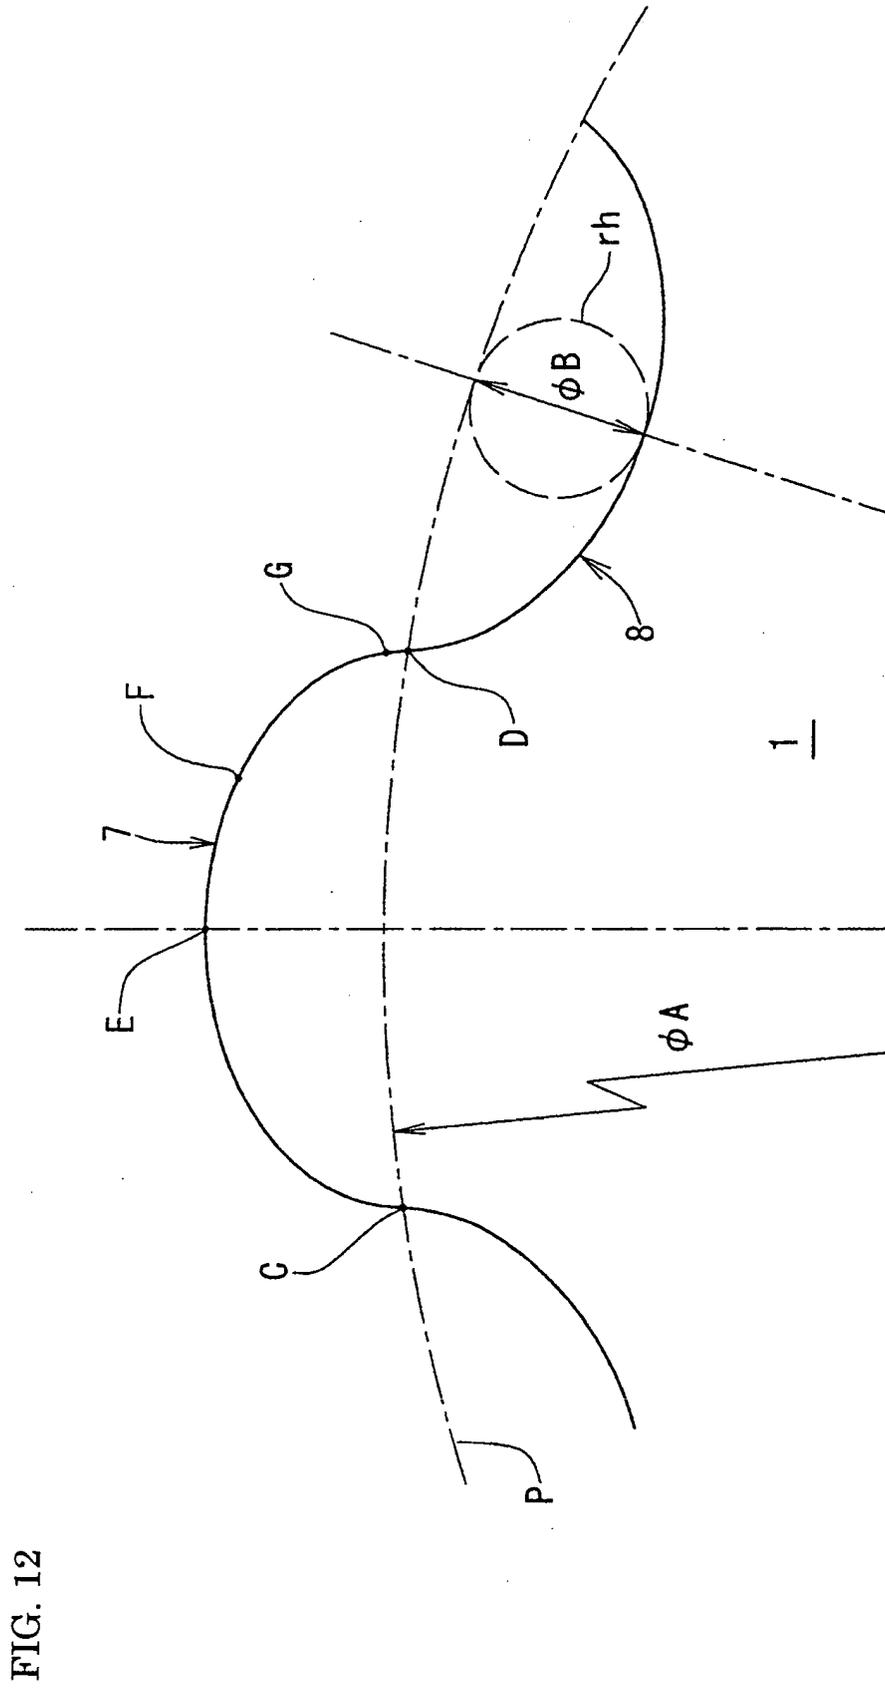


FIG. 11

PRIOR ART





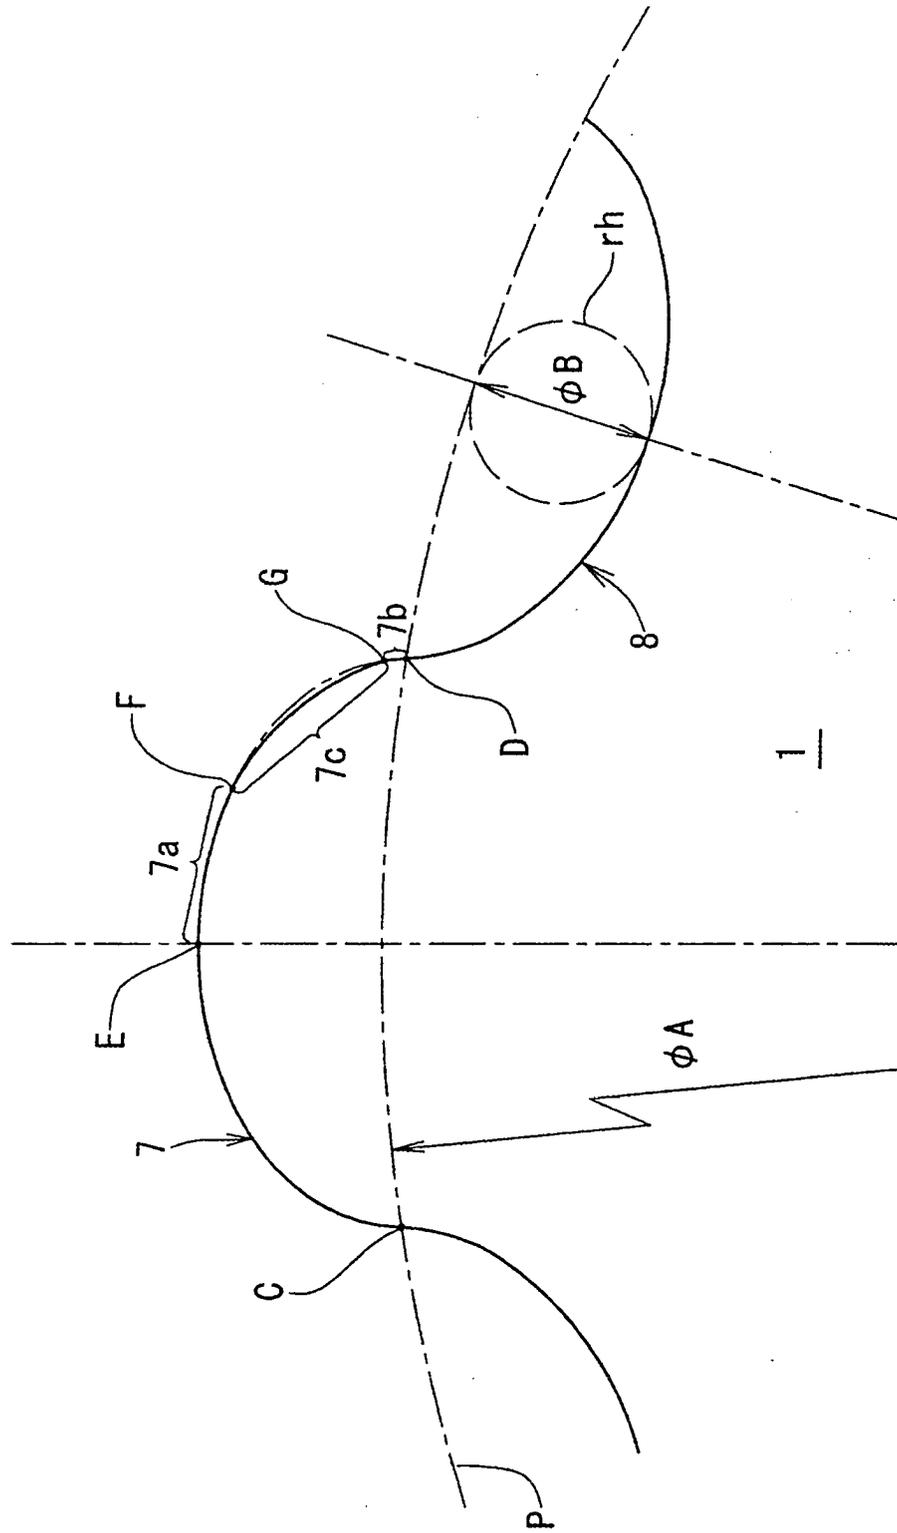


FIG. 13

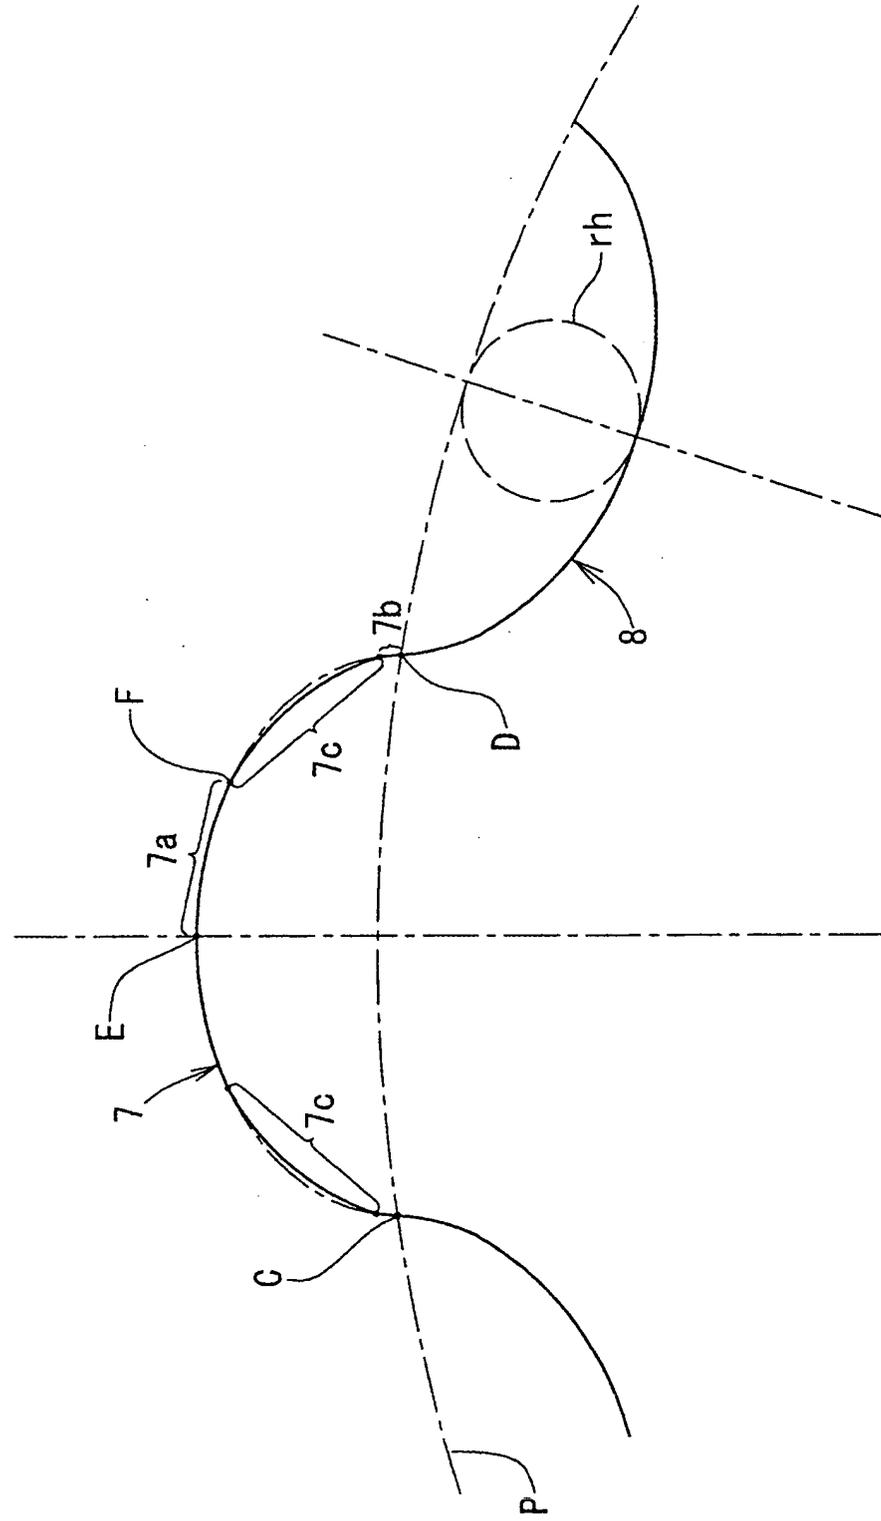


FIG. 14

FIG. 15B

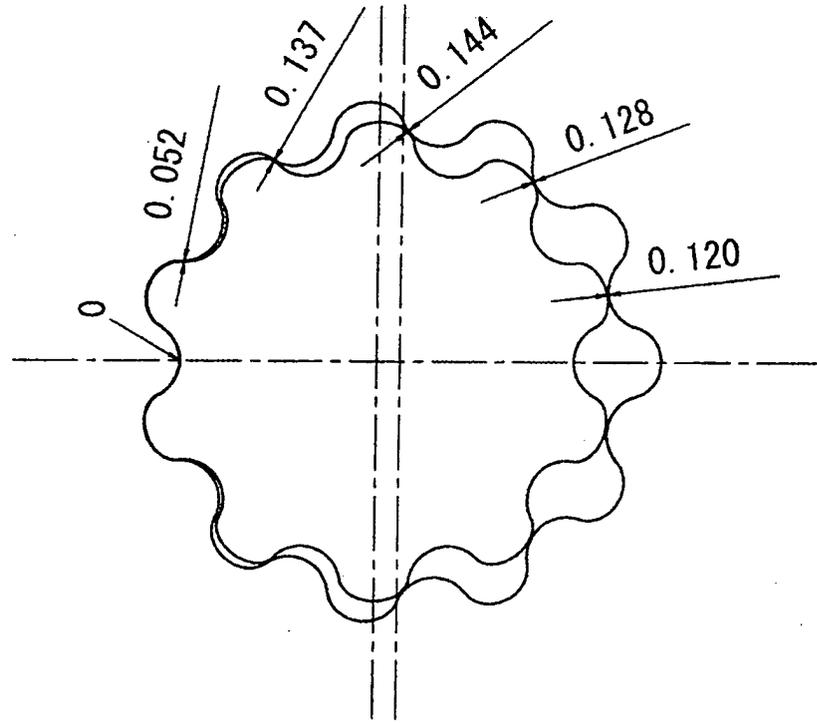


FIG. 15A

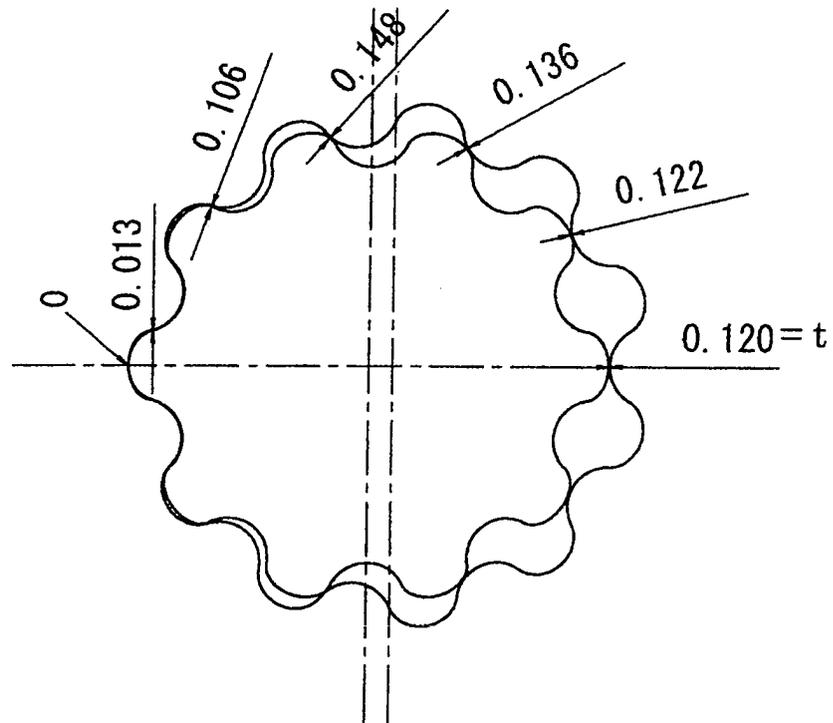


FIG. 16B


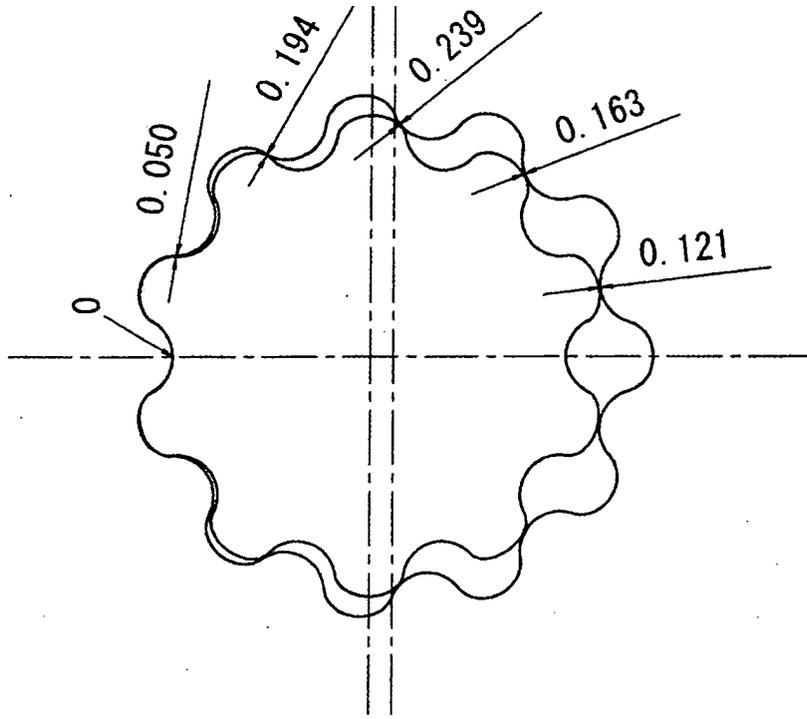


FIG. 16A



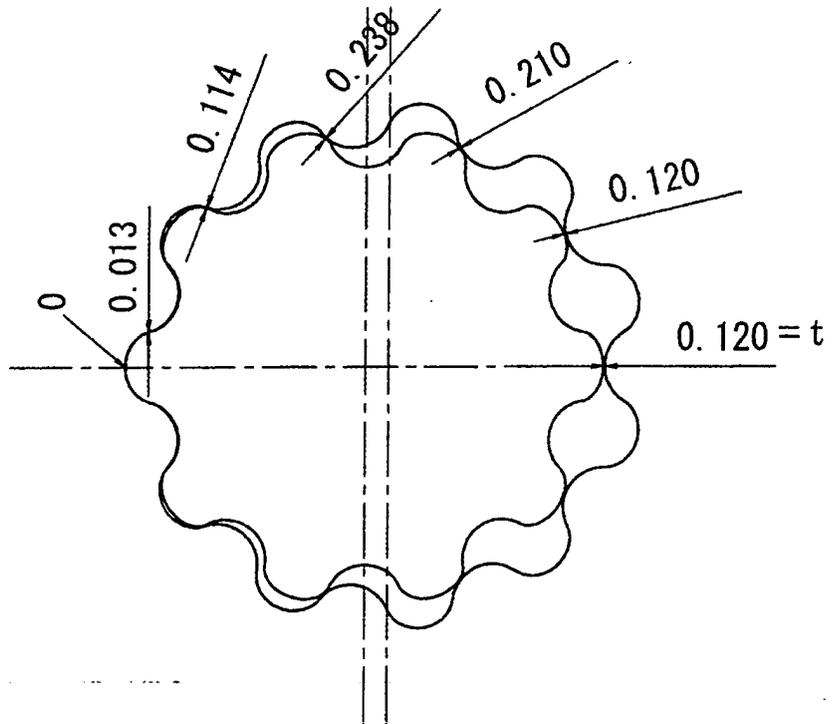

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	EP 0 785 360 A (MITSUBISHI MATERIALS CORP) 23 July 1997 (1997-07-23) * figures 1,2,10 * * column 2, line 1 - line 9 * * column 3, line 49 - column 4, line 21 * * column 7, line 30 - line 56 * -----	1,2,4,5	F04C2/08 F04C2/10
A	EP 1 016 784 A (SUMITOMO ELECTRIC INDUSTRIES) 5 July 2000 (2000-07-05) * figures 1-4 * * column 3, line 55 - column 5, line 18 * -----	1,2	
A	PATENT ABSTRACTS OF JAPAN vol. 0110, no. 48 (M-561), 13 February 1987 (1987-02-13) -& JP 61 210281 A (YAMADA SEISAKUSHO:KK), 18 September 1986 (1986-09-18) * abstract * * figure 2 * -----	1,4	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			F04C F01C
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
The Hague		1 July 2004	Lequeux, F
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document	

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 25 1636

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

01-07-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0785360	A	23-07-1997	DE 69702776 D1	21-09-2000
			DE 69702776 T2	01-02-2001
			EP 0785360 A1	23-07-1997
			JP 3293507 B2	17-06-2002
			JP 9256965 A	30-09-1997
			US 5876193 A	02-03-1999

EP 1016784	A	05-07-2000	AT 247778 T	15-09-2003
			DE 69817378 D1	25-09-2003
			DE 69817378 T2	09-06-2004
			EP 1016784 A1	05-07-2000
			US 6244843 B1	12-06-2001
			DE 29824515 U1	10-05-2001
			ES 2205538 T3	01-05-2004
			WO 9911935 A1	11-03-1999
			JP 2003056473 A	26-02-2003

JP 61210281	A	18-09-1986	NONE	

EPO FORM P0659

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82