



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
29.09.2004 Bulletin 2004/40

(51) Int Cl.7: **F28F 9/26**

(21) Application number: **04075909.4**

(22) Date of filing: **22.03.2004**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR
 Designated Extension States:
AL HR LT LV MK

(74) Representative: **van Westenbrugge, Andries**
Nederlandsch Octrooibureau,
Scheveningseweg 82,
Postbus 29720
2502 LS Den Haag (NL)

(30) Priority: **24.03.2003 NL 1022998**

Remarks:

In accordance with the last part of Article 14 (2) EPC the applicant has filed a text with which it is intended to bring the translation into conformity with the original text of the application.

(71) Applicant: **Finhoeks B.V.**
3743 DC Baarn (NL)

(72) Inventor: **Hoeks, Wilhelmus A. J. M.**
3743 DC Baarn (NL)

(54) **Mobile heat exchanger**

(57) The invention relates to a mobile heat exchanger (1), comprising at least one assembly (2) of at least two generally rigid pipes (3) for transport of a first medium, and a coupling element (4) which interconnects the two pipes (3), and feed means and discharge means (5) connected to the assembly (2) for feeding and dis-

charging of the first medium, respectively, the first medium being adapted for heating or cooling of a second medium surrounding the assembly (2). The invention also relates to an assembly (2) for use in such a mobile heat exchanger (1). The invention furthermore relates to a system for providing a skating rink having such a mobile heat exchanger (1).

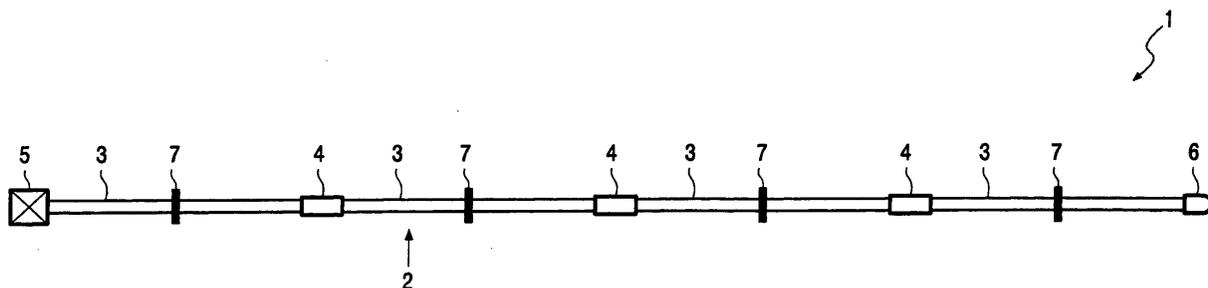


FIG. 1

Description

[0001] The invention relates to a mobile heat exchanger, comprising: at least one assembly of at least two generally rigid pipes for transport of a first medium, and a coupling element which interconnects the two pipes, and feed means and discharge means connected to the assembly for feeding and discharging of the first medium, respectively, the first medium being adapted for heating or cooling of a second medium surrounding the assembly. The invention also relates to an assembly for use in such a mobile heat exchanger. De invention furthermore relates to a system for providing a skating rink having such a mobile heat exchanger.

[0002] The mobile heat exchanger mentioned in the preamble is known in itself, and is used in systems for forming a skating rink. By transporting a coolant through the pipes of the heat exchanger, water surrounding the assembly is frozen while the actual skating surface is formed. De skating rinks can be constructed at diverse locations and under varying conditions but are generally only temporarily installed at one location. The known heat exchanger has as an important disadvantage that upon installation and dismantling, the components making up the heat exchanger have to separately assembled or disengaged, respectively. This makes the construction and dismantling of a system provided with such a known heat exchanger relatively laborious and therefore relatively time-consuming and expensive.

[0003] It is an object of the present invention to provide an improved heat exchanger, avoiding the above-mentioned disadvantages.

[0004] Hereto a heat exchanger is provided according to the invention of the type mentioned in the pre-amble, characterised in that the coupling element can pivot, the pipes being connected in such a way to the pivoting coupling element that the pipes can be hinged with respect to one another between an active operating position in which the assembly has a relatively extended configuration and a non-operative transport position wherein the assembly has a relatively compact configuration. By executing the assembly in a pivoting manner between an operative position and a transport or storage position the relatively complex actions relating to assembly and dismantling, discussed above, are no longer required. A change in the configuration only of the assembly suffices for changing the transport configuration into the operative configuration, and vice versa. Assembling and dismantling of the mobile heat exchanger in accordance with the present invention, therefore is relatively simple in view of which the heat exchanger can be assembled and dismantled relatively rapidly and cheaply. After use, the heat exchanger can be transformed into its relatively compact transport position and can be transported as a single compact unit. In the compact transport position, the assembly can be doubled over or folded in a zig-zag manner in case the assembly comprises more than two pipes. It is however as possible to in fact roll up the as-

sembly around a rotating frame, such as a reel.

[0005] In a preferred embodiment, the coupling element is at least partly formed by a tubular member. Particularly in case the pipes are tubular as well, use of a tubular body is advantageous. In that case the tubular body is congruent with the pipes such that the coupling element is not, or barely, provided with projecting parts, whereas the throughflow of the first medium through the assembly is not, or at least hardly, restricted. In this manner a relatively smooth assembly is provided which can be transformed easily between an operative position and a transport position.

[0006] In another preferred embodiment the joint member is of at least partially elastic, or at any rate flexible, construction. By making the joint member flexible it is relatively easy to transform the extended configuration of the assembly into the compact configuration of the assembly and vice versa. In a particular preferred embodiment, the joint member is made of rubber, in particular ethylene propylene diene monomer (EPDM). EPDM is a synthetic rubber that usually is very suitable for use as a joint member since EPDM is relatively strong, durable and permanently elastic. Moreover, EPDM can be manipulated at relatively low temperatures (down to about -40 °C). In addition, EPDM has a relatively high chemical resistance and a relatively high elongation at break of approximately 400 %.

[0007] Preferably, the longitudinal pipes are connected to the joint member some distance apart. Positioning the pipes some distance apart and connecting to the joint member in this way usually makes it easier for the assembly to swing, since there will be no friction between the successive longitudinal pipes during swinging of the assembly. In a particular preferred embodiment, an external diameter of each pipe is smaller than half of the spacing between the pipes. By allowing the spacing between the pipes to be at least twice the external diameter, the extent to which the assembly can be swung will be made even more flexible. Moreover, in this way it will be possible in a relatively simple manner to fold up the assembly completely into the relatively compact transport position.

[0008] Preferably, the joint member is provided with at least one mechanical joint. The mechanical joint can be of very diverse types. Preferably, the joint member is also provided with locking means for locking the joint in the use position and/or in the transport position. The joint member is also preferably provided with a valve closure or other similar closure so that when the pipes are swung with respect to one another the first medium is retained in the pipes concerned. In this way loss of the first medium contained in the pipes can be prevented or at least counteracted.

[0009] In a preferred embodiment the assembly is provided with a number n of pipes and a number $(n-1)$ of joint members for connecting the n pipes to one another, where n is greater than two. The assembly is thus not restricted to two pipes but can be provided with sev-

eral pipes, as a result of which the assembly can acquire a relatively long length.

[0010] In another preferred embodiment, the heat exchanger comprises a number of interconnected assemblies which are oriented at least generally in a parallel orientation with respect to one another. In this manner a relatively wide unit of assemblies can be achieved whereby relatively large heat exchanging surfaces can be provided. In a particular embodiment, the assemblies are held a distance apart by at least one spacer. In this way an ordered unit of the assemblies is obtained with which the surface area/volume ratio has at least essentially already been determined in advance. In one embodiment, the spacer and the joint member are joined to one another and in particular are integrated with one another.

[0011] Preferably, the pipes are made of metal, in particular aluminium. Metal, in particular aluminium, has the property of conducting heat particularly well. Thus, by using pipes made of aluminium in combination with joint members that have the same thermal conductivity, such as aluminium joint members, uniform heat exchange can take place between the first medium and the second medium. Moreover, pipes made of metal are relatively durable, strong and inexpensive. In addition to the abovementioned advantages, aluminium also has the advantage that this material has a relatively low density, as a result of which the relatively lightweight assembly can be transformed relatively easily from the use position into the transport position and vice versa.

[0012] In another preferred embodiment, the pipes are connected in a medium-tight manner by the coupling element both in the operative configuration and the transport configuration. As was described above, such a medium tight connection can be achieved by use of a flexible, in particular elastic coupling element.

[0013] The invention furthermore relates to an assembly for use in such a mobile heat exchanger.

The invention relates as well to a system for a system for creating an ice rink comprising such a mobile heat exchanger and a cooling unit connected to the assembly for cooling the first medium. The cooling unit can be of very diverse types, but preferably must make efficient use of space, be relatively quiet and have a low energy consumption. Preferably the system comprises a housing for water that at least partly surrounds the system. The housing will generally be constructed from a substructure below the assembly and upstanding walls connected to the substructure, the housing being impermeable for water irrespective of its temperature.

[0014] In a preferred embodiment the first medium is glycol. Glycol is usually very suitable as a coolant and is cooled by the cooling unit to a temperature of between approximately -12°C to approximately -25°C before the (liquid) glycol is fed through the assembly.

[0015] In another preferred embodiment, the discharge means are coupled to the feed means for recirculation of the first medium. In this way a fully closed

system is provided which is generally advantageous.

[0016] The invention will be explained with reference to non-limiting illustrative embodiments shown in the following figures. In the figures:

Fig. 1 shows a side view of part of a heat exchanger according to the invention in an extended use position,

Fig. 2 shows a side view of the heat exchanger according to Fig. 1 in a compact transport position,

Fig. 3 shows a side view of the heat exchanger according to Fig. 1 in another compact transport position,

Fig. 4 shows a side view of part of an assembly according to the invention,

Fig. 5 shows a side view of part of another assembly according to the invention, and

Fig. 6 shows a perspective view of a system for creating an ice rink in accordance with the invention;

[0017] Fig. 1 shows a side view of part of heat exchanger 1 according to the invention in an extended use position. The part shown comprises several assemblies 2 of pipes 3 for a first medium that are connected together parallel to one another in the extension of one another by means of separate flexible hoses 4. Now only a single assembly 2 is shown. The assemblies 2 are coupled to one another by means of a collector 5 at one end and several transverse connectors 6 at the other end. The assemblies 2 are held a constant distance apart by means of several spacers 7 fitted around the assemblies 2. The heat exchanger 1, or at least part thereof, is now shown in a position ready for use, in which the first medium can be fed through the assemblies 2 and with which the surface area/volume ratio of the assemblies 2 is maximised.

[0018] Fig. 2 shows a side view of the heat exchanger 1 according to Fig. 1 in a compact transport position. After the heat exchanger 1 has been used it no longer has to be (completely) disassembled, in contrast to the heat exchangers known from the state of the art. The flexible hoses 4 connecting pipes 3 now act as an element that allows swinging, as a result of which disassembly of the pipes 3 is no longer necessary because the extended position according to Fig. 1 can be transformed into a relatively compact transport position. The pipes 3 of the assemblies 2 are folded up in a zig-zag manner, as a result of which a compact construction is produced that is ready for storage and/or transport. With this arrangement the assemblies 2 can remain connected to one another by the collector 5 and the transverse connectors 6.

[0019] Fig. 3 shows a side view of part of a heat exchanger 1 according to Fig. 1 in another compact transport position. In contrast to the position shown in Fig. 2, the assemblies 2 have now been uncoupled from one another by removing the collector 5, the transverse connectors 6 and the spacers 7. Each assembly 2 is now

wound up around a rotary beam 7', which beam 7' is supported by a supporting structure 8. As shown in the present illustrative embodiment, if each assembly 2 were to comprise several pipes 3 it would be conceivable to fit the assembly 2 in a helical manner around the rotary beam 7'. The length of each pipe 3 can now essentially correspond to the length of each of the sides 9 making up the beam 7', so that the flexible hoses 4 enclose three of the ribs 10 making up the beam 7'.

[0020] Fig. 4 shows a side view of part of an assembly 11 according to the invention. The assembly 11 comprises two pipes 12 for a fluid, in particular a liquid. The pipes 12 are positioned some distance apart but are connected to one another by a flexible hose 13. The hose 13 is preferably made of rubber, in particular of EPDM. The advantages of this synthetic rubber have already been described in detail above. An interior side of the hose 13 is stretched onto an external side of each of the pipes 12 so that it grips. In order to improve the fixing of the hose 13 to the pipes, (conventional) hose clips 14 can be fitted at either end of the hose 13. An adhesive can optionally additionally be applied between the hose 13 and the pipes 12. It should be clear that the pipes 12 can swing with respect to one another, as a result of which the assembly can be positioned in an extended position ready for use and a folded-up transport position.

[0021] Fig. 5 shows a side view of part of another assembly 15 according to the invention. The assembly 15 now comprises two pipes 16 that are fixed to one another by means of a mechanical joint 17. The joint 17 comprises two joint parts 18 that can swing with respect to one another and locking means 19, joined to the joint parts 18, for locking the hinge 17 in an operational use position. The pipes 16 are connected to the hinge 17 by means of a screw joint 20 (shown in broken lines). The joint 17 can be provided with a valve mechanism, which is not shown, to prevent a fluid present in the pipes 16 leaking out. In addition, each joint part 18 can be provided with a seal surrounding the pipes 16 in order to counteract fluid leaks. It should be clear that the pipes 16 can swing with respect to one another and thus can be configured in a use position as shown or in a compact, folded-up transport position.

[0022] Fig. 6 shows a perspective view of a system 21 for creating an ice rink in accordance with the invention. The system comprises a housing 22 for several assemblies 23 of pipes 24 and coupling elements 25 allowing swinging coupled to one another. Water is contained in the housing 22 (not shown). The assemblies 23 are kept a distance apart by a spacer 26. The construction and mode of operation of the assemblies 23 has already been discussed in more detail above. The pipes 24 preferably have a length of approximately 5 metres and an external diameter of approximately 19 millimetres. The distance between the pipes 24 is approximately 5 centimetres. At one end the assemblies 23 are coupled to one another by several transverse connectors 27 and at the other end are connected to

two collectors 28. Glycol, which has been cooled to approximately -12 °C by a cooling unit 30, can be fed through the assemblies 23 with the aid of a pump 29 connected to one collector 28, as a result of which water contained in the housing 22 and surrounding the assemblies 23 will freeze with the formation of the ice rink. Preferably, the pipes 24 are positioned (some) distance away from the housing 22, so that the water can completely surround the pipes 24 on all sides. The housing 22 has a medium-tight substructure 30 for containing the water and a raised border 31, screening the ice rink, joined to substructure 30. After use of the ice rink, the assemblies 23 can be transformed easily and rapidly into a relatively compact transport position, after which the folded-up unit of assemblies 23 can then be transported. As a result of the use of the system 21 according to the invention, labour-intensive and time-consuming disassembly of separate components of the system is therefore no longer necessary.

Claims

1. Mobile heat exchanger, comprising:

- at least one assembly of
 - at least two generally rigid pipes for transport of a first medium, and
 - a coupling element which interconnects the two pipes, and
- feed means and discharge means connected to the assembly for feeding and discharging of the first medium, respectively, the first medium being adapted for heating or cooling of a second medium surrounding the assembly, **characterised in that**, the coupling element can pivot, the pipes being connected in such a way to the pivoting coupling element that the pipes can be hinged with respect to one another between an active operating position in which the assembly has a relatively extended configuration and a non-operative transport position wherein the assembly has a relatively compact configuration.

2. Heat exchanger according to claim 1, **characterised in that**, the coupling element is at least partly formed by a tubular body.

3. Heat exchanger according to any of the preceding claims **characterised in that** the coupling element is at least partly elastic.

4. Heat exchanger according to claim 3, **characterised in that** coupling element is made of rubber, in particular ethylene propylene diene monomer (EP-

DM).

terised in that the discharge means are coupled to the feed means for recirculation of the first medium.

5. Heat exchanger in accordance with any of the preceding claims, **characterised in that** the pipes are connected at a distance from each other to the coupling element. 5
6. Heat exchanger according to claim 1, **characterised in that**, the outer diameter of each pipe is smaller than half the mutual distance between the pipes. 10
7. Heat exchanger according to any of the preceding claims, **characterised in that** the coupling element is provide with at least one mechanical hinge. 15
8. Heat exchanger according to any of the preceding claims, cit the assembly is provided with n pipes and a number of (n-1) coupling elements for mutual connection of the n pipes, n being larger than two. 20
9. Heat exchanger according to any of the preceding claims, cit, the heat exchanger is provided with a plurality of assemblies, the assemblies being oriented one with respect to the other, in a substantially parallel manner. 25
10. Heat exchanger according to claim 9, **characterised in that** the assemblies are maintained at a mutual distance via at least one spacer attached to the assemblies. 30
11. Heat exchanger according to any of the preceding claims, **characterised in that** the piping is made of metal, in particular aluminium. 35
12. Heat exchanger according to any of the preceding claims, **characterised in that** the piping is coupled in an at least predominantly fluid tight manner via the coupling element both in the in operative configuration as in the transport configuration. 40
13. Assembly for use in a mobile heat exchanger according to one of claims 1-12. 45
14. System for providing a skating rink comprising a mobile heat exchanger according to claims 1-12, further comprising a cooling unit connected to the assembly for cooling the first medium. 50
15. System according to claim 14, cit, the system also comprises a housing at least partly surrounding the assembly for containing water. 55
16. System according to claim 14 or 15, **characterised in that**, the first medium is formed by glycol. 55
17. System according to any of claims 14-16, **charac-**

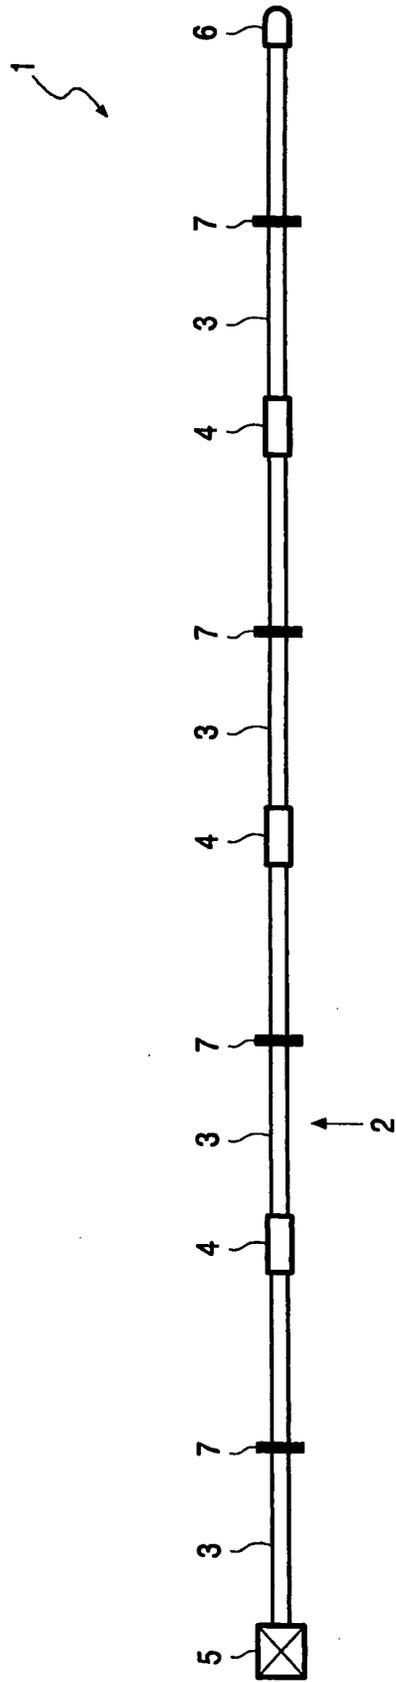


FIG. 1

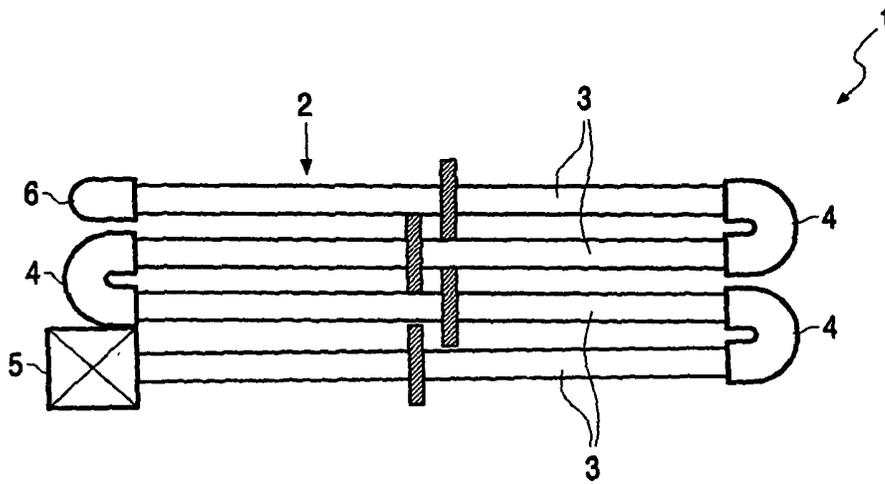


FIG. 2

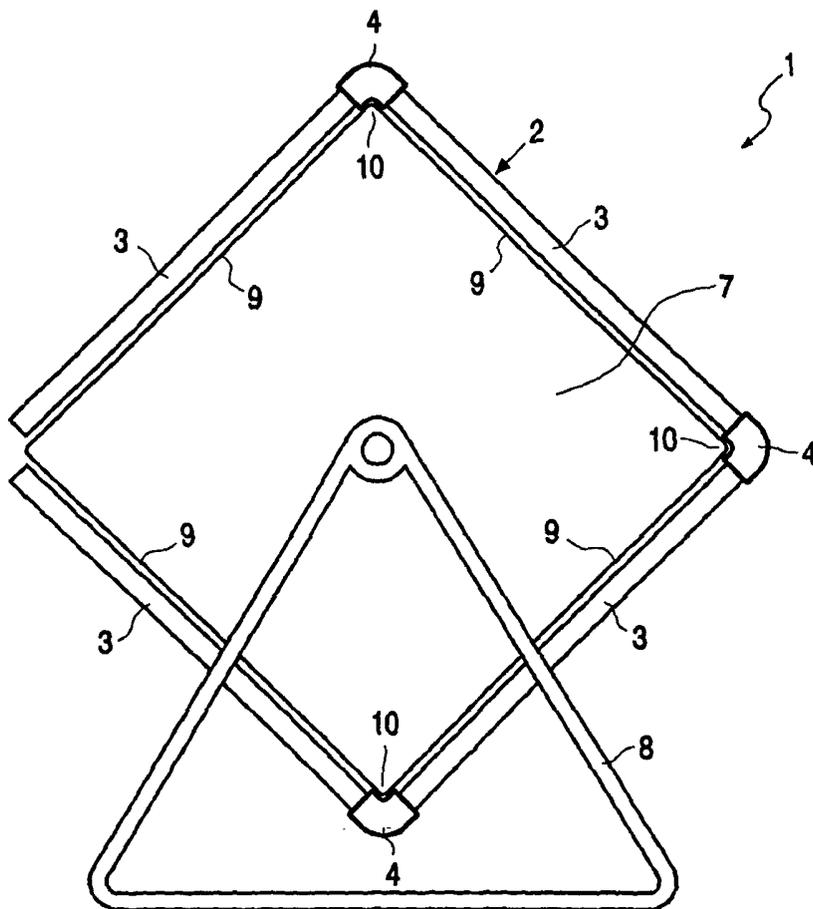


FIG. 3

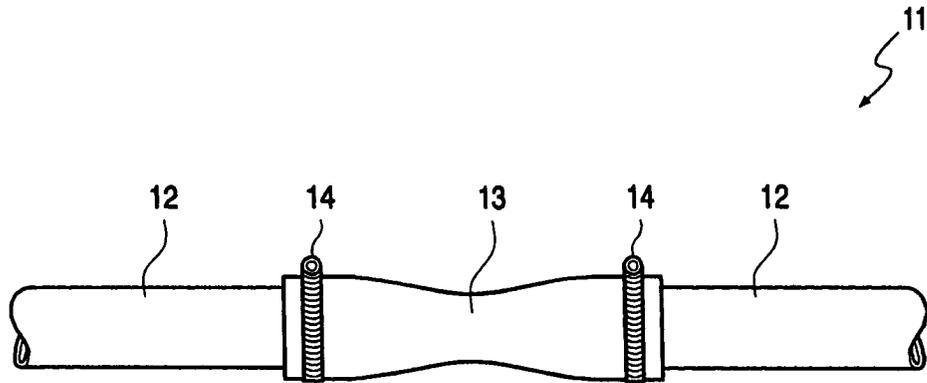


FIG. 4

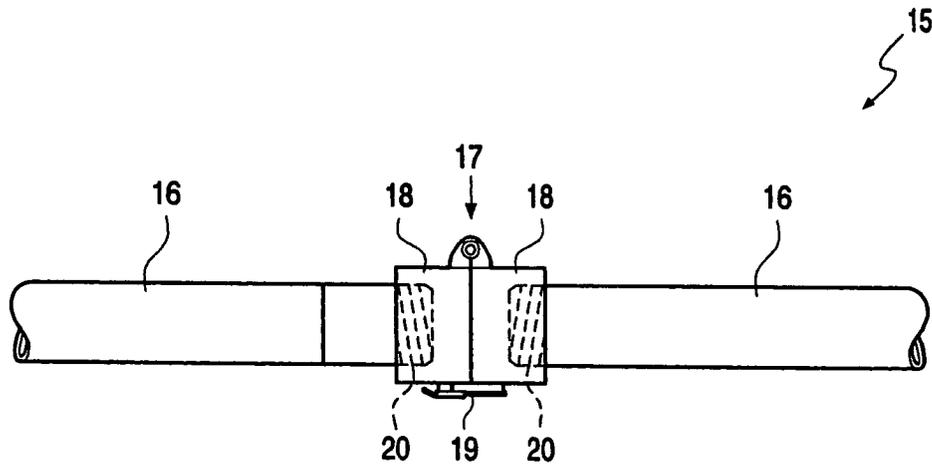
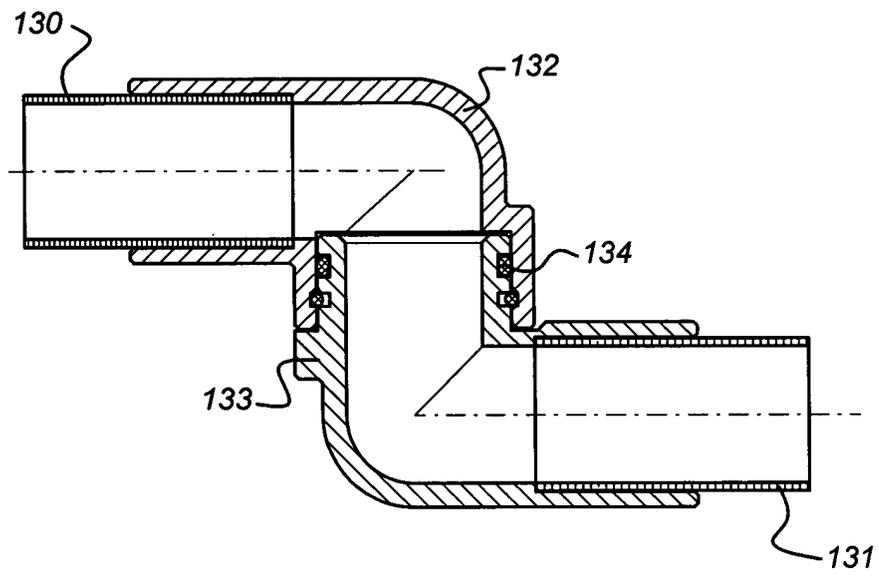


FIG. 5

Fig 6



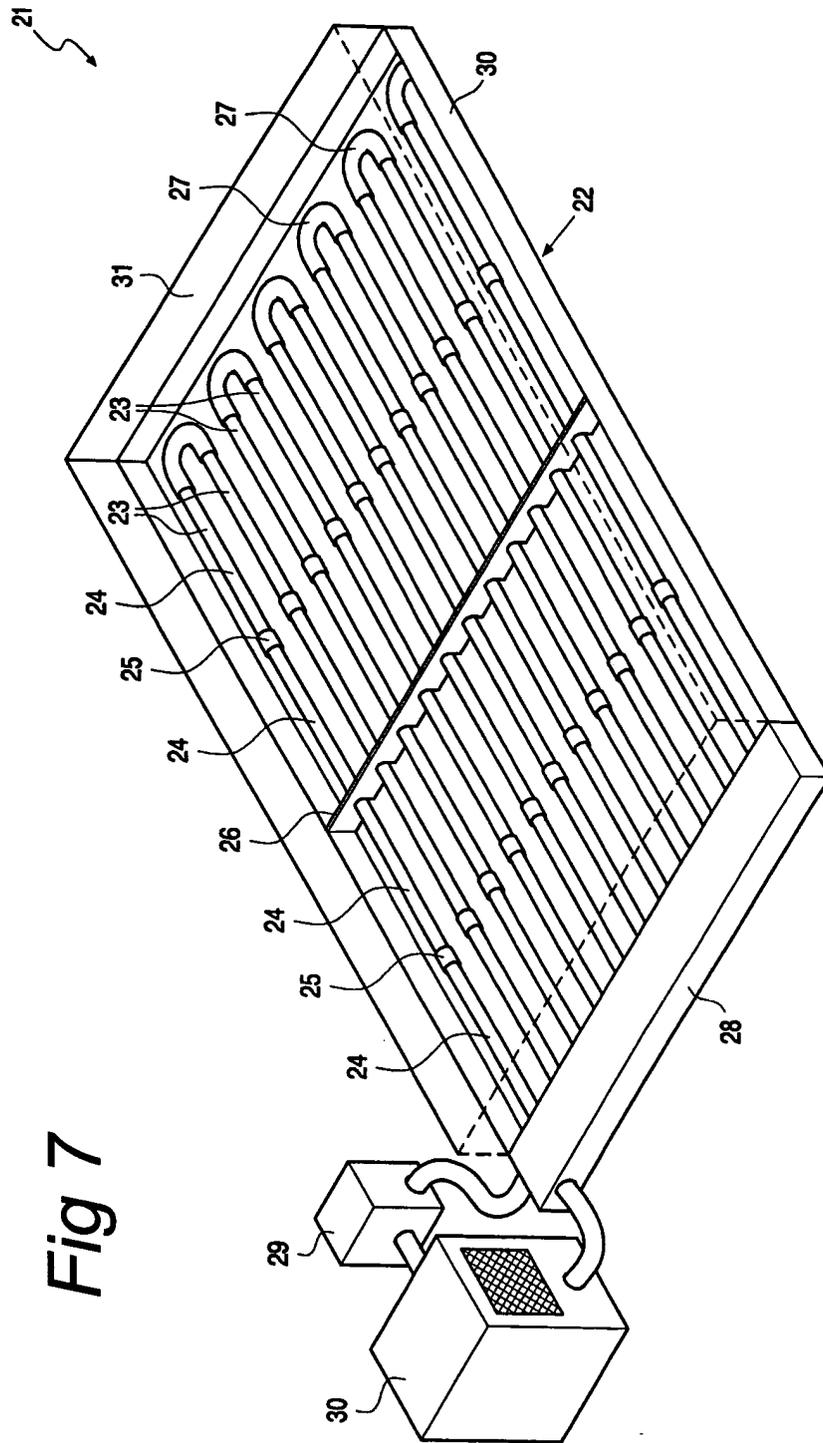
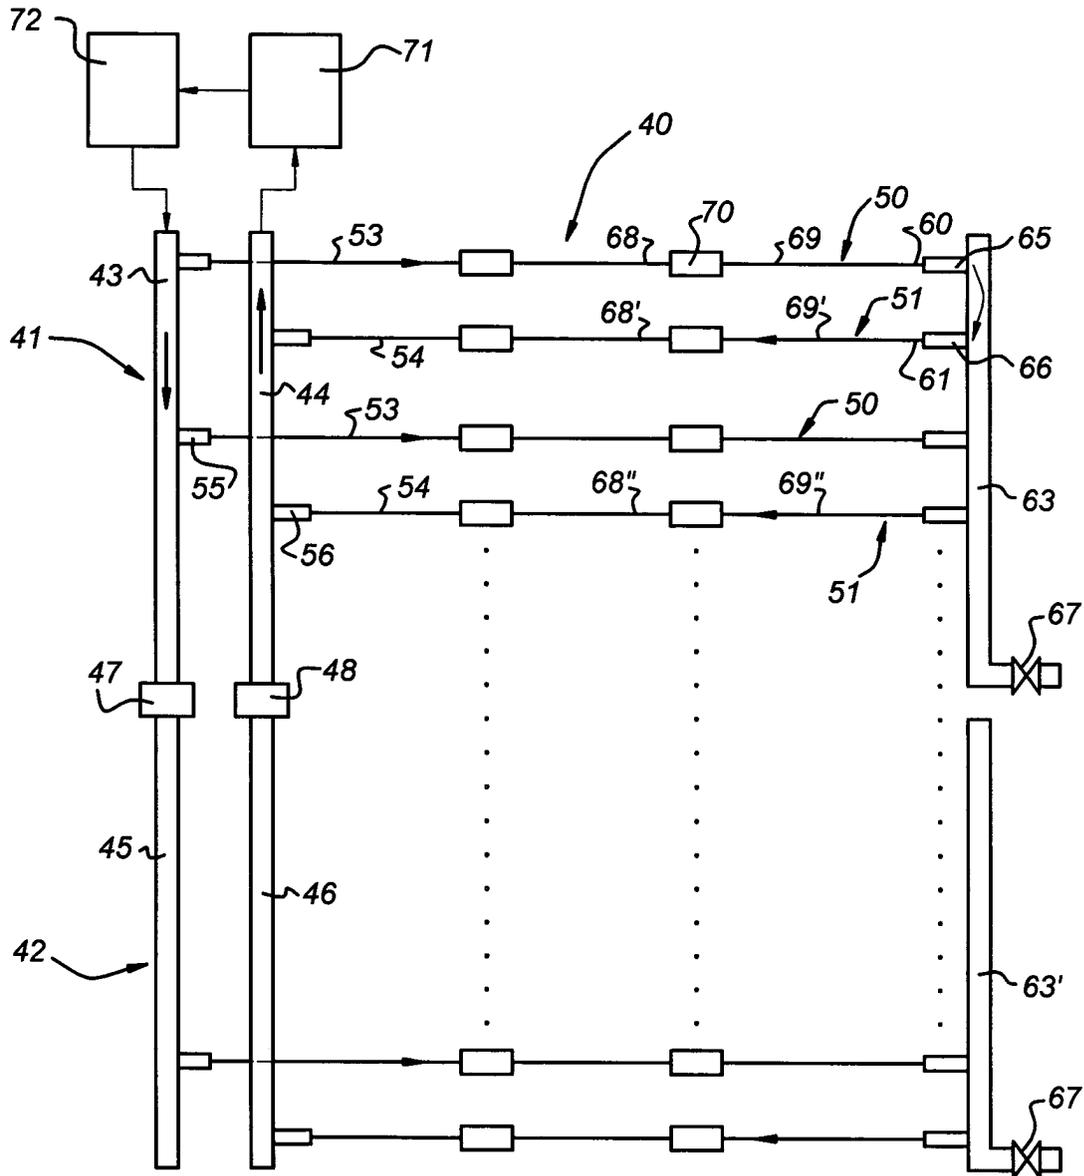


Fig 8



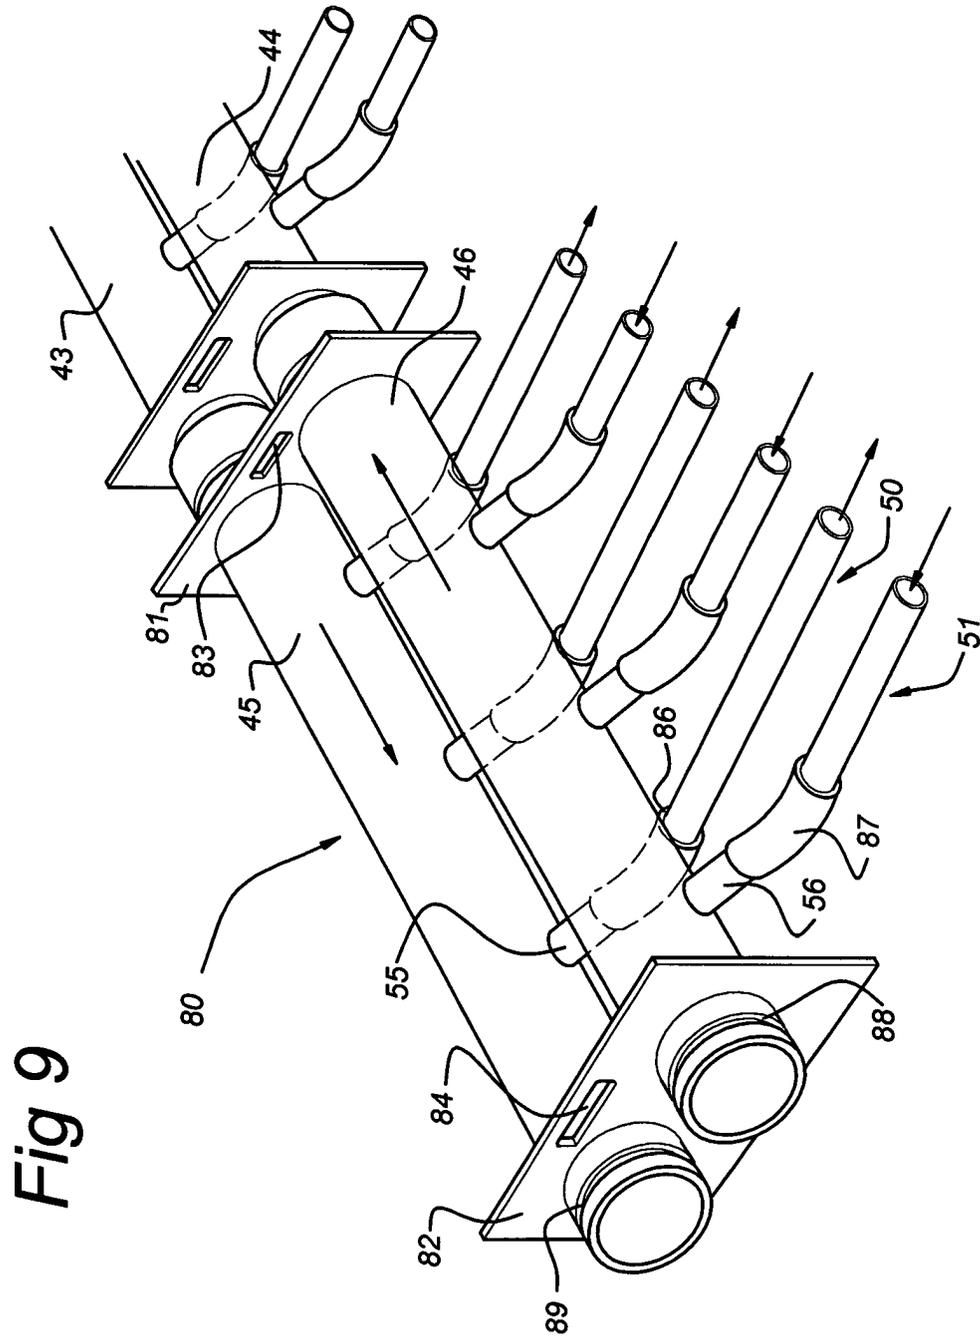


Fig 9

Fig 10

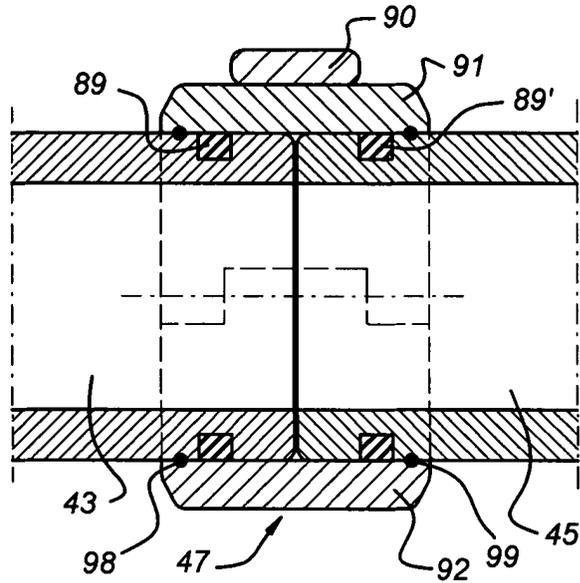


Fig 11

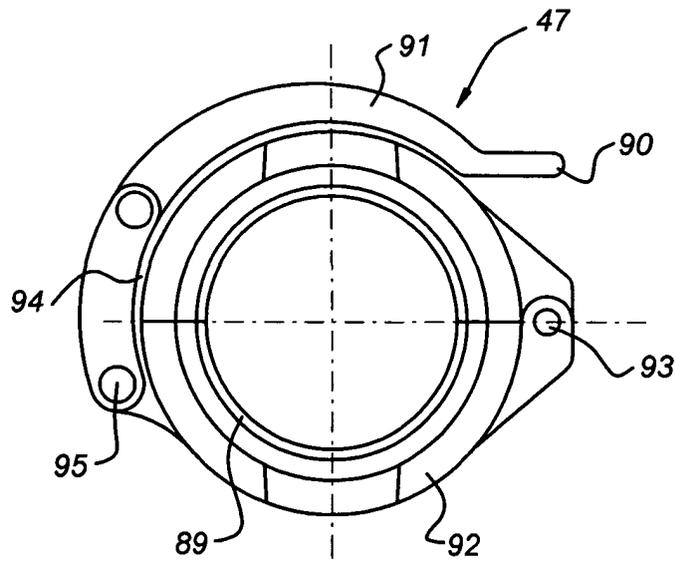


Fig 12

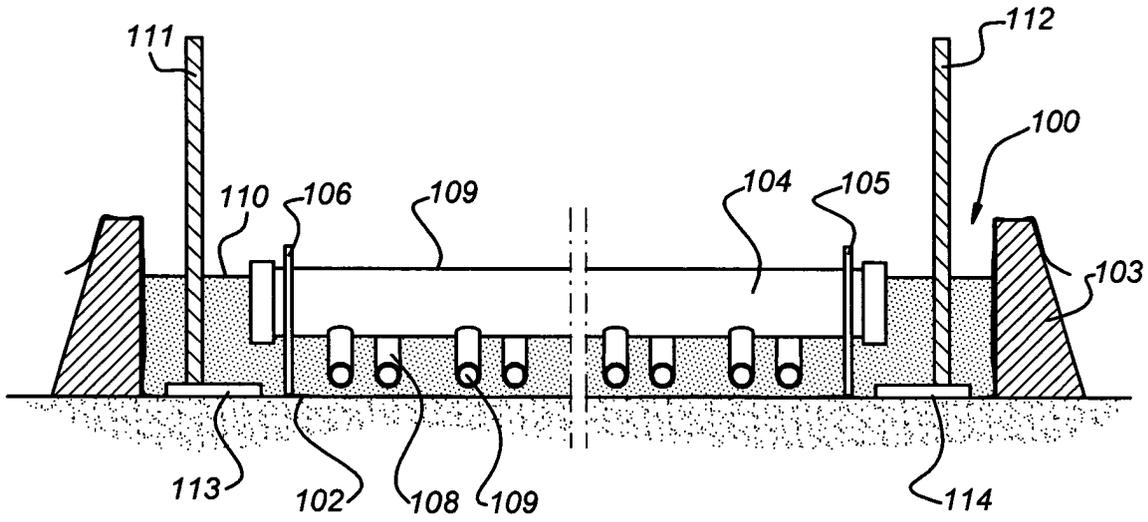


Fig 13

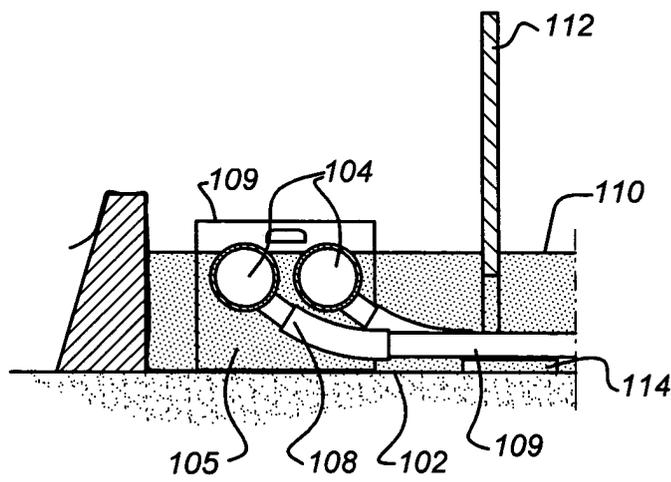


Fig 14a


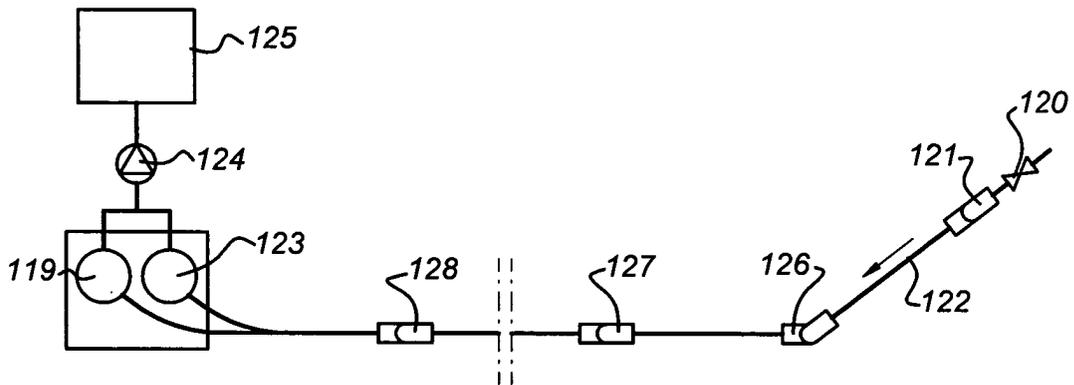


Fig 14b



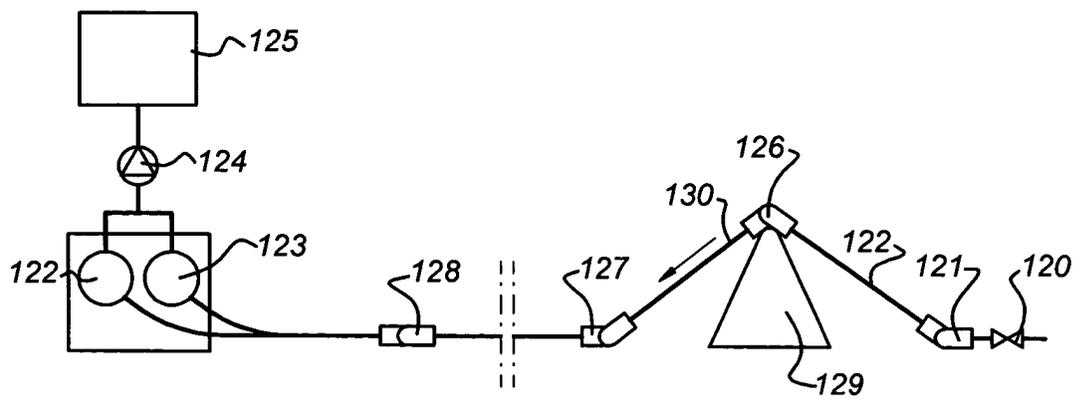

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 07 5909

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	FR 2 802 292 A (FIGAS MARIANA MARIA CARMEN) 15 June 2001 (2001-06-15)	8	F28F9/26
A	* abstract; figures * * page 8, line 20 - line 23 * -----	1-3,10, 15	
X	US 6 253 558 B1 (RZECHULA MICHAEL ET AL) 3 July 2001 (2001-07-03)	8	
A	* abstract; figures * * column 6, line 47 - line 59 * -----		
A	FR 2 677 262 A (CAZORLA JEAN CLAUDE) 11 December 1992 (1992-12-11)	1,7,8, 10,15	
A	* the whole document * -----		
A	DATABASE WPI Section Ch, Week 199243 Derwent Publications Ltd., London, GB; Class H03, AN 1992-355493 XP002260014 -& SU 1 664 693 A (BELO KIROV TECHN INST) 23 July 1991 (1991-07-23)		TECHNICAL FIELDS SEARCHED (Int.Cl.7)
	* abstract; figures * -----		F28F F25C
A	US 6 334 439 B1 (LENGAUER PHILIP E ET AL) 1 January 2002 (2002-01-01)		
	* column 3, line 21 - column 6, line 9; figures * -----		
A	GB 2 051 340 A (MICKEE F B) 14 January 1981 (1981-01-14)		
	* abstract; figures * -----		
A	FR 2 502 896 A (SOLENA) 8 October 1982 (1982-10-08)		
	* page 2, last paragraph - page 4; figures * -----		
	-/--		
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
The Hague		19 July 2004	Van Dooren, M
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document	

EPO FORM 1503 03/02 (P04CO1)



DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	GB 252 516 A (ROBINSON ERNEST) 3 June 1926 (1926-06-03) * the whole document *		
A	EP 1 031 809 A (MACCHINE CURVATUBI CRIPPA AGOS) 30 August 2000 (2000-08-30) * abstract; figures *		
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Place of search The Hague		Date of completion of the search 19 July 2004	Examiner Van Dooren, M
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/02 (P04001)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 04 07 5909

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

19-07-2004

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR 2802292 A	15-06-2001	FR 2802292 A1	15-06-2001
US 6253558 B1	03-07-2001	US 5970734 A CA 2216341 A1 CA 2329493 A1	26-10-1999 27-03-1998 27-03-1998
FR 2677262 A	11-12-1992	FR 2677262 A1	11-12-1992
SU 1664693 A	23-07-1991	SU 1664693 A1	23-07-1991
US 6334439 B1	01-01-2002	CA 2303626 A1	11-12-2000
GB 2051340 A	14-01-1981	NONE	
FR 2502896 A	08-10-1982	FR 2502896 A1 BE 892774 A1 IT 1205454 B NL 8201477 A PT 74717 A ,B	08-10-1982 02-08-1982 23-03-1989 01-11-1982 01-05-1982
GB 252516 A	03-06-1926	NONE	
EP 1031809 A	30-08-2000	EP 1031809 A1	30-08-2000

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82