



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 479 628 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**

Note: Bibliography reflects the latest situation

- (15) Correction information:
Corrected version no 1 (W1 A2)
Corrected Kind of Document code A2
Previously published as A1
- (51) Int Cl.7: **B65H 20/22**, B65H 23/188,
B65H 35/06
- (48) Corrigendum issued on:
26.01.2005 Bulletin 2005/04
- (43) Date of publication:
24.11.2004 Bulletin 2004/48
- (21) Application number: **04011636.0**
- (22) Date of filing: **17.05.2004**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR
Designated Extension States:
AL HR LT LV MK

(30) Priority: **20.05.2003 IT TO20030371**

(71) Applicant: **TECNAU S.r.l.**
10090 Ivrea (TO) (IT)


(72) Inventors:
• **De Marco, Giuliano**
10015 Ivrea (TO) (IT)

- **Aprato, Armando**
10080 Lugnacco (TO) (IT)
- **Terrusi, Francesco**
20100 Milano (IT)
- **Massucco, Alberto**
10015 Ivrea (TO) (IT)

(74) Representative: **Nola, Eduardo**
c/o Ing. E. Nola & Associati,
Via C. Olivetti 7
10015 Ivrea (To) (IT)

(54) **Cutting equipment for continuous forms**

(57) A cutting equipment (34) for continuous forms (37) comprising an input moving device (53) for a continuous form, a loop forming device (54), a cutting feeding device (56) and a transversal cutting mechanism (58) for the form. The form (37) has side sprocket holes and the cutting feeding device (56) includes intermediate pin feed tractors (91, 92) interposed between the loop forming device (54) and the transversal cutting mechanism (58) and provided for cooperating with the sprocket holes of the section of form (37) to be cut. The loop forming device includes a loop sensor (78) and the input moving device (53) causes the form to be entered at a mean velocity depending on the velocity of the intermediate pin feed tractors (91, 92) and on the state of the loop sensor.

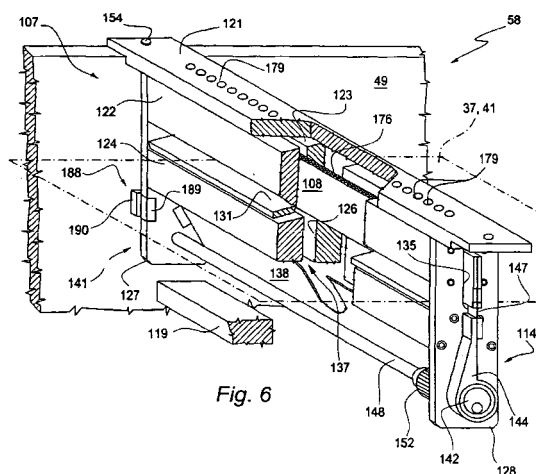

EP 1 479 628 A8