



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 491 451 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**

published in accordance with Art. 158(3) EPC

Note: Bibliography reflects the latest situation

(15) Correction information:

Corrected version no 1 (W1 A1)
INID code(s) 71

(51) Int Cl.7: **B65D 1/02**, B65D 25/38

(86) International application number:

PCT/JP2003/002386

(48) Corrigendum issued on:

27.04.2005 Bulletin 2005/17

(87) International publication number:

WO 2003/074372 (12.09.2003 Gazette 2003/37)

(43) Date of publication:

29.12.2004 Bulletin 2004/53

(21) Application number: **03743539.3**

(22) Date of filing: **28.02.2003**

(84) Designated Contracting States:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT SE SI SK TR

(72) Inventors:

- **Yamana, Shigeru**
Imizu-gun, Toyama 939-0362 (JP)
- **AICELLO CHEMICAL CO., LTD.**
Toyohashi-shi Aichi 441-1115 (JP)

(30) Priority: **05.03.2002 JP 2002058129**

15.07.2002 JP 2002205866

(74) Representative: **Johnstone, Helen Margaret et al**

Eric Potter Clarkson
Park View House
58 The Ropewalk
Nottingham NG1 5DD (GB)

(71) Applicants:


- **Yamana, Shigeru**
Imizu-gun, Toyama 939-0362 (JP)
- **AICELLO CHEMICAL CO., LTD.**
Toyohashi-shi Aichi 441-1115 (JP)

(54) **CONTAINER WITH INTAKE MECHANISM**

(57) An one-mouth container for storing liquid capable of preventing pulsating flow and controlling a discharging speed approximately at a constant independently of the amount of an internal liquid in the container when the internal liquid is discharged, in which a blow-molded portion (23) is formed on the container body side portion of a container mouth portion; a narrowed portion

(24), a discharge port (31) and an air channel (11) extending from a side wall of the blow-molded portion (23) to a space at an upper part of the container body are formed by narrowing down the narrowed portion; the air channel has such a length that air supplied through the air channel (11) is released directly in the internal liquid; and both a discharge port (31) and an air port (25) are formed at the narrowed portion (24).

FIG. 3

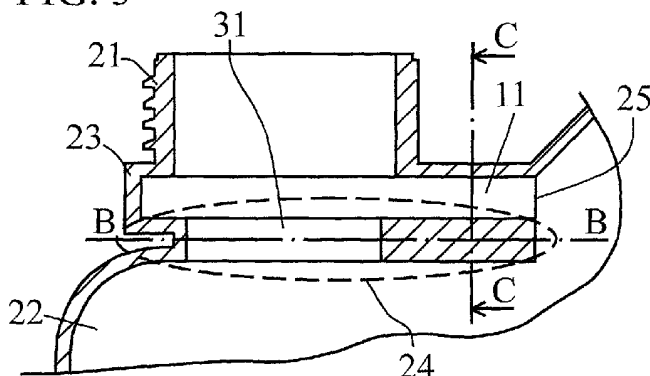

EP 1 491 451 A8