

(19)



(11)

EP 1 509 376 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
31.03.2010 Bulletin 2010/13

(51) Int Cl.:
B28B 23/00 (2006.01) B29C 67/24 (2006.01)

(21) Application number: **03723058.8**

(86) International application number:
PCT/IT2003/000225

(22) Date of filing: **11.04.2003**

(87) International publication number:
WO 2003/084725 (16.10.2003 Gazette 2003/42)

(54) **PROCESS FOR MANUFACTURING REINFORCED TILES OR PANELS OF AGGLOMERATED MATERIAL WITH A METALLIC PLATE AS WELL AS PRODUCT OBTAINED THROUGH SAID PROCESS**

VERFAHREN ZUR HERSTELLUNG VON VERSTÄRKTEN FLIESEN ODER PLATTEN AUS AGGLOMERIERTEM MATERIAL MIT EINER METALLISCHEN PLATTE SOWIE PRODUKT HERGESTELLT DURCH DIESES VERFAHREN

PROCEDE DE FABRICATIONS DE DALLES OU DE PANNEAUX RENFORCES EN UN MATERIAU D'AGGLOMERAT AVEC UNE PLAQUE METALLIQUE ET PRODUIT AINSI OBTENU

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**

(30) Priority: **11.04.2002 IT VR20020035**

(43) Date of publication of application:
02.03.2005 Bulletin 2005/09

(73) Proprietor: **Stone Italiana S.p.A.
37135 Verona (IT)**

(72) Inventor: **DALLA VALLE, Roberto
I-37012 Bussolengo (IT)**

(74) Representative: **Petraz, Gilberto Luigi et al
GLP S.r.l.
Piazzale Cavedalis 6/2
33100 Udine (IT)**

(56) References cited:
**BE-A- 404 120 GB-A- 873 283
IT-A- VR 940 068 US-A- 4 640 854
US-A- 4 833 845 US-A- 4 945 701
US-A- 5 057 355**

EP 1 509 376 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**TECHNICAL FIELD**

[0001] The present invention concerns a procedure for the production of sheets or tiles made from agglomerate material according to claim 1, in the case in question a material generally consisting of marble and/or quartz and/or sand and/or binding resins and/or granite-based mixtures, also comprising possible intrusions of various kinds, such as elements in metal, glass, wood, etc., these sheets or tiles being equipped with a metal, reinforcement plate positioned on the lower surface.

[0002] The invention also refers to sheets or tiles according to claim 5 manufactured according to this procedure.

[0003] The invention applies mainly to the industrial processing field of marble, stone, granite and the like.

BACKGROUND ART

[0004] Sheets or tiles in agglomerate material presenting an internal reinforcement structure are frequently used for laying so-called raised or floating floors in which the sheets or tiles are positioned on top of an appropriate wire grid which is raised with respect to the ground thus making it possible to obtain a hollow space with a predetermined height, allowing the laying of large quantities of electrical and/or hydraulic ducting and their easy maintenance or modification.

[0005] While on one hand raised or floating floors present considerable advantages, including those described above, on the other they involve a series of drawbacks which limit their construction and use or make them difficult.

[0006] A first drawback presented by raised or floating floors made from composite material is due to the fact that these floors are usually electrically ground-insulated.

[0007] This implies an unfavourable accumulation of electrostatic charges on objects which are present on or which move on this floor, an effect which is unacceptable for numerous precision electronic devices but which may be even more simply disadvantageous if these electrostatic discharges involve the people who walk across the floor.

[0008] A further limitation usually involved in the construction of raised or floating floors consists of the fact that the sheets must directly support the weight of considerable loads and must therefore be fairly thick in order to withstand maximum breaking loads in compliance with safety regulations.

[0009] All this inevitably means not only great structural and working limitations but also high costs and lengthy and difficult laying times for these floors.

[0010] The Italian document VR94A000068 describes a procedure according to the preamble of claim 1 for the production of sheets made from agglomerate material according to the preamble of claim 5, comprising a series

of processing stages, specifically:

- an initial stage consisting of the crushing of the various materials making up the agglomerate;
- a second stage consisting of the mixing of the crushed materials in order to obtain a product which is as homogeneous as possible, during which the binding resins are added;
- a third stage consisting of the pressing and compacting of the agglomerate during which the required shape is obtained and in which a wire or fibre mesh is buried, this being formed by a plurality of wires arranged according to a predetermined layout and whose ends are situated at the same level as or protrude beyond the lower surface of the sheet;
- a fourth stage in which the sheet is hardened at a predetermined temperature;
- a fifth stage in which at least one side of the sheet is smoothed and polished;
- a sixth stage in which the sheet is cut to size, chamfered, gauged and flared, followed by unloading of the end products.

[0011] A procedure such as the one described above makes it possible to obtain sheets made from agglomerate material, with precisely predetermined lengths, widths and thicknesses, and which is performed in a continuous process on a specially designed plant.

[0012] In spite of the presence of the wire-mesh consisting of wires as described above, the previously mentioned disadvantages are still present, particularly as regards the electrostatic charge.

[0013] In fact, during the hardening stage the resin envelops the metal surface of the wires forming the reinforcement mesh, creating an insulation film which does not permit effective discharge of the accumulated electrostatic charge.

[0014] Document US-A-4640854 discloses a composite plate for double floors comprising a pan-shaped wrapper for receiving therein a flowable and hardenable filler material. The wrapper comprises a plurality of downwardly extending projecting blocks containing the filler material.

[0015] Documents US-A-4833845 and US-A-5057355 disclose a metallic shallow pan serving for the production of a self-supporting composite plate, wherein the pan forms the outside wrapper for a filler with high compression resistance such as anhydrite.

DESCRIPTION OF THE INVENTION

[0016] The present invention aims to overcome the above-mentioned drawbacks and disadvantages, and to therefore provide a procedure which allows the production of sheets or tiles made from agglomerate material designed to be advantageously used in laying floating floors.

[0017] This is achieved by implementing the features

described in the main claim.

[0018] The dependent claims describe particularly advantageous forms of embodiment of the procedure according to the invention.

[0019] Finally, claim 5 describes a sheet or tile made from agglomerate material advantageously obtained by means of the procedure according to the invention.

[0020] According to a fundamental feature of the invention, during the pressing and compacting stage of the procedure for obtaining the sheets a metal plate is positioned on the lower surface of the sheet. The structure of this plate is the result of the processing of a laminar element, obtained for example by die forming, presenting an irregular structure for example with cavities and protruberances designed to accommodate the agglomerate mixture which, during the polymerisation and hardening stage, binds to the plate thus forming the base of the sheet or tile.

[0021] As far as the other stages of the procedure are concerned, there are no technically significant variations with respect to what is already known and the end result is a sheet reinforced with a metal plate which covers its lower surface to form a single object.

[0022] The use of this type of sheet makes it possible to resolve the problems mentioned above, typical of background art.

[0023] When using the sheets or tiles to lay raised or floating floors, the metal reinforcement plates can be connected to each other, thus allowing a continuous and precise ground-discharge of the electrostatic charge generated on the surface of the floor or of the objects in contact with the floor, preventing the discharges from damaging the equipment or affecting the people walking across the floor.

[0024] In fact thanks to the particular structure of the metal plate and its extensive surface, although the resin contained in the mixture forming the agglomerate binds to the plate during the polymerisation and hardening stage, also due to the presence of elements that make its surface irregular and allow an excellent adherence of the mixture, it does not lead to the formation of an insulating film as in the solutions known to background art.

DESCRIPTION OF THE DRAWINGS

[0025] Other features and advantages of the invention will become evident on reading the following description, given as a non-binding example, with the help of the enclosed drawings, in which:

- figure 1 a metal plate according to the present invention;
- figure 2 shows a perspective view from above, partially in cross-section, of a sheet or tile according to the present invention; and
- figure 3 shows a perspective view from below, of the base of the sheet or plate according to figure 2.

DESCRIPTION OF A FORM OF EMBODIMENT

[0026] In the figures, the reference number 10 generally indicates a sheet or tile made from stone agglomerate material, manufactured by means of the procedure according to this invention.

[0027] The materials normally used for the production of sheets or tiles 10 of this type comprise a variety of mixtures such as for example marble of different types or colours bonded by resins, marble bonded with predetermined percentages of quartz, sands bonded with binding resins and various other possibilities widely known to the background art.

[0028] The procedure for manufacturing the sheets or tiles 10 is typically carried out on an automated plant controlled by a computerised system in the various processing stages.

[0029] The first stage of the procedure foresees the crushing of the various components in order to achieve the required granulometry, particularly when marble, granite or quartz are used.

[0030] In the second stage the crushed products are mixed together in a special mixing machine and an appropriate synthetic resin acting as a binder is added.

[0031] In the third stage the mixture is poured into a die of a press. The action of the press on the mixture, together with the activation of a vibrator device and a vacuum device, makes it possible to model a sheet or tile according to a predetermined shape, thickness and density, and with a homogeneous structure free of gas or air bubbles.

[0032] According to the present invention, a metal plate 11 is positioned on the bottom of the pressing die before the mixture to be pressed is poured into the die.

[0033] Once the pressing and hardening has been carried out, the metal plate 11 constitutes a single object with the sheet or tile 10, forming the lower surface.

[0034] The subsequent stages of the procedure are then carried out in the traditional way.

[0035] The sheet or tile 10 is first conveyed inside a kiln in which the polymerisation of the synthetic resin and the consequent hardening of the sheet or tile take place, with particular temperature conditions and hardening times, well known to experts in the sector.

[0036] On leaving the kiln, the sheet or tile 10 is conveyed towards the next processing stations for the subsequent smoothing and polishing of the upper surface, the cutting to size according to the required shape, the chamfering, gauging and flaring operations, and then to any waxing, drying and packaging stations.

[0037] The above description shows that the procedure according to this invention differs from what is already known to the background art by the insertion of a metal plate during the product pressing stage.

[0038] This particular solution makes it possible to obtain an end product with completely new features with respect to what is already known.

[0039] In fact, the insertion of the plate makes it pos-

sible to completely discharge any electrostatic charge accumulated on the sheet or tile by connecting it to ground electrically or by connecting the entire floor once the various sheets or tiles of which it consists are connected to each other as in the case of a floating floor.

[0040] This particular ability to discharge the electrostatic current is made possible by the presence of the plate and its extensive contact surface with the conductor elements inside the agglomerate structure.

[0041] The metal plate 11 according to this invention can be obtained for example from an element die-formed or rolled in such a way as to present a series of cavities or protruberances which allow excellent adherence of the resin to the plate.

[0042] In figure 1 these cavities are represented by elements 12 which expand from the bottom of the plate. According to other variations, not shown in the drawings, these cavities can also be knurled or rippled, or protruberances or elements protruding towards the mixture forming the agglomerate.

[0043] According to a particular embodiment of the invention, the metal plate can be made from aluminium.

[0044] The other considerably important function of the metal plate 11 is to reinforce the sheet or tile 10 giving it a much higher breaking load compared with a sheet of the same size constructed according to known techniques.

[0045] This means that sheets or tiles 10 much thinner than traditional ones but with the same required breaking load can be used to lay a floor.

[0046] For example, according to this invention it is possible to use sheets or tiles with a thickness of between 10 and 20 mm to construct raised or floating floors and with a breaking load which is the same as that of traditional panels, sheets or tiles, which are normally at least 30-35 mm thick.

[0047] As already mentioned above, the possibility of using thinner sheets or tiles means less material, less weight, easier laying and, basically, a remarkable saving in costs, despite the insertion of the metal plate.

[0048] The invention is described above with reference to a preferred form of embodiment.

[0049] It is nevertheless clear that the invention is not limited to this form of embodiment but is also susceptible to numerous variations with the same aims, within the framework of technical equivalents.

Claims

1. A procedure for the production of sheets or tiles (10) in agglomerate material consisting of products comprising marble and/or granite and/or sand and/or quartz powders and binding resins, also comprising possible inclusions of elements made from metal, glass, ceramic, wood, precious stones, comprising the following processing stages:

- a) crushing of the components of the sheets or tiles (10);
- b) mixing of these components with the afore-said binding resins;
- c) pressing and compacting of these components inside a pressing die, and hardening at a predetermined pressure and temperature, in order to obtain a predetermined shape, advantageously quadrangular, and predetermined dimensions of these sheets or tiles (10);

said procedure being **characterised in that** before stage c) is carried out a metal plate (11) which covers the lower surface of the die is positioned inside the pressing die and has a structure comprising a series of cavities suitable for receiving the mixture of the components which, during the polymerisation and hardening stages, bond to the plate (11) thus forming the base of the sheet or tile (10).

2. A procedure according to claim 1, **characterised in that** the metal plate (11) is obtained by die-pressing or rolling.

3. A procedure according to any one of the preceding claims, **characterised in that** it also comprises the following additional stages:

- d) smoothing and polishing of at least one of the upper and/or lower surfaces of these sheets or tiles (10);
- e) cutting to size, chamfering, gauging and flaring of these sheets or tiles (10).

4. A procedure according to any one of the preceding claims, **characterised in that** said procedure is achieved by means of an automated plant comprising a series of automatic machines designed to carry out the said processing stages and whose functioning is controlled by a computerised system.

5. A sheet or tile (10) made from an agglomerate material consisting of products comprising marble and/or granite and/or sand and/or quartz powders and binding resins, also comprising possible inclusions of elements made from metal, glass, ceramic, wood, precious stones, **characterised in that** the lower surface of said sheet or tile is constituted by a metal plate (11) having a structure comprising a series of cavities receiving the the agglomerate mixture and such as to allow, during the polymerisation and hardening of the mixture, the bonding of the plate which thus forms the base of the sheet.

6. A sheet or tile (10) according to claim 5 **characterised in that** the metal plate is obtained by die-pressing.

7. A sheet or tile (10) according to any one of the claims 5 or 6, **characterised in that** the metal plate is made from aluminium.
8. A sheet or tile (10) according to any one of the claims 5 to 7, **characterised in that** the base of the metal plate comprises a plurality of cavities (12) and/or of protruberances designed to facilitate the adherence of the mixture to the plate.

Patentansprüche

1. Verfahren zur Herstellung von Platten oder Fliesen (10) aus agglomeriertem Material, bestehend aus Produkten, die Marmor und/oder Granit und/oder Sand und/oder Quarzpulver und Bindemittelkunstharze umfassen, sowie bestehend aus möglichen Einschlüssen von Elementen, die aus Metall, Glas, Keramik, Holz, Edelsteinen gemacht sind, mit den folgenden Schritten:

- a) Zerkleinern der Bestandteile der Platten oder Fliesen (10);
- b) Mischen dieser Bestandteile mit dem oben erwähnten Bindemittelkunstharzen;
- c) Verpressen und Verdichten dieser Bestandteile in einer Pressform, sowie

Aushärten bei einer bestimmten Temperatur und einem bestimmten Druck, um so eine vorbestimmte Gestalt, vorzugsweise viereckig, sowie vorbestimmte Abmessungen dieser Platten oder Fliesen (10) zu erhalten; wobei dieses Verfahren **dadurch gekennzeichnet ist, dass**, bevor der Schritt c) ausgeführt wird, eine Metallplatte (11), die die untere Oberfläche der Pressform abdeckt, innerhalb der Pressform positioniert wird, wobei die Metallplatte eine Struktur aufweist, die eine Serie von Hohlräumen aufweist, die geeignet sind, die Mischung aus den Bestandteilen aufzunehmen, die sich während der Polymerisation und dem Aushärteschritt mit der Platte (11) verbinden, so dass **dadurch** die Basis der Platte oder der Fliese (10) ausgebildet wird.

2. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, dass** die Metallplatte (11) durch Formpressen oder Walzen erhalten wird.
3. Verfahren nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** es ebenso die folgenden zusätzlichen Schritte aufweist:
- d) Glätten und Polieren von zumindest einer der, oberen und/oder der unteren, Oberflächen dieser Platten oder Fliesen (10);
 - e) Zuschneiden auf Größe, Anfasen, Abmessen

und Bördeln dieser Platten oder Fliesen (10).

4. Verfahren nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** das Verfahren durch eine automatische Fertigungsfabrik ausgeführt wird, die eine Reihe von automatischen Maschinen umfasst, die derart gebaut sind, dass sie diese Verfahrensschritte ausführen, sowie deren Funktionsweisen durch ein computergesteuertes System kontrolliert werden.

5. Platte oder Fliese (10) aus agglomeriertem Material, bestehend aus Produkten, die Marmor und/oder Granit und/oder Sand und/oder Quarzpulver und Bindemittelkunstharze umfassen, sowie bestehend aus möglichen Einschlüssen von Elementen, die aus Metall, Glas, Keramik, Holz, Edelsteinen gemacht sind, **dadurch gekennzeichnet, dass** die untere Oberfläche der Platte oder Fliese (10) durch eine Metallplatte (11) ausgebildet ist, wobei die Metallplatte eine Struktur aufweist, die eine Serie von Hohlräumen aufweist, die die agglomerierte Mischung usw. aufnehmen, um zu ermöglichen, dass sich während der Polymerisation und der Aushärtung der Mischung diese mit der Platte (11) verbindet, so dass **dadurch** die Basis der Platte ausgebildet ist.

6. Platte oder Fliese (10) nach Anspruch 5, **dadurch gekennzeichnet, dass** die Metallplatte durch Pressformen erhalten wird.

7. Platte oder Fliese (10) nach irgendeinem der vorhergehenden Ansprüche 5 oder 6, **dadurch gekennzeichnet, dass** die Metallplatte aus Aluminium hergestellt ist.

8. Platte oder Fliese (10) nach irgendeinem der vorhergehenden Ansprüche 5 bis 7, **dadurch gekennzeichnet, dass** die Basis der Metallplatte eine Vielzahl von Hohlräumen (12) und/oder Vorsprüngen aufweist, die vorgesehen sind, um das Anhaften der Mischung an die Platte zu erleichtern.

Revendications

1. Procédé de production de feuilles ou de dalles (10) en matériau aggloméré consistant en des produits comprenant des poudres de marbre et/ou de granit et/ou de sable et/ou de quartz et des liants résineux, comprenant également d'éventuelles inclusions d'éléments en métal, en verre, en céramique, en bois, en pierres précieuses, ledit procédé comprenant les étapes suivantes :

- a) le broyage des composants des feuilles ou des dalles (10) ;
- b) le mélange de ces composants aux liants ré-

sineux susmentionnés ;

c) le moulage et le compactage de ces composants à l'intérieur d'un moule de pressage, et le durcissement à une température et une pression prédéterminées, afin d'obtenir une forme prédéterminée, avantageusement quadrangulaire, et des dimensions prédéterminées de ces feuilles ou de ces dalles (10) ;

ledit procédé étant **caractérisé en ce que**, avant de réaliser l'étape c), une plaque métallique (11) qui recouvre la surface inférieure du moule est positionnée à l'intérieur du moule de pressage et a une structure comprenant une série de cavités appropriées pour recevoir le mélange des composants qui, pendant les étapes de polymérisation et de durcissement, se lient à la plaque (11) en formant ainsi la base de la feuille ou de la dalle (10).

2. Procédé selon la revendication 1, **caractérisé en ce que** la plaque métallique (11) est obtenue par laminage ou estampage.

3. Procédé selon l'une quelconque des revendications précédentes, **caractérisé en ce qu'il** comprend également les étapes supplémentaires suivantes :

d) le lissage et le polissage d'au moins une des surfaces supérieure et/ou inférieure de ces feuilles ou de ces dalles (10) ;

e) le découpage à dimension, le chanfreinage, le calibrage et l'évasement de ces feuilles ou ces dalles (10).

4. Procédé selon l'une quelconque des revendications précédentes, **caractérisé en ce que** ledit procédé est mis en oeuvre au moyen d'une installation automatisée comprenant une série de machines automatiques conçues pour réaliser lesdites étapes de traitement et dont le fonctionnement est commandé par un système informatisé.




5. Feuille ou dalle (10) fabriquée à partir d'un matériau aggloméré consistant en des produits comprenant des poudres de marbre et/ou de granit et/ou de sable et/ou de quartz et des liants résineux, comprenant également d'éventuelles inclusions d'éléments en métal, en verre, en céramique, en bois, en pierres précieuses, **caractérisée en ce que** la surface inférieure de ladite feuille ou de ladite dalle est constituée par une plaque métallique (11) ayant une structure qui comprend une série de cavités recevant le mélange aggloméré de façon à permettre, pendant la polymérisation et le durcissement du mélange, la liaison de la plaque qui forme ainsi la base de la feuille.

6. Feuille ou dalle (10) selon la revendication 5, **carac-**

térisée en ce que la plaque métallique est obtenue par estampage.

7. Feuille ou dalle (10) selon l'une quelconque des revendications 5 ou 6, **caractérisée en ce que** la plaque métallique est fabriquée à partir d'aluminium.

8. Feuille ou dalle (10) selon l'une quelconque des revendications 5 à 7, **caractérisée en ce que** la base de la plaque métallique comprend une pluralité de cavités (12) et/ou de protubérances conçues pour faciliter l'adhérence du mélange à la plaque.

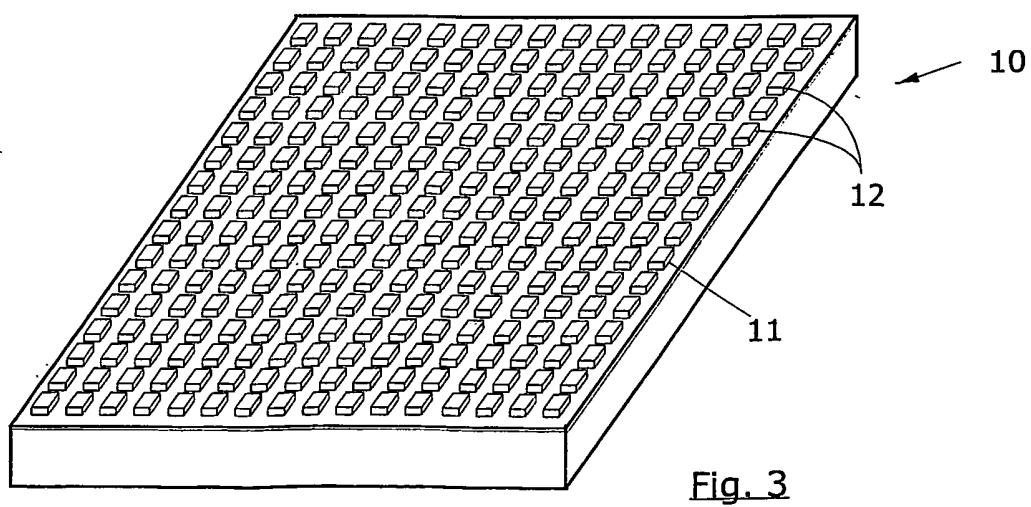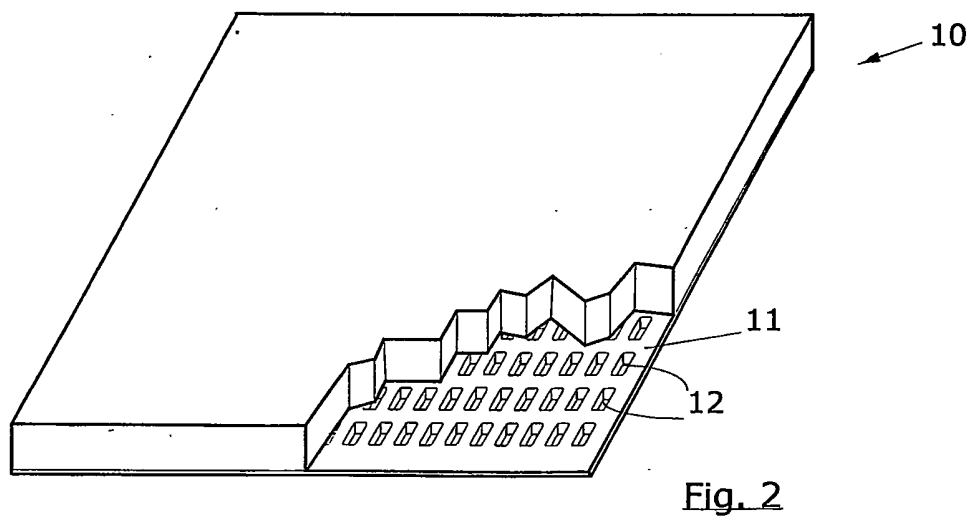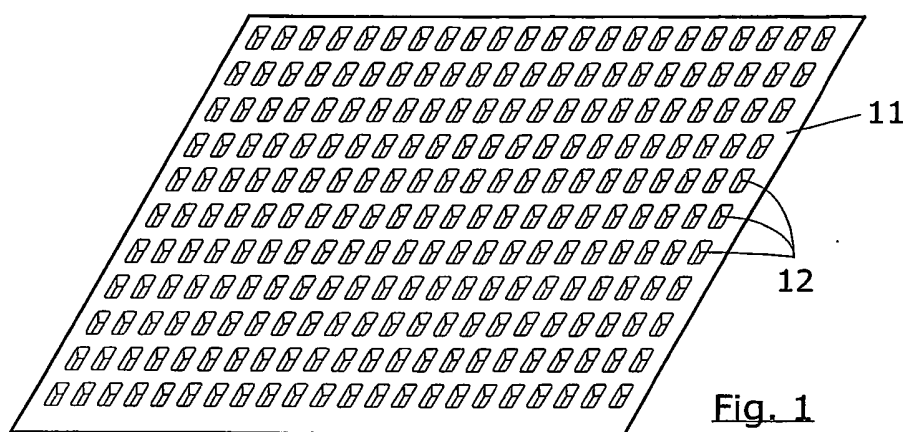

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- IT VR94A000068 [0010]
- US 4640854 A [0014]
- US 4833845 A [0015]
- US 5057355 A [0015]