



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
02.03.2005 Bulletin 2005/09

(51) Int Cl.7: **B25B 13/46**

(21) Application number: **03019148.0**

(22) Date of filing: **25.08.2003**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**
Designated Extension States:
AL LT LV MK

(72) Inventor: **Chen, Terence**
Lo Tung Town, Yi Lan Hsien (TW)

(74) Representative: **Casalonga, Axel et al**
BUREAU D.A. CASALONGA - JOSSE
Paul-Heyse-Strasse 33
80336 München (DE)

(71) Applicant: **Chen, Terence**
Lo Tung Town, Yi Lan Hsien (TW)

(54) **Ratchet wrench**

(57) A ratchet wrench includes a handle (10) and an annular head (11) from which the handle projects. The annular head defines a first space (12), a second space (13) communicated with the first space and a third space (14) communicated with the second space. An annular gear (20) is rotationally put in the first space. The annular gear includes a toothed external face (21). A direction

controller (30) is put in the second space. The direction controller includes two pawls (31,32) and a spring (33) installed between the pawls. Each of the pawls includes a toothed face (312;322). The direction switch (40) is rotationally mounted on the handle and partially put in the third space for bringing the toothed face of selective one of the pawls into engagement with the toothed external face of the annular gear.

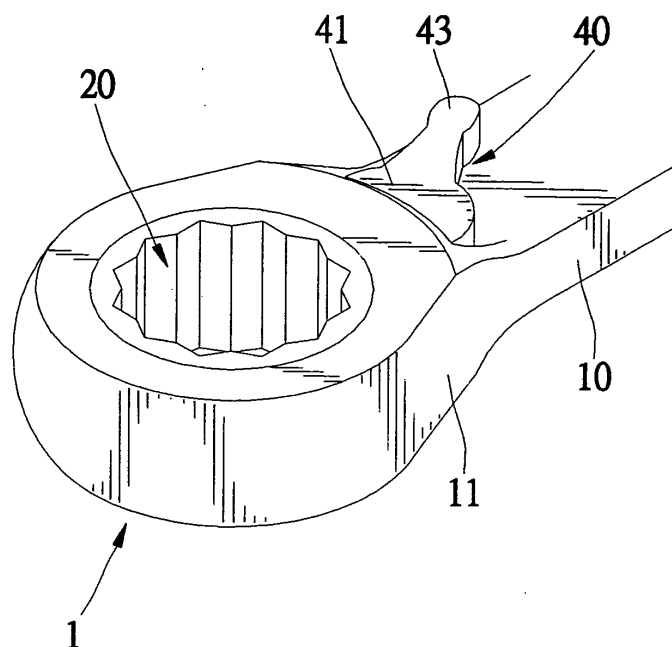


Fig. 1

Description

Field of Invention

[0001] The present invention relates to a ratchet wrench.

Background of Invention

[0002] Referring to Figures 7~10, a conventional ratchet wrench 50 includes a handle 52 and an annular head 54 formed at an end of the handle 52. The annular head 52 defines a circular space 56, a crescent space 58 communicated with the circular space 56, a groove 60 in a side thereof and a recess 62 communicated with the groove.

[0003] A spring 64 and a ball detent 66 are put in the recess 62.

[0004] A direction switch 68 is put in and can be moved along the groove 60. A friction plate 70 is formed on the direction switch 68 for frictional contact with a user's finger. The direction switch 68 defines two recesses 72 and 74 in a side and a space 76 in an opposite side. The ball detent 66 is put in the recess 72 or 74 for keeping the direction switch 68 in one of two positions. The friction plate 70 defines an aperture 80 communicated with the space 76.

[0005] A V-shaped elastic element 80 includes two helical ends 82 and 84. The V-shaped elastic element 78 is put in the space 76.

[0006] As best shown in Figure 8, a tab 86 is inserted in the space 76 for preventing the elastic element 80 from faltering in the space 76. The tab 86 defines an aperture 88.

[0007] A pin 90 is fit in the apertures 78 and 88 and put between the helical ends 82 and 84 so as to avoid the elastic element 80 escaping the space 76.

[0008] A pawl 92 includes two recesses 94 and 96 defined in a side and teeth 98 formed on an opposite side. The pawl 92 is put in the crescent space 58. The helical end 82 can be put in the recess 94, or the helical end 84 in the recess 96.

[0009] An annular gear 100 is put in the circular space 56. The annular gear 100 includes teeth 102 formed on an external side thereof for engagement with the teeth 98.

[0010] Referring to Figure 9, the direction switch 68 is moved to a right-hand end of the groove 60 so that the ball detent 66 enters the recess 74. Via the elastic element 80, a right-hand end of the pawl 92 is moved to a right-hand end of the crescent space 58. Thus, the annular head 10 can drive the annular gear 100 clockwise, but not vice versa.

[0011] Referring to Figure 10, the direction switch 68 is moved to a left-hand end of the groove 60 so that the ball detent 66 enters the recess 74. Via the elastic element 80, a left-hand end of the pawl 92 is moved to a left-hand end of the crescent space 58. Thus, the annu-

lar head 10 can drive the annular gear 100 counterclockwise, but not vice versa.

[0012] This conventional ratchet wrench 50 includes many elements. Many of its elements require fine fabrication, e.g., the direction switch 68 and the elastic element 80. It takes a lot of time to fabricate these elements. It also takes a lot time to assemble these elements. This conventional ratchet wrench 50 is very complicated in structure. As result, the cost of manufacturing of this conventional ratchet wrench 50 is high.

[0013] The present invention is therefore intended to obviate or at least alleviate the problems encountered in prior art.

Summary of Invention

[0014] It is the primary objective of the present invention to provide a structurally simple ratchet wrench.

[0015] According to the present invention, a ratchet wrench includes a handle and an annular head from which the handle projects. The annular head defines a first space, a second space communicated with the first space and a third space communicated with the second space. An annular gear is rotationally put in the first space. The annular gear includes a toothed external face. A direction controller is put in the second space. The direction controller includes two pawls and a spring installed between the pawls. Each of the pawls includes a toothed face. The direction switch is rotationally mounted on the handle and partially put in the third space for bringing the toothed face of selective one of the pawls into engagement with the toothed external face of the annular gear.

[0016] Other objects, advantages and novel features of the invention will become more apparent from the following detailed description in conjunction with the attached drawings.

Brief Description of Drawings

[0017] The present invention will be described via detailed illustration of the preferred embodiment referring to the drawings.

[0018] Figure 1 is a perspective view of a ratchet wrench according to the preferred embodiment of the present invention.

[0019] Figure 2 is an exploded view of the ratchet wrench of Figure 1.

[0020] Figure 3 is a cutaway view of the ratchet wrench of Figure 1.

[0021] Figure 4 is a cross-sectional view of the shown in Figure 1.

[0022] Figure 5 is a cross-sectional view of the ratchet wrench of Figure 11 in a position for driving a bolt or nut counterclockwise.

[0023] Figure 6 is similar to Figure 5 but showing the ratchet wrench in a position for driving a bolt or nut clockwise.

[0024] Figure 7 is an exploded view of a ratchet wrench according to prior art.

[0025] Figure 8 is a cross-sectional view of the ratchet wrench of Figure 7.

[0026] Figure 9 is a cross-sectional view of the ratchet wrench of Figure 7 in a position for driving a bolt or nut clockwise.

[0027] Figure 10 is similar to Figure 9 but showing the ratchet wrench in a position for driving a bolt or nut counterclockwise.

Detailed Description of Preferred Embodiment

[0028] Referring to Figure 1, according to the preferred embodiment of the present invention, a ratchet wrench 1 includes a handle 10 and an annular head 11 from which the handle 10 projects.

[0029] Referring to Figures 2 and 3, the annular head 11 defines a circular space 12, a crescent space 13 communicated with the circular space 12 and a semi-circular space 14 communicated with the crescent space 13. An annular groove 121 is defined in the wall of the circular space 12. Two recesses 15 and 16 are defined in the handle 10 near the semi-circular space 14.

[0030] A direction controller 30 is put in the crescent space 13. The direction controller 30 includes two pawls 31 and 32 and a spring 33 for connecting the pawl 31 with the pawl 32.

[0031] The pawl 31 includes a top, a bottom, a planar side, a toothed side 312, an arched side, a boss 311 formed on the planar side and rod 313 formed on the top.

[0032] The pawl 32 includes a top, a bottom, a planar side, a toothed side 322, an arched side, a boss 321 formed on the planar side and rod 323 formed on the top.

[0033] The spring 33 includes an end in which the boss 311 is fit and an opposite end in which the boss 321 is fit. Thus, the pawl 31 is firmly connected with the pawl 32 by means of the spring 33.

[0034] Referring to Figures 2 and 4, an O-ring 22 is put in the circular space 12. The O-ring 22 includes an annular groove 24 defined in an external face thereof.

[0035] A C-ring 23 includes an internal edge put in the annular groove 24 and an external edge put in the annular groove 121. Thus, the O-ring 22 is firmly attached to the annular head 11 by means of the C-ring 23.

[0036] An annular gear 20 is put in the circular space 12. The annular gear 20 is put on the O-ring 22 rotationally. The annular gear 20 includes a toothed internal face for engagement with a bolt or nut and a toothed external face 21 for selective engagement with the pawl 31 or 32.

[0037] A spring 152 and a rod detent 151 are put in the recess 15.

[0038] A spring 162 and a ball detent 162 are put in the recess 16.

[0039] A direction switch 40 includes a disc 41 and a lever 43 extending from the disc 41. The disc 41 includes a bottom in which a space 42, an aperture 44, two recesses 45 and 46 are defined. The wall of the space 42

includes a first end 421 and a second end 422. The disc 41 is put in the semi-circular space 14. The rod detent 151 extends into the aperture 44. Thus, the direction switch 40 is installed on the handle 10 and the annular head 11 rotationally. The ball detent 16 selectively enters the recess 45 or 46.

[0040] Referring to Figure 5, the direction switch 40 is in a first position. The ball detent 16 enters the recess 46 so as to retain the direction switch 40 in the first position. The first end 421 of the wall of the space 42 pushes the rod 323. Thus, the pawl 31 is moved into a left-hand end of the crescent space 13. Thus, the annular head 11 can drive the annular gear 20 counterclockwise, but not vice versa.

[0041] Referring to Figure 6, the direction switch 40 is in a second position. The ball detent 16 enters the recess 45 so as to retain the direction switch 40 in the second position. The second end 422 of the wall of the space 42 pushes the rod 323. Thus, the pawl 32 is moved into a right-hand end of the crescent space 13. Thus, the annular head 11 can drive the annular gear 20 clockwise, but not vice versa.

[0042] The present invention has been described via detailed illustration of the preferred embodiment. Those skilled in the art can derive variations from the preferred embodiment without departing from the scope of the present invention. Therefore, the preferred embodiment shall not limit the scope of the present invention defined in the claims.

Claims

1. A ratchet wrench including:

- ☐ a handle (10);
- ☐ an annular head (11) from which the handle (10) projects, the annular head (11) defines a first space (12), a second space (13) communicated with the first space (12) and a third space (14) communicated with the second space (13);
- ☐ an annular gear (20) rotationally put in the first space (12), the annular gear (20) including a toothed external face (21);
- ☐ a direction controller (30) put in the second space (13), the direction controller (30) including two pawls (31; 32) and a spring (33) installed between the pawls (31; 32), each of the pawls (31; 32) including a toothed face (312; 322); and
- ☐ a direction switch (40) rotationally mounted on the handle (10) and partially put in the third space (14) for bringing the toothed face (312; 322) of selective one of the pawls (31; 32) into engagement with the toothed external face (21) of the annular gear (20).

2. The ratchet wrench according to claim 1 wherein the first space (12) is a circular space.
3. The ratchet wrench according to claim 1 wherein the second space (13) is a crescent space. 5
4. The ratchet wrench according to claim 1 wherein the third space (14) is a semi-circular space (14).
5. The ratchet wrench according to claim 1 including a spring-biased detent (151; 152), wherein the handle (10) defines a recess (15) for receiving the spring-biased detent (151; 152), and the disc (41) defines a recess (44) for receiving the spring-biased detent (151; 152) so that the disc (41) is rotationally mounted on the handle (10). 10 15
6. The ratchet wrench according to claim 1 including a spring-biased detent (161; 162), wherein the handle (10) defines a recess (16) for receiving the spring-biased detent (161; 162), and the disc (41) defines two recesses (45; 46) selective one of which receives the spring-biased detent (161; 162) so that the disc (41) is retained in selective one of two positions. 20 25
7. The ratchet wrench according to claim 1 wherein the direction switch (40) includes a disc (41) rotationally mounted on the handle (10) and partially put in the third space (14) for moving selective one of the pawls (31; 32) into engagement with the annular gear (20). 30
8. The ratchet wrench according to claim 7 wherein each of the pawls (31; 32) includes a rod (313; 323), and the disc (41) defines a space (42) by means of a wall including two ends (421; 422) selective one of which can be engaged with one of the rods (313; 323) so as to engage the toothed face (312; 322) of one of the pawls (31; 32) with the toothed face (21) of the annular gear (20). 35 40
9. The ratchet wrench according to claim 7 wherein the direction switch (40) includes a lever (43) extending from the disc (41). 45
10. The ratchet wrench according to claim 1 wherein each of the pawls (31; 32) includes a boss (311) formed thereon and fit in an end of the spring (33) so that it is firmly connected with the spring (33). 50
11. The ratchet wrench according to claim 1 including an O-ring (22) fit in the first space (12) for supporting the annular gear (20). 55
12. The ratchet wrench according to claim 10 including a C-ring (23), wherein the annular head (11) defines an annular groove (121) in an internal side for receiving an external edge of the C-ring (23), and the O-ring (22) defines an annular groove (24) in an external side for receiving an internal edge of the C-ring (23).

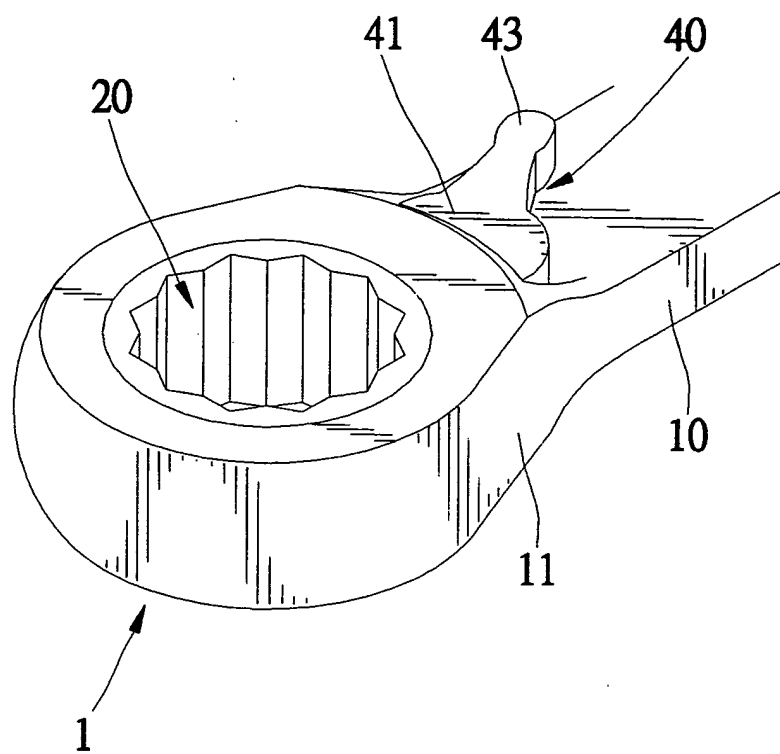


Fig. 1


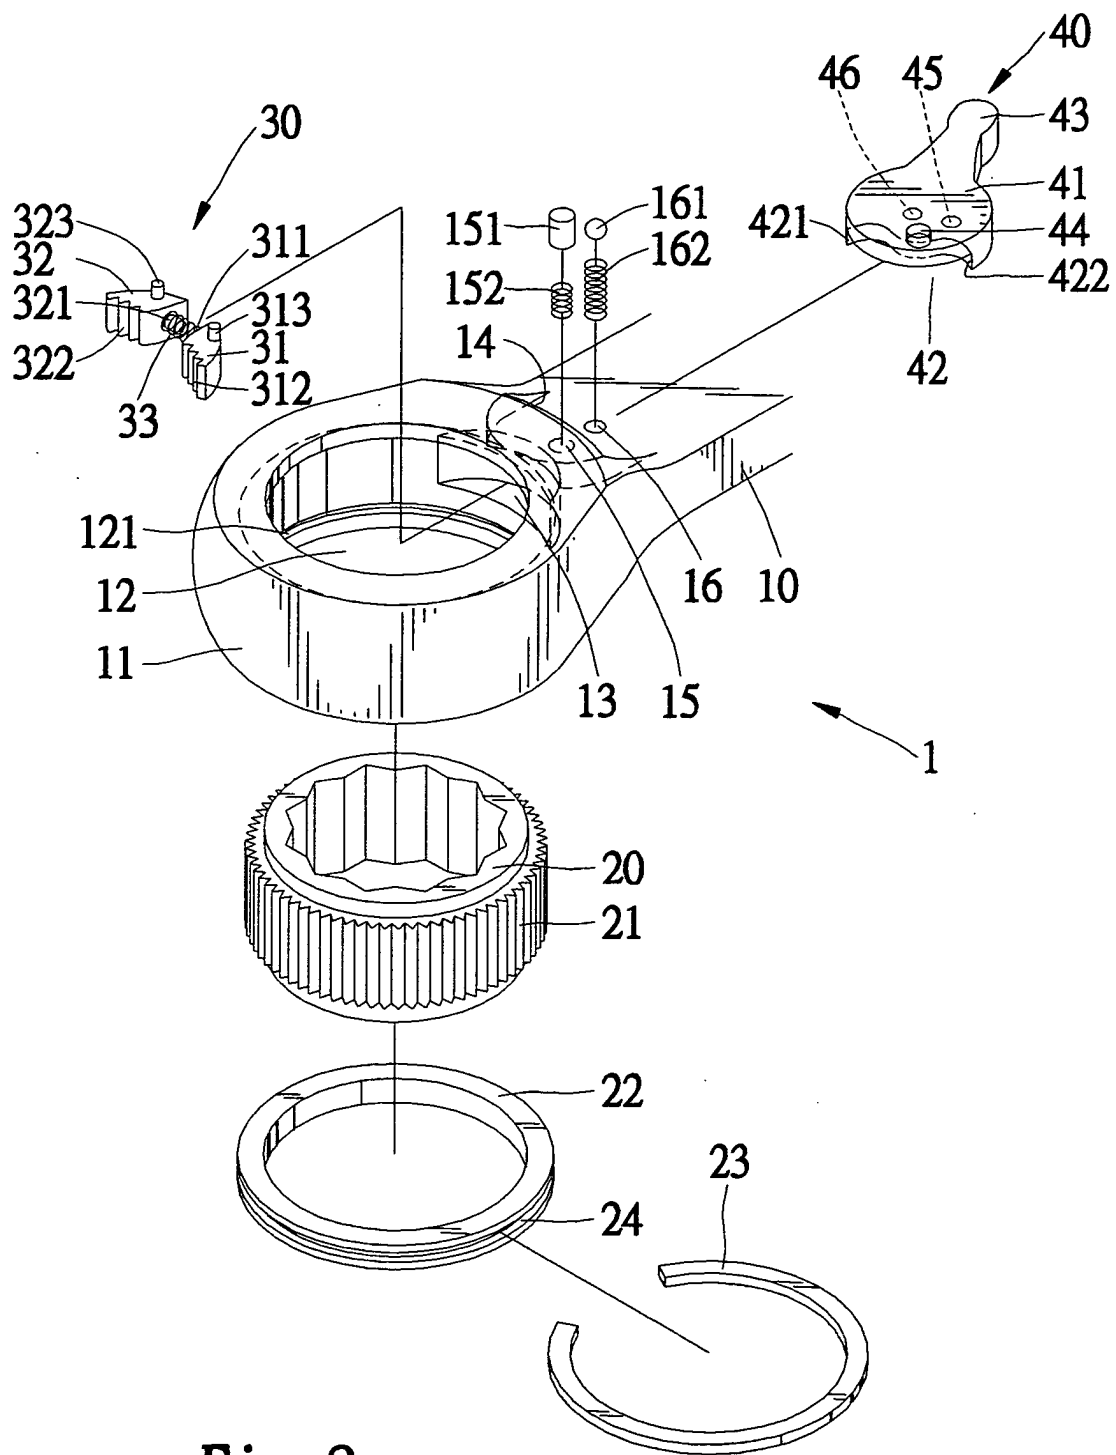


Fig. 2

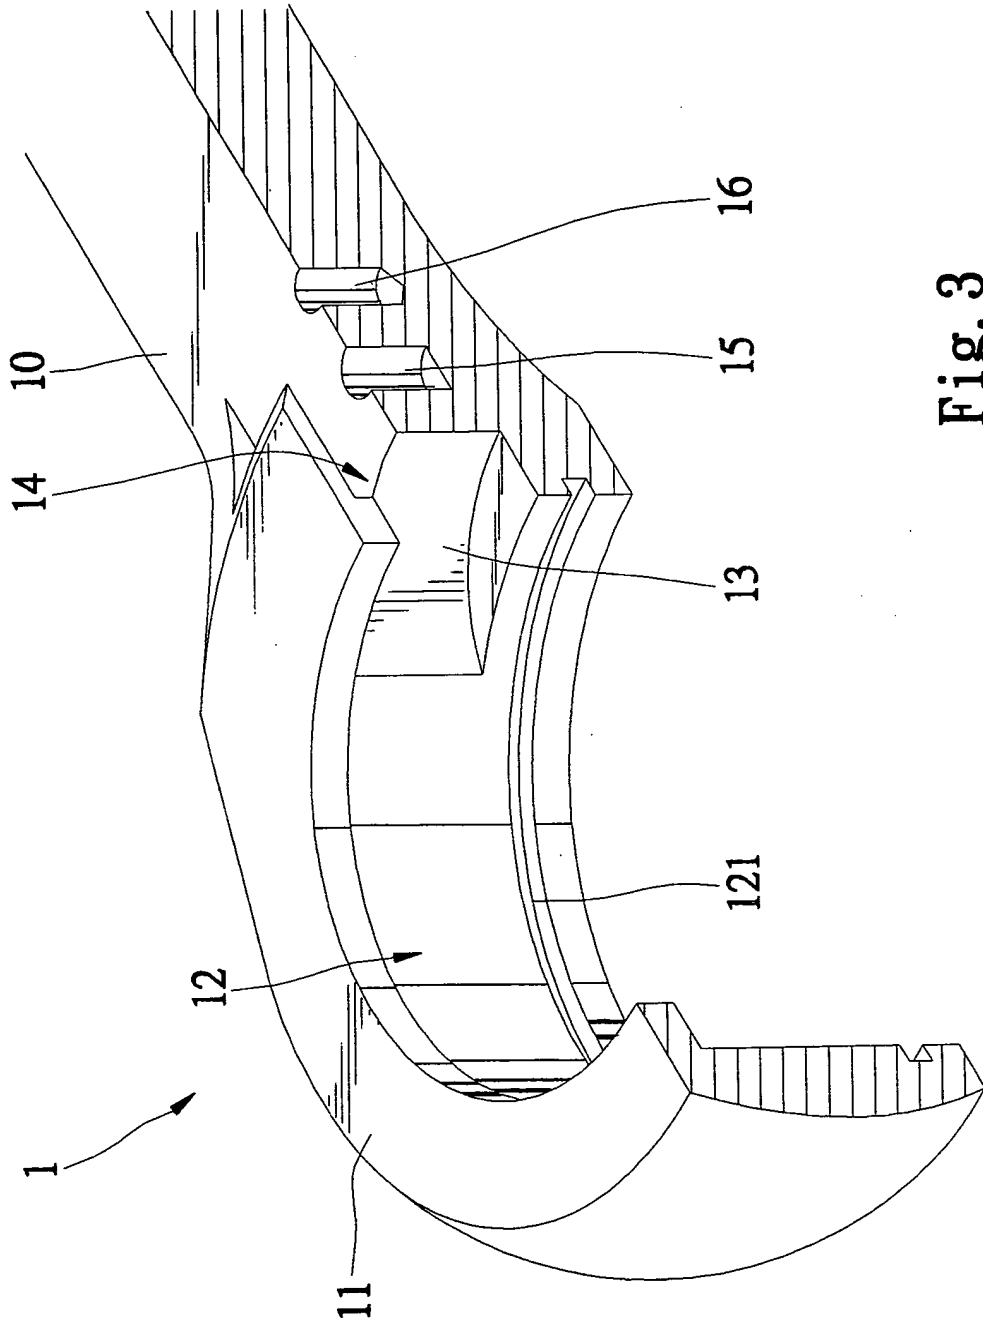

Fi. 3

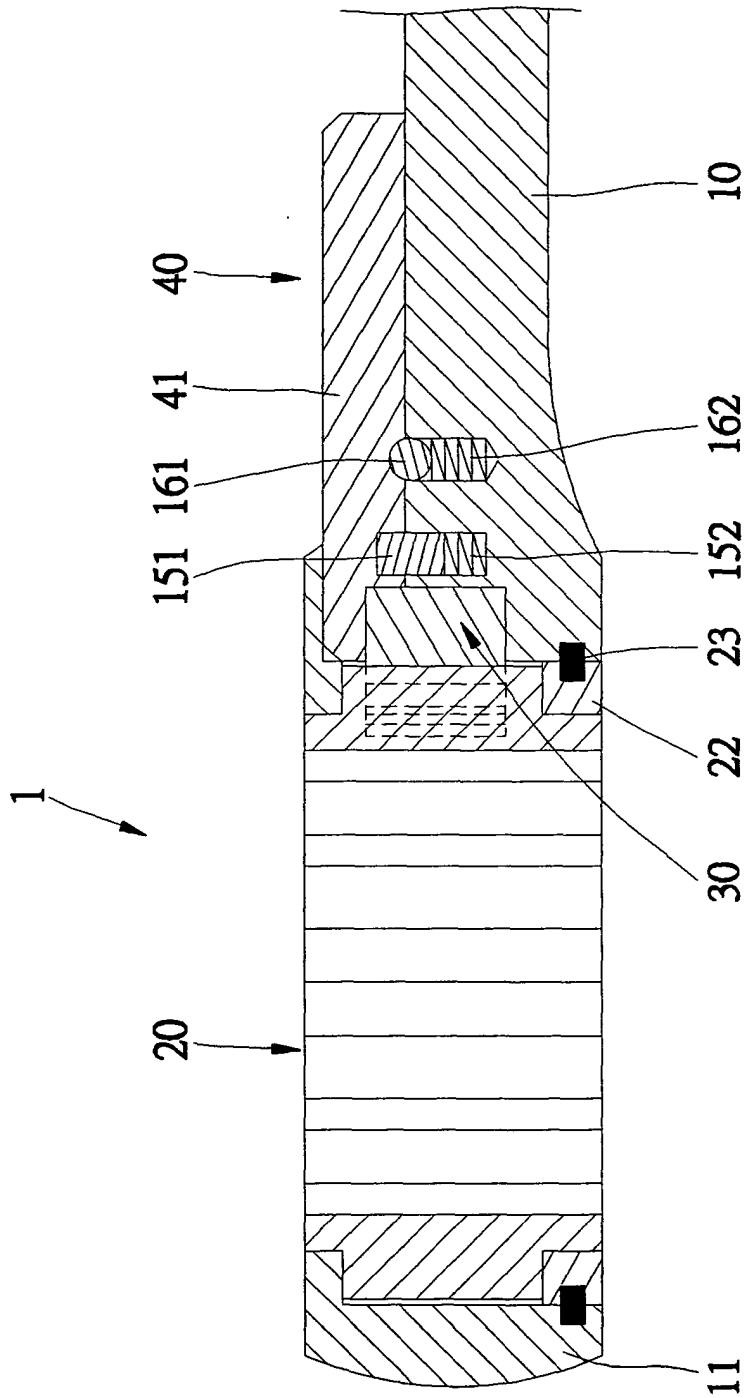


Fig. 4

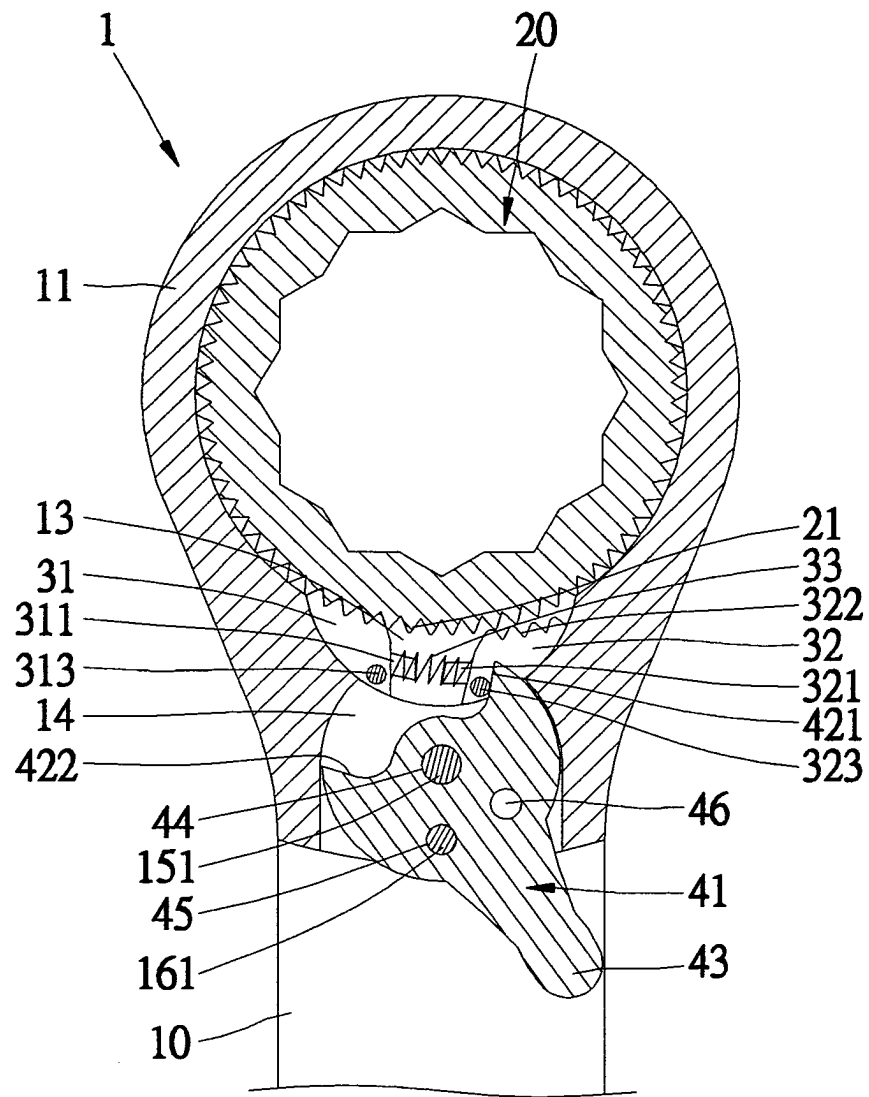


Fig. 5

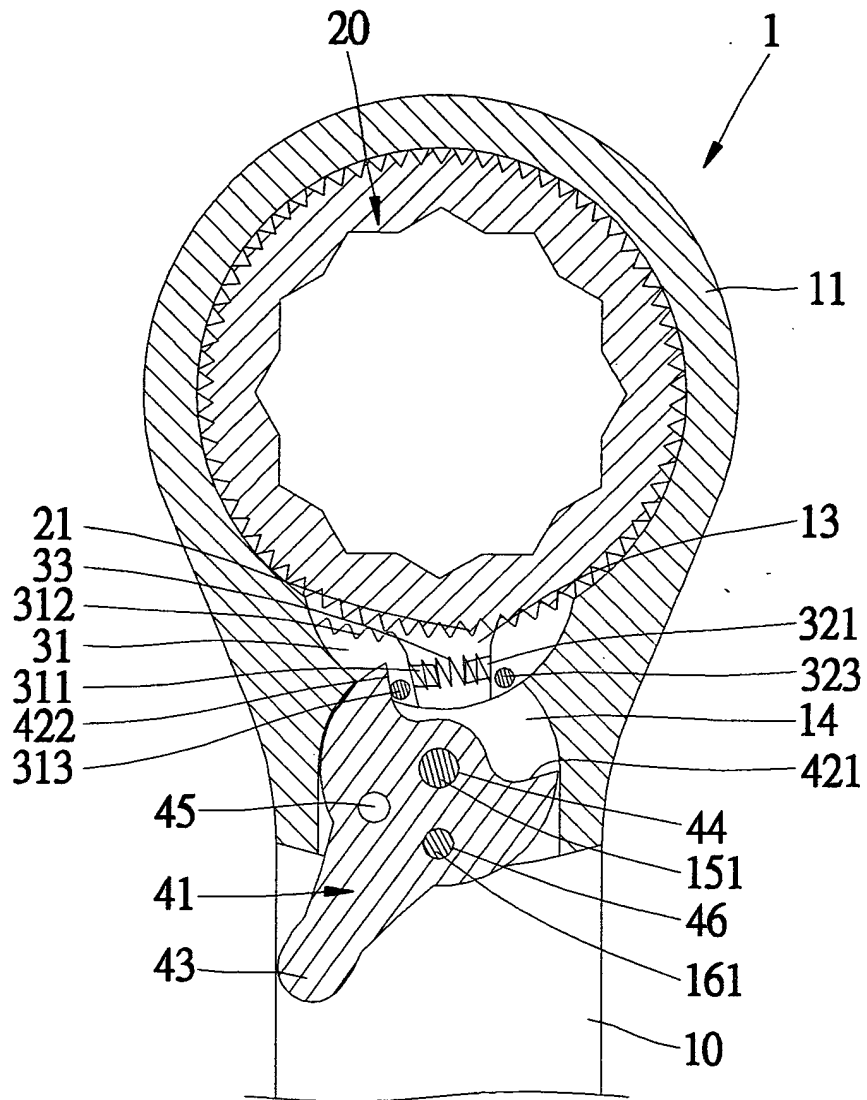


Fig. 6

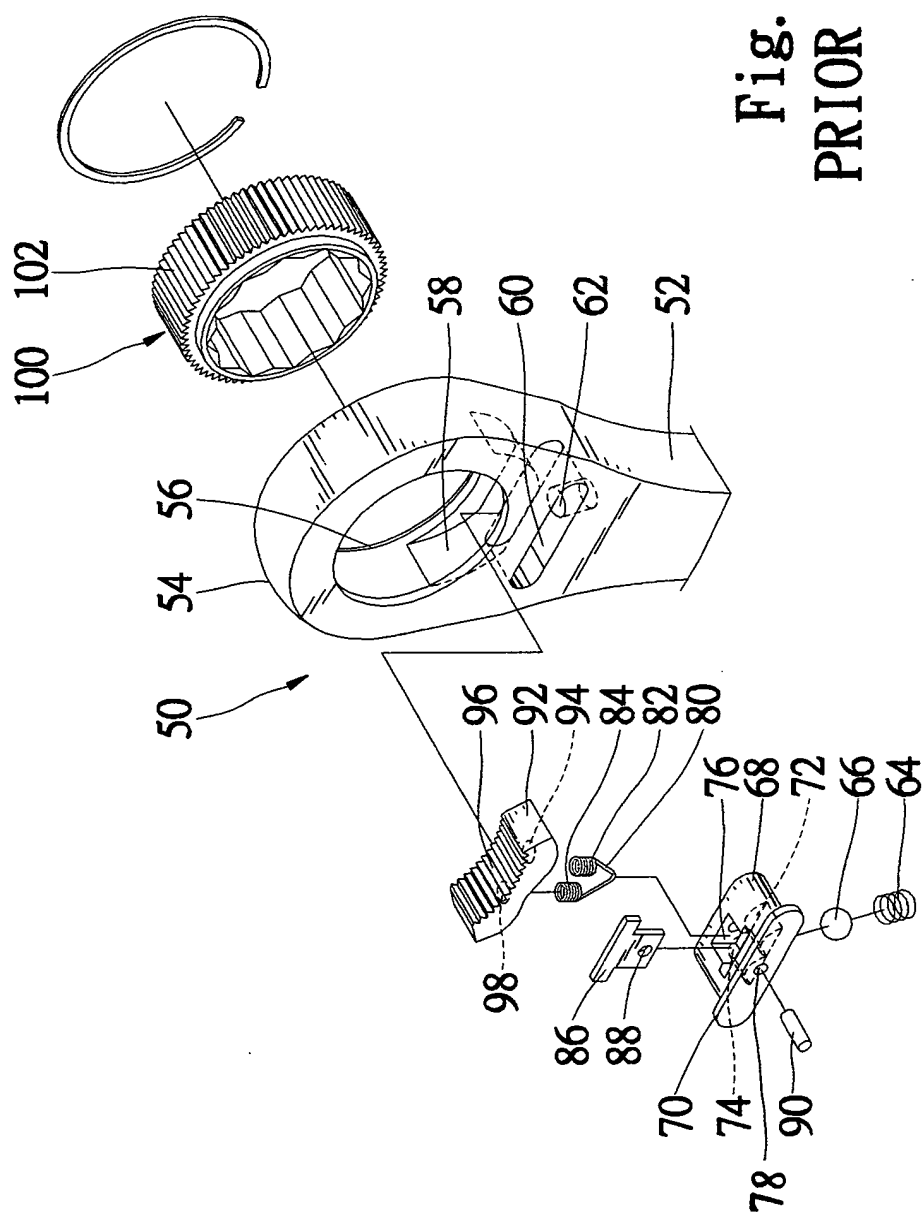


Fig. 7
PRIOR ART

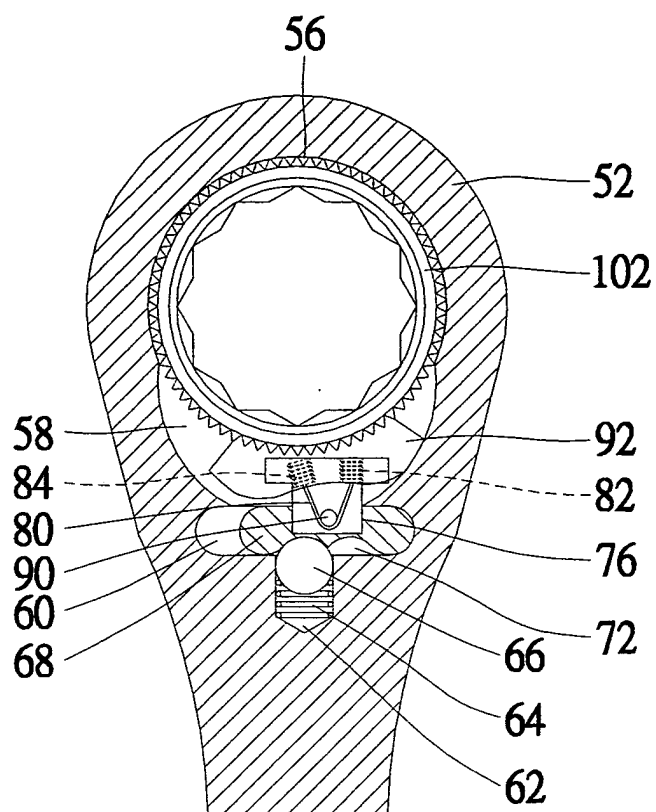


Fig. 9
PRIOR ART

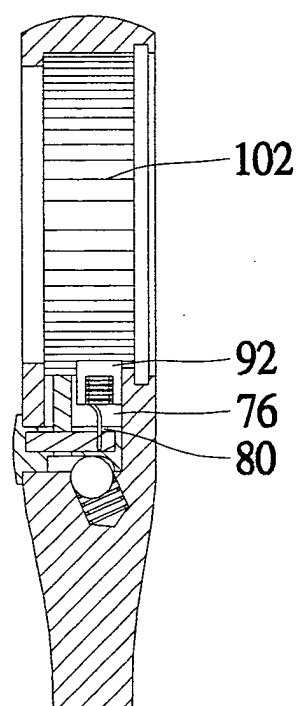


Fig. 8
PRIOR ART

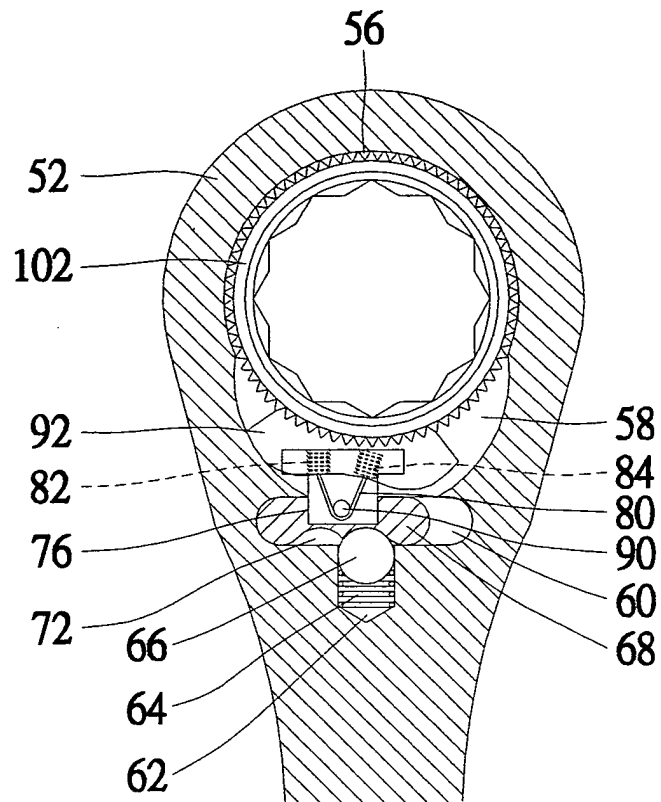


Fig. 10
PRIOR ART



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 01 9148

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 3 436 992 A (OVER JOHN A ET AL) 8 April 1969 (1969-04-08)	1-4,6,7,9	B25B13/46
Y	* column 4, line 4 - line 11 * ---	11,12	
X	GB 2 353 746 A (LEE JACK) 7 March 2001 (2001-03-07)	1-3,6-9	
Y	* page 2, last line - page 3, line 17; figure 1 * ---	10-12	
X	US 5 174 176 A (KRIVEC BERT) 29 December 1992 (1992-12-29) * figures 2,3 *	1-3	
Y	US 6 513 409 B1 (LEE DANIEL) 4 February 2003 (2003-02-04) * column 4, line 9 - line 15; figures 1-3 *	1-3,5-7,9,10	
Y	US 6 516 930 B2 (CHEN CHING) 11 February 2003 (2003-02-11) * figures 1,2 *	1-3,5-7,9,10	
Y	US 2003/051583 A1 (LIN YEN-WEN) 20 March 2003 (2003-03-20) * page 2, paragraph 26 *	10	TECHNICAL FIELDS SEARCHED (Int.Cl.7) B25B
Y	US 6 386 072 B1 (PEI-CHIH YANG ET AL) 14 May 2002 (2002-05-14) * figure 2 *	11,12	
Y	US 2002/026858 A1 (HU BOBBY) 7 March 2002 (2002-03-07) * figure 16 *	11,12	
A	US 6 516 692 B1 (HSIEN CHIH-CHING) 11 February 2003 (2003-02-11) * the whole document * --- -/-	1-3	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 22 January 2004	Examiner Carmichael, Guy
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

2

EPO FORM 1503 03.82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 01 9148

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 5 199 330 A (ARNOLD ROBERT L ET AL) 6 April 1993 (1993-04-06) * column 1, line 53 - line 56 * -----	5	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 22 January 2004	Examiner Carmichael, Guy
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

2

EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 01 9148

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

22-01-2004

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 3436992	A	08-04-1969	DE	1678400 A1	25-11-1971

GB 2353746	A	07-03-2001	AU	721120 B3	22-06-2000
			DE	29915837 U1	09-12-1999
			FR	2799147 A3	06-04-2001
			NL	1013081 C2	20-03-2001

US 5174176	A	29-12-1992	NONE		

US 6513409	B1	04-02-2003	NONE		

US 6516930	B2	04-07-2002	US	2002084163 A1	04-07-2002

US 2003051583	A1	20-03-2003	CN	1370659 A	25-09-2002
			DE	10239054 A1	24-04-2003

US 6386072	B1	14-05-2002	NONE		

US 2002026858	A1	07-03-2002	TW	444633 Y	01-07-2001
			DE	10136254 A1	28-03-2002

US 6516692	B1	11-02-2003	DE	20210730 U1	14-11-2002

US 5199330	A	06-04-1993	NONE		

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82