



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
23.03.2005 Bulletin 2005/12

(51) Int Cl.7: **C23C 8/32**, C21D 6/00,
C21D 9/28, C21D 9/32

(21) Application number: **03026668.8**

(22) Date of filing: **19.11.2003**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**
Designated Extension States:
AL LT LV MK

(72) Inventor: **Sandur, Ajithkumar
Kandivali(E) Mumbai 400 101 Maharashtra (IN)**

(74) Representative: **Rössig, Rolf
Beck & Rössig
European Patent Attorneys
Cuvilliesstrasse 14
81679 München (DE)**

(30) Priority: **18.09.2003 IN bo09752003**

(71) Applicant: **Mahindra & Mahindra Ltd.
Mumbai 400001 (IN)**

(54) **Method for producing gears and/or shaft components with superior bending fatigue strength and pitting fatigue life from conventional alloy steel**

(57) The present invention is directed to a method for producing steel components such as gears and/or shafts of superior bending fatigue strength and pitting fatigue life. According to the present invention said components are made from a steel material, comprising

0.10 to 0.30 weight%	Carbon,
0.15 to 0.35 weight%	Silicon,
0.3 to 1.5 weight%	Chromium,
0.30 to 2.0 weight%	Nickel,

(continued)

0.08 to 0.50 weight%	Molybdenum,
0.6 to 1.5 weight%	Manganese,
0.017 to 0.040 weight%	Aluminium and

balance iron including impurities, produced in vacuum degassing and alike routes. wherein these components are subjected to a method comprising in sequence the steps of

- subjecting said steel components to a process of modified Carbonitriding treatment, and
- subjecting said steel components to a process of

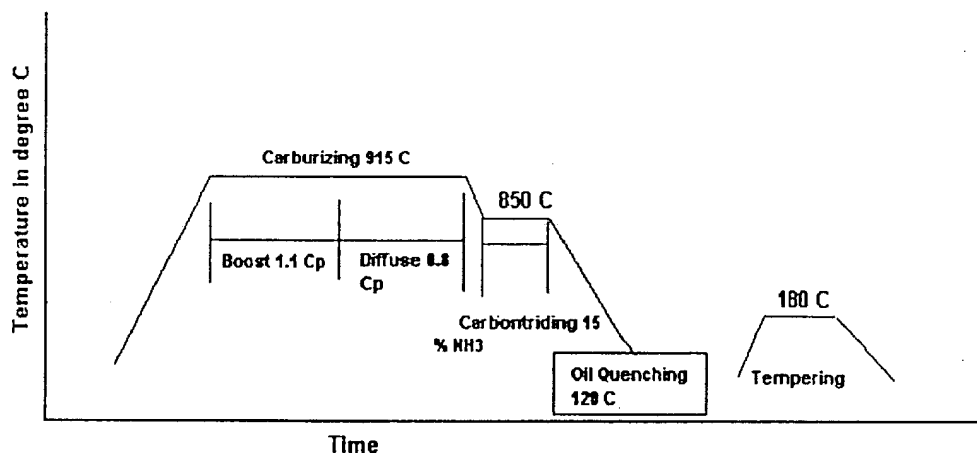


FIGURE 1

Description

FIELD OF INVENTION

5 **[0001]** This invention relates to achieving both superior Bending fatigue strength and Pitting fatigue life of gear(s) and/or shaft components, using "conventional alloy steel" by a method having following steps in sequence.

Step 1 : Modified Carbonitriding treatment

10 Step 2 : Hard Shot peening process

BACKGROUND ART

15 **[0002]** Carburising , hardening and tempering (hereafter called only " carburised ") have been followed commonly over years for gear train transmission components in many designs so as to increase load carrying capacity. However, load carrying capability produced after carburising is limited by microstructural and/or sub microstructural anomalies such as grain boundary oxidation , segregated carbides , bainite and alike anomalies. It has not been possible to extend, beyond certain limits, the load carrying capability of such transmissions without geometrical changes of components. Such geometrical changes in transmissions come with following significant disadvantages

20 **[0003]** Increases in weight, fuel consumption, development cost, development time and product cost and which ultimately results in increased customer dissatisfaction

[0004] Geometrical changes in transmission components result in weight increase as mentioned above, impose more loads on engines. Higher engine loads lead to higher emissions. To address higher emission problems, engine designs are required to undergo associated changes to reduce such emissions and this further increases the design and manufacturing costs.

25 **[0005]** Many times space constraints in existing transmissions will make such geometric design changes very difficult to accommodate.

[0006] Several other surface treatment related techniques have been evolved and being used in the recent years to make surfaces and sub surfaces more durable and reliable for higher torque transmitting capabilities of transmissions, already in use.

30 **[0007]** Some of the techniques available take advantage of the residual compressive stresses. However, such techniques have limited applications as they make use of special steels and/or elaborate Heat Treatment processes leading to higher production costs. Further, they are not able to produce simultaneous improvements in bending fatigue strength and pitting fatigue life.

35 **[0008]** Patent references :

1) US Patent No. 6,447,619 uses special steels with 0.3 to 3.0 weight % Aluminium and 0.2 to 2.0 weight. % Vanadium. The disclosure claims increase in pitting life only and does not address bending fatigue strength, essential for gear(s) and/or shaft of the components. Further the special steel used for processing requires special steel making process which increases production costs.

40 2) US Patent No 5,595,613 claims to produce superior pitting resistance and wear resistance only with special steels having 1.5 to 5.0 weight .% Chromium .The treatment does not address bending fatigue strength. Further the special steel used for processing requires special steel making process which increases production costs.

45 3) US Patent No. 5,019,182 claims to use heat treatment route which docs not address Tempering process. In absence of tempering process after quenching, quenching stresses are not relieved prior to service leading to dimensional instability and susceptibility to -cracking. Further, the bending fatigue strength is not addressed in the claim.

50 **[0009]** In light of the existing prior-art, there is long standing demand to provide both superior bending and pitting fatigue life on gear(s) and/or shaft components simultaneously using "conventional alloy steel " which is described as cheaper, most widely used and widely available steels for gear(s) and/or shaft components. All above disclosures do not provide complete solutions for producing both superior bending fatigue strength and pitting fatigue life simultaneously.

SUMMARY OF INVENTION

5 [0010] It is the object of this present invention to achieve both superior pitting and bending fatigue strengths of gear (s) and/or shaft components simultaneously using "conventional alloy steel" (hereafter called only "conventional steel") which is described as cheaper, most widely used and most widely available for gear(s) and/or shaft components, by a method having following steps in sequence.

Modified Carbonitriding treatment

10 Hard Shot Peening. process

[0011] The second aspect of the present invention is to provide the said method for enhancing load carrying capability of transmissions without geometrical changes resulting in reduction of weights for higher load carrying capability, fuel consumption, development cost, development time and product cost and in turn give higher satisfaction to the customer.

15 [0012] Another aspect of the present invention is to avoid geometrical changes in transmission components resulting in maintaining same weight and hence lower emission levels for enhanced load carrying capabilities.

[0013] Another aspect of the present invention is to provide solution to the problem of providing additional space in transmissions in case of geometric design changes are required to be introduced. The invention is also beneficial in such cases where the space constraints do not permit any geometric changes.

20

BRIEF DESCRIPTION OF THE DRAWINGS

[0014]

25 FIGURE shows heat treatment cycle of Modified Carbonitriding This is followed by Hard shot peening

DETAILED DESCRIPTION OF THE INVENTION

30 [0015] The present invention features achieving both superior bending fatigue strength and pitting fatigue life of gear (s) and / or shaft components using "conventional steel" by a method having following steps in sequence.

Modified Carbonitriding treatment

Hard Shot Peening. process

35

[0016] "Conventional steel" used in the present invention is either one of the following types.

"Conventional steel" type 1 :

40 [0017] Steel material comprising 0.10 to 0.30 weight % Carbon, 0.15 to 0.35 weight % Silicon, 0.8 to 1.5 weight % Chromium , 0.6 to 1.5 weight % Manganese , 0.017 to 0.040 weight % Aluminium , and balance iron including impurities , produced in vacuum degassing and alike routes.

"Conventional steel" type 2 :

45

[0018] Steel material comprising 0.10 to 0.30 weight % Carbon , 0.15 to 0.35 weight % Silicon , 0.3 to 1.5 weight % Chromium , 0.30 to 2.0 weight % Nickel , 0.08 to 0.50 weight % Molybdenum , 0.6 to 1.5 weight % Manganese, 0.017 to 0.040 weight % Aluminium and balance iron including impurities , produced in vacuum degassing and alike routes ,

[0019] The rationale for choosing the "conventional steel" having the said compositions are as follows:

50

"Conventional steel" type 1:

[0020] Carbon inherently present in any steel is restricted in the range of 0.1 to 0.3 weight % . Lower than 0.1 weight % will not have sufficient core strength after the present processing. More than 0.3% will lead to core brittleness and reduced toughness. The response to heat treatment process will also be poor depending on higher Carbon contents.

55

[0021] Silicon is an essential element for de-oxidation of molten steel and hence minimum of 0.15 weight % is specified to ensure that de-oxidation is effectively taken care of. Higher than 0.35 weight % will entail more silicate inclusions affecting forgeability, machinability and reliability in service.

EP 1 516 940 A1

[0022] Chromium is easily available element for increasing hardenability. It is limited between 0.8 to 1.5 weight % to ensure adequate hardenability in the steels for gear(s) and / or shall components, in combination with Manganese. Higher than the limits will entail intergranular oxidation in the heat treated layers during carburising.

[0023] Manganese is yet another essential element effective in de-oxidation during melting and imparting hardenability. Not less than 0.6 weight % ensures de-oxidation and holds sulphur together. More than 1.5 weight % will lead to forgeability and machinability problems. It is easily available and cheaper element to increase the hardenability of the material for adequate core strengths and reasonable toughness

[0024] Aluminium content in the range 0.017 to 0.040 weight % gives fully killed steel and does not contribute significantly in the nitride formation and stabilizing retained Austenite necessitating use of Modified Carbonitriding treatment for the purpose.

[0025] Trace elements like Nb , Ti , Zr , Cu and B are adjusted in such a way that the total contents are below 0.60 weight % . Nitrogen content is kept at 55 to 90 parts per million (ppm) and hydrogen is not more than than 2.5 ppm . Calcium and Sulphur are usually added in suitable quantities to improve morphology of inclusions to facilitate machinability

[0026] The steel during melting is treated by standard Vacuum degassing cycle to maintain lower oxygen contents (Oxygen content in the product not more than 20 ppm) and hence limit size and distribution of inclusions to a degree that the component is fit for the applications already mentioned .

"Conventional steel" type 2:

[0027] Carbon inherently present in any steel is restricted in the range of 0.1 to 0.3 weight % . Lower than 0.1 weight % will not have sufficient core strength after the present processing. More than 0.3% will lead to core brittleness and reduced toughness. The response to heat treatment process will also be poor depending on higher Carbon contents.

[0028] Silicon is an essential element for de-oxidation of molten steel and hence minimum of 0.15 weight % is specified to ensure that de-oxidation is effectively taken care of. Higher than 0.35 weight % will entail more silicate inclusions affecting forgeability, machinability and reliability in service.

[0029] Chromium is easily available element for increasing hardenability. It is limited between 0.3 to 1.5 weight % to ensure adequate hardenability in the steels for gear(s) and / or shaft components, in combination with Manganese , Nickel and Molybdenum. of suitable quantities mentioned above. Higher than the limits will entail intergranular oxidation in the heat treated layers during carburising.

[0030] Nickel is another essential element effective in ensuring hardenability and improve toughness , required in critical applications. The required quantity is to be not less than 0.3 weight % for ensuring the toughness and hardenability. The upper limit is set to 2 weight % arrived at based on the effect in combination with other elements mentioned above.

[0031] Molybdenum is yet another highly effective element in promoting hardenability of the surface and in the core portion. The lower limit is set to 0.08 weight % to be effective in promoting hardenability. The upper limit of 0.5 % is set in combination with other elements mentioned above.

[0032] Manganese is yet another essential element effective in imparting hardenability, de-oxidation during melting . Not less than 0.6 weight % ensures de-oxidation and holds sulphur together. More than 1.5 weight % will lead to forgeability and machinability problems. It is also easily available and cheaper element to increase the hardenability of the material for adequate core strengths and reasonable toughness.

[0033] Aluminium content in the range 0.017 to 0.040 weight % gives fully killed steel and does not contribute significantly in the nitride formation and stabilizing retained Austenite necessitating use of Modified Carbonitriding treatment for the purpose.

[0034] Trace elements like Nb , Ti , Zr , Cu and B are adjusted in such a way that the total contents are below 0.60 weight % . Nitrogen content is kept at 55 to 90 parts per million (ppm) and hydrogen is not more than than 2.5 ppm . Calcium and Sulphur are usually added in suitable quantities to improve morphology of inclusions to facilitate machinability

[0035] The steel during melting is treated by standard Vacuum degassing cycle to maintain lower oxygen contents (Oxygen content in the product not more than 20 ppm) and hence limit size and distribution of inclusions to a degree that the component is fit for the applications already mentioned .

Modified Carbonitriding :

[0036] The gear(s) and/or shaft components are manufactured as per conventional gear machining practice for highway, off-highway vehicle transmissions and similar industrial transmissions. The said components after machining are loaded in a standard sealed quench furnace having requisite facilities for automatic measurement and feedback mechanisms for carbon potential, temperature and time and facility for ammonia introduction is to be in place. Furnaces

other than standard sealed quench furnaces having above requisite capabilities are also covered in the object of the invention.

[0037] The first step in the heat treatment cycle is Carburising (Refer FIGURE). The carburising is done at 915 degree Centigrade with equal boost and diffusion periods with Carbon potential (Cp) 1.0 and 0.8 respectively , using carrier gas and enricher gases. The temperature of not less than 900 degree Centigrade at which the carbon diffusion is more pronounced is covered in the invention. The effective case depth covered is in the range of 0.3 to 1.7 mm (cut off hardness 513 Hv). Effective case depths less than 0.3 mm do not provide adequate pitting resistance and more than 1.7 mm have deleterious effects on the fatigue properties for the applications covered in the scope of invention.

[0038] At the end of carburising cycle , the component is cooled inside the furnace to 850 degree Centigrade and ammonia is introduced with 15% of the whole furnace gas mixture (rest of the percent being carrier gas) . The cycle is carried out for minimum 30 minutes. Temperature not less than 840 degree Centigrade and not more than 870 degree Centigrade is also covered as part of the invention to facilitate pronounced nitrogen diffusion upto a depth of 0.3 mm. Similarly ammonia not less than 15% and not more than 20% of the whole furnace gas mixture is covered for the "conventional steel" in which nitrogen absorbing elements and elements promoting diffusion of nitrogen are not in sufficient quantities.

[0039] To minimize distortions in the steel components, quenching in suitable medium at 120 to 150 degree Centigrade is maintained in the present invention. Depending on the criticality of the component, the quenching medium temperature of not less than 50 C is covered in the object of the invention.

[0040] Tempering temperature of 180 degree Centigrade is adopted for the purpose of relieving quenching stresses, without reduction in retained austenite produced after quenching, as above. The temperature not less than 160 degree Centigrade is covered to relieve quenching stresses.

[0041] Hardness after Modified Carbonitriding is maintained at not less than 74U Hv at a depth of 0.05 to 0.35 mm below the surface. The stresses responsible for pitting (called "Hertzian" stresses) are maximum at depth range mentioned here in the applications mentioned above. The hardness will get further enhanced during Hard shot peening and will provide adequate safety against pitting failures for the applications already covered.

[0042] The bending fatigue strength, which is a function of maximum residual compressive stress below the surface, is also enhanced by Hard shot peening.

Hard Shot Peening :

[0043] Further processing by Hard shot peening of the gear(s) and/or shaft components has simultaneous benefits of increasing the bending fatigue strength not less than 30% and pitting fatigue life by more than 3 times. The results have been confirmed in severe, rigorous and accelerated transmission endurance trials for life time, in comparison with conventional " carburising " component run with conventional monograde GL-4 gear oil , with oil temperature reaching upto 95 degree Centigrade. Similar results are covered with GL-4 or higher performance category multigrade oils with the present invention.

[0044] The improvement in bending fatigue strength results are further confirmed with Residual stress measurements using non- destructive Rigaku X-ray diffraction treatment upto a depth of 150 microns of actual component with conventional "Carburising " route and " Modified Carbonitriding with Hard Shot Peening " method using "conventional steel" . The maximum residual compressive stresses of 1500 Mpa and corresponding bending fatigue strength improvement of 30 to 80 % are covered in the present invention

[0045] The roughness and finish of the component surface influences the lubrication condition during engagement of with the mating components. Keeping in mind that the gears need to be within the intended surface quality norms, the parameters are limited to as below,

shot size ranging from 0.5 to 0.8 mm ,
 shot hardness 610 to 800 Hv,
 shot velocity 60 to 150 m/sec ,
 part coverage 200 to 500 %
 Almen A arc height 0.6 to 0.9 mm.

Claims

1. A method for producing steel components such as gears and/or shafts of superior bending fatigue strength and pitting fatigue life, comprising the following steps in sequence:

subjecting said steel components to a process of Modified Carbonitriding Treatment;

EP 1 516 940 A1

subjecting said steel components to a process of Hard Shot Peening.

2. Method according to claim 1, wherein said steel material comprising:

5
10

0.10 to	0.30	weight%	Carbon,
0.15 to	0.35	weight%	Silicon,
0.8 to	1.5	weight%	Chromium,
0.6 to	1.5	weight %	Manganese,
0.017 to	0.040	weight %	Aluminium, and
balance iron including impurities, produced in vacuum degassing and alike routes.			

3. Method according to claim 1, wherein said steel material comprising:

15
20

0.10 to	0.30	weight%	Carbon,
0.15 to	0.35	weight%	Silicon,
0.3 to	1.5	weight%	Chromium,
0.30 to	2.0	weight%	Nickel,
0.08 to	0.50	weight%	Molybdenum,
0.6 to	1.5	weight%	Manganese,
0.017 to	0.040	weight%	Aluminium and
balance iron including impurities, produced in vacuum degassing and alike routes.			

4. Method according to at least one of claims 1 to 3, wherein the process of Modified Carbon Treatment includes the following steps in sequence:

25
30

Carburising at 900 to 1050 degree Centigrade,
Cooling down to 840 to 870 degree Centigrade for Carbonitriding with 15 to 20% Ammonia,
Quench in a medium at 120 to 150 degree Centigrade
Tempering at 160 to 180 degree Centigrade.

5. Method according to at least one of claims 1 to 4, wherein said process of Hard Shoot Peening is performed under the following parameters:

35
40

shot size ranging from 0.5 to 0.8 mm,
shot hardness 610 to 800 HV,
shot velocity 60 to 150 m/sec,
part coverage 200 to 500%, and
Almen A arc height 0.6 to 0.9 mm.

6. Gear component produced in accordance with the method according to at least one of claims 1 to 5.

45

7. Shaft component produced in accordance with the method according to at least one of claims 1 to 5.

50

55

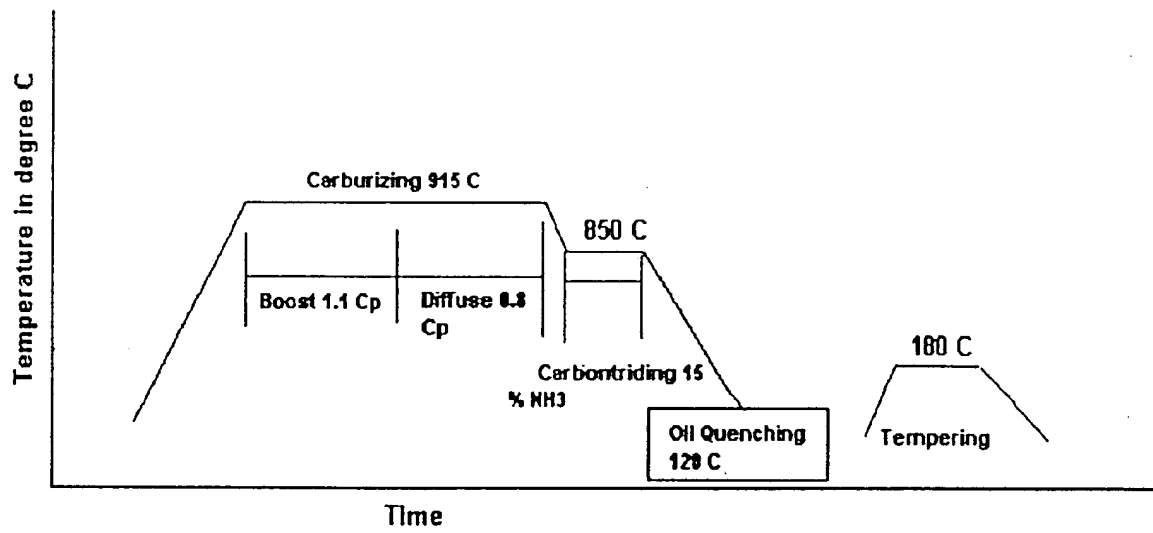


FIGURE 1



DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	PATENT ABSTRACTS OF JAPAN vol. 1995, no. 10, 30 November 1995 (1995-11-30) & JP 7 190173 A (KOBE STEEL LTD; others: 01), 28 July 1995 (1995-07-28) * abstract * * page 4; table 1 * * page 6; figures 1,2 * See paragraphs 10,19,22-26 of the english translation. -----	1-6	C23C8/32 C21D6/00 C21D9/28 C21D9/32
X	PATENT ABSTRACTS OF JAPAN vol. 1998, no. 11, 30 September 1998 (1998-09-30) & JP 10 158743 A (NISSAN MOTOR CO LTD), 16 June 1998 (1998-06-16) * abstract * * page 7; figure 2 * See paragraphs 1-17 and 29 of the english translation. -----	1-6	
X	PATENT ABSTRACTS OF JAPAN vol. 1996, no. 09, 30 September 1996 (1996-09-30) & JP 8 120438 A (KOBE STEEL LTD), 14 May 1996 (1996-05-14) * abstract * * page 6; table 1 * * page 13; figures 1-3 * See paragraphs 1,6-7,9-13,41-42 of the english translation. ----- -/--	1-3,6,7	TECHNICAL FIELDS SEARCHED (Int.Cl.7) C23C C21D
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
Munich		18 October 2004	Brown, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 (03.82) (P/04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 02 6668

DOCUMENTS CONSIDERED TO BE RELEVANT				
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)	
X	US 5 595 610 A (MAEDA HISAO ET AL) 21 January 1997 (1997-01-21) * figures 3A-3B * * column 1, line 25 - line 67 * * column 2, line 25 - line 34 * * column 3, line 9 - line 37 * * column 5, line 45 - line 67 * * column 6 - column 8 * * table 2 * * column 9, line 35 - line 52 * -----	1-7		
X,D	US 5 595 613 A (HATANO ATSUMI ET AL) 21 January 1997 (1997-01-21) * figures 4,5 * * column 2, line 45 - line 67 * * column 3 * * table 1 * * column 6, line 11 - line 19 * -----	1-7		
X	EP 0 950 723 A (KOMATSU MFG CO LTD) 20 October 1999 (1999-10-20) * paragraph [0001] - paragraph [0002]; figures 3,4 * * paragraph [0015] - paragraph [0018] * * paragraph [0023] * * paragraph [0026] * * paragraph [0043] - paragraph [0044] * * page 9; table 1 * * paragraph [0052] - paragraph [0055] * -----	1-6		TECHNICAL FIELDS SEARCHED (Int.Cl.7)
X	PATENT ABSTRACTS OF JAPAN vol. 1998, no. 03, 27 February 1998 (1998-02-27) & JP 9 296250 A (DAIDO STEEL CO LTD), 18 November 1997 (1997-11-18) * abstract * * page 5; table 1 * ----- -/--	1,3,6		
The present search report has been drawn up for all claims				
Place of search Munich		Date of completion of the search 18 October 2004	Examiner Brown, A	
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document		

EPO FORM 1503 00/02 (P04001)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 02 6668

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 08, 6 October 2000 (2000-10-06) & JP 2000 129347 A (KOBE STEEL LTD), 9 May 2000 (2000-05-09) * abstract *	1,6	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 18 October 2004	Examiner Brown, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03 82 (P04C01) 2

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 03 02 6668

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-10-2004

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 7190173	A	28-07-1995	NONE
JP 10158743	A	16-06-1998	NONE
JP 8120438	A	14-05-1996	NONE
US 5595610	A	21-01-1997	JP 5148535 A 15-06-1993
US 5595613	A	21-01-1997	JP 3308377 B2 29-07-2002 JP 7242994 A 19-09-1995
EP 0950723	A	20-10-1999	JP 10176219 A 30-06-1998 DE 69723302 D1 07-08-2003 DE 69723302 T2 17-06-2004 EP 0950723 A1 20-10-1999 US 2001001396 A1 24-05-2001 EP 1273672 A1 08-01-2003 WO 9827242 A1 25-06-1998 US 6447619 B1 10-09-2002
JP 9296250	A	18-11-1997	NONE
JP 2000129347	A	09-05-2000	NONE