



(11) **EP 1 516 999 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
10.01.2007 Bulletin 2007/02

(51) Int Cl.:
E06C 1/12 (2006.01)

(21) Application number: **04030411.5**

(22) Date of filing: **12.06.2002**

(54) **Collapsible ladder**

Zusammenlegbare Leiter

Echelle pliable

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

(30) Priority: **13.06.2001 SE 0102109**

(43) Date of publication of application:
23.03.2005 Bulletin 2005/12

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
02736438.9 / 1 402 143

(73) Proprietor: **Telesteps AB**
573 24 Tranås (SE)

(72) Inventor: **Kjell, Johansson**
570 22 Forserum (SE)

(74) Representative: **Karlsson, Leif Gunnar Börje et al**
Ström & Gulliksson AB
P.O. Box 4188
203 13 Malmö (SE)

(56) References cited:

EP-A- 0 527 766	DE-A1- 19 653 003
DE-C- 73 768	DE-U1- 9 407 043
US-A- 2 194 856	US-A- 4 989 692
US-A- 5 495 915	US-A- 5 645 140
US-A- 5 743 355	

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 516 999 B1

Description

AREA OF INVENTION

[0001] The present invention relates to a collapsible ladder of the type comprising U-shaped ladder sections being telescopically inserted in each other.

BACKGROUND OF INVENTION

[0002] Such ladders having collapsible and expandable ladder sections are used in order to make the ladder smaller for storage and transport purposes.

[0003] A similar ladder is described in EP-A-0 527 766. This ladder comprises ladder bars divided into sections interconnected by ladder pins. The diameters of the ladder bars are reduced upwards. This previously known ladder is characterized in that the retaining mechanisms of each ladder section are designed to automatically release the upper ladder sections, when a ladder pin reaches a lower ladder pin. This means, that subsequent to the release of the bottommost ladder section, the following ladder sections are automatically released, whereby the ladder collapses. Thus, accidents, particularly injuries caused by crushing, may occur. This known mechanism allows or actually invites people to manipulate it, which may lead to catastrophic results. Also, if manipulation does not occur, material wear and tear, inappropriate friction etc. may bring about similar risks and consequences. Also, it is not possible, at least not without risks, to adjust the length of the ladder somewhere in the middle of the ladder. Also, an expansion of the ladder to only a portion of the maximally possible length may involve risks.

[0004] DE-73 768 relates to a locking device for hydraulically expandable fire ladders (A) with telescopic bars. At the ends of the ladder pins (N), inactive bolts (c) are mounted in a normal position, which can be prestressed by springs. The springs can be activated by clinchers (b), whereby the bolts penetrate through diametrically arranged holes in the lower part of the bar sections. In the area, where the bolts have been inserted into a matching ladder pin (ladder pins), there are no restraints for preventing a total collapse of the entire ladder, whereby the ladder pins hit each other and may cause injuries by crushing etc.

[0005] US-2 194 856 relates to a ladder with telescopic sections, similar to the sections in DE-73 768. However, the ladder is provided with spring-loaded bolts (10), which work automatically in the locking direction. This construction also has the above-mentioned drawbacks.

[0006] US-4 989 692 relates to a ladder with telescopic sections (10), in which the ladder pins (13) are provided with press buttons (31), designed to simultaneously release locking mechanisms via a wire in the two ends of the respective ladder pin. A single blow against the only press button in each ladder pin may put the locking device out of order. The involved sections will then collapse and

the above-mentioned risks will occur.

[0007] DE-19653003 discloses a collapsible ladder having a safety position. However, this ladder does not comprise locking pins that can be operated manually. Moreover, the ladder collapses sequentially from the safety position to a transport position upon a release action, whereby the risk of injury occurs.

[0008] DE-U1-94 070 43 discloses an automatically collapsible ladder similar to EP-H1-0 527 766 having actuators that enables above located ladder sections to be automatically collapsed when bottommost located actuators are released. Thus, accidents, particularly injuries caused by crushing, may occur.

[0009] In previously known telescopically collapsible ladders, the length of the ladder always corresponds to the number of expanded ladder sections, because a ladder length between two expanded ladder sections is normally impossible.

SUMMARY OF INVENTION

[0010] An object of the present invention is to counteract and eliminate as far as possible the above-mentioned drawbacks and risks. Another object of the invention is to create an extra safety measure particularly against injuries caused by crushing, wherein not even a released ladder section will result in that a hand or a foot might be squeezed. Still another object is to be able to establish new ladder section levels, positioned between the levels for adjacent locked ladder sections.

[0011] These objects are attained according to the invention by a collapsible ladder, comprising several ladder sections, each section comprising two ladder bars arranged parallel to each other and interconnected at one end by a ladder step to form a U-shaped ladder section. Each ladder section is telescopically inserted in a lower ladder section to form a collapsible ladder comprising at least three ladder sections. Each ladder bar comprises a retaining mechanism adjacent the upper end of the ladder bar and a locking hole adjacent the lower end of the ladder bar. Each retaining mechanism comprises a locking pin which is spring biased towards an extended position in order to engage the locking hole provided in the ladder bar of an ladder section positioned there above, and an actuator for moving the locking pin into a retracted position. According to the invention, the actuator is arranged to be actuated outside of the space between the ladder pins, preferably at the front of the ladder, and is designed to be released manually and individually at both sides of a ladder section. Moreover, each locking pin has a length which is sufficient for extending through the locking hole of the ladder section positioned there above and into the hollow space inside the ladder bar and the ladder bar having an extension below the locking hole, so that when an upper ladder section is released and telescopically inserted into an intermediate ladder section, which is locked in relation to a lower ladder section by the locking pin of the lower ladder section engag-

ing the locking hole of the intermediate ladder section, the upper ladder section being stopped in a safety position from being fully inserted in the intermediate ladder section, by a safe distance, preferably 5 to 15 cm, by engagement of the extension of the lower ends of the ladder bars of the upper ladder section with the locking pins of the lower ladder section extending through the locking holes into the hollow space of the ladder bars of the intermediate ladder section, whereby the ladder sections are arranged so that if a specific ladder section located immediately above or immediately below an already collapsed ladder section is released, only the specific ladder section will be lowered collapsed, possibly together with a ladder section in the safety position immediately thereabove.

[0012] In an embodiment of the invention, the retaining mechanism on the lowermost ladder section is arranged so that if it is released, only a single ladder section located immediately above will collapse, possibly together with a ladder section in the safety position.

[0013] In another embodiment of the invention, the lowermost ladder section comprises two ladder steps. The actuator of the retaining mechanism may comprise a slide button or a pivoting button.

[0014] In yet another embodiment of the invention, the retaining mechanism comprises a pivoting button projecting from a recess in the front surface of the ladder step and being pivotable on a spindle parallel with the ladder bars and arranged in a housing. The button is approximately L-shaped, one of the legs in a locking position of the mechanism projecting obliquely out of the recess, whereas the other leg encloses a central portion of the locking pin between two flanges of the locking pin. The locking pin is displaceably mounted in the shell and is biased by a coil spring, which surrounds the locking pin and is supported at one of its ends by a washer, which is fixed in relation to the housing and slidably receives a first end of the locking pin, whereas the other end of the spring abuts one of the flanges, and the other end of the locking pin extends through the locking hole and into the respective ladder bar in the locking position. When the rotary button is activated, the spring is compressed and the locking pin is retracted from the locking hole to make free the upper ladder section.

[0015] In a further embodiment of the invention, the retaining mechanism comprises a slide button arranged in a recess in the front of the ladder step and being displaceable in the longitudinal direction of the ladder step and comprising a lever engaging a flange arranged on the locking pin. A coil spring is arranged for biasing the locking pin towards a locking position, one end of the spring abutting the flange and the other end abutting a wall arranged in the ladder step. When the slide button is activated, the spring is compressed and the locking pin is retracted from the locking hole to make free the upper ladder section.

[0016] In a still further embodiment of the invention, the locking pin position is indicated by a field, preferably

with red color, when the locking pin is withdrawn from the respective ladder bar, and by another field, preferably with green color, when the locking pin is in the locking position.

[0017] In yet a further embodiment of the invention, the ladder bar is provided with a safety ring in the area of the locking hole and designed to prevent that a ladder section is withdrawn from the ladder section below.

10 BRIEF DESCRIPTION OF THE DRAWINGS

[0018] Additional objects, features and advantages of the invention are described below, reference being made to the accompanying drawings, which show a few preferred but nonlimiting embodiments of the invention. In the drawings:

Fig. 1 is a front view of a maximally collapsed ladder according to the invention;

20 Fig. 2 is a view from above of the ladder of Fig. 1;

Fig. 3 is a view along line III-III in Fig. 1, but without bar sections, in which a locking pin has an inactive position;

25 Fig. 4 is a view from above of the section of Fig. 3, showing inserted bar sections;

Fig. 5 is a view similar to Fig. 3 and shows the locking position of the locking pin for an adjacent bar section;

30 Fig. 6 is a view similar to Fig. 4, in which an adjacent bar section is locked;

Figs. 7-10 are a diametrical longitudinal section, a schematic view from below, a lateral view, and a cross-section, respectively along line X-X in Fig. 8 of an alternative retaining mechanism with slide buttons;

35 Figs. 11 and 12 are perspective views of a ladder pin with slide buttons approximately according to Figs. 7-10 from below and above respectively; and Figs. 13-17 are front views of a ladder according to the invention in consecutive positions from a completely expanded to a completely collapsed position with a ladder section released in order to occupy an intermediate or security position.

45 DETAILED DESCRIPTION OF EMBODIMENTS

[0019] A collapsible ladder 1 according to the invention is shown on the drawings. Fig. 1 shows ladder bars 2 and 3 and ladder pins 4 and 4 a-i, respectively. The ladder pins are arranged between the ladder bars and interconnect them. The bars are divided into sections, which telescope into each other. The bar sections to the right and to the left form U-shaped ladder sections together with the ladder pins connected at the top of the bars.

[0020] The lowermost ladder section is suitably provided at the bottom with a stationary ladder pin 4i, designed to provide an extra foot support and a more stable lowermost ladder section. The ladder pin is suitably made of an extruded aluminum profile 5.

[0021] Each ladder pin houses at each end a retaining mechanism 6 comprising a shell 7. The shell is inserted in the profile of the ladder pin, e.g. by means of a press fit. The ladder pin of the uppermost ladder section may lack a retaining mechanism.

[0022] Figs. 1-6 show the retaining mechanisms 6 comprising a rotary button 10, used as an actuation or control member, whereas the remaining drawings show retaining mechanisms 6 having a slide button 10' as a control member.

[0023] In retaining mechanism 6 according to Figs. 3-6, rotary button 10 is pivotably mounted on a spindle 15 in shell 7. The spindle 15 is parallel to the bars. The rotary button 10 projects out of a recess 14 in the face of the ladder pin 4. Rotary button 10 is roughly L-shaped. In a locking position, one of the legs of the rotary button projects obliquely out from the recess, whereas the other leg, e.g. having a fork-shaped and rounded end, grasps a control portion of a locking pin 8 between two flanges 16. Locking pin 8 is displaceably mounted in the shell 7 and is biased by means of a coil spring 13. The spring 13 surrounds the locking pin 8 and is supported at one end by a bearing eye or washer 17. The washer 17 is constrained by the shell and receives one end of the locking pin, in order to, with the other end, abut one of follower flanges 16.

[0024] The locking pin projects at its other end through a locking hole 11 diametrically into the corresponding bar section. Coil spring 13 tends to move the locking pin into the hole and to retain it in the position. When the rotary button is pressed into the shell, the spring is compressed and the locking pin leaves the locking hole. Then, the respective bar section may be pushed downwards telescopically into the underlying bar section.

[0025] Slide button 10' according to Figs. 7-10 operates in an analogous way and the retaining mechanism is approximately designed in an analogous way. However, recess 14' in the front side of the ladder pin is longer and the slide button moves in the recess. Also in this case one of the ends of coil spring 13' abuts a follower flange 16', the other side of which being designed to be actuated by the slide button.

[0026] In the position according to Fig. 13 the ladder has a maximal length and is ready to be used. The locking pins 8 are inserted into locking holes of hollow space 9 of each bar section in order to safely lock each upper bar section relative to the underlying bar section. The safety is guaranteed, since every locking pin is constantly biased by its spring, which tends to push the locking pin into the locking hole of the adjacent upper bar section. The secure position can be visually indicated by means of a field 18, which is marked on the ladder pin and e.g. has a red color. The field becomes visible when the locking pin is withdrawn out of the locking hole. The field is normally covered by slide button 10', when the locking pin is not engaged. On the other hand, a green field 19 may be arranged at the ladder pin, which will become visible, when the locking pin exerts its locking function.

[0027] In the positions according to Fig. 14, the retaining mechanisms of the two sides in the second lowest ladder pin has been released by moving the slide buttons towards each other. Then, the locking pins are withdrawn from the respective locking holes in the corresponding bar section. The bar section slides downwards past the locking pin ends. Due to the spring load, the ends of the locking pins are kept tightened against the outside of the respective bar section. The second lowest bar section slides downwards, until the ladder pin from the third bottom section reaches the second lowest ladder pin. Since the user must keep both his hands around the outside of the bar section, his thumb being placed on the slide buttons, no injuries may be caused.

[0028] In this manner, section after sections are lowered according to Figs. 15 and 16, until the entire ladder has been collapsed.

[0029] In Figs. 13-16 is also shown that if a specific ladder section located immediately above or immediately below an already collapsed ladder section is released, only the specific ladder section, which is located immediately above or immediately below, will be lowered or collapse. Possibly together with an already released ladder section a ladder section in a safety position, which will be discussed below, and located immediately above the specific ladder section. This is due to the fact that each ladder section is locked in relation to the other ladder sections by its locking pins and will only be collapsed if its locking pins are released. An already partially collapsed ladder section, e.g. being the safety position, will collapse completely if the ladder section located immediately below is released.

[0030] This is shown in Figs. 13-15, where the ladder section 4b is extended in Fig. 14. Then the locking pins associated with the ladder section 4b, i.e. the locking pins arranged on the ladder section 4c, are released. The ladder section 4b will be lower to the position shown in Fig. 15. The ladder section 4a will not be collapsed since the locking pins associated with the ladder section 4a, i.e. the locking pins arranged on the ladder section 4b, are not released.

[0031] If the retaining mechanism on the lowermost ladder section (4h) is released, only a single ladder section (4g) located immediately above will collapse, possibly together with a ladder section in the safety position immediately thereabove.

[0032] When the ladder is to be expanded, one starts with the third ladder pin from below, i.e. with the second moveable ladder pin. It is not necessary to operate the retaining mechanisms of the ladder pins. As soon as the hole in the upwardly moved bar section ends up at the same level as the locking pin in the underlying bar section, the locking pin snaps into the hole and locks the section. The process continues, until the entire ladder, or a desired portion thereof, has been expanded.

[0033] As is shown in the drawings, locking holes 11 are arranged in every bar portion for receiving locking pins. Moreover, the bar portion within the area for such

a locking hole is surrounded by an outer safety ring 12, which is designed to prevent the bar portion from being withdrawn out of lower bar portion.

[0034] In case, e.g. by mistake, or when a certain ladder length is desired, which is between two bar section distances, one activates two control units somewhere in the middle of the ladder, the bar section above the retaining mechanism will sink, due to the force of gravity, but only up to the locking pins of the next retaining mechanism. The locking pins of next retaining mechanism project into the hollow space 9 and limit the downward movement. In this position the two respective ladder pins 4b and 4c of Fig. 17 are positioned at a safe distance from each other, e.g. 5-15 cm, in order to safely avoid injuries which might otherwise occur if the ladder pins could be moved into contact with each other. Such a position is shown in Fig. 17. Otherwise, the ladder can be used in all the shown positions. Thus, it is safe to climb on the ladder or load it in other ways, since each ladder pin always is secured either by itself or by means of underlying secured ladder pins.

[0035] The invention is not limited to the embodiments described above and shown on the drawings, but can be supplemented and modified in any manner within the scope of the invention as defined by the enclosed claims.

Claims

1. A collapsible ladder, comprising:

several ladder sections, each section comprising two ladder bars (2,3) arranged parallel to each other and interconnected at one end by a ladder pin (4) to form a U-shaped ladder section; each ladder section being telescopically inserted into a lower ladder section to form a collapsible ladder comprising at least three ladder sections;

each ladder bar (2,3) comprising a retaining mechanism (6) adjacent the upper end of the ladder bar and a locking hole (11) adjacent the lower end of the ladder bar;

each retaining mechanism comprising:

a locking pin (8) being spring biased towards an extended position in order to engage the locking hole (11) provided in the ladder bar of a ladder section positioned there above; and

an actuator (10) for moving the locking pin into a retracted position;

characterized in that

the actuator (10) is arranged to be actuated outside of the space between the ladder pins, preferably at the front of the ladder, and is designed to be released manually and individually at both

sides of a ladder section;

each locking pin (8) having a length which is sufficient for extending through the locking hole (11) of the ladder section positioned there above and into the hollow space inside the ladder bar and the ladder bar having an extension below the locking hole (11), so that when an upper ladder section (4b) is released and telescopically inserted into an intermediate ladder section (4c), which is locked in relation to a lower ladder section (4d) by the locking pin of the lower ladder section (4d) engaging the locking hole of the intermediate ladder section (4c), the upper ladder section (4b) being stopped in a safety position from being fully inserted in the intermediate ladder section (4c), by a safe distance, preferably 5 to 15 cm, by engagement of the extension of the lower ends of the ladder bars of the upper ladder section (4b) with the locking pins of the lower ladder section (4d) extending through the locking holes into the hollow space of the ladder bars of the intermediate ladder section (4c), whereby the ladder sections are arranged so that if a specific ladder section located immediately above or immediately below an already collapsed ladder section is released, only the specific ladder section will be lowered collapsed, possibly together with a ladder section in the safety position immediately thereabove.

2. A collapsible ladder according to claim 1, **characterized in that** the retaining mechanism on the lowermost ladder section (4h) is arranged so that if it is released, only a single ladder section (4g) located immediately above will collapse, possibly together with a ladder section in the safety position immediately thereabove.

3. A collapsible ladder according to any of claims 1 or 2, **characterized in that** the lowermost ladder section comprises two ladder steps (4i, 4h).

4. A collapsible ladder according to any of the preceding claims, **characterized in that** the actuator of the retaining mechanism comprises a slide button or a pivoting button.

5. A collapsible ladder according to any of claims 1-3, **characterized in that** the retaining mechanism comprises:

a pivoting button projecting from a recess in the front surface of the ladder step and being pivotable on a spindle (15) parallel with the ladder bars and arranged in a housing (7), wherein the button is approximately L-shaped, one of the legs in a locking position of the mechanism projecting obliquely out of the recess,

whereas the other leg encloses a central portion of the locking pin (8) between two flanges (16) of the locking pin,

wherein the locking pin (8) is displaceably mounted in a shell and being biased by a coil spring (13), which surrounds the locking pin and is supported at one of its ends by a washer (17), which is fixed in relation to the housing and slidably receives a first end of the locking pin, whereas the other end of the spring abuts one of the flanges (16), and the other end of the locking pin extends through the locking hole (11) and into the respective ladder bar in the locking position, whereas, when the rotary button is activated, the spring is compressed and the locking pin is retracted from the locking hole to make free the upper ladder section.

6. A collapsible ladder according to any of claims 1-3, **characterized in that** the retaining mechanism comprises:

a slide button (10') arranged in a recess (14') in the front of the ladder step and being displaceable in the longitudinal direction of the ladder step and comprising a lever engaging a flange (16') arranged on the locking pin, a coil spring (13') for biasing the locking pin (8) towards a locking position, one end of the spring abutting the flange (16) and the other end abutting a wall arranged in the ladder step; whereas, when the slide button is activated, the spring is compressed and the locking pin is retracted from the locking hole to make free the upper ladder section.

7. A collapsible ladder according to claim 6, **characterized in that** the locking pin position is indicated by a field, preferably with red color, when the locking pin is withdrawn from the respective ladder bar, and by another field, preferably with green color, when the locking pin is in the locking position.

8. A collapsible ladder according to any one of the preceding claims, **characterized in that** the ladder bar is provided with a safety ring (12) in the area of the locking hole (11) and designed to prevent that a ladder section is withdrawn from the ladder section below.

Patentansprüche

1. Kollabierbare Leiter mit:

mehreren Leiterabschnitten, wobei jeder Abschnitt zwei Leiterstangen (2,3) aufweist, die

parallel zueinander angeordnet und an dem oberen Ende durch eine Leitersprosse (4) derart miteinander verbunden sind, dass ein U-förmiger Leiterabschnitt gebildet ist;

wobei jeder Leiterabschnitt teleskopisch in einen tiefergelegenen Leiterabschnitt derart eingeführt ist, dass eine kollabierbare Leiter mit mindestens drei Leiterabschnitten gebildet wird; wobei jede Leiterstange (2,3) einen Rückhaltemechanismus (6) nahe dem oberen Ende der Leiterstange und eine Verriegelungsöffnung (11) nahe dem unteren Ende der Leiterstange aufweist;

wobei jeder Rückhaltemechanismus aufweist:

einen Verriegelungsstift (8), der zu einer ausgefahrenen Position hin federvorgespannt ist, um in die Verriegelungsöffnung (11), die in der Leiterstange eines darüber positionierten Leiterabschnitts angeordnet ist, einzugreifen;

ein Betätigungsteil (10) zum Bewegen des Verriegelungsstifts in eine zurückgezogene Position;

dadurch gekennzeichnet, dass

das Betätigungsteil (10) derart angeordnet ist, dass es außerhalb des Raums zwischen den Leitersprossen, vorzugsweise an der Vorderseite der Leiter, betätigt werden kann, und derart ausgebildet ist, dass es manuell und einzeln an beiden Seiten des Leiterabschnitts gelöst werden kann,

wobei jeder Verriegelungsstift (8) eine ausreichende Länge hat, um sich durch die Verriegelungsöffnung (11) des darüber positionierten Leiterabschnitts und in den hohlen Raum innerhalb der Leiterstange zu erstrecken, und die Leiterstangen unterhalb der Verriegelungsöffnung (11) eine derartige Verlängerung haben, dass, wenn ein oberer Leiterabschnitt (4b) freigegeben wird und teleskopisch in einen zwischenliegenden Leiterabschnitt (4c) eingeführt wird, der relativ zu einem unteren Leiterabschnitt (4d) mittels des mit der Verriegelungsöffnung des zwischenliegenden Leiterabschnitts (4c) zusammengreifenden Verriegelungsstifts des unteren Leiterabschnitts (4d) verriegelt ist, der obere Leiterabschnitt (4b) in einer Sicherheitsposition in einem sicheren Abstand von vorzugsweise 5 bis 15 cm relativ zu einer vollen Einführung in den zwischenliegenden Leiterabschnitt (4c) gestoppt wird, und zwar durch Zusammengreifen der Verlängerung der unteren Enden der Leiterstangen des oberen Leiterabschnitts (4b) mit den Verriegelungsstiften des unteren Leiterabschnitts (4d), die sich durch die Verriegelungsöffnungen in den hohlen Raum der Leiterstangen

- gen des zwischenliegenden Leiterabschnitts (4c) erstrecken, wobei die Leiterabschnitte derart angeordnet sind, dass, falls ein bestimmter Leiterabschnitt, der unmittelbar oberhalb oder unmittelbar unterhalb eines bereits kollabierten Leiterabschnitts angeordnet ist, freigegeben wird, nur dieser bestimmte Leiterabschnitt kollabiert, möglicherweise zusammen mit einem unmittelbar darüber angeordneten Leiterabschnitt in der Sicherheitsposition.
2. Kollabierbare Leiter nach Anspruch 1, **dadurch gekennzeichnet, dass** der Rückhaltemechanismus an dem untersten Leiterabschnitt (4h) derart angeordnet ist, dass, falls er freigegeben wird, nur ein einziger Leiterabschnitt (4g), der unmittelbar darüber angeordnet ist, kollabiert, möglicherweise zusammen mit einem unmittelbar darüber angeordneten Leiterabschnitt in der Sicherheitsposition.
3. Kollabierbare Leiter nach Anspruch 1 oder 2, **dadurch gekennzeichnet, dass** der unterste Leiterabschnitt zwei Leitersprossen (4i,4h) aufweist.
4. Kollabierbare Leiter nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** das Betätigungsteil des Rückhaltemechanismus einen Gleitknopf oder einen Drehknopf aufweist.
5. Kollabierbare Leiter nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** der Rückhaltemechanismus aufweist:
- einen Drehknopf, der von einer Ausnehmung in der Vorderseite der Leitersprosse absteht und an einer Spindel (15) parallel zu den Leiterstangen schwenkbar und in einem Gehäuse (7) angeordnet ist, wobei der Drehknopf im wesentlichen L-förmig ist, wobei einer der Schenkel in einer Verriegelungsposition des Mechanismus schräg aus der Ausnehmung absteht, während der andere Schenkel einen zentralen Teil des Verriegelungsstifts (8) zwischen zwei Flanschen des Verriegelungsstifts hält, wobei der Verriegelungsstift (8) verschiebbar in einer Hülse angeordnet ist und durch eine Schraubenfeder (13) vorgespannt ist, die den Verriegelungsstift umgibt und an einem ihrer Enden durch eine Lageröse (17) gehalten ist, welche relativ zu dem Gehäuse festgelegt ist und ein erstes Ende des Verriegelungsstifts gleitbar aufnimmt, während das andere Ende der Feder an einem der Flansche (16) anliegt, und wobei sich das andere Ende des Verriegelungsstifts in der Verriegelungsposition durch die Verriegelungsöffnung (11) und in die betreffende Leiterstange erstreckt,

während, wenn der Drehknopf aktiviert wird, die Feder zusammengedrückt wird und der Verriegelungsstift aus der Verriegelungsöffnung zurückgezogen wird, um den oberen Leiterabschnitt freizugeben.

6. Kollabierbare Leiter nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** der Rückhaltemechanismus aufweist:

einen Gleitknopf (10'), der in einer Ausnehmung (14') an der Vorderseite der Leitersprosse angeordnet ist und in der Längsrichtung der Leitersprosse verschiebbar ist und einen Hebel aufweist, der an einem am Verriegelungsstift angeordneten Flansch (16') angreift, eine Schraubenfeder (13') zum Vorspannen des Verriegelungsstifts (8) zu einer Verriegelungsposition hin, wobei ein Ende der Feder an dem Flansch (16) anliegt und das andere Ende an einer in der Leitersprosse angeordneten Wand angreift, während, wenn der Gleitknopf aktiviert wird, die Feder zusammengedrückt wird und der Verriegelungsstift aus der Verriegelungsöffnung zurückgezogen wird, um den oberen Leiterabschnitt freizugeben.

7. Kollabierbare Leiter nach Anspruch 6, **dadurch gekennzeichnet, dass** die Verriegelungsstift-Position mittels eines Felds mit vorzugsweise roter Farbe angezeigt wird, wenn der Verriegelungsstift aus der betreffenden Leiterstange zurückgezogen ist, und durch ein anderes Feld mit vorzugsweise grüner Farbe angezeigt wird, wenn sich der Verriegelungsstift in der Verriegelungsposition befindet.
8. Kollabierbare Leiter nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** die Leiterstange mit einem Sicherheitsring (12) versehen ist, der im Bereich der Verriegelungsöffnung (11) angeordnet und dazu vorgesehen ist, zu verhindern, dass ein Leiterabschnitt aus dem unter ihm positionierten Leiterabschnitt herausgezogen wird.

Revendications

1. Echelle repliable, comprenant :

plusieurs sections d'échelle, chaque section comprenant deux montants d'échelle creux (2, 3) disposés parallèlement l'un à l'autre et raccordés au niveau de l'extrémité supérieure par une broche d'échelle (4) pour former une section d'échelle en forme de U ; chaque section d'échelle étant insérée de manière télescopique dans une section d'échelle

inférieure pour former une échelle repliable comprenant au moins trois sections d'échelle ; chaque montant d'échelle (2, 3) comprenant un mécanisme de retenue (6) adjacent à l'extrémité supérieure du montant d'échelle et un orifice de verrouillage (11) adjacent à l'extrémité inférieure du montant d'échelle ;
chaque mécanisme de retenue comprenant :

une broche de verrouillage (8) polarisée par ressort vers une position étendue afin de venir en prise avec l'orifice de verrouillage (11) prévu dans le montant d'échelle d'une section d'échelle positionnée au-dessus ; et
un actionneur (10) pour déplacer la broche de verrouillage dans une position rétractée ;

caractérisée en ce que

l'actionneur (10) est disposé pour être actionné à l'extérieur de l'espace entre les broches d'échelle, de préférence devant l'échelle, et est conçu pour être relâché manuellement et individuellement sur les deux côtés d'une section d'échelle ;

chaque broche de verrouillage (8) ayant une longueur qui est suffisante pour s'étendre à travers l'orifice de verrouillage (11) de la section d'échelle positionnée au-dessus et dans l'espace creux à l'intérieur du montant d'échelle de la section d'échelle au-dessus, et les montants d'échelle ayant une extension sous l'orifice de verrouillage (11), de façon à ce que lorsqu'une section d'échelle supérieure (4b) est relâchée et insérée de manière télescopique dans une section d'échelle intermédiaire (4c), qui est bloquée en relation avec une section d'échelle inférieure (4d) par la broche de verrouillage de la section d'échelle inférieure (4d) en prise avec l'orifice de verrouillage de la section d'échelle intermédiaire (4c), la section d'échelle supérieure (4b) est empêchée dans une position de sécurité d'être totalement insérée dans la section d'échelle intermédiaire (4c) d'une distance de sécurité, de préférence entre 5 et 15 cm, au moyen de l'engagement de l'extension des extrémités inférieures des montants d'échelle de la section d'échelle supérieure (4b) avec les broches de verrouillage de la section d'échelle inférieure (4d) s'étendant à travers les orifices de verrouillage dans l'espace creux des montants d'échelle de la section d'échelle intermédiaire (4c), moyennant quoi les sections d'échelle sont agencées de sorte que si une section d'échelle spécifique positionnée immédiatement au-dessus ou immédiatement en dessous d'une section d'échelle déjà repliée est relâchée, seulement la section d'échelle spécifique sera re-

pliée, éventuellement conjointement à une section d'échelle dans la position de sécurité immédiatement au-dessus de celle-ci.

2. Echelle repliable selon la revendication 1, **caractérisée en ce que** le mécanisme de retenue sur la section d'échelle la plus inférieure (4h) est agencé de sorte que s'il est relâché, seulement une section d'échelle unique (4g) positionnée immédiatement au-dessus se repliera, éventuellement conjointement à une section d'échelle dans la position de sécurité immédiatement au-dessus de celle-ci.
3. Echelle repliable selon l'une quelconque des revendications 1 ou 2, **caractérisée en ce que** la section d'échelle la plus inférieure comprend deux barreaux d'échelle (4i, 4h).
4. Echelle repliable selon l'une quelconque des revendications précédentes, **caractérisée en ce que** l'actionneur du mécanisme de retenue comprend un bouton coulissant ou un bouton pivotant.
5. Echelle repliable selon l'une quelconque des revendications 1 à 3, **caractérisée en ce que** le mécanisme de retenue comprend:

un bouton pivotant se projetant à partir d'un renforcement dans la surface avant du barreau d'échelle et pouvant pivoter sur un axe (15) parallèle aux montants d'échelle et disposé dans un boîtier (7),

dans laquelle le bouton est approximativement en forme de L, l'une des jambes dans une position de verrouillage du mécanisme se projetant à l'oblique hors du renforcement, tandis que l'autre jambe entoure une partie centrale de la broche de verrouillage (8) entre deux rebords (16) de la broche de verrouillage,

dans laquelle la broche de verrouillage (8) est montée de façon à pouvoir être déplacée dans une coque et étant polarisée par un ressort hélicoïdal (13) qui entoure la broche de verrouillage et est supporté au niveau d'une de ses extrémités par une rondelle (17) qui est fixée en relation avec le boîtier et reçoit de façon coulissante une première extrémité de la broche de verrouillage, tandis que l'autre extrémité du ressort vient en butée contre l'un des rebords (16) et que l'autre extrémité de la broche de verrouillage s'étend à travers l'orifice de verrouillage (11) et dans le montant d'échelle respectif dans la position de verrouillage, tandis que, lorsque le bouton tournant est activé, le ressort est comprimé et la broche de verrouillage est rétractée de l'orifice de verrouillage pour libérer la section d'échelle supérieure.

6. Echelle repliable selon l'une quelconque des revendications 1 à 3, **caractérisée en ce que** le mécanisme de retenue comprend:

un bouton coulissant (10') disposé dans un renfoncement (14') à l'avant du barreau d'échelle et pouvant être déplacé dans la direction longitudinale du barreau d'échelle et comprenant un levier venant en prise avec un rebord (16') disposé sur la broche de verrouillage, 5
un ressort hélicoïdal (13') pour polariser la broche de verrouillage (8) vers une position de verrouillage, une extrémité du ressort venant en butée contre le rebord (16) et l'autre extrémité venant en butée contre une paroi disposée dans le barreau d'échelle ; 10
tandis que, lorsque le bouton coulissant est activé, le ressort est comprimé et la broche de verrouillage est rétractée de l'orifice de verrouillage pour libérer la section d'échelle supérieure. 15 20

7. Echelle repliable selon la revendication 6, **caractérisée en ce que** la position de la broche de verrouillage est indiquée au moyen d'un champ, de préférence de couleur rouge, lorsque la broche de verrouillage est retirée du montant d'échelle respectif, et au moyen d'un autre champ, de préférence de couleur verte, lorsque la broche de verrouillage est dans la position de verrouillage. 25 30

8. Echelle repliable selon l'une quelconque des revendications précédentes, **caractérisée en ce que** le montant d'échelle est muni d'un anneau de sécurité (12) dans la zone de l'orifice de verrouillage (11) et conçu pour empêcher qu'une section d'échelle soit retirée de la section d'échelle inférieure. 35 40 45 50 55

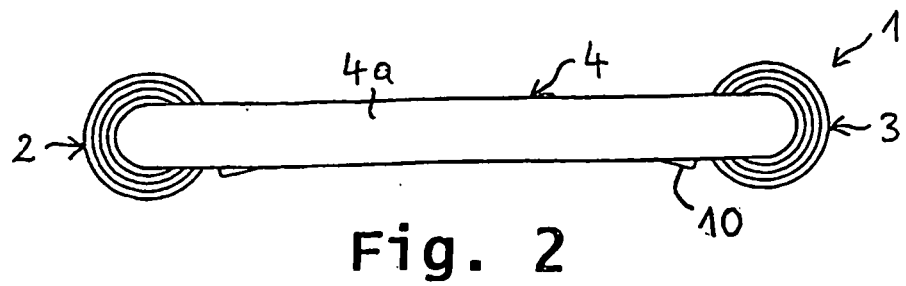
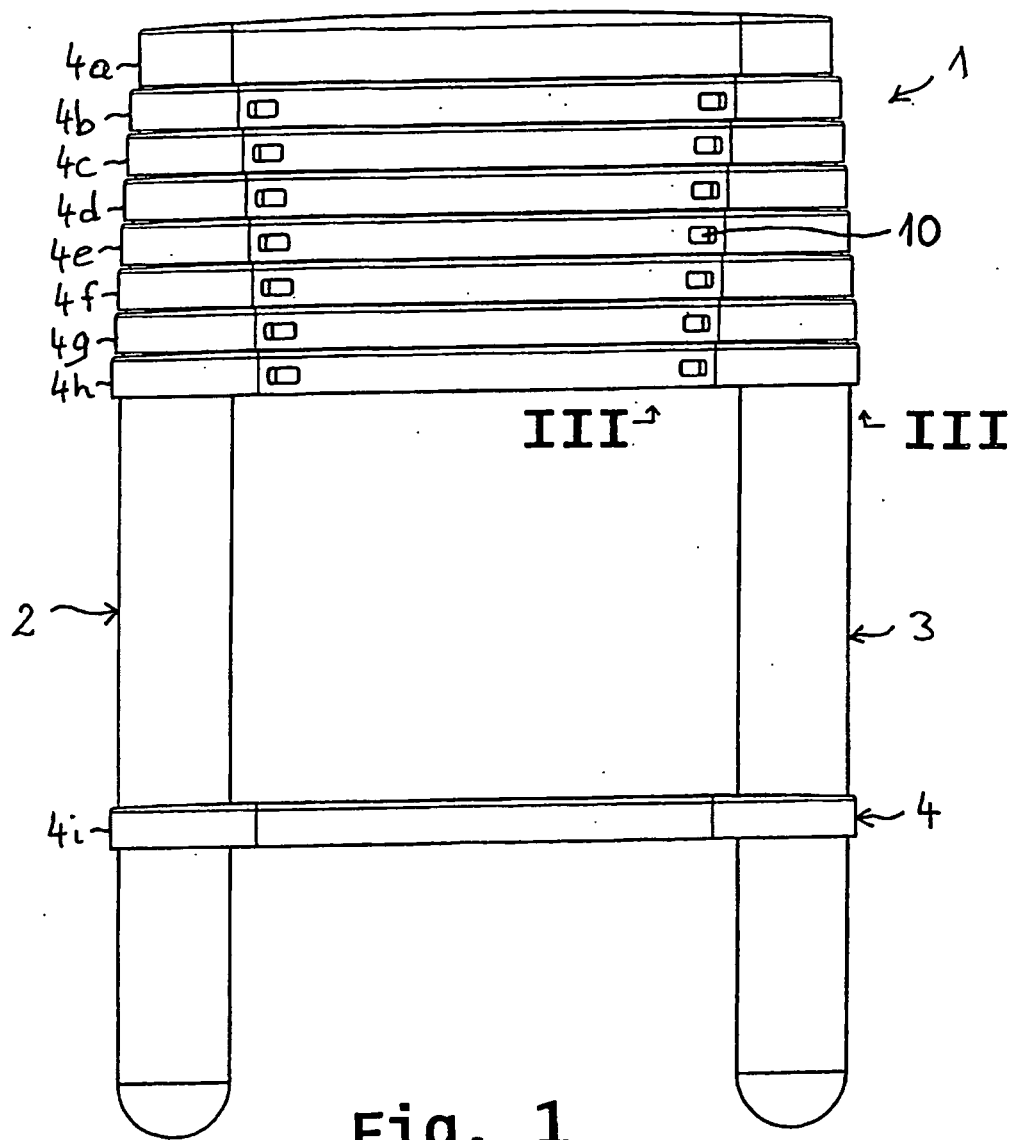


Fig. 3

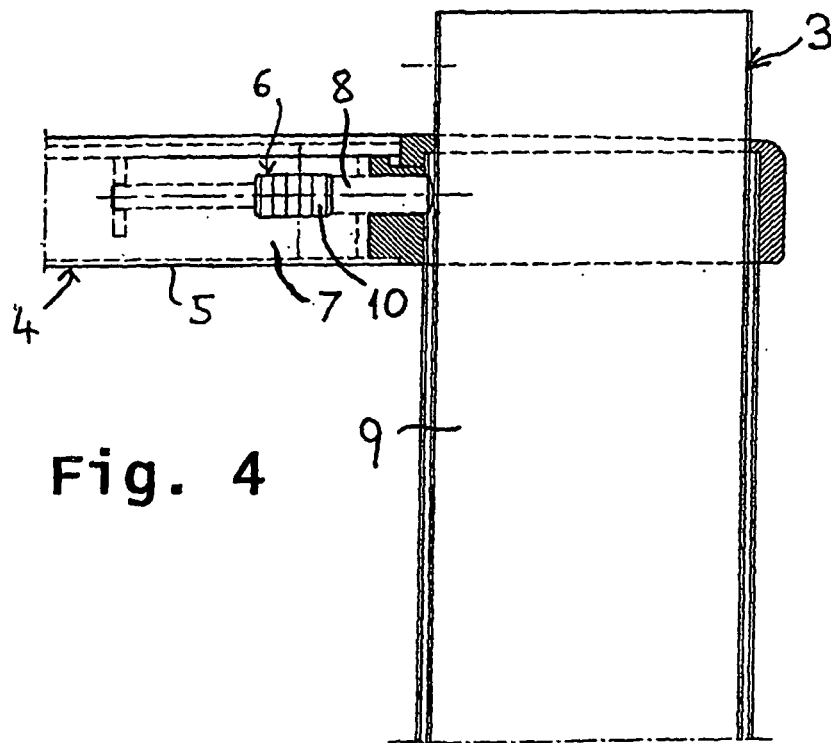
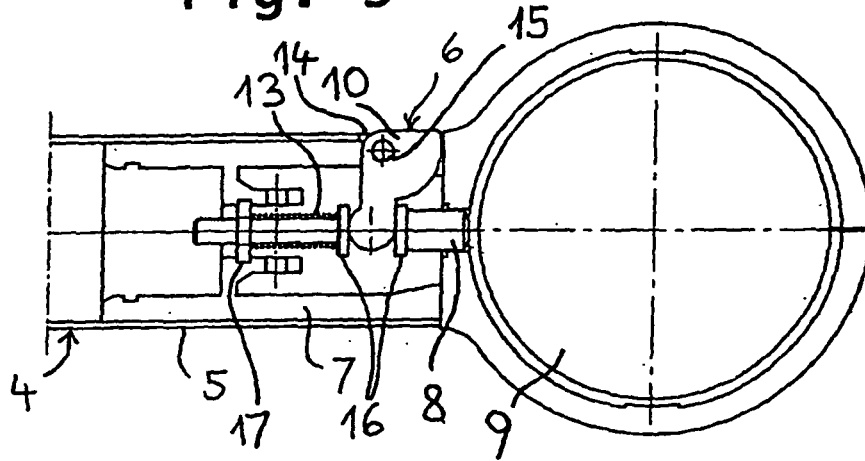


Fig. 4

Fig. 5

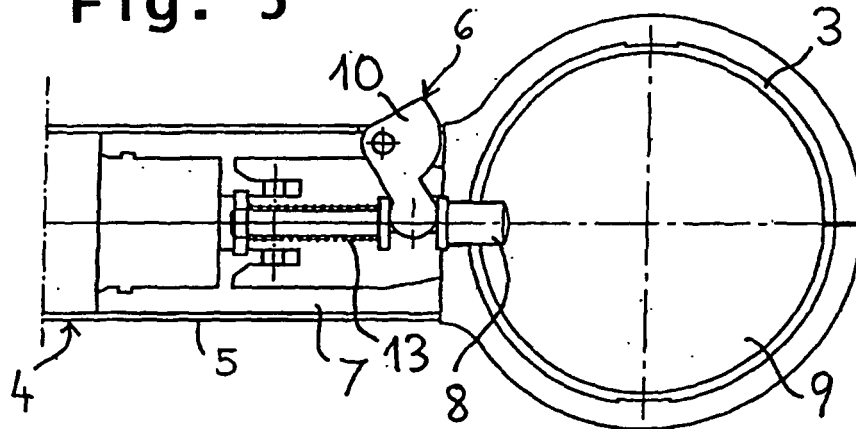
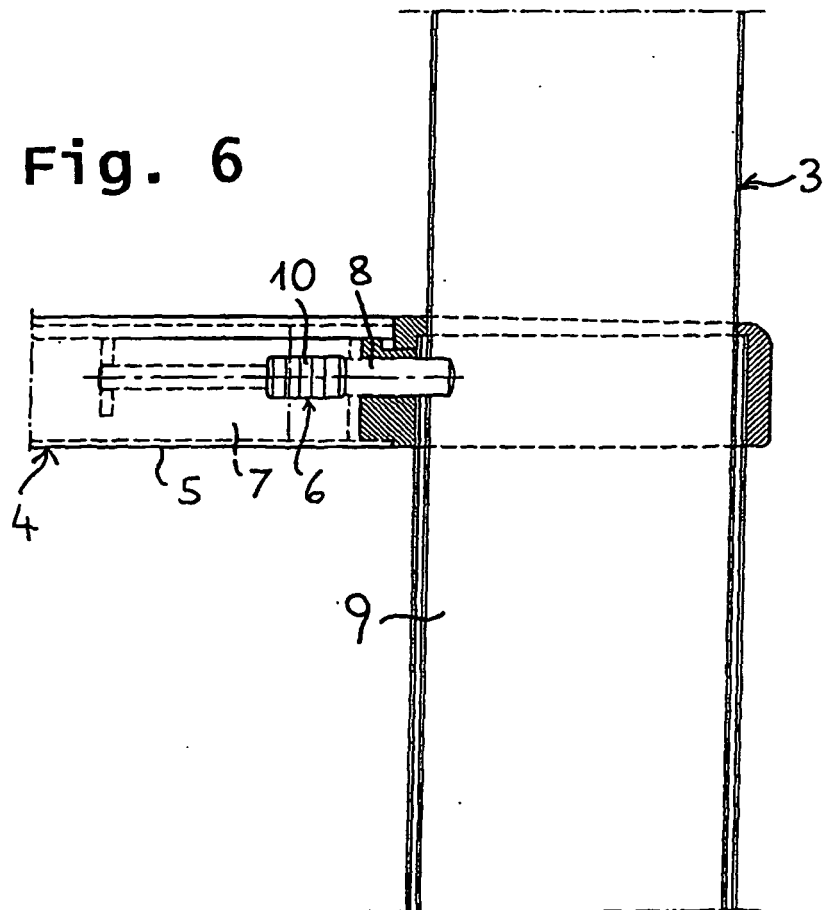


Fig. 6



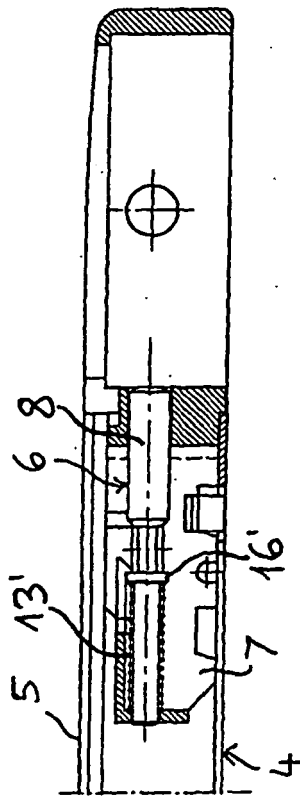


Fig. 7

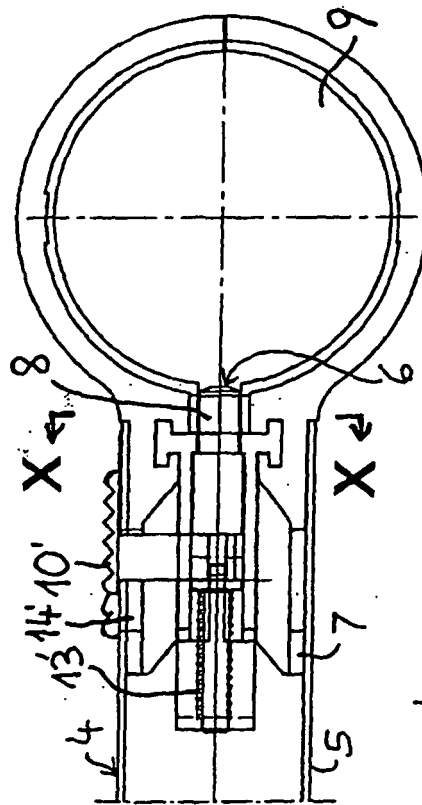


Fig. 8

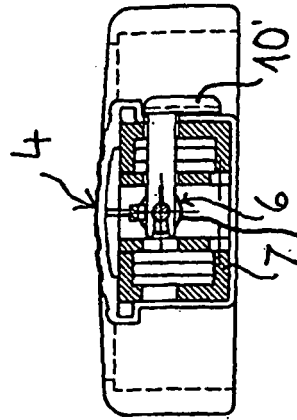


Fig. 9

Fig. 10

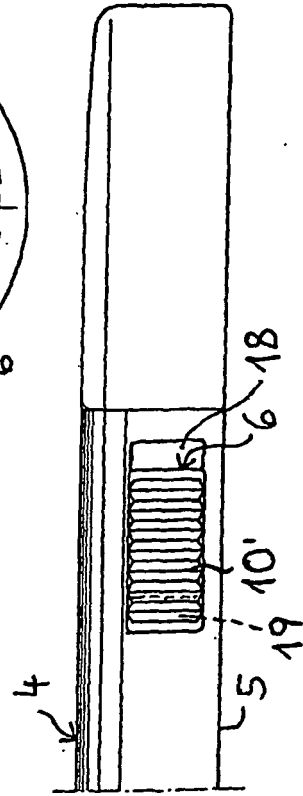


Fig. 11

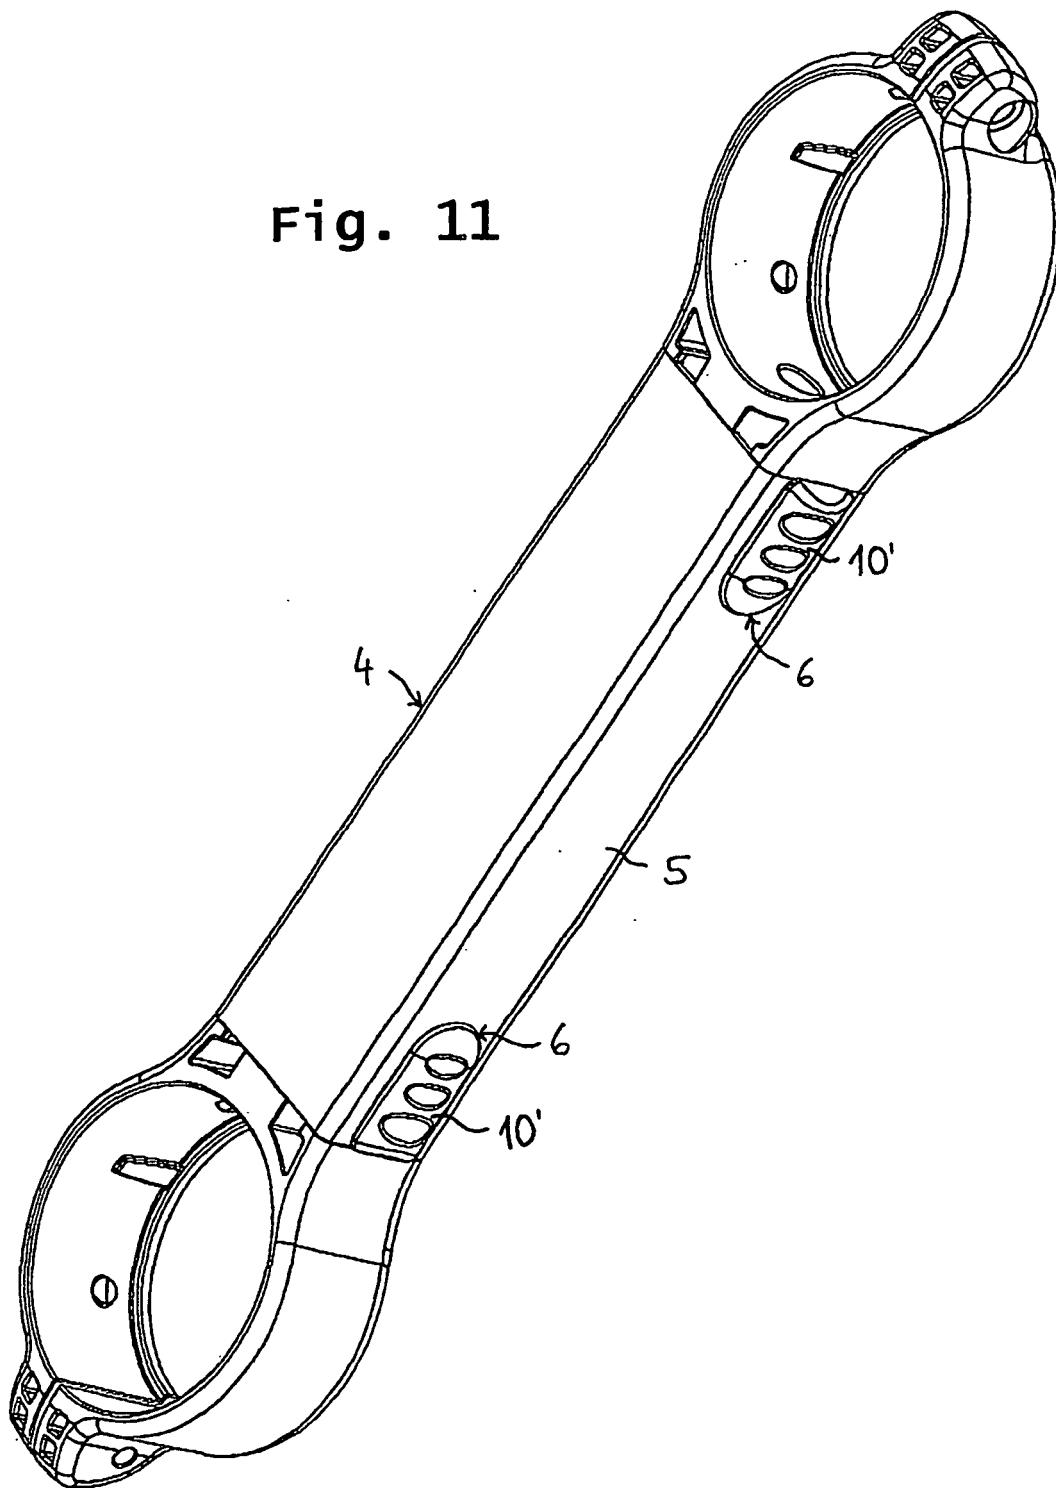


Fig. 12

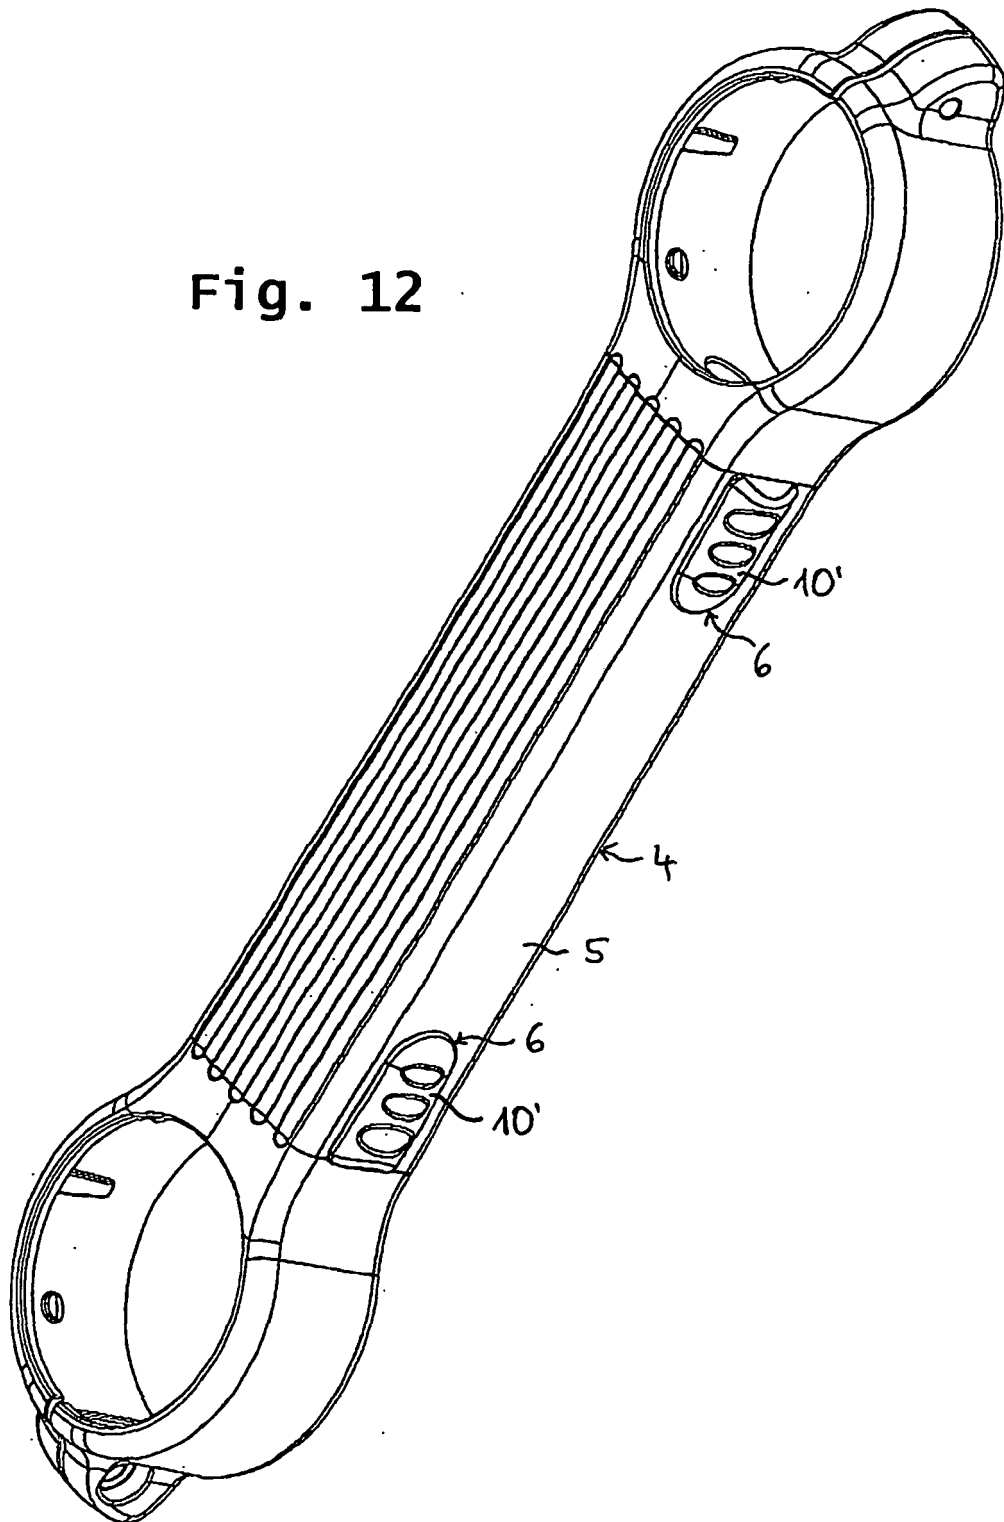


Fig. 13

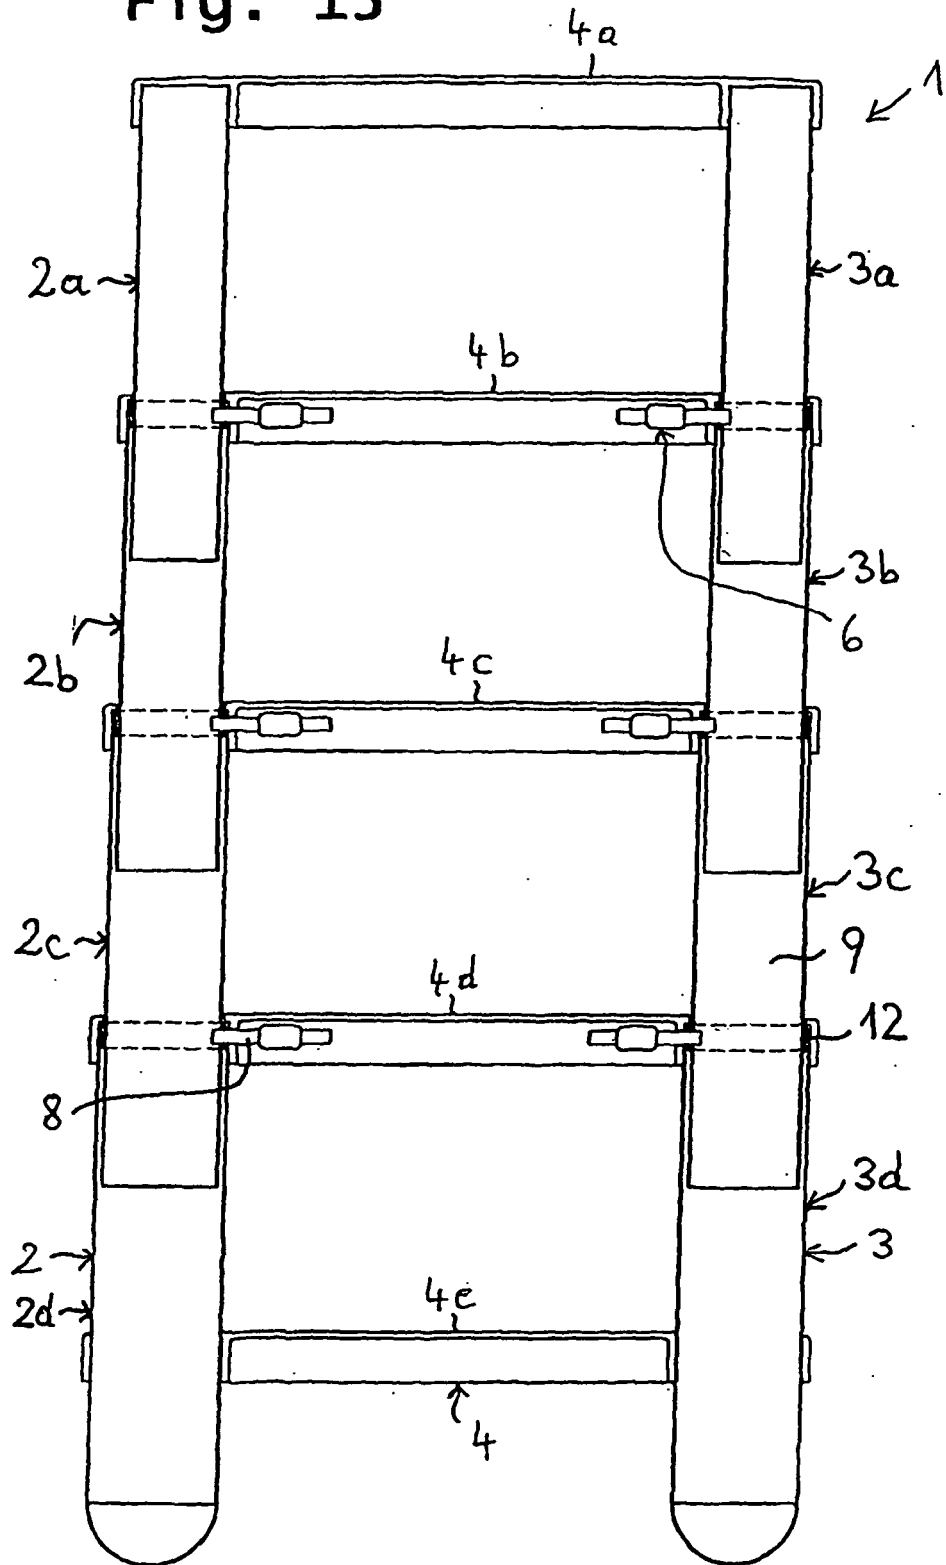


Fig. 14

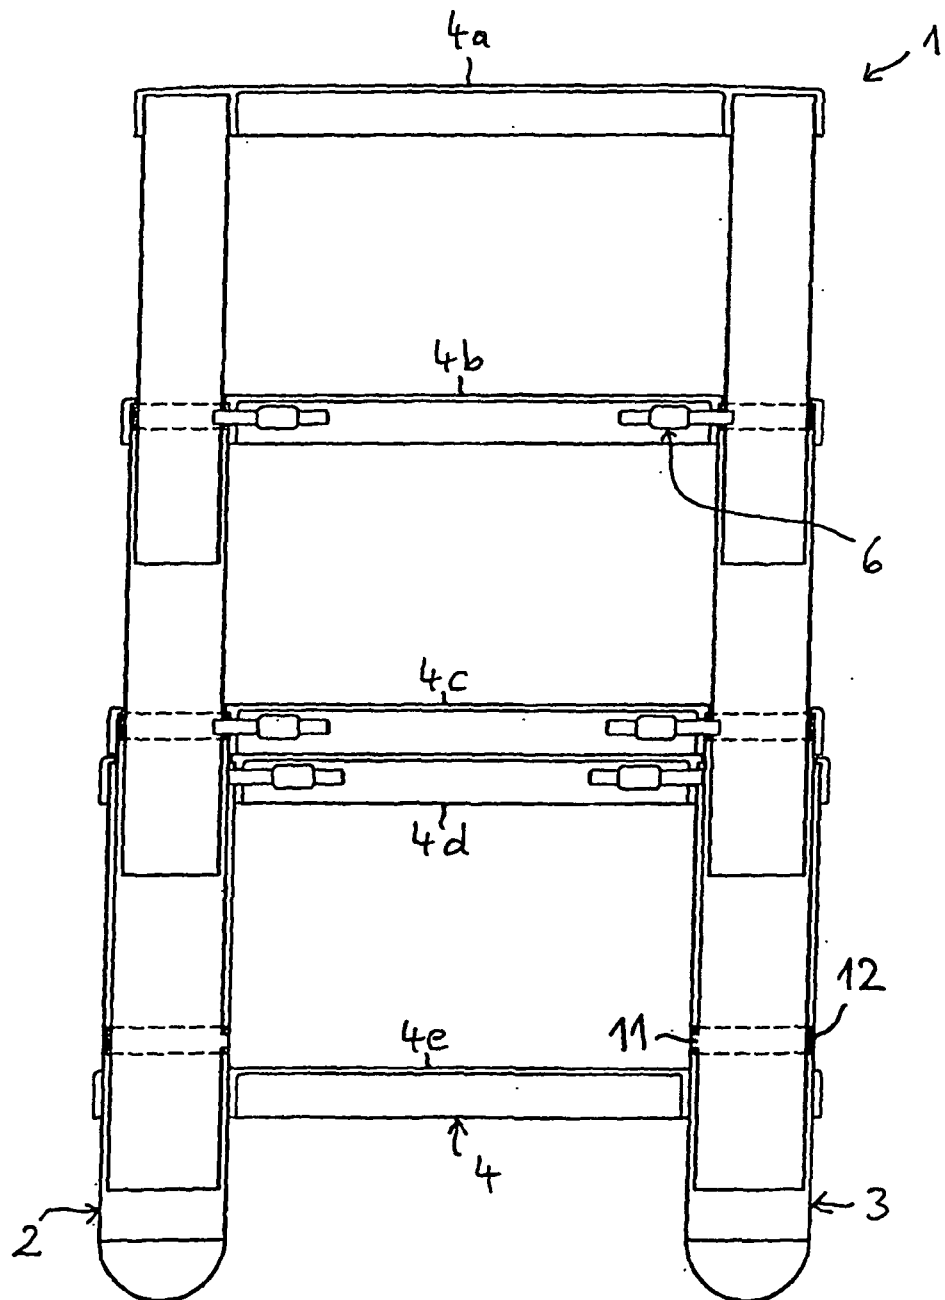


Fig. 15

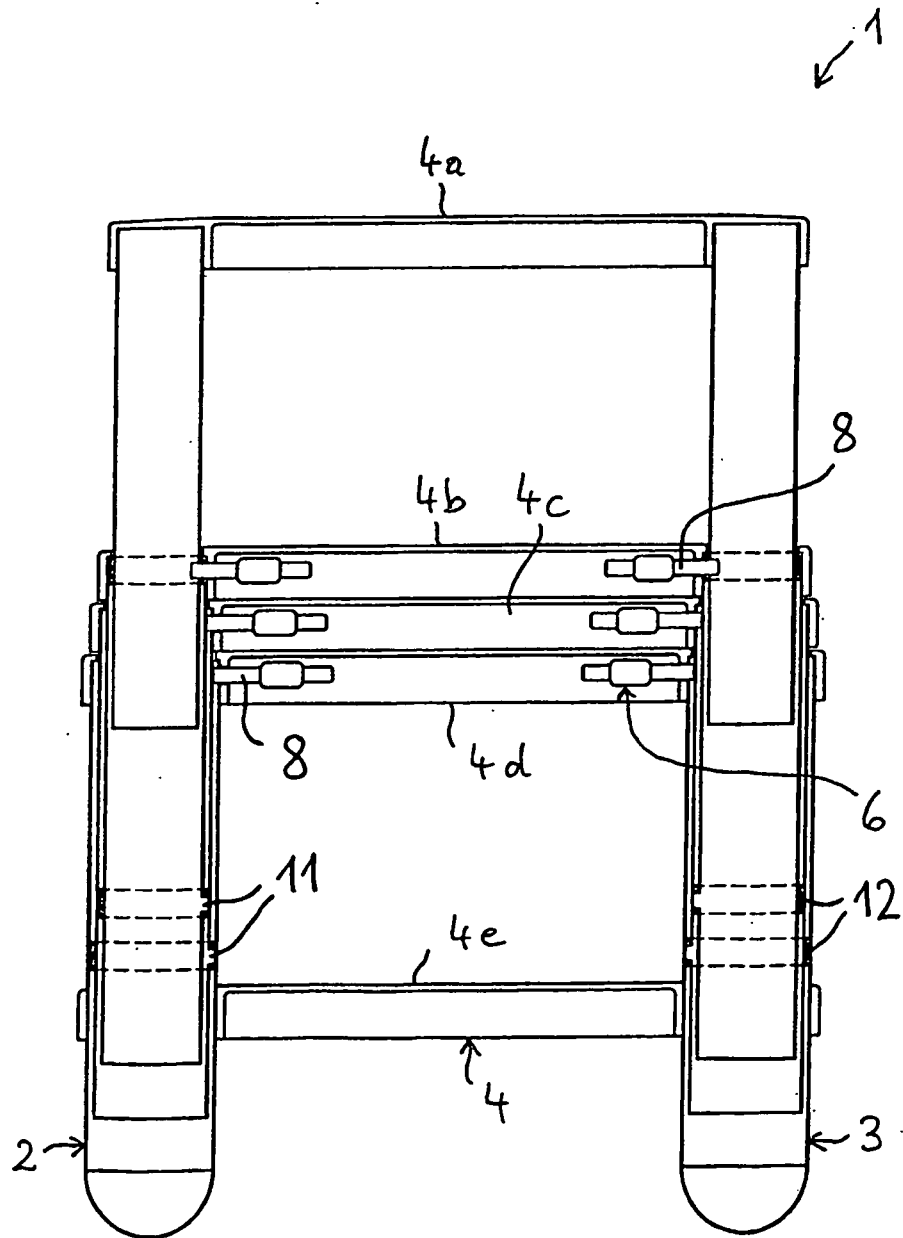


Fig. 16

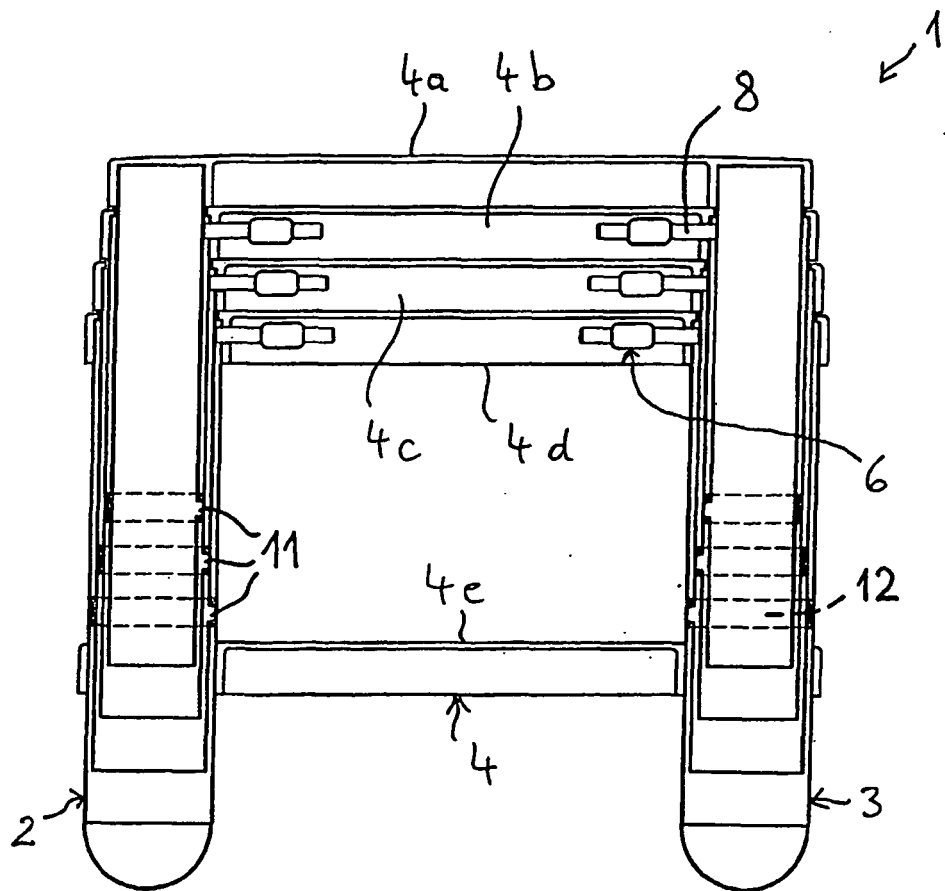


Fig. 17

