



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
30.03.2005 Bulletin 2005/13

(51) Int Cl.7: **H01J 65/04**, H01J 61/30,
H01J 61/16

(21) Application number: **04008363.6**

(22) Date of filing: **06.04.2004**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR
Designated Extension States:
AL HR LT LV MK

(30) Priority: **31.07.2003 US 604588**

(71) Applicant: **Delta Optoelectronics, Inc.**
Hsin-Chu, Taiwan (TW)

(72) Inventors:
• **Fran, Yui-Shin**
Hsinchu (TW)

- **Chen, Lai-Cheng**
Hsinchu (TW)
- **Chang, Cheng-Yi**
Hsinchu City (TW)
- **Wu, Chien-Chung**
Taipei (TW)
- **Chen, Jui-Hsia**
Ku-Keng Hsiang YunLin Hsien (TW)
- **Yang, Jer-Shien**
Shui-Shang Hsiang Chia-Yi Hsien (TW)

(74) Representative: **Becker Kurig Straus**
Patentanwälte
Bavariastrasse 7
80336 München (DE)

(54) **Flat lamp structure**

(57) A flat lamp structure is disclosed. The flat lamp structure comprises a gas discharge chamber (200), a fluorescent substance (202), a discharge gas (204), and a plurality of electrodes (206). The fluorescent substance (202) is disposed on the inner surface of the wall of the gas discharge chamber (200) and the discharge gas (204) is disposed in the gas discharge chamber (200). The electrodes (206) are disposed on the outer surface of the wall of the gas discharge chamber (200),

wherein the gas discharge chamber (200) preferably comprises a dielectric substrate (200a), a plate (200b), and a plurality of strips (200c), the plate (200b) being disposed on the upper portion of the dielectric substrate (200a) and the strips (200c) being disposed between the plate (200b) and the dielectric substrate (200a), the plate (200b) and the edge of dielectric substrate (200a) being connected. Additionally, the gas discharge chamber (200) may dispose of at least a spacer (300) to enhance the strength of the chamber (200).

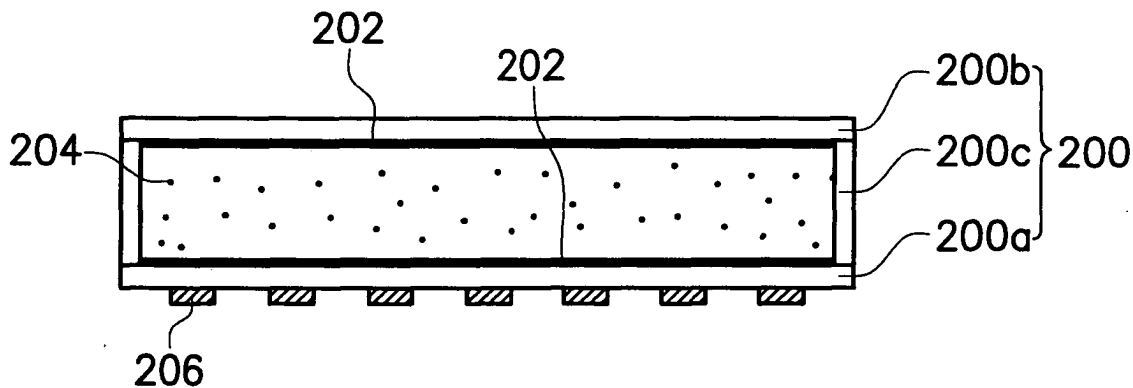


FIG. 2

Description

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims the priority benefit of U. S. application serial no. 10/604,588, filed on July 31, 2003.

BACKGROUND OF THE INVENTION

Field of the Invention

[0002] The present invention relates to a flat lamp structure, and in particular, to a flat lamp structure having electrodes positioned on the outer wall of a gas discharge chamber.

Description of the Related Art

[0003] As a consequence of industrial progress, developments in mobile phones, digital cameras, digital video cameras, notebook computers, and desk-top computers are now concerned with multifunctional and aesthetic design. However, the display screen used in mobile phones, digital cameras, digital video cameras, notebook computers, and desk-top computers is an essential interactive interface. The display screen provides the user with great convenience of operation.. In recent years, it has become commonplace for most mobile phones, digital cameras, digital video cameras, notebook computers, and desk-top computers to employ a LCD panel as the display screen. However, the LCD panel per se is non-luminous, and a back light module must be provided at the bottom of the LCD panel to provide a light source for displaying.

[0004] The flat lamp provides excellent luminosity and uniformity and also provides a larger surface area light source. Therefore, it is widely applied as a back light source for LCD panels and for other fields of applications. The flat lamp is a plasma luminous component, essentially utilizing the electrons emitted from the cathode to collide with the inert gas between the cathode and anode within the gas discharge chamber, and the gas is ionized and excited to form plasma. After that the excited state atoms of the plasma return to the ground state by emission of UV rays, the UV rays further excite the fluorescence substance within the flat lamp, producing visible light.

[0005] FIG. 1 is a schematic view showing the structure of a conventional flat lamp.

[0006] Referring to FIG. 1, the conventional flat lamp structure comprises a gas discharge chamber 100, a fluorescence substance 102, a discharge gas 104, electrodes 106 and dielectric layers 108. The gas discharge chamber 100 comprises a plate 100a, a second plate 100b and strip 100c mounted between the plate 100a and the plate 100b, and is connected to the edge of the plate 100a and the edge of plate 100b, forming a closed

chamber.

[0007] Referring again to FIG. 1, the conventional electrode 106 is generally a silver electrode, and the electrode 106 is disposed on the plate 100a. The electrode is generally covered with the dielectric layer 108 so as to protect the electrode 106 from damaging by the collision of the ions. As shown in FIG. 1, the dielectric layer 108 covering electrode 106 is positioned at the inner wall of the gas discharge chamber 100. The gas discharge chamber 100 is charged with a gas 104. Generally, the gas 104 includes Xe, Ne and Ar, or other inert gas. Moreover, the fluorescence substance 102 is disposed on the inner wall of the gas discharge chamber 100, for example on the surface of the plate 100b, on the surface of the dielectric layer 108, and on the surface of the plate 100a not covered by the dielectric layer 108.

[0008] In the process of ignition of the flat lamp, the electrode 106 emits electrons to collide with the discharge gas 104 within the gas discharge chamber 100, and the discharge gas 104 is ionized and excited to form plasma. After that, the excited state atoms of the plasma return to the ground state by emitting UV rays, and the emitted UV rays further excite the fluorescence substance 102 within the inner wall of the gas discharge chamber 100 to produce visible light. However, on the above light luminous mechanism, the high energy ions released by the plasma generally collide through the dielectric layer, and may reach further to the electrode 106. Thus, the longevity of the flat lamp is greatly reduced.

[0009] Please note that the dielectric layer 108 covering the electrode 106 is generally fabricated by a multiple screen printing process the thickness of which is controlled between 200 μ m to 250 μ m. However, the fabrication process of the multiple screen printing is complicated, and the test sample capacity and yield are low. In addition, multiple screen printing can easily cause unevenness in the thickness of the film, causing each of the test samples or a single test sample with different optical characteristics of different region to differ with each other. Due to the fact that the optical characteristics of the test sample cannot be easily controlled, the designing cost for the driving circuit is increased.

SUMMARY OF THE INVENTION

[0010] Accordingly, it is an object of the present invention to provide a flat lamp structure which effectively avoids collision through the dielectric layer, improving the longevity of the flat lamp.

[0011] Another object of the present invention is to provide a flat lamp structure which effectively avoids the unevenness occurring on the dielectric substrate film due to multiple screen printing, thereby improving the luminosity and the uniformity of the flat lamp.

[0012] In order to achieve the above objects, the present invention provides a flat lamp structure comprising a gas discharge chamber; a fluorescence substance

disposed on the inner wall of the gas discharge chamber; a discharge gas disposed in the gas discharge chamber; and a plurality of electrodes disposed on the outer wall of the gas discharge chamber.

[0013] The gas discharge chamber, for example, comprises a dielectric substrate; a plate disposed on the upper portion of the dielectric substrate; and a plurality of strips disposed between the dielectric substrate and the plate, and the plate connected to the edge of the dielectric substrate.

[0014] In order to achieve the above objects, the present invention provides a flat lamp structure comprising a gas discharge chamber; a fluorescence substance disposed on the inner wall of the gas discharge chamber; a discharge gas disposed in the gas discharge chamber; a plurality of electrodes disposed on the outer wall of the gas discharge chamber; and a spacer disposed on the gas discharge chamber to enhance the strength of the gas discharge chamber.

[0015] The gas discharge chamber, for example, comprises a dielectric substrate; a plate disposed on the upper portion of the dielectric substrate; and a plurality of strips disposed between the dielectric substrate and the plate, and plate connected to the edge of the dielectric substrate.

[0016] In accordance with a preferred embodiment of the present invention, the thickness of the dielectric substrate is, for example, between 0.3mm and 1.1mm, and the distance between the dielectric substrate and the plate, for example, is between 0.5mm and 2.0mm.

[0017] In accordance with the preferred embodiment of the present invention, the gas charged into the gas discharge chamber, for example, is Xe, Ne or Ar, and the electrodes, for example, include silver electrode or copper electrode.

[0018] In accordance with the preferred embodiment of the present invention, the lower portion of the dielectric substrate, for example, is stuck to a carrier substrate for carrying the gas discharge chamber containing the electrode.

[0019] In addition, an adhesive, for example, is disposed between the dielectric substrate and the carrier substrate and connects the dielectric substrate and the carrier substrate.

[0020] In accordance with the preferred embodiment of the present invention, the adhesive, for example, includes glass adhesive, UV curing adhesive or thermal curing adhesive.

[0021] In accordance with the present invention, the electrode is fabricated on the outer wall of the gas discharge chamber, and by means of the dielectric substrate as dielectric material for protecting the electrode, the uniformity with respect to thickness is good and the ability to withstand the collision of ions is excellent. Thus, the present invention does not require a dielectric layer formed by multiple screen printing covering the electrode, resulting in uniformity of luminosity and significant improvement in longevity.

DESCRIPTION OF THE DRAWINGS

[0022] The accompanying drawings are included to provide a further understanding of the invention, and are incorporated in and constitute a part of this specification. The drawings illustrate embodiments of the invention and, together with the description, serve the principles of the invention.

[0023] FIG. 1 is a schematic view of a conventional flat lamp structure.

[0024] FIGS. 2 and 3 are schematic views of a first preferred embodiment flat lamp in accordance with the present invention.

[0025] FIGS. 4 and 5 are schematic views of a second preferred embodiment flat lamp in accordance with the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0026] Reference will now be made in detail to the present preferred embodiments of the invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers are used in the drawings and the description to refer to the same or like parts.

[0027] FIGS. 2 and 3 show schematically the flat lamp structure of a first preferred embodiment of the present invention.

[0028] First, referring to FIG. 2, the flat lamp comprises a gas discharge chamber 200, fluorescence substance 202, a discharge gas 204 and a plurality of electrodes 206. Wherein the material for forming the gas discharge chamber is, for example, glass. The gas discharge chamber 200, for instance, is a dielectric substrate 200a, a plate 200b and a plurality of strips 200c. The plate 200b is disposed on the upper portion of the dielectric substrate 200a, and the strips 200c are disposed between the dielectric substrate 200a and the plate 200b, and are connected to the dielectric substrate 200a and the edge of the plate 200b. In the present preferred embodiment, the thickness of the dielectric substrate is, for example, between 0.3mm to 1.1mm, and the distance between the dielectric substrate 200a and the plate 200b is, for example, between 0.5mm and 2.0mm.

[0029] Similarly, referring to FIG. 2, the fluorescence substance 202 is disposed on the inner wall of the gas discharged chamber 200, and the fluorescence substance 202 is generally disposed on the dielectric substrate 200a and the surface of the plate 200b. The gas 204 is charged into the gas discharge chamber 200, and examples of the gas are Xe, Ne, and Ar. The electrode 206 is disposed on the outer wall of the gas discharge chamber 200. Examples of the electrodes are silver electrode or copper electrode.

[0030] In the process of ignition of the flat lamp, the electrode 206 on the outer wall of the gas discharge

chamber 200 is driven so that the electrode within the gas discharge chamber 202 partially emits electrons which collide with the gas 204, and the gas 204 is ionized and excited to form plasma. After that, the excited state atoms of the plasma return to the ground state by way of emission of UV rays, and the emitted UV rays further excite the fluorescence substance 202 on the inner wall of the gas discharge chamber 200 so as to produce visible light.

[0031] In accordance with the preferred embodiment during the driving process, the electrodes 206, isolated by the dielectric substrate 200a, form an electric field within the gas discharge chamber 200, and the thickness of the dielectric substrate 200a directly affects the difficulty of the driving process. When the thickness of the dielectric substrate 200a is large, the flat lamp is more difficult to drive, and vice versa; to facilitate the driving process, a thinner dielectric material 200a is used. In contrast, the dielectric substrate 200a may be broken for the reason that the substrate 200a cannot withstand the external atmospheric pressure. Thus, in order to consider both the difficulty of the driving process and the strength of the dielectric substrate 200a, the present preferred embodiment provides a flat lamp structure, as shown in FIG. 3.

[0032] Referring to FIG. 3, in order to obtain a balance between the difficulty of the driving process and the strength of the dielectric substrate 200a, the present flat lamp structure, as shown in FIG. 2, is supported on a carrier substrate 210, and the dielectric substrate 200a and the carrier substrate 210 are connected, for example, by means of an adhesive 208 having a thickness between 0.1mm and 0.3mm. In accordance with the present invention, the adhesive 208 includes, for example, glass adhesive, UV curing adhesive or thermal curing adhesive.

[0033] In accordance with the flat lamp structure, as the dielectric substrate 200a and the carrier substrate 210 are connected using the adhesive 208, the structural body constructed by the dielectric substrate 200a and the carrier substrate 210 can withstand the external atmospheric pressure, thus, as a whole, the strength of the flat lamp is enhanced.

[0034] FIGS. 4 and 5 show a flat lamp structure in accordance with the second preferred embodiment. As shown in FIG. 4, the flat lamp comprises a gas discharge chamber 200, a fluorescence substance 202, a discharge gas 204, a plurality of electrodes 206 and at least a spacer 300, wherein the material of the gas discharge chamber 200 is, for example, glass. The gas discharge chamber 200 comprises a dielectric substrate 200a, a plate 200b and a plurality of strips 200c. The plate substrate 200b is disposed on the upper portion of the dielectric substrate 200a, and the strips 200c are disposed between the dielectric substrate 200a and the plate 200b, and the dielectric substrate 200a and the edge of the plate 200b are connected. In accordance with the preferred embodiment, the thickness of the dielectric

substrate 200a is, for example, between 0.3mm and 1.1 mm, and the distance between the dielectric substrate 200a and the plate 200b is, for example, between 0.5mm and 2.0mm.

[0035] Similarly, referring to FIG. 4, the fluorescence substance 202 is disposed on the inner wall of the gas discharge chamber 200, and the fluorescence substance 202 is generally disposed on the dielectric substrate 200a and the surface of the plate 200b. The gas 204 is charged into the gas discharge chamber 200, and an example of the gas is Xe. The electrode 206 is disposed on the outer wall of the gas discharge chamber 200. An example of the electrode is silver electrode.

[0036] The flat lamp structure of the present invention is similar to that of the first preferred embodiment, and the only difference is on the design of the spacer 300.

[0037] The spacer 300 is designed out of concern for the difficulty of the driving process and the strength of the dielectric substrate 200a; the spacer 300 of the gas discharge chamber 200b can withstand the dielectric substrate 200a and the surface of the plate 200b such that the strength of the dielectric substrate 200a can be enhanced, and its breakage as a result of its inability to withstand the external atmospheric pressure will not occur.

[0038] Next, referring to FIG. 5, there is shown the flat lamp structure similar to that shown in FIG. 3, the only difference is on the design of the spacer 300. In accordance with the present preferred embodiment, the dual reinforcement of the spacer 300 with the combination of the carrier 210 deals with the difficulty of the driving process and the strength of the dielectric substrate 200a.

[0039] In accordance with the present invention, the dielectric substrate with controllable thickness and uniformity is used to substitute conventional dielectric layer formed from multiple screen printing process and the electrode is disposed on the outer wall of the gas discharge chamber to form external electrodes. Thus, the flat lamp structure of the present invention possesses the following advantages:

[0040] (1) The replacement of the dielectric layer fabricated by multiple screen printing with the present dielectric substrate provides a simple fabrication process and the fabrication time is shortened, and the yield is improved.

[0041] (2) The replacement of the dielectric layer fabricated by multiple screen printing with the present dielectric substrate alleviates the error in the fabrication process, thus improving yield and reducing production costs.

[0042] (3) Excellent thickness uniformity of the dielectric substrate allows for a small difference of electric field between the individual electrodes, thus the uniformity of light emission of the flat lamp is improved.

[0043] It will be apparent to those skilled in the art that various modifications and variations can be made to the structure of the present invention without departing from

the scope or spirit of the invention. In view of the foregoing, it is intended that the present invention cover modifications and variations of this invention provided they fall within the scope of the following claims and their equivalents.

Claims

1. A flat lamp structure comprising :
 a gas discharge chamber;
 a fluorescence substance disposed on the inner wall of the gas discharge chamber;
 a discharge gas disposed in the gas discharge chamber; and
 a plurality of electrodes disposed on the outer wall of the gas discharge chamber.
2. The flat lamp structure of claim 1, wherein the gas discharge chamber comprises :
 a dielectric substrate;
 a plate disposed on the upper portion of the dielectric substrate; and
 a plurality of strips disposed between the dielectric substrate and the plate, and plate connected to the edge of the dielectric substrate.
3. The flat lamp structure of claim 2, wherein the thickness of the dielectric substrate is between 0.3mm and 1.1mm.
4. The flat lamp structure of claim 2, wherein the distance between the dielectric substrate and the plate is between 0.5mm and 2.0mm.
5. The flat lamp structure of claim 1, wherein the discharge gas is an inert gas.
6. The flat lamp structure of claim 5, wherein the inert gas includes one of Xe, Ne or Ar.
7. The flat lamp structure of claim 1, wherein the electrode is a metal electrode.
8. The flat lamp structure of claim 7, wherein the metal electrode includes one of silver electrode or copper electrode.
9. The flat lamp structure of claim 1, further comprising a carrier substrate disposed beneath the dielectric substrate to carry the gas discharge chamber.
10. The flat lamp structure of claim 9, further comprising an adhesive disposed between the dielectric substrate and the carrier substrate and the adhesive connected the dielectric substrate and the carrier substrate.
11. The flat lamp structure of claim 10, wherein the adhesive includes one of glass adhesive, UV curing adhesive or thermal curing adhesive.
12. A flat lamp structure comprising :
 a gas discharge chamber;
 a fluorescence substance disposed on the inner wall of the gas discharge chamber;
 a discharge gas disposed in the gas discharge chamber; and
 a plurality of electrodes disposed on the outer wall of the gas discharge chamber.
13. The flat lamp structure of claim 12, wherein the gas discharge chamber comprises :
 a spacer to enhance the strength of the gas discharge chamber;
 a dielectric substrate;
 a plate disposed on the upper portion of the dielectric substrate; and
 a plurality of strips disposed between the dielectric substrate and the plate, the plate being connected to the edge of the dielectric substrate.
14. The flat lamp structure of claim 13, wherein the thickness of the dielectric substrate is between 0.3mm and 1.1mm.
15. The flat lamp structure of claim 13, wherein the distance between the dielectric substrate and the plate is between 0.5mm and 2.0mm.
16. The flat lamp structure of claim 12, wherein the discharge gas is an inert gas.
17. The flat lamp structure of claim 16, wherein the inert gas includes one of Xe, Ne or Ar.
18. The flat lamp structure of claim 12, wherein the electrode is a metal electrode.
19. The flat lamp structure of claim 18, wherein the metal electrode includes one of silver electrode or copper electrode.
20. The flat lamp structure of claim 12, further comprising a carrier substrate disposed beneath the dielectric substrate to carry the gas discharge chamber.
21. The flat lamp structure of claim 20, further comprising an adhesive disposed between the dielectric substrate and the carrier substrate and the adhesive

sive connected the dielectric substrate and the carrier substrate.

- 22.** The flat lamp structure of claim 21, wherein the adhesive includes one of glass adhesive, UV curing adhesive or thermal curing adhesive. 5

10

15

20

25

30

35

40

45

50

55

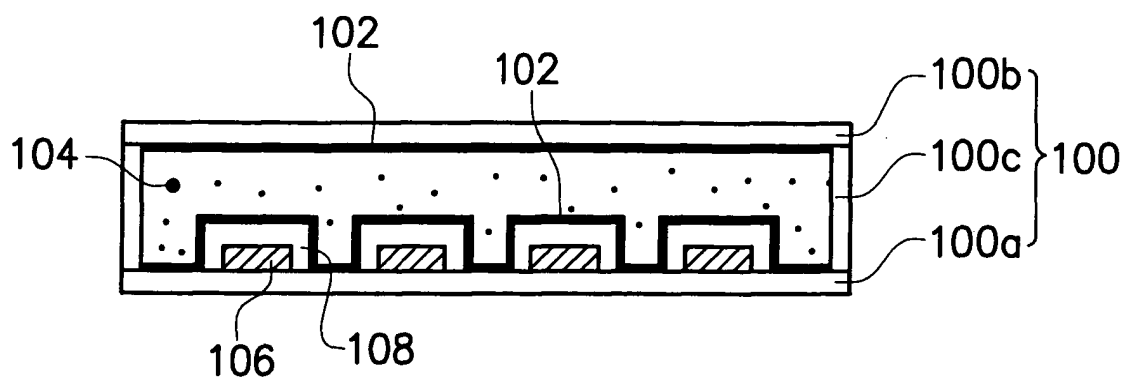


FIG. 1 (PRIOR ART)

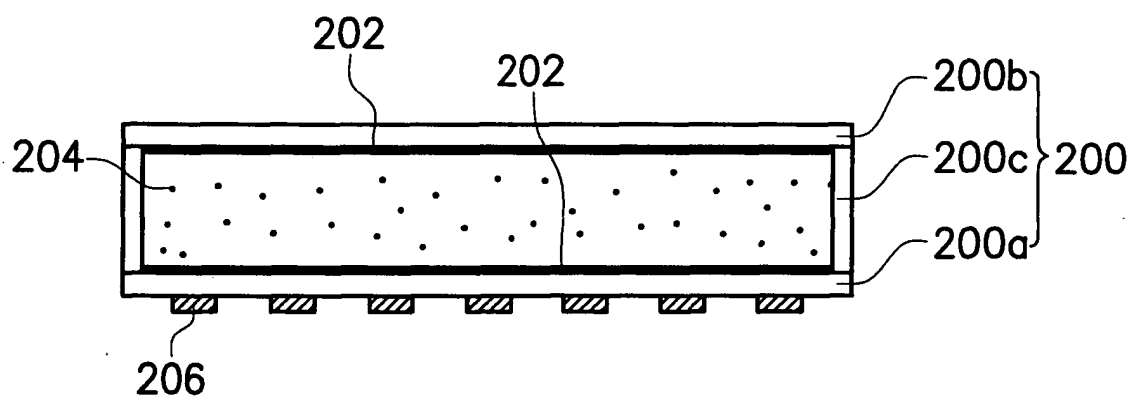


FIG. 2

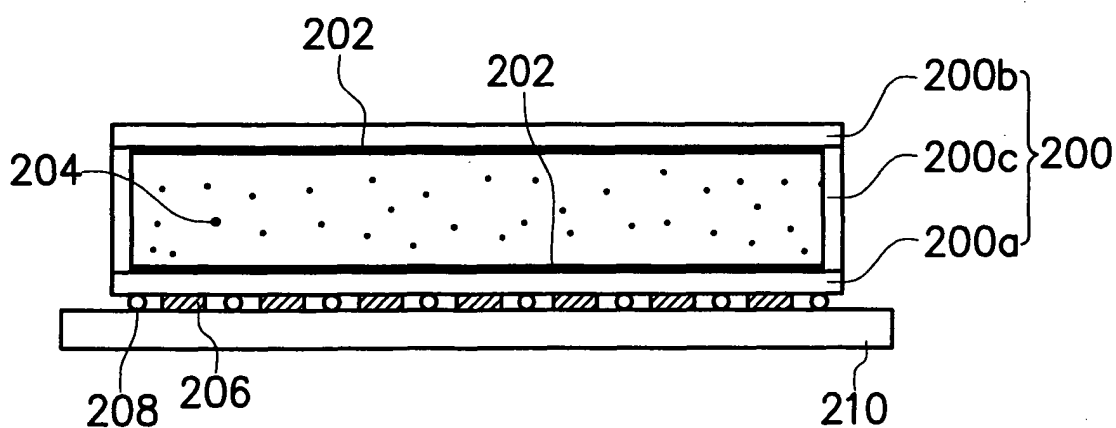


FIG. 3

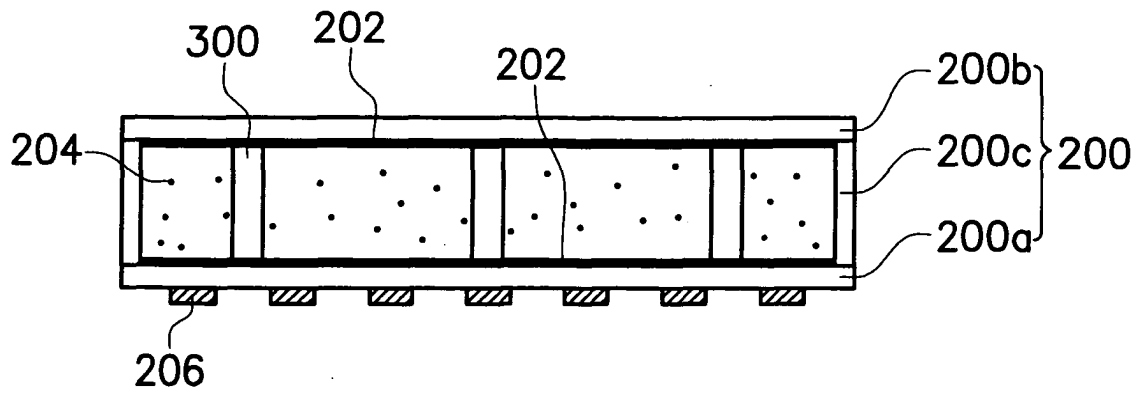


FIG. 4

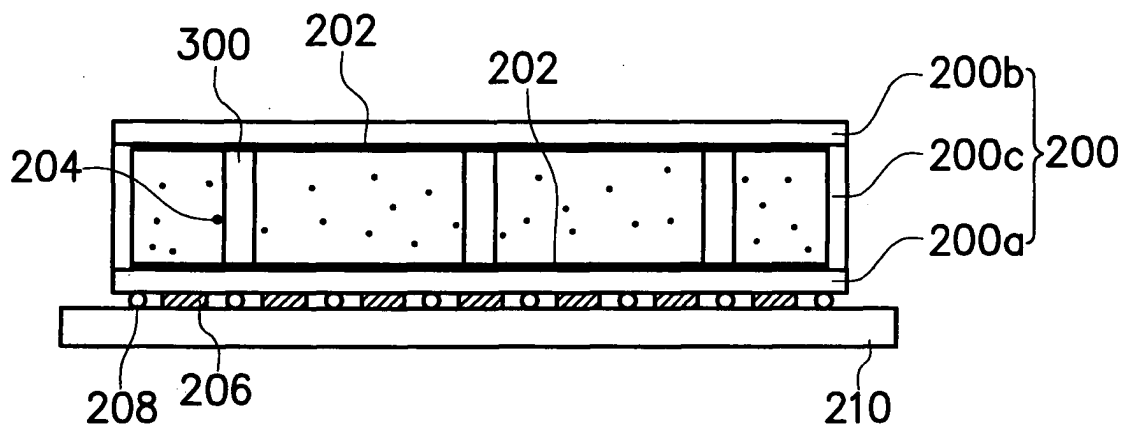


FIG. 5



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 00 8363

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
P, X P, A	WO 2004/015739 A2 (SAINT-GOBAIN GLASS FRANCE; BERTIN-MOUROT, THOMAS; NEUILLET, ALAIN; LEB) 19 February 2004 (2004-02-19) * abstract * * page 1 - page 2, line 28 * * page 3, lines 2-6, 13-26 * * page 4, lines 15-17 * * page 5, lines 6, 7, 16-18, 23-25 * * page 6, lines 6, 7 * * page 7, lines 1, 2, 27, 28 * * page 8, lines 11-28 * * page 9, lines 2, 3, 12 * * page 10, lines 3-17 * * claims 1-4, 15, 16, 18; figures *	1, 2, 4-13, 15-22 3, 14	H01J65/04 H01J61/30 H01J61/16
X	US 2002/117959 A1 (WINSOR MARK) 29 August 2002 (2002-08-29) * paragraphs '0004!', '0009!' - '0014!', '0022!', '0023!', '0025!', '0028!; claims 1, 2, 4-6, 8, 13-15, 18-20 * * abstract *	1-8, 12-19	
X	US 4 983 881 A (ELIASSON ET AL) 8 January 1991 (1991-01-08) * abstract; figure 4 * * column 2, lines 20-23, 54-63 * * column 3, lines 1-30 * * column 4, lines 32-34, 56-60 *	1, 2, 4, 5, 7, 12, 13, 15, 16, 18	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H01J
X	US 5 592 047 A (PARK ET AL) 7 January 1997 (1997-01-07) * abstract; claims 1, 2, 4, 5; figure 1 * * column 1, lines 50, 51 * * column 2, lines 1-50 *	1, 2, 5-8, 12	
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 28 January 2005	Examiner Martín Vicente, M.
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

2
EPO FORM 1503 03 82 (P04001)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 00 8363

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 521 553 A2 (N.V. PHILIPS' GLOEILAMPENFABRIEKEN; PHILIPS PATENTVERWALTUNG GMBH; PHI) 7 January 1993 (1993-01-07)	1,2,5-8, 12	
A	* abstract * * column 1, line 50 * * column 4, lines 32-36 * -----	3,14	
X	MIKOSHIBA S ED - SOCIETY FOR INFORMATION DISPLAY: "INVITED PAPERD XE DISCHARGE BACKLIGHTS FOR LCDS" 2001 SID INTERNATIONAL SYMPOSIUM DIGEST OF TECHNICAL PAPERS. SAN JOSE, CA, JUNE 5 - 7, 2001, SID INTERNATIONAL SYMPOSIUM DIGEST OF TECHNICAL PAPERS, SAN JOSE, CA : SID, US, vol. 32, June 2001 (2001-06), pages 286-289, XP001054087 * page 286; figure 3 * -----	1,2,5,6, 12	
A	US 2002/079795 A1 (SON SUK MIN) 27 June 2002 (2002-06-27) * paragraph '0011! * -----	9,20	
P,X	FR 2 843 483 A1 (SAINT-GOBAIN GLASS FRANCE) 13 February 2004 (2004-02-13)	1,2, 4-13, 15-22	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
P,A	* abstract; figures * * page 1 - page 2, line 27 * * page 3, lines 18,19,30,31 * * page 4, lines 7-16,31,32 * * page 5, lines 16,17 * * page 7, lines 17,18 * * page 8, lines 18-20,29 * * page 9, lines 30,31 * * page 9, last line - page 10, line 4 * -----	3,14	
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 28 January 2005	Examiner Martín Vicente, M.
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 00 8363

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-01-2005

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
WO 2004015739	A2	19-02-2004	FR	2843483 A1	13-02-2004
US 2002117959	A1	29-08-2002	EP	1389343 A2	18-02-2004
			WO	02069367 A2	06-09-2002
US 4983881	A	08-01-1991	CH	675504 A5	28-09-1990
			CA	1310686 C	24-11-1992
			DE	3855074 D1	11-04-1996
			EP	0324953 A1	26-07-1989
			JP	2007353 A	11-01-1990
			JP	2057211 C	23-05-1996
			JP	7087093 B	20-09-1995
US 5592047	A	07-01-1997	KR	171939 Y1	02-03-2000
			JP	3015262 U	29-08-1995
EP 0521553	A2	07-01-1993	DE	69210113 D1	30-05-1996
			DE	69210113 T2	21-11-1996
			JP	3152505 B2	03-04-2001
			JP	5205704 A	13-08-1993
			US	5343114 A	30-08-1994
US 2002079795	A1	27-06-2002	KR	2002051365 A	29-06-2002
			US	2004142624 A1	22-07-2004
FR 2843483	A1	13-02-2004	WO	2004015739 A2	19-02-2004