

(12)

EUROPEAN PATENT APPLICATION

(43)

Date of publication:
13.04.2005 Bulletin 2005/15

(51)

Int Cl.7: H04R 1/04

(21)

Application number: 03405718.2

(22)

Date of filing: 07.10.2003


(84) Designated Contracting States: AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PT RO SE SI SK TR Designated Extension States: AL LT LV MK	• Gysin, Stefan 3007 Bern (CH)
(71) Applicant: PHONAK COMMUNICATIONS AG 1796 Courgevaux (CH)	(74) Representative: BOVARD LTD Patent Attorneys Optingenstrasse 16 3000 Bern 25 (CH)
(72) Inventors: • Gerber, Louis 3014 Bern (CH)	Remarks: Amended claims in accordance with Rule 86 (2) EPC.

(54)

Wireless microphone with coupling element

(57) A wireless microphone (1) comprises a radio transmitter for transmitting radio signals carrying audio signals to a hearing device. The wireless microphone (1) further comprises at least one coupling element (11) for detachably fixing one of various interchangeable functional modules (2) to the wireless microphone (1). The coupling element (11) is designed to fix the interchangeable functional module (2) to the wireless microphone (1) by mating with a coupling element (21) of the interchangeable functional module (2). The coupling elements (11, 21) comprise electrical contacts (12, 22) for

electrically connecting the interchangeable functional module (2) to the wireless microphone (1) when the interchangeable functional module (2) is fixed to the wireless microphone (1) by means of said coupling elements (11, 21). The coupling element (11) constitutes a bidirectional electrical interface between the wireless microphone (1) and the interchangeable functional module (2). The wireless microphone (1) can be limited to an assistive listening device with basic functions and features, extendible by the user with extra functions and features as needed.

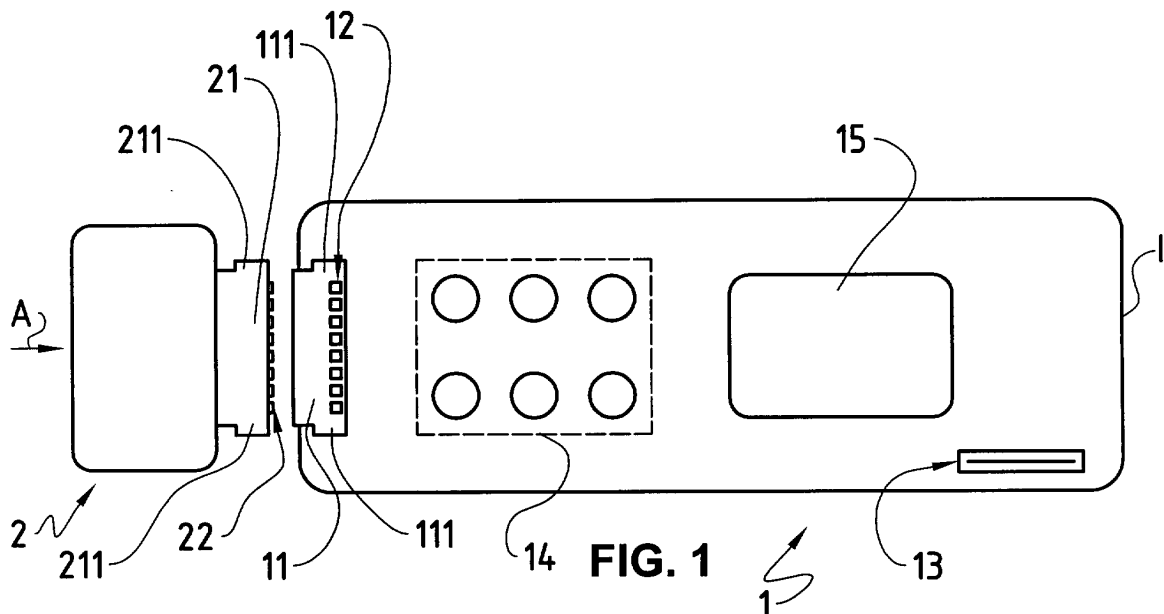

Description

Technical Field

[0001] The present invention relates to a wireless microphone; specifically, the present invention relates to a wireless microphone comprising a radio transmitter for transmitting radio signals carrying audio signals to a hearing device.

Background Art

[0002] Wireless microphones are used as assistive listening devices for transmitting sound from the sound source directly to a hearing device arranged in or at a person's ear, whereby the signal-to-noise ratio is greatly improved. The wireless microphones currently available for that purpose comprise radio transmitters for transmitting radio signals that carry audio signals to a radio receiver of a hearing aid, for example a behind-the-ear (BTE) hearing instrument, or to a radio receiver with an electro-acoustic converter reproducing the sound directly into the ear. Common applications of wireless microphones as assistive listening devices include applications in schools, where the teacher wears the wireless microphone and the hearing impaired student wears a receiver connected to his hearing aid. The wireless microphone is also used in business meetings or in restaurants, where the wireless microphone is placed on a table. The wireless microphones are also useful for listening to the sound of a television or a stereo set without turning up the volume. Typically, the known wireless microphones suitable as assistive listening devices are equipped to receive electrical audio signals through wire connections from external audio sources such as a television or a stereo set. However, the users often find the connective wires not very practical. Because the wireless microphone needs to be placed at wire's length from the audio source, the wireless microphone is not always within reach of the user. The known wireless microphones often comprise omnidirectional and/or beam-forming microphones. Moreover, for recharging the power source, the known wireless microphones comprise charging circuits. Although these additional features are not used all the time, they consume power and the components used for their implementation increase the weight of the wireless microphone. Other features or functions which could be of interest to the users are currently not available and cannot be added to the known wireless microphones.

Disclosure of Invention

[0003] It is an object of this invention to provide a wireless microphone which is suitable as an assistive listening device but does not have the disadvantages of the prior art, particularly a wireless microphone with a radio transmitter for transmitting audio signals to a hearing de-

vice.

[0004] According to the present invention, these objects are achieved particularly through the features of the independent claims. In addition, further advantageous embodiments follow from the dependent claims and the description.

[0005] According to the present invention, the above-mentioned objects are achieved in particular in that a wireless microphone comprising a radio transmitter for transmitting radio signals carrying audio signals to a hearing device is provided with at least one coupling element for detachably fixing one of various interchangeable functional modules to the wireless microphone, said coupling element comprising electrical contacts for electrically connecting the interchangeable functional module to the wireless microphone when the interchangeable functional module is fixed to the wireless microphone by means of said coupling element. As the coupling element makes it possible to fix and connect different functional modules to the wireless microphone, the wireless microphone can be limited to an assistive listening device with basic functions and features, extendible by the user with extra functions and features as needed. The user can easily adapt the functionality of the assistive listening device to the requirements of a new situation by fixing (and thereby connecting) a desired functional module to the wireless microphone. The wireless microphone and an additional functional module fixed and connected thereto can be carried comfortably by the user as one unit.

[0006] In a preferred embodiment, the coupling element constitutes a bidirectional electrical interface between the wireless microphone and the interchangeable functional module fixed to the wireless microphone. Particularly, electronic modules of the wireless microphone are connected to one or more of the electrical contacts for bidirectional exchange of electrical signals between said electronic modules and the interchangeable functional module fixed to the wireless microphone. Thus, the bidirectional electrical interface makes it possible to transfer electrical signals from an external functional module to the wireless microphone, particularly to an electronic module of the wireless microphone, as well as from the wireless microphone to the external functional module, particularly from an electronic module of the wireless microphone. For example, audio signals received by the wireless microphone can be routed through a functional module for special processing, before being transmitted to the receiver of the hearing device.

[0007] In a preferred embodiment, the coupling element is designed to fix the interchangeable functional module to the wireless microphone by mating with a coupling element of the interchangeable functional module. Mating of the coupling elements, for example in a tight or snap-in fit, causes the wireless microphone and the fixed functional module to mechanically interlock so that they are not accidentally separated.

[0008] In an embodiment, the wireless microphone comprises an electronic control module which is connected to one or more of the electrical contacts for exchanging electrical control signals with the interchangeable functional module fixed to the wireless microphone. For example, the wireless microphone comprises operating elements connected to the control module and the control module is designed for transferring electrical control signals, in response to operation of said operating elements, to the interchangeable functional module fixed to the wireless microphone. Consequently, a user using the operating elements of the wireless microphone can set operating parameters in a fixed functional module or control operation of the fixed functional module. In another example, the wireless microphone is designed to transfer electrical control signals to the radio transmitter for transmission to the hearing device. As a result, control signals received in the control module from a fixed functional module can be passed to the hearing device for setting operational parameters in the hearing aid.

[0009] In an embodiment, the wireless microphone comprises an electronic audio processing module which is connected to one or more of the electrical contacts for exchanging electrical audio signals with the interchangeable functional module fixed to the wireless microphone. It is thus possible to use an interchangeable functional module as an audio source in that electrical audio signals from the functional module are received in the electronic audio processing module and transmitted to the hearing device. In reverse direction, it is possible to transfer electrical audio signals from the electronic audio processing unit to the functional module, for example for further processing.

[0010] In an embodiment, the electronic audio processing module is connected to one or more of the electrical contacts for receiving electrical control signals from the interchangeable functional module fixed to the wireless microphone. Therefore, it is, possible to control operation of the electronic audio processing module through control signals from the interchangeable functional module.

[0011] In an embodiment the radio transmitter is connected to one or more of the electrical contacts for exchanging electrical signals with the interchangeable functional module fixed to the wireless microphone. In this way, electrical signals from the radio transmitter can be transferred to a special antenna, for example, located in the fixed functional module.

[0012] In an embodiment the wireless microphone comprises a power source module connected to one or more of the electrical contacts for supplying power to the interchangeable functional module fixed to the wireless microphone and/or for receiving power from the interchangeable functional module fixed to the wireless microphone.

Brief Description of Drawings

[0013] The present invention will be explained in more detail, by way of example, with reference to the drawings in which:

Figure 1 shows a top view of a wireless microphone and an interchangeable functional module, the wireless microphone and the functional module each having a coupling element for fixing the functional module to the wireless microphone.

Figure 2 shows a cross section of the wireless microphone and the interchangeable functional module along arrow A shown in Figure 1.

Figure 3 shows a block diagram illustrating functional blocks of the wireless microphone and their interconnection with electrical contacts of the coupling element.

Mode(s) for Carrying Out the Invention

[0014] In the following description the term audio signal refers to acoustic signals audible to humans, typically in the range of 100 Hz to 8 KHz or, in the case of high fidelity electronic devices, in the extended range of 20 Hz to 20 KHz. The term electrical audio signal refers to electrical signals representing audio signals in analogue or encoded form.

[0015] In the Figures 1, 2 and 3, the reference numeral 1 refers to a wireless microphone having a housing 1' and a microphone element 13 for receiving audio signals from sound sources. As can be seen in Figures 1 and 3, the wireless microphone 1 also includes user interface comprising operating elements 14, such as push buttons, and a display 15.

[0016] As is illustrated in Figures 1 and 2, the wireless microphone 1 comprises a coupling element 11 for detachably fixing an interchangeable functional module 2 to the wireless microphone 1. The coupling element 11 is designed to fix the interchangeable functional module 2 to the wireless microphone 1 by mating with a coupling element 21 of the interchangeable functional module 2. Preferably, the coupling element 21 is implemented as a counterpart complementary to the coupling element 11 of the wireless microphone 1. In the embodiment illustrated in Figures 1 and 2, the coupling element 11 is executed as an undercut clearance in the housing 1' of the wireless microphone 1, the undercut being formed by lateral recesses 111 in the clearance. The coupling element 21 of the functional module 2 is executed as a protrusion fitting in the clearance in the housing 1' of the wireless microphone 1, lateral protrusions 211 of the coupling element 21 fitting the lateral recesses 111 of the coupling element 11. One skilled in the art will understand that there are alternative methods for mechanically coupling the wireless microphone 1 and the func-

tional module 2. Moreover, one skilled in the art will understand that wireless microphone 1 can be provided with more than one coupling element 11 for detachably fixing more than one interchangeable functional module 2 to the wireless microphone 1.

[0017] As is illustrated in Figures 1, 2 and 3, the wireless microphone 1 comprises electrical contacts 12 for electrically connecting an interchangeable functional module 2 to the wireless microphone 1. Likewise, the interchangeable functional module 2 comprises corresponding electrical contacts 22 for electrical connection with the wireless microphone 1. The electrical contacts 12, 22 are arranged in the coupling element 11, respectively 21, so that electrical connections are established between the electrical contacts 12 of the wireless microphone 1 and the corresponding electrical contacts 22 of the functional module 2 when the coupling element 21 of the functional module 2 is engaged with the coupling element 11 of the wireless microphone 1. Thus, when the interchangeable functional module 2 is mechanically fixed to the wireless microphone 1, electrical connections are established automatically between the electrical contacts 12 of the wireless microphone 1 and the corresponding electrical contacts 22 of the functional module 2; consequently, the functional module 2 is electrically connected to the wireless microphone 1.

[0018] In Figure 3, the reference numeral 17 refers to an electronic audio processing module. The audio processing module 17 is connected to the microphone element 13, to an electronic control module 16 and to a radio transmitter 18. The audio processing module 17 includes signal processing functions such as parametric filter functions and amplification functions.

[0019] The radio transmitter 18 is designed for transmitting radio signals carrying audio signals received from the audio processing module 17 to a receiver of a hearing device or a headphone. In addition to the radio receiver, the hearing device comprises an electro-acoustic converter for reproducing the sound directly into the ear or a parametric hearing aid. The radio transmitter 18 is preferably a low power radio transmitter with a transmitting power in the range of 0.1 milliwatts to 100 milliwatts, suitable for transmitting audio signals over a distance of approximately 10 to 100 metres. The output of the radio transmitter 18 is connected to an internal antenna 20. For connection with an external antenna of an interchangeable functional module 2 connected to the wireless microphone 1, the output of the radio transmitter 18 is connected to the electrical contact 12a.

[0020] The electronic modules of the wireless microphone 1 are preferably integrated as an integrated circuit. It is also possible to build the electronic modules from several separate electronic components. Various functions of the electronic modules can be implemented by means of non-programmable logic circuits, by means of programmable logic circuits or by means of a combination of a processor and program code.

[0021] The control module 16 is connected to the op-

erating elements 14 and to the display 15. In response to instructions and parameter values received from a user via the operating elements 14, the control module 16 transfers control signals including instructions and/or parameter values to the audio processing module 17 and/or via the electronic contacts 12d, 12e to a functional module 2 connected to the wireless microphone 1. The control module 16 is designed for bidirectional exchange of control signals with the connected functional module 2, i.e. control signals from the functional module 2 can also be transferred to the control module 16. Control signals from the functional module 2 can also be transferred directly to the audio processing module 17.

[0022] As is illustrated in Figure 3, the input of the audio control module 17 is connected to the electrical contact 12b for receiving electrical audio signals from a functional module 2 connected to the wireless microphone 1. Furthermore, the output of the audio control module 17 is connected to the electrical contact 12c for transferring electrical audio signals from the audio control module 17 to the functional module 2 connected to the wireless microphone 1. The audio control module 17 is designed for transferring control signals received from the control module 16 or from the functional module 2 to the radio transmitter 18 for transmission to the receiver of the hearing aid. Control signals may be transmitted to the hearing aid on a carrier frequency different from the one used to transmit the audio signals to the hearing aid.

[0023] In Figure 3, the reference numeral 19 refers to a power source module, preferably a rechargeable battery. For recharging the power source module 19 by means of an interchangeable functional module 2 connected to the wireless microphone 1, a positive charging line and a negative supply line of the power source module 19 are connected to the electrical contacts 12f and 12h, respectively. For supplying power to a functional module 2 connected to the wireless microphone 1, a positive supply line of the power source module 19 is connected to the electrical contact 12g.

[0024] Aside from an interchangeable functional module 2 comprising a charging circuit or an external antenna, a variety of interchangeable functional modules 2 with different functions can be fixed and connected to the wireless microphone 1. One of the interchangeable communication modules 2 includes a communication module for communicating over a mobile network, for example a GSM- (Global System for Mobile Communication) or a UMTS-network (Universal Mobile Telephone System). Other interchangeable communication modules 2 include an interface module for communicating with another communication device over a short distance of approximately 5 to 25 metres, for example infrared and/or radio interfaces, e.g. a so-called Bluetooth interface, for communicating bidirectionally with a remote control unit or a communication device such as a mobile telephone. Other interchangeable functional modules 2 include receivers for receiving audio or con-

trol signals via wire, infrared, induction, ultrasound, or radio connections from devices such as a stereo set, a television set, a security alarm system, or a remote control unit for the wireless microphone 1 or the receiver of the hearing device. Another interchangeable communication module 2 includes an audio recorder and/or an audio player for recording audio signals on a data carrier and/or for replaying audio signals from a data carrier, respectively, for example an MP3 player (MPEG3, Moving Picture Expert Group). Still other interchangeable communication modules 2 include external microphones, for example omnidirectional or directional microphones, external power supplies, such as a battery pack or a solar cell, or external audio signal processing units with special purpose processing functions not available in the audio processing module 17 of the basic wireless microphone 1.

Claims

1. Wireless microphone (1) comprising a radio transmitter (18) for transmitting radio signals carrying audio signals to a hearing device, **characterised by** at least one coupling element (11) for detachably fixing one of various interchangeable functional modules (2) to the wireless microphone (1), said coupling element (11) comprising electrical contacts (12) for electrically connecting the interchangeable functional module (2) to the wireless microphone (1) when the interchangeable functional module (2) is fixed to the wireless microphone (1) by means of said coupling element (11).
2. Wireless microphone (1) according to claim 1, **characterised in that** the coupling element (11) constitutes a bidirectional electrical interface between the wireless microphone (1) and the interchangeable functional module (2) fixed to the wireless microphone (1).
3. Wireless microphone (1) according to one of the claims 1 or 2, **characterised in that** the coupling element (11) is designed to fix the interchangeable functional module (2) to the wireless microphone (1) by mating with a coupling element (21) of the interchangeable functional module (2).
4. Wireless microphone (1) according to one of the claims 1 to 3, **characterised in that** electronic modules of the wireless microphone (1) are connected to one or more of the electrical contacts (12) for bidirectional exchange of electrical signals between said electronic modules and the interchangeable functional module (2) fixed to the wireless microphone (1).
5. Wireless microphone (1) according to one of the

claims 1 to 4, **characterised in that** the wireless microphone (1) comprises an electronic control module (16), said electronic control module (16) being connected to one or more of the electrical contacts (12) for exchanging electrical control signals with the interchangeable functional module (2) fixed to the wireless microphone (1).

6. Wireless microphone (1) according to claim 5, **characterised in that** the wireless microphone (1) comprises operating elements (14), said operating elements (14) being connected to the control module (16), and said control module (16) being designed for transferring electrical control signals to the interchangeable functional module (2) fixed to the wireless microphone (1) in response to operation of said operating elements (14).
7. Wireless microphone (1) according to one of the claims 1 to 6, **characterised in that** the wireless microphone (1) comprises an electronic audio processing module (16), said electronic audio processing module (16) being connected to one or more of the electrical contacts (12) for exchanging electrical audio signals with the interchangeable functional module (2) fixed to the wireless microphone (1).
8. Wireless microphone (1) according to one of the claims 1 to 7, **characterised in that** the wireless microphone (1) comprises an electronic audio processing module (16), said electronic audio processing module (16) being connected to one or more of the electrical contacts (12) for receiving electrical control signals from the interchangeable functional module (2) fixed to the wireless microphone (1).
9. Wireless microphone (1) according to one of the claims 1 to 8, **characterised in that** the radio transmitter (18) is connected to one or more of the electrical contacts (12) for exchanging electrical signals with the interchangeable functional module (2) fixed to the wireless microphone (1).
10. Wireless microphone (1) according to one of the claims 1 to 9, **characterised in that** the wireless microphone (1) comprises a power source module (19), said power source module (19) being connected to one or more of the electrical contacts (12) for supplying power to the interchangeable functional module (2) fixed to the wireless microphone (1) and/or for receiving power from the interchangeable functional module (2) fixed to the wireless microphone (1).

Amended claims in accordance with Rule 86(2) EPC.

1. Wireless microphone (1) as an assistive listening device for direct and one-way cooperation with an associated hearing device arranged in or at a person's ear, comprising a radio transmitter (18) for transmitting radio signals carrying audio signals from said microphone to said hearing device,

characterised by

at least one coupling element (11) for detachably fixing one of various interchangeable functional modules (2) to the wireless microphone (1), said coupling element (11) comprising electrical contacts (12) for electrically connecting the interchangeable functional module (2) to the wireless microphone (1) when the interchangeable functional module (2) is fixed to the wireless microphone (1) by means of said coupling element (11).

2. Wireless microphone (1) according to claim 1, **characterised in that** the coupling element (11) constitutes a bidirectional electrical interface between the wireless microphone (1) and the interchangeable functional module (2) fixed to the wireless microphone (1).

3. Wireless microphone (1) according to one of the claims 1 or 2, **characterised in that** the coupling element (11) is designed to fix the interchangeable functional module (2) to the wireless microphone (1) by mating with a coupling element (21) of the interchangeable functional module (2).

4. Wireless microphone (1) according to one of the claims 1 to 3, **characterised in that** electronic modules of the wireless microphone (1) are connected to one or more of the electrical contacts (12) for bidirectional exchange of electrical signals between said electronic modules and the interchangeable functional module (2) fixed to the wireless microphone (1).

5. Wireless microphone (1) according to one of the claims 1 to 4, **characterised in that** the wireless microphone (1) comprises an electronic control module (16), said electronic control module (16) being connected to one or more of the electrical contacts (12) for exchanging electrical control signals with the interchangeable functional module (2) fixed to the wireless microphone (1).

6. Wireless microphone (1) according to claim 5, **characterised in that** the wireless microphone (1) comprises operating elements (14), said operating elements (14) being connected to the control module (16), and said control module (16) being designed for transferring electrical control signals to the interchangeable functional module (2) fixed to




the wireless microphone (1) in response to operation of said operating elements (14).

7. Wireless microphone (1) according to one of the claims 1 to 6, **characterised in that** the wireless microphone (1) comprises an electronic audio processing module, said electronic audio processing module being connected to one or more of the electrical contacts (12) for exchanging electrical audio signals with the interchangeable functional module (2) fixed to the wireless microphone (1).

8. Wireless microphone (1) according to one of the claims 1 to 6, **characterised in that** the wireless microphone (1) comprises an electronic audio processing module, said electronic audio processing module being connected to one or more of the electrical contacts (12) for receiving electrical control signals from the interchangeable functional module (2) fixed to the wireless microphone (1).

9. Wireless microphone (1) according to one of the claims 1 to 8, **characterised in that** the radio transmitter (18) is connected to one or more of the electrical contacts (12) for exchanging electrical signals with the interchangeable functional module (2) fixed to the wireless microphone (1).

10. Wireless microphone (1) according to one of the claims 1 to 9, **characterised in that** the wireless microphone (1) comprises a power source module (19), said power source module (19) being connected to one or more of the electrical contacts (12) for supplying power to the interchangeable functional module (2) fixed to the wireless microphone (1) and/or for receiving power from the interchangeable functional module (2) fixed to the wireless microphone (1).

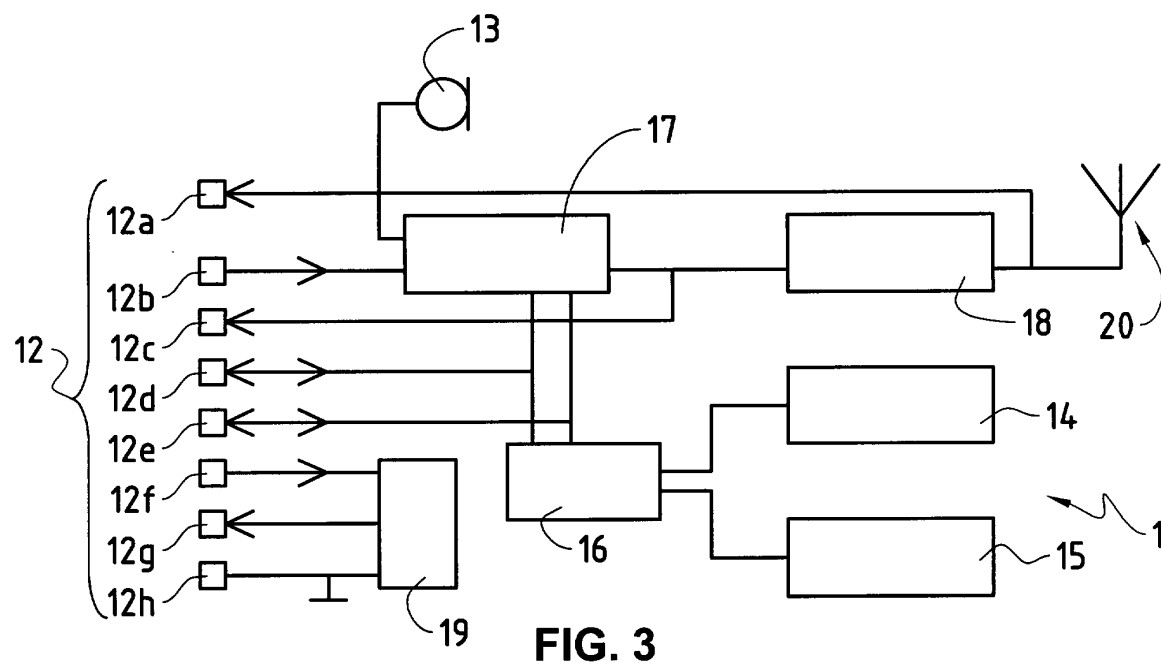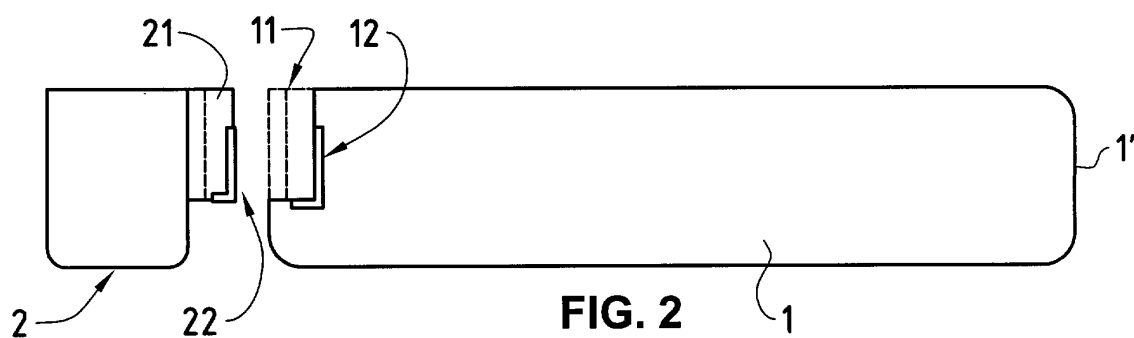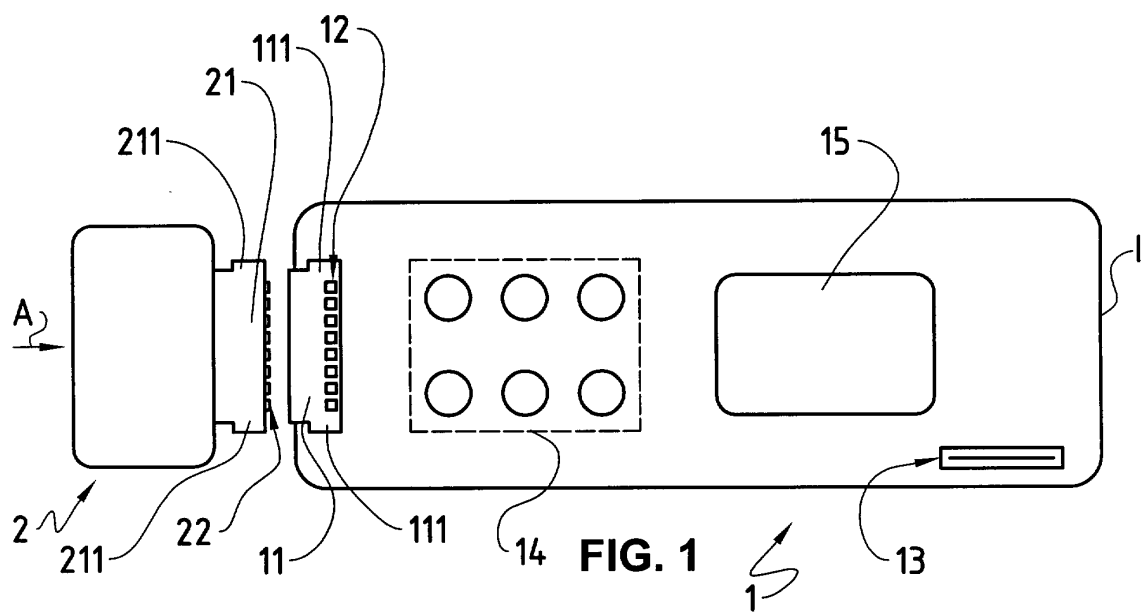



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 40 5718

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	FR 2 779 598 A (AISENBERG ALAIN) 10 December 1999 (1999-12-10) * page 1, line 5 - page 1, line 11 * * page 3, line 33 - page 4, line 6 * * claims 1-3; figures 1,3-8 * ---	1-11	H04R1/04
X	WO 94 29968 A (MITSUI COMTEK CORP) 22 December 1994 (1994-12-22) * page 1, line 31 - page 3, line 19 * * page 6, line 19 - page 7, line 24 * * figures 1A,1B,3A * ---	1-11	
X	WO 94 24775 A (CELL PORT LAB INC) 27 October 1994 (1994-10-27) * page 4, line 19 - page 5, line 9 * * page 9, line 18 - page 16, line 10 * * page 23, line 14 - page 23, line 21 * * page 33, line 24 - page 33, line 28 * * figures 2A-2F,9,14,15 * -----	1-11	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H04R H04B H04M
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 26 March 2004	Examiner Meiser, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

1

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 40 5718

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-03-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
FR 2779598	A	10-12-1999	FR 2779598 A1	10-12-1999
-----			-----	
WO 9429968	A	22-12-1994	AU 7095294 A	03-01-1995
			WO 9429968 A1	22-12-1994
-----			-----	
WO 9424775	A	27-10-1994	US 5479479 A	26-12-1995
			AU 682512 B2	09-10-1997
			AU 6630894 A	08-11-1994
			CA 2160918 A1	27-10-1994
			DE 69432927 D1	14-08-2003
			EP 0699361 A1	06-03-1996
			JP 8509331 T	01-10-1996
			WO 9424775 A1	27-10-1994
-----			-----	