



(11) **EP 1 527 187 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
02.04.2014 Bulletin 2014/14

(21) Application number: **03784114.5**

(22) Date of filing: **30.07.2003**

(51) Int Cl.:
C12P 7/40 (2006.01) **C12P 13/04** (2006.01)
C12P 7/16 (2006.01) **C12P 7/18** (2006.01)
C12P 7/20 (2006.01) **C12P 7/24** (2006.01)
C12P 7/28 (2006.01) **C12P 7/06** (2006.01)

(86) International application number:
PCT/EP2003/008427

(87) International publication number:
WO 2004/015121 (19.02.2004 Gazette 2004/08)

(54) **PRODUCTION OF A FERMENTATION PRODUCT**
HERSTELLUNG EINES FERMENTATIONSPRODUKTS
PRODUCTION D'UN PRODUIT DE FERMENTATION

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**

(30) Priority: **05.08.2002 GB 0218021**

(43) Date of publication of application:
04.05.2005 Bulletin 2005/18

(73) Proprietor: **Ciba Specialty Chemicals Water
Treatments Limited
Bradford,
West Yorkshire BD12 0JZ (GB)**

(72) Inventors:
• **HUGHES, Jonathan
Huddersfield,
West Yorkshire HD2 2HE (GB)**
• **SYMES, Kenneth Charles
Keighley,
West Yorkshire BD20 5UU (GB)**

(74) Representative: **Bernhardt, Wolfgang Willy-Hans
Ciba Specialty Chemicals Holding Inc.
Patentabteilung
Klybeckstrasse 141
4057 Basel (CH)**

(56) References cited:
**WO-A-01/12778 WO-A-02/16495
US-A- 5 552 316 US-A- 5 846 433
US-A- 6 031 037**

- **PATENT ABSTRACTS OF JAPAN vol. 1997, no. 07, 31 July 1997 (1997-07-31) & JP 09 059891 A (HYMO CORP), 4 March 1997 (1997-03-04)**
- **PATENT ABSTRACTS OF JAPAN vol. 002, no. 060 (M-018), 28 April 1978 (1978-04-28) & JP 53 023145 A (KURITA WATER IND LTD), 3 March 1978 (1978-03-03)**
- **TOM LINDSTROEM: "Flocculation of kraft lignin sols with polyethylene oxide", SEPARATION SCIENCE AND TECHNOLOGY, DEKKER, NEW YORK, NY, US, vol. 14, no. 7, 1 January 1979 (1979-01-01), pages 601-610, XP009155602, ISSN: 0149-6395**
- **GALBE ET AL: "Separation of solid residues after SSF and SHF in Fuel ethanol production spruce", 24TH SYMPOSIUM ON BIOTECH. FOR FUELS AND CHEMICALS, 28 April 2002 (2002-04-28), - 1 May 2002 (2002-05-01),**

Remarks:

The file contains technical information submitted after the application was filed and not included in this specification

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 527 187 B1

Description

[0001] The present invention relates to processes of treating plant derived material to provide an aqueous liquor containing sugars which are used in a fermentation process to produce a fermentation product. In particular the present invention relates to a process of dewatering a fermentation broth residue, produced as a by-product from the distillation recovery of a fermentation product. Typically the dewatered solids are dried and used as a solid fuel. The clarified water would normally be returned to watercourses and/or used as wash liquor further back in the process.

[0002] Typically such fermentation products include for instance ethanol, glycerol, acetone, n-butanol, butanediol, isopropanol, butyric acid, methane, citric acid, fumaric acid, lactic acid, propionic acid, succinic acid, itaconic acid, acetic acid, acetaldehyde, 3-hydroxypropionic acid, glycolic acid and tartaric acid and amino acids such as L-glutaric acid, L-lysine, L-aspartic acid, L-tryptophan, L-arylglycines or salts of any of these acids.

[0003] It is known to treat a biomass with acid in order to hydrolyse polysaccharides to the component sugars that can be used in a fermentation process to produce a fermentation product. For instance US-A-4384897 describes a method of treating biomass material in which it is subjected to a two stage hydrolysis in which polysaccharides that are more easily hydrolysed, such as hemicellulose and then in a second stage the material that is more difficult to depolymerise e.g. cellulose, is depolymerised using a more severe hydrolytic treatment. The products of the first and second stages include sugar solutions and organic acids, aldehydes. The monosaccharides are subjected to fermentation to produce ethanol and the beer resulting from the fermentation may then be subjected to rectification to produce ethanol of commercial grade. US-A-4384897 sets out to provide improvements in more efficient washing of solids, the use of co-current washing or countercurrent washing of solids and proposes the use of ferric and or aluminium ions as flocculating agents to separate finely dispersed solids resulting from the neutralisation of the hydrolysate liquor stream.

[0004] It is also known from a National Renewable Energy Laboratory (NREL) report entitled "Lignocellulose Biomass to Ethanol Process Design and Economics of Co-Current Dilute Acid Prehydrolysis and Enzymatic Hydrolysis Current and Future Scenarios", NREL/IP-580-26157 (July 1999) to treat cellulose as the second polysaccharide by a cellulase enzyme in order to hydrolyse the cellulose into its component sugars. In one form of this process the solid by-product residue resulting from the first hydrolysis step and containing cellulose is divided into a main stream and a secondary stream. The main stream is fed directly into the fermentation vessel and the secondary stream is passed to a cellulase production stage, in which fungi are allowed to grow and act upon the cellulose, such that sugars and cellulase are form.

The sugars and cellulase are then fed into the fermentation vessel and the cellulase acts upon the cellulose from the main stream and converts it into the component sugars which in turn can be fermented to produce the fermentation product.

[0005] It is known to treat shredded cellulosic material using concentrated acid to provide aqueous solutions of sugars, which can be used in a fermentation process. For instance US-A-4650689 discloses a process of preparing ethanol from cellulosic material by subjecting the cellulosic material to highly concentrated mineral acid gas such as HCl under pressure, and treatment with hot water to give a liquor containing sugars which can be fermented.

[0006] US-A-5975439 describes an automated process for producing ethanol by shredding the cellulosic component of municipal solid waste and mixing this with equal amounts of concentrated sulphuric acid at high temperature to provide a digested mixture. The aqueous sugar solution is separated from the solids by a filtration process before being subjected to a fermentation process.

[0007] However, in the recovery of the fermentation product from the fermentation broth it is sometimes necessary to continually distil off the fermentation product in a distillation stage, wherein a stillage stream, comprising residues and by-products is removed.

[0008] WO-A-8603514 describes manufacture of ethanol by fermentation and then extraction of the ethanol from the fermentation broth. The residual fermentation broth liquor contains yeast and dissolved polymeric materials such as polysaccharides and proteins. An advantage of locating the solid liquid separation stage after the distillation stage is that some part of the non-separable dissolved protein in the fermentation liquor is transferred into a separable form through coagulation due to heating in the distillation and heat exchange processes.

[0009] In a study by Ann C Wilkie et al (Biomass and Bioenergy 19 (2000) 63-102, the treatment of ethanol stillage is evaluated. The bacterium, *Zymomonas mobilis* has been shown to produce higher ethanol yields but there is difficulty in separating the stillage liquor from the solid material. The study also identifies the difficulty in separating suspended solids from sugar crops and cellulosic crops.

[0010] Galbe et al describes the use of a flocculant (cationic or anionic) in the separation process of lignin from a liquor resulting from a fermentation process. Separation can be done in the presence a cationic polymer.

[0011] In general, the stillage stream or still bottoms resulting from the distillation processes are subjected to a solids-liquid separation step to produce a dewatered product which can be dried to produce a dry solid fuel product. The aqueous liquid separated from the solids are either returned to watercourses and/or recycled as wash water used in the washing of acid treated plant derived material. The stillage stream or still bottoms are normally high in BOD (Biological Oxygen Demand) and

so it is important to ensure that the aqueous liquor is effectively clarified and the water produced therefrom is substantially free of impurities in order not to poison watercourses and/or when used as wash liquor contaminate the substrate that is being washed.

[0012] The stillage stream containing precipitated protein based impurities and high levels of lignin, which make it difficult to flocculate and effect solids-liquid separation. It is known from an NREL report entitled "Liquid/Solid Separation" 99-10600/14 (March 2001) to treat post distillate slurry with a single polymer solution of concentration 0.01 to 0.02 wt%, identified as Perc-765, at doses in the range of 0.4 to 1 Kg/tonne of dry solids to effect the dewatering of the solids on a belt press to a final solids content of 26-29 wt%. However, the filtrate clarity is poor, with separation of a dilute feed of concentration 3 to 4 wt% producing a filtrate containing solids of 0.25 wt% or greater. It is noted that when operating with a desired feed concentration of 11.7 wt%, the ability to flocculate the solids may be impacted by this difference and either dilution of the feed, greater mixing intensity, and/or increased polymer dosages may result. Based on the final solids content and the filtrate solids content, belt presses were not recommended for this application. Furthermore, the liquor is normally at an elevated temperature, for instance above 50°C and can be as high as 95°C or 100°C. At these elevated temperatures it is normally even harder to adequately flocculate these liquors. It is therefore an objective to improve the solids-liquid separation.

[0013] A process of separating suspended solids from a fermentation liquor by subjecting the liquor to solids-liquid separation stage, wherein the fermentation liquor is produced in a fermentation process for the production of a fermentation product, which liquor comprises water, lignin and BOD, wherein the fermentation liquor is subjected to a mechanical dewatering stage during or subsequent to application of a treatment system, wherein the solid residue resulting from the separation process contains mainly lignin, wherein the solids-liquid separation stage is assisted by a treatment system, characterised in that the treatment system comprises ,

- (ii) a cationic polymer having an intrinsic viscosity (IV) of at least 4 dl/g and,
- (iii) an anionic polymer, and/or
- (iv) a cationic polymer of intrinsic viscosity of below 4 dl/g and a cationic charge density of at least 3 meq/g and/or
- (v) inorganic coagulants and/or

[0014] Intrinsic viscosity is measured using a suspended level viscometer in 1M NaCl buffered to pH 7.5 at 25°C.

[0015] We have found that surprisingly the yield and/or efficiency of the process can be improved by effecting a rapid but efficient solids-liquid separation of the solid res-

idues from an aqueous liquor containing BOD and that the liquor can be recycled to the fermentation process. The treatment system of the present invention allows a significantly improved separation of liquors from the solid residues and by-products. In particular the process induces more effective flocculation and the separation process is found to be significantly faster. In addition the solid residues, which contain mainly lignin, resulting from the separation process have higher cake solids than conventional separation treatment. Such a solid product would take less time and energy to dry and thus can be for instance used more efficiently as a solid fuel.

[0016] Usually the biomass residue comprises in addition to lignin, microbes and residual unconverted cellulose and hemicellulose. Frequently the aqueous liquors will also comprise proteins, polysaccharides, organic and inorganic salts.

[0017] It is also important to ensure that very effective separation of liquor from the solid by-product is also achieved more rapidly than conventional treatments.

[0018] In one aspect of the present invention the fermentation liquor is subjected to a distillation stage in which the fermentation product is recovered, wherein the liquor is removed from the distillation stage as a stillage stream and then subjected to the solids-liquid separation stage. Thus in this form of the invention the fermentation liquor is essentially free of the fermentation product when it is subjected to the solids-liquid separation stage.

[0019] Alternatively the fermentation liquor contains the fermentation product wherein the liquor is subjected to the solids-liquid separation stage and then passed to a distillation stage wherein the fermentation product is recovered. Thus in this form of the invention the solids are removed prior to the distillation stage and thus the distillation column and the stillage stream produced therefrom will be substantially free of the solids.

[0020] We have found that the separation process is particularly effective when the treatment system comprises a second component in addition to the cationic coagulant. In particular a preferred embodiment employs a treatment system which comprises (i) the cationic coagulant and (ii) a high IV cationic polymer of intrinsic viscosity of at least 4 dl/g.

[0021] In a treatment system comprising cationic coagulant and high IV polymer, the components may be added simultaneously, either as a pre-mix or alternatively separately. In one preferred form of the invention the coagulant is added first followed by the addition of high IV polymer. The reverse order of addition is also possible and may be particularly suited to certain cases.

[0022] The cationic coagulant may be a low IV natural, semi-natural or synthetic cationic polymer which exhibits intrinsic viscosity of below 4 dl/g and a cationic charge density of at least 3 meq/g.

Preferably the low IV polymer is selected from the group consisting of polyamines, amine/epihalohydrin addition polymers, polymers of dicyandiamide with formaldehyde, polymers of diallyldimethyl ammonium chloride (DAD-

MAC), cationic starch and cationic inulin. Polyamines may be commercially available polyamines, for instance polyethyleneimine (PEI). Cationic starch or cationic inulin may be commercially available products.

[0023] Preferred coagulant polymers are addition polymers of formaldehyde with dimethylamine and optionally other amines such as ethylenediamine, for example commercially available as Magnafloc™ 1597 or polymers of formaldehyde with dicyandiamide, for example commercially available as Magnafloc™ 1797. More preferred low IV polymeric coagulants include polymers of water-soluble ethylenically unsaturated cationic monomer or blend of monomers at least one cationic, non-ionic or and/or anionic monomer(s) alone or with other water soluble monomers, provided that the polymer has a cationicity of at least 3 meq/g. By water-soluble we mean that the monomer has a solubility of at least 5g/100 ml at 25°C. Particularly preferred polymers are homopolymers of diallyldimethyl ammonium chloride or copolymers of diallyldimethyl ammonium chloride with up to 20 mole% acrylamide. Typically such polymers would have molecular weights of up to 2,000,000 and usually below 1,000,000. Useful polymers would ideally exhibit an intrinsic viscosity of below 4 dl/g.

[0024] Inorganic coagulants may be any suitable inorganic coagulants, for instance alum or polyaluminium chloride (PAC).

[0025] Anionic polymers may be water-soluble or water-swellaable natural polymers or their derivatives. These may include starch derivatives, soluble cellulosic polymers, plant gums, marine gums, microbial gums, proteinaceous and polypeptide extracts and synthetic analogues. The anionic polymer may be a synthetic polymer that has been formed from ethylenically unsaturated water-soluble monomer or monomer blend. These monomers may include (meth) acrylic acid and its salts, maleic acid and its salts, itaconic acid and its salts and the like.

[0026] When the process also involves a cationic coagulant and a high IV cationic polymer, the high IV polymer may be desirably selected from water-soluble or water swellaable polymers. The polymer may be a natural polymer or a synthetic polymer which has been formed from ethylenically unsaturated water-soluble monomer or monomer blend. Suitably the high IV polymer is a flocculating agent selected from the group consisting of water soluble or water swellaable natural, semi-natural and synthetic polymers. Natural polymers are desirably chitosan based materials. Preferably the polymer is synthetic and may be formed by polymerisation of at least one cationic, non-ionic or and/or anionic monomer(s) alone or with other water-soluble monomers.

[0027] Preferably high IV polymeric flocculating agents are formed from ethylenically unsaturated water soluble monomers that readily polymerise to produce high molecular weight polymers. Particularly preferred polymers include monomers that are selected from the group consisting of polyacrylamide, copolymers of acrylamide with (meth) acrylic acid or salts thereof, copolymers of acry-

lamide with dialkylaminoalkyl (meth) acrylate or acid addition or quaternary ammonium salts, polymers of diallyldimethyl ammonium chloride. The polymers may be linear in that they have been prepared substantially in the absence of branching or crosslinking agent. Alternatively the polymers can be branched or cross-linked, for example as in EP-A-202780.

[0028] Desirably the coagulant and high IV polymer are added sequentially, preferably employing the coagulant first. In this way the addition of the coagulant coagulates the suspended solids and the coagulated solids are then flocculated by the bridging flocculant. However, in some instances it may be desirable to add the high IV flocculant first followed by the coagulant. It may also be desirable the coagulant and high IV polymer are added simultaneously, preferably as a premix.

[0029] In the case where the treatment system employs a premix, the coagulant may be an inorganic coagulant or the aforementioned low IV polymer. Preferably the premix comprises (i) a low IV cationic polymer of intrinsic viscosity of below 4 dl/g and a cationic charge density of at least 3 meq/g and (ii) a high IV cationic polymer of intrinsic viscosity of at least 4 dl/g.

[0030] The coagulant is suitably introduced into the aqueous suspension in any suitable amount in order to effect coagulation of the suspended solids. Usually the dose of coagulant is at least 50 grams per tonne (based on dry weight of biomass residue). The dose of coagulant is usually significantly higher, and can be typically up to 5000 grams per tonne. Usually the amount of coagulant is added in an amount between 500 and 3000 grams per tonne, especially around 750 to 2000 grams per tonne.

[0031] When the treatment employs a high IV flocculant with the cationic coagulant, the dose of flocculant is typically at least 50 grams per tonne (based on dry weight of biomass residue). The dose of flocculant is usually significantly higher, and can be typically up to 5000 grams per tonne. Usually the amount of flocculant is added in an amount between 500 and 3000 grams per tonne, especially around 750 to 2000 grams per tonne.

In order to ensure that the coagulated and/or flocculated solids are separated from the liquid medium, the biomass residue is subjected to a mechanical dewatering stage during or subsequent to application of the treatment system. The mechanical dewatering step is ideally selected from at least one of, a centrifuge, a screw press, a filter press, a belt filter press a horizontal belt filter or preferably a pressure filter.

[0032] The liquor separated from the biomass residue comprising sugars and/or cellulose are generally free of unwanted suspended solids and desirably are recycled into a fermentation process in order to produce a fermentation product.

[0033] The dewatered biomass residue comprises lignin and thus is generally difficult to dewater. Generally the dewatered biomass residue is subjected to a drying stage and the dried residue may for instance be used as a solid fuel, a nutrient source for further fermentation or

a source of chemicals. The process enables the manufacture of the fermentation product to be made more efficiently. Preferably the fermentation product is selected from the group consisting of ethanol, glycerol, acetone, n-butanol, butanediol, isopropanol, butyric acid, methane, citric acid, fumaric acid, lactic acid, propionic acid, succinic acid, itaconic acid, acetic acid, acetaldehyde, 3-hydroxypropionic acid, glyconic acid and tartaric acid and amino acids such as L-glutaric acid, L-lysine, L-aspartic acid, L-tryptophan, L-arylglycines or salts of any of these acids.

[0034] The following examples illustrate the invention.

Example I

[0035] Pre-hydrolysis: Milled wood chips steamed with low pressure steam to approximately 100°C. After steaming concentrated sulphuric acid is diluted and added to the mixture until the mixture contains 0.52% acid and the solids in the reactor are 22% by weight. The mixture is then steamed heated to 175°C for 15 minutes. The mixture is then flash cooled for 15 minutes to remove 6.5% of the acetic acid and 61 % of the furfural and hydroxymethyl furfural.

[0036] Separation: The 26% insoluble solids present in the pre-hydrolysed slurry (containing 0.38% sulphuric acid) is treated then separated on a filter press. A method of reducing the toxins remaining in the liquid portion is to wash with (recycled) water. After ion exchange to remove acetic acid, the liquid portion of the hydrolysate is acidified to pH 2 by the addition of sulphuric acid. Lime is then added to raise the pH to 10 and the liquor is heated to 50°C. The liquid is then adjusted to the fermentation pH of 4.5 for 4 hours allowing gypsum crystals to form for separation by filtration.

[0037] Simultaneous Saccharification and Co-Fermentation (SSCF): Detoxified and diluted hydrolysed solids are split to cellulase fermentations and SSCF fermenters. The hydrolysate feed stream is 22% soluble and insoluble solids. The portion of hydrolysate split off for *Z. mobilis* seed production is approximately 10%. The portion of hydrolysed solids split off for cellulase production is dependent on the cellulase yield on the xylose and cellulose present and the required loading of enzyme in the SSCF. For cellulase production pre-hydrolysed solids-conditioned hydrolysate liquor, recycle water, corn steep liquor (to 1%) and nutrients ((NH₄)₂SO₄, KH₂PO₄, MgSO₄·7H₂O CaCl₂·2H₂O and Tween 80) and corn oil as an antifoam (0.1 % v/v) are combined to give a final cellulose concentration of 4%. The batch is then run for 160 hours at 28°C to produce cellulase. For SSCF, detoxified hydrolysate slurry (22% total solids) is cooled to 30°C and added to the fermenter together with a 10% (v/v) seed inoculum. Addition of corn steep liquor to 0.25% and cellulase to give a final concentration of 15 FPU/g (cellulose) and an initial cellulose concentration of 22%. The SSCF fermentation in which cellulose is converted to fermentable sugars by cellulase and the fermentable

sugars converted to ethanol by *Z. mobilis* takes 7 days. Distillation: A whole beer containing 5.1 % ethanol by weight is fed to a distillation column where the ethanol concentration is reduced to 0.12% by weight, and generating vapour containing 37% by weight ethanol.

[0038] Separation: A 200 ml portion of the still bottom stream containing 7.5% suspended solids by weight and 2.5% soluble solids at 85°C was flocculated in a Triton mixer set at a speed of 1500 revs per minute and treated with a 65:35 blend of polymer A (polyDADMAC IV approx 1 dl/g) and polymer B (a cationic polymer active composition 20% acrylamide 80% cationic monomer dimethylaminoethyl methacrylate quaternized with methyl chloride having an IV of 4 dl/g preferably after shear as described in EP 0202780B) at a dose of 5 kg/tonne dry solids. The flocculated stillage is allowed one minute of free drainage time. A free drainage of 80 ml in 5 seconds is obtained. A sample of the flocculated material was also transferred to a piston press. A press cycle of ten minutes is used with a maximum pressure of 100 psi. The 5 second filtrate volume was 101 ml and the cake solids was 31.4%.

Example II

[0039] In order to evaluate the separation of liquid from solids in a fermentation broth a test procedure was established which will now be described by way of example with reference to the accompanying drawings in which:

Figure 1 shows a test rig in part sectional side elevation,

Figure 2 is a plan view of the rig of Figure 1, and

Figure 3 is a graph showing the speed of separation at different concentrations of flocculant.

[0040] Referring to the drawings the test rig comprises a vertically oriented open ended tube 10. the lower end of the tube 10 is disposed just above filter paper 12. Contacts 14 are provided on the filter paper which are arranged to supply a signal to a timer 16 to start the timer when liquid spreads to the contacts from the tube 10. A further contact 18 linked to the timer is arranged to turn the timer off when liquid from the tube reaches the contact 18. Thus the rig measures the time taken for liquid to spread across the filter paper from contacts 14 to contact 18. This is known as Capillary Suction Time (CST) and is a measure of the speed of separation of liquid from solid in a sample under test.

[0041] A 10 ml sample of fermentation broth was placed in a measuring cylinder and flocculant added. The cylinder was closed and then inverted a number of times, for example eight times, in order to ensure good distribution of the flocculant in the fermentation broth at low shear. The sample was then poured into tube 10 of the test rig and the CST obtained.

[0042] The CST, in seconds, of a fermentation broth derived from corn stover pretreated with 60 ppm of Pol-

polymer 1 was measured at different additions of cationic flocculant (Polymer 2). The results are shown in the graph of Figure 3 which also shows CST for samples with the addition of water in place of flocculant.

[0043] Polymer 1 is a copolymer of 52.5 wt% sodium acrylate and 47.5 wt% acrylamide, IV approx. 11 dl/g. Polymer 2 is a copolymer of 43.5 wt% acrylamide and 56.5 wt% cationic monomer (dimethylaminoethylacrylate quaternised with methyl chloride), IV approx. 6.5 dl/g.

Claims

1. A process of separating suspended solids from a fermentation liquor by subjecting the liquor to solids-liquid separation stage, wherein the fermentation liquor is produced in a fermentation process for the production of a fermentation product, which liquor comprises water, lignin and BOD, wherein the fermentation liquor is subjected to a mechanical dewatering stage during or subsequent to application of a treatment system, wherein the solid residue resulting from the separation process contains mainly lignin, wherein the solids-liquid separation stage is assisted by a treatment system, **characterised in that** the treatment system comprises ,

- (ii) a cationic polymer having an intrinsic viscosity (IV) of at least 4 dl/g and,
- (iii) an anionic polymer, and/or
- (iv) a cationic polymer of intrinsic viscosity of below 4 dl/g and a cationic charge density of at least 3 meq/g and/or
- (v) inorganic coagulants and/or
- (vi) charged microparticulate material.

2. A process according to claim 1 in which the fermentation liquor is subjected to a distillation stage wherein the fermentation product is recovered, wherein the liquor is removed from the distillation stage as a stillage stream and then subjected to the solids-liquid separation stage.
3. A process according to claim 1 in which the fermentation liquor contains the fermentation product wherein the liquor is subjected to the solids-liquid separation stage and then passed to a distillation stage wherein the fermentation product is recovered
4. A process according to any of claims 1 to 3 in which the treatment system comprises (i) a low IV cationic polymer of intrinsic viscosity of below 4 dl/g and a cationic charge density of at least 3 meq/g and (ii) a high IV cationic polymer of intrinsic viscosity of at least 4 dl/g.

5. A process according to any of claims 1 to 4 in which the low IV polymer is selected from the group consisting of polyamines, amine/epihalohydrin addition polymers, polymers of dicyandiamide with formaldehyde, polymers of diallyldimethyl ammonium chloride (DADMAC), cationic starch and cationic inulin.
6. A process according to any of claims 1 to 5 in which the inorganic coagulant is selected from alum and polyaluminium chloride (PAC).
7. A process according to claims 1 to 6 in which the coagulant is a charged microparticulate material.
8. A process according to any of claims 5 to 7 in which the high IV polymer is selected from water-soluble or water-swelling polymers, which polymer is a natural polymer, semi-natural polymer or a synthetic polymer which has been formed from ethylenically unsaturated water-soluble monomer or monomer blend.
9. A process according to any of claims 5 to 8 in which the high IV polymer is either chitosan based material or a polymer of acrylamide with one or more water soluble cationic monomers selected from dialkylaminoalkyl (meth) acrylates, dialkylaminoalkyl (meth) acrylamides and acid addition salts or quaternary ammonium salts thereof.
10. A process according to any of claims 5 to 9 in which the coagulant and high IV polymer are added sequentially, preferably employing the coagulant first.
11. A process according to any of claims 5 to 9 in which the coagulant and high IV polymer are added simultaneously, preferably as a premix.
12. A process according to claim 11 in which the premix comprises (i) a low IV cationic polymer of intrinsic viscosity of below 4 dl/g and a cationic charge density of at least 3 meq/g and (ii) a high IV cationic polymer of intrinsic viscosity of at least 4 dl/g.
13. A process according to any of claims 1 to 12 in which the dose of coagulant is at least 50 grams per tonne (based on dry weight of fermentation liquor).
14. A process according to any of claims 5 to 13 in which the dose of high IV polymer is at least 50 grams per tonne (based on dry weight of fermentation liquor).
15. A process according to claim 1 in which the mechanical dewatering step is selected from at least one of, a centrifuge, a screw press, a filter press, a belt filter press, a horizontal belt filter or preferably a pressure filter.

16. A process according to any of claims 1 to 15 in which the treated liquor from which suspended solids have been removed are recycled and used as wash water.
17. A process according to any of claims 1 to 16 in which the fermentation liquor comprises lignin and in which the separated solids are dewatered and then subjected to a drying stage to provide a dry solid material and in which the dry solid material is used as a solid fuel.
18. A process according to any of claims 1 to 17 in which the fermentation product is selected from the group consisting of ethanol, glycerol, acetone, n-butanol, butanediol, isopropanol, butyric acid, methane, citric acid, fumaric acid, lactic acid, propionic acid, succinic acid, itaconic acid, acetic acid, acetaldehyde, 3-hydroxypropionic acid, gluconic acid and tartaric acid and amino acids such as L-glutaric acid, L-lysine, L-aspartic acid, L-tryptophan, L-arylglycines or salts of any of these acids.

Patentansprüche

1. Verfahren zum Abtrennen suspendierter Feststoffe aus einer Fermentationsbrühe durch Unterwerfen der Brühe an eine Feststoff-Flüssigkeits-Trennstufe, wobei die Fermentationsbrühe bei einem Fermentationsverfahren für die Herstellung eines Fermentationsprodukts hergestellt wird, welche Brühe Wasser, Lignin und BOD umfasst, wobei die Fermentationsbrühe einer mechanischen Entwässerungsstufe während oder nach der Anwendung eines Behandlungssystems unterworfen wird, wobei der feste Rückstand, der bei dem Trennverfahren entsteht, hauptsächlich Lignin enthält, wobei die Feststoff-Flüssigkeits-Trennstufe durch ein Behandlungssystem unterstützt wird, **dadurch gekennzeichnet, dass** das Behandlungssystem
- (ii) ein kationisches Polymer mit einer intrinsischen Viskosität (IV) von wenigstens 4 dl/g und
- (iii) ein anionisches Polymer und/oder
- (iv) ein kationisches Polymer mit einer intrinsischen Viskosität von unter 4 dl/g und einer kationischen Ladungsdichte von wenigstens 3 meq/g und/oder
- (v) anorganische Koagulationsmittel und/oder
- (vi) geladenes mikropartikuläres Material umfasst.
2. Verfahren gemäß Anspruch 1, wobei die Fermentationsbrühe einer Destillationsstufe unterworfen wird, worin das Fermentationsprodukt gewonnen wird, wobei die Brühe von der Destillationsstufe als Stillationsstrom entfernt und dann der Feststoff-Flüssigkeits-Trennstufe unterworfen wird.

3. Verfahren gemäß Anspruch 1, wobei die Fermentationsbrühe das Fermentationsprodukt enthält, wobei die Brühe der Feststoff-Flüssigkeits-Trennstufe unterworfen und dann zu einer Destillationsstufe geleitet wird, worin das Fermentationsprodukt gewonnen wird.
4. Verfahren gemäß einem der Ansprüche 1 bis 3, wobei das Behandlungssystem (i) ein kationisches Nieder-IV-Polymer mit einer intrinsischen Viskosität unter 4 dl/g und einer kationischen Ladungsdichte von wenigstens 3 meq/g und (ii) ein kationisches Hoch-IV-Polymer mit einer intrinsischen Viskosität von wenigstens 4 dl/g umfasst.
5. Verfahren gemäß einem der Ansprüche 1 bis 4, wobei das Nieder-IV-Polymer ausgewählt ist aus der Gruppe bestehend aus Polyaminen, Amin/Epihalohydrin-Additionspolymeren, Polymeren von Dicyandiamid mit Formaldehyd, Polymeren von Diallyldimethylammoniumchlorid (DADMAC), kationischer Stärke und kationischem Inulin.
6. Verfahren gemäß einem der Ansprüche 1 bis 5, wobei das anorganische Koagulationsmittel ausgewählt ist aus Alum und Polyaluminiumchlorid (PAC).
7. Verfahren gemäß einem der Ansprüche 1 bis 6, wobei das Koagulationsmittel ein geladenes mikropartikuläres Material ist.
8. Verfahren gemäß einem der Ansprüche 5 bis 7, wobei das Hoch-IV-Polymer ausgewählt ist aus wasserlöslichen oder wasserquellbaren Polymeren, welches Polymer ein natürliches Polymer, ein halbnatürliches Polymer oder ein synthetisches Polymer ist, das aus einem ethylenisch nichtgesättigten wasserlöslichen Monomer oder Monomergemisch gebildet worden ist.
9. Verfahren gemäß einem der Ansprüche 5 bis 8, wobei das Hoch-IV-Polymer entweder ein Chitosanbasiertes Material oder ein Polymer von Acrylamid mit einem oder mehreren wasserlöslichen Monomeren, ausgewählt aus Dialkylaminoalkyl(meth)acrylaten, Dialkylaminoalkyl(meth)acrylamiden und Säureadditionssalzen oder quaternären Ammoniumsalzen davon, ist.
10. Verfahren gemäß einem der Ansprüche 5 bis 9, wobei das Koagulationsmittel und das Hoch-IV-Polymer aufeinanderfolgend zugegeben werden, wobei vorzugsweise zuerst das Koagulationsmittel eingesetzt wird.
11. Verfahren gemäß einem der Ansprüche 5 bis 9, wobei das Koagulationsmittel und das Hoch-IV-Polymer gleichzeitig zugegeben werden, vorzugsweise

als Vormischung.

12. Verfahren gemäß Anspruch 11, wobei die Vormischung (i) ein kationisches Nieder-IV-Polymer mit einer intrinsischen Viskosität unter 4 dl/g und einer kationischen Ladungsdichte von wenigstens 3 meq/g und (ii) ein kationisches Hoch-IV-Polymer mit einer intrinsischen Viskosität von wenigstens 4 dl/g umfasst.
13. Verfahren gemäß einem der Ansprüche 1 bis 12, wobei die Dosis an Koagulationsmittel wenigstens 50 Gramm pro Tonne beträgt (bezogen auf das Trockengewicht der Fermentationsbrühe).
14. Verfahren gemäß einem der Ansprüche 5 bis 13, wobei die Dosis an Hoch-IV-Polymer wenigstens 50 Gramm pro Tonne beträgt (bezogen auf das Trockengewicht der Fermentationsbrühe).
15. Verfahren gemäß Anspruch 1, wobei der mechanische Entwässerungsschritt ausgewählt ist aus wenigstens einem von einer Zentrifuge, einer Schraubenpresse, einer Filterpresse, einer Bandfilterpresse, einem horizontalen Bandfilter und vorzugsweise einem Druckfilter.
16. Verfahren gemäß einem der Ansprüche 1 bis 15, wobei die behandelte Brühe, aus der suspendierte Feststoffe entfernt worden sind, recycelt und als Waschwasser verwendet wird.
17. Verfahren gemäß einem der Ansprüche 1 bis 16, wobei die Fermentationsbrühe Lignin umfasst und wobei die abgetrennten Feststoffe entwässert und dann einer Trocknungsstufe unterworfen werden, um ein trockenes festes Material zu ergeben, wobei das trockene feste Material als fester Brennstoff verwendet wird.
18. Verfahren gemäß einem der Ansprüche 1 bis 17, wobei das Fermentationsprodukt ausgewählt ist aus der Gruppe bestehend aus Ethanol, Glycerol, Aceton, n-Butanol, Butandiol, Isopropanol, Buttersäure, Methan, Citronensäure, Fumarsäure, Milchsäure, Propionsäure, Bernsteinsäure, Itaconsäure, Essigsäure, Acetaldehyd, 3-Hydroxypropionsäure, Glucosäure und Weinsäure und Aminosäuren, wie z. B. L-Glutarsäure, L-Lysin, L-Asparaginsäure, L-Tryptophan, L-Arylglycinen und Salzen beliebiger dieser Säuren.

Revendications

1. Procédé de séparation de matières solides en suspension à partir d'une liqueur de fermentation en soumettant la liqueur à une étape de séparation so-

lide-liquide,

dans lequel la liqueur de fermentation est produite dans un procédé de fermentation pour la production d'un produit de fermentation, ladite liqueur comprenant de l'eau, de la lignine et BOD, la liqueur de fermentation étant soumise à une étape de déshydratation mécanique pendant ou après l'application d'un système de traitement, le résidu solide résultant du procédé de séparation contenant principalement de la lignine, l'étape de séparation solide-liquide étant assistée par un système de traitement, **caractérisé en ce que** le système de traitement comprend,

- (ii) un polymère cationique ayant une viscosité intrinsèque (IV) d'au moins 4 dl/g et,
- (iii) un polymère anionique, et/ou
- (iv) un polymère cationique de viscosité intrinsèque inférieure à 4 dl/g et une densité de charge cationique d'au moins 3 meq/g et/ou
- (v) des coagulants inorganiques et/ou
- (vi) un matériau microparticulaire chargé.

2. Procédé selon la revendication 1 dans lequel la liqueur de fermentation est soumise à une étape de distillation dans laquelle le produit de fermentation est récupéré, la liqueur étant séparée de l'étape de distillation sous la forme d'un flux de distillation et ensuite soumise à l'étape de séparation solide-liquide.
3. Procédé selon la revendication 1 dans lequel la liqueur de fermentation contient le produit de fermentation dans lequel la liqueur est soumise à l'étape de séparation solide-liquide et ensuite transférée vers une étape de distillation dans laquelle le produit de fermentation est récupéré.
4. Procédé selon l'une quelconque des revendications 1 à 3 dans lequel le système de traitement comprend (i) un polymère cationique à VI faible de viscosité intrinsèque inférieure à 4 dl/g et une densité de charge cationique d'au moins 3 meq/g et (ii) un polymère cationique à VI élevée de viscosité intrinsèque d'au moins 4 dl/g.
5. Procédé selon l'une quelconque des revendications 1 à 4 dans lequel le polymère à VI faible est choisi dans le groupe constitué de polyamines, polymères d'addition d'amine/épihalogénohydrine polymères de dicyanodiamide avec du formaldéhyde, polymères de chlorure de diallyldiméthylammonium (DAD-MAC), amidon cationique et inuline cationique.
6. Procédé selon l'une quelconque des revendications 1 à 5 dans lequel le coagulant inorganique est choisi parmi l'alun et le poly(chlorure d'aluminium) (PAC).

7. Procédé selon les revendications 1 à 6 dans lequel le coagulant est un matériau microparticulaire chargé. 5
8. Procédé selon l'une quelconque des revendications 5 à 7 dans lequel le polymère à VI élevée est choisi parmi des polymères hydrosolubles ou gonflables dans l'eau, ledit polymère étant un polymère naturel, un polymère semi-naturel ou un polymère synthétique qui a été formé à partir d'un monomère hydrosoluble ou un mélange de monomères à insaturation éthylénique. 10
9. Procédé selon l'une quelconque des revendications 5 à 8 dans lequel le polymère à VI élevée est un matériau à base de chitosane ou un polymère d'acrylamide avec un ou plusieurs monomères cationiques hydrosolubles choisis parmi des (méth)acrylates de dialkylaminoalkyle, des (méth)acrylamides de dialkylaminoalkyle et des sels d'addition d'acide ou des sels d'ammonium quaternaire de ceux-ci. 15
10. Procédé selon l'une quelconque des revendications 5 à 9 dans lequel le coagulant et le polymère à VI élevée sont ajoutés séquentiellement, de préférence en utilisant le coagulant dans un premier temps. 20
11. Procédé selon l'une quelconque des revendications 5 à 9 dans lequel le coagulant et le polymère à VI élevée sont ajoutés simultanément, de préférence sous la forme d'un prémélange. 25
12. Procédé selon la revendication 11 dans lequel le prémélange comprend (i) un polymère cationique à VI faible de viscosité intrinsèque inférieure à 4 dl/g et une densité de charge cationique d'au moins 3 meq/g et (ii) un polymère cationique à VI élevée de viscosité intrinsèque d'au moins 4 dl/g. 30
13. Procédé selon l'une quelconque des revendications 1 à 12 dans lequel la dose de coagulant est d'au moins 50 grammes par tonne (sur la base du poids sec de liqueur de fermentation). 35
14. Procédé selon l'une quelconque des revendications 5 à 13 dans lequel la dose de polymère à VI élevée est d'au moins 50 grammes par tonne (sur la base du poids sec de liqueur de fermentation). 40
15. Procédé selon la revendication 1 dans lequel l'étape de déshydratation mécanique est choisie parmi au moins l'un parmi, une centrifugeuse, une presse à vis, une presse à filtre, une presse à filtre à bande, un filtre à bande horizontale ou, de préférence, un filtre à pression. 45
16. Procédé selon l'une quelconque des revendications 1 à 15 dans lequel la liqueur traitée à partir de laquelle les matières solides en suspension ont été éliminées sont recyclées et utilisées en tant qu'eau de lavage. 50
17. Procédé selon l'une quelconque des revendications 1 à 16 dans lequel la liqueur de fermentation comprend de la lignine et dans lequel les matières solides séparées sont déshydratées et ensuite soumises à une étape de séchage pour obtenir un matériau solide sec et dans lequel le matériau solide sec est utilisé en tant que combustible solide. 55
18. Procédé selon l'une quelconque des revendications 1 à 17 dans lequel le produit de fermentation est choisi dans le groupe constitué de l'éthanol, le glycérol, l'acétone, le n-butanol, le butanediol, l'isopropanol, l'acide butyrique, le méthane, l'acide citrique, l'acide fumarique, l'acide lactique, l'acide propionique, l'acide succinique, l'acide itaconique, l'acide acétique, l'acétaldéhyde, l'acide 3-hydroxypropionique, l'acide gluconique et l'acide tartrique et des acides aminés tels que l'acide L-glutarique, la L-lysine, l'acide L-aspartique, le L-tryptophane, des L-arylglycines ou des sels de l'un quelconque de ces acides.

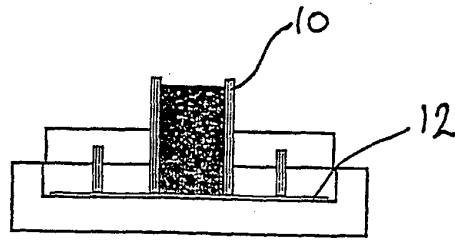


Fig. 1

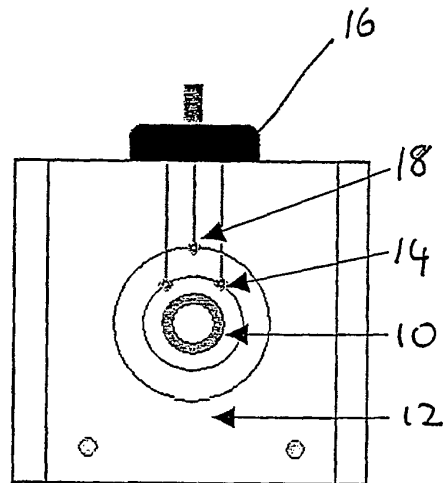


Fig. 2

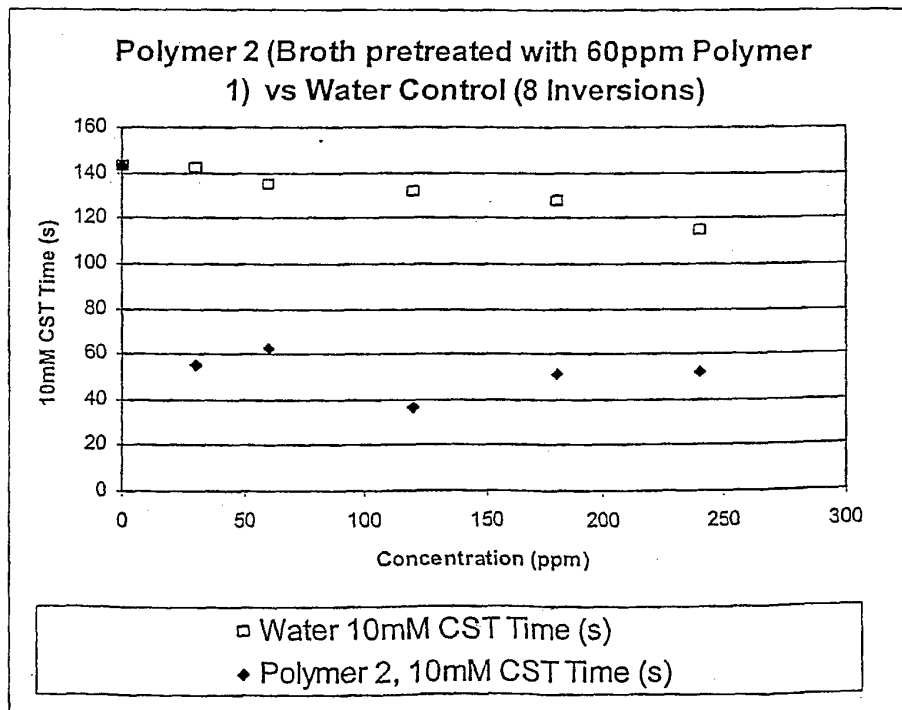


Fig. 3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 4384897 A [0003]
- US 4650689 A [0005]
- US 5975439 A [0006]
- WO 8603514 A [0008]
- EP 202780 A [0027]
- EP 0202780 B [0038]

Non-patent literature cited in the description

- Lignocellulose Biomass to Ethanol Process Design and Economics of Co-Current Dilute Acid Prehydrolysis and Enzymatic Hydrolysis Current and Future Scenarios. NREL/IP-580-26157, July 1999 [0004]
- **ANN C WILKIE et al.** *Biomass and Bioenergy*, 2000, vol. 19, 63-102 [0009]