



(11) **EP 1 529 945 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
23.09.2009 Bulletin 2009/39

(51) Int Cl.:
F02D 41/06^(2006.01) F02D 41/34^(2006.01)

(21) Application number: **03025197.9**

(22) Date of filing: **04.11.2003**

(54) **System and method for controlling fuel injection**

System und Verfahren für die Steuerung der Kraftstoffeinspritzung in einem Motor

Système et méthode pour la commande d'injection de carburant dans un moteur

(84) Designated Contracting States:
DE GB SE

(43) Date of publication of application:
11.05.2005 Bulletin 2005/19

(73) Proprietor: **Ford Global Technologies, LLC**
Dearborn, MI 48126 (US)

(72) Inventors:
• **Dahlgren, Jan**
423 39 Gothenbur (SE)
• **Moren, Mats**
417 19 Gothenburg (SE)

(74) Representative: **Börlin, Maria et al**
Albihns AB
P.O. Box 5581
114 85 Stockholm (SE)

(56) References cited:
EP-A- 0 990 784 EP-A- 1 284 349
DE-A- 4 418 579 FR-A- 2 827 911
US-A- 4 723 523 US-A- 5 852 998
US-A- 6 098 585

• **PATENT ABSTRACTS OF JAPAN vol. 1995, no.**
06, 31 July 1995 (1995-07-31) & JP 07 083093 A
(NIPPONDENSO CO LTD), 28 March 1995
(1995-03-28)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 529 945 B1

Description

[0001] The present invention relates to a method for controlling fuel injection in a vehicle combustion engine comprising at least one combustion chamber and means for supplying fuel into the combustion chamber.

[0002] The present invention also relates to a motor vehicle comprising an internal combustion engine comprising at least one combustion chamber, means for generating a first signal comprising information about a desire to start the engine, an electronic control unit adapted to control fuel supply to said combustion chamber.

[0003] The present invention further relates to a computer program for carrying out a method for controlling fuel injection in a vehicle combustion engine.

Background of the invention

[0004] From US 6,098,585 a method for controlling fuel injection in a vehicle combustion engine is known.

[0005] In motor vehicle engines there are, after the engine is shut off, some residual fuel in one or several combustion chambers or intake system. This fuel remains in the combustion chambers or intake system during the time when the engine is not in use.

[0006] When a user of the vehicle is starting up the engine again after a period of time some of the residual fuel is pumped out from the engine to the vehicle exhaust system when cranking up the engine with a starter.

Summary of the invention

[0007] An object of the invention relates to the problem of achieving an improved operation of a combustion engine of a motorised vehicle.

[0008] A further object of the invention is to provide a combustion engine with reduced exhaust emissions, especially with reduced HC emissions during start of the engine.

[0009] These objects are achieved by a method according to the above mentioned kind, further comprising the steps of:

- detecting a first signal comprising information indicating a desire to start the engine;
- controlling fuel supply to said combustion chamber in dependence of a second signal, said control being performed before the engine is cranked up by a starter.

[0010] Advantageously the method, according to an embodiment of the invention, will reduce the number of pump-outs when starting up the engine. Preferably the number of pump-outs when starting up the engine is minimised. Consequently this results in less hydro carbons (HC) in an exhaust system of the vehicle. This may further have a positive effect on the environment of the vehicle.

[0011] A favourable aspect of the invention is that a

part of the residual fuel in the combustion chambers will be used for combustion as purposed.

[0012] Further, according to an embodiment of the invention, there is provided a shorter activation time for a starter of the engine and, thus, quicker revving-up in start is achieved.

[0013] Advantageously a more stable voltage will be achieved in a power supply system of the vehicle due to no starter is activated during the fuel supply. The fuel supply bears upon pre-injections.

[0014] The method provides an improved control of fuel injection due to the possibility to await a correct fuel pressure value. A starter of the engine is not activated as early as in prior art, and there is therefore no need to quickly inject fuel in combustion chambers when there is too low pressure in a fuel rail.

[0015] Even further, a more stable fuel pressure in the fuel rail of the engine is achieved due to that the pre-injections do not necessarily have to be performed simultaneously but one by one.

[0016] According to a preferred embodiment of the invention, the second signal comprising information about cylinder status in response to said first signal is acquired. This provides a positive effect relating to the control of fuel supply to the combustion chambers.

Brief description of the drawings

[0017] The invention will now be described in greater detail with aid of the enclosed drawings in which:

Figure 1 is a schematic diagram depicting a vehicle drivetrain and a control system therefore according to an embodiment of the invention.

Figure 2 is a schematic diagram illustrating a motor vehicle engine in greater detail according to an embodiment of the invention.

Figure 3 is illustrating a part of the motor vehicle engine in greater detail according to an embodiment of the present invention.

Figure 4 is illustrating a sequence schedule according to an embodiment of the invention.

Figure 5 is a flowchart describing a subroutine for controlling fuel supply in a vehicle combustion engine executed by a control unit according to an embodiment of the invention

Figure 6 is a flowchart describing in greater detail a subroutine for controlling fuel supply in a vehicle combustion engine executed by a control unit according to an embodiment of the invention.

Figure 7 is a block diagram illustrating an apparatus, according to an embodiment of the invention.

Detailed description of the preferred embodiments

[0018] Figure 1 shows schematically a vehicle drivetrain 10 and a control system therefore. The drivetrain comprises an internal combustion engine 120 and a drivetrain member in the form of a gear unit 140. A shaft 150 is coupled between the engine 120 and the gear unit 140, which shaft 150 works as force transmitting means. A transmission output shaft 170 drives wheels (not shown) of the vehicle for its propulsion.

[0019] An electronic control unit 180, such as an Engine Control Unit (ECU), is adapted to receive signals from an accelerator member 190 of the drivetrain, said member 190 may be an accelerator pedal, and to receive condition parameters, such as engine condition parameters, from sensors 114 and/or 110. The sensors 114 are adapted to communicate with the control unit 180 and a control unit 100 by means of a cable 160 and a cable 155, respectively. The sensors 110 are adapted to communicate with the control unit 180 by means of a cable 152. The sensors 110 are adapted to detect various engine parameters, such as engine temperature, or other parameters, which may be used in a calculation or simulation performed in the control unit 180, so as to perform a pre-injection of fuel into one or several combustion chambers of the engine. The sensors 110 are provided at adequate positions in the engine, so as to detect or measure a certain parameter's quantity or quality. The accelerator member 190 is adapted for communication with the control unit 180 via a cable 153. The electronic control unit 180 is adapted to send signals to a plurality of devices as to control the operation of the engine. The control unit 180 is adapted to process received signals from said sensors. The electronic control unit 180 is programmable.

[0020] The electronic control unit 100 is adapted to receive signals from a gear selecting unit 116 via a cable 158, said gear selector unit may be a manual electronic gear selector. Alternatively the vehicle 10 has a manual gear shift lever. The control unit 100 is adapted to control gear changes of the gear unit by means of control signals sent to the gearbox via a cable 159.

[0021] The control unit 180 and the control unit 100 are adapted for communication with each other by means of a cable 156. When in the later it is depicted that a subroutine is performed in the control unit 180 it may alternatively be performed in the control unit 100.

[0022] A start device 112 is adapted for communication with the control unit 180 by means of a cable 154. The start device is arranged for generating a start signal in response to an action taken by a user of the vehicle. The start device is further arranged for sending the start signal to the control unit 180. Preferably the start device comprises a key hole adapted to closely receive a key. The start device may generate the start signal when the user turns the inserted key from a first position to a second position.

[0023] The control unit 180 is adapted for communica-

tion with a starter 185 via a cable 183. The starter 185 is arranged for cranking up the engine when starting the engine. The control unit 180 is adapted to control the starter. Typically the control unit controls the starter in dependence of the start signal generated by the start device 112. A control procedure of the starter performed after a pre-injection of fuel into combustion chambers of the engine will be described in more detail below.

[0024] An emission system is arranged downstream the engine 120. The emission system comprises a first pipe 122, which is adapted to lead emission products from the combustion chambers of the engine to a house 124. The house may comprise a catalyst (not shown). A second pipe 126 is adapted to lead emission products from the house 124 out of the emission system.

[0025] Figure 2 is illustrating the engine 120 of the vehicle 10 and a control system therefore according to an embodiment of the invention. The engine 120 is comprising a plurality of cylinders, five cylinders 235a, 235b, 235c, 235d and 235e of which are shown in Figure 1, are controlled by the electronic control unit 180 via the cable 157. The electronic control unit 180 is adapted for communication with engine members, e.g. spark plugs 232a, 232b, 232c, 232d and 232e, via the cable 157. The cable 157 may comprise a plurality of independent signal paths, as indicated in the figure. In an alternative embodiment, the control unit 180 is adapted for communication with a spark plug via a separate cable. According to one embodiment, inlet- and outlet valves are controlled by the control unit 180, which is illustrated by a cable 211, which is connected between the control unit 180 and the inlet valve 230e. According to one embodiment, the inlet- and outlet valves are controlled by a camshaft (not shown), which is in mechanical communication with a crankshaft 240. It should be noted that the figure is a simplification, which schematically illustrates parts of the engine. For example the form of the crankshaft is simplified for illustrative purposes.

[0026] The control unit is adapted to control the spark plugs 232a-e. The spark plugs are adapted to generate sparks in combustion chambers 234a, 234b, 234c, 234d and 234e, respectively, so as to initiate combustion of fuel injected to combustion chambers, which are corresponding to the cylinders 235a, 235b, 235c, 235d and 235e. The cylinders have cylinder walls 231a, 231b, 231c, 231d and 231e, respectively. Each cylinder is provided with a piston 237a, 237b, 237c, 237d and 237e, respectively, positioned therein and connected in one end to crankshaft 240 by means of a connecting rod 238a, 238b, 238c, 238d and 238e. Each connecting rod having a fastening device 239a, 239b, 239c, 239d and 239e fixedly secured in a second end with the crankshaft 240.

[0027] Alternatively, the engine may be configured such that the fuel is injected directly into the cylinder of the engine, which is known to those skilled in the art as a direct injection engine.

[0028] Figure 3 is illustrating a part of the engine 120 in greater detail. Shown in Figure 3 is the engine cylinder

235a comprising the combustion chamber 234a. The control unit 180 is adapted to receive various signals from sensors coupled to engine 120 (also see Fig. 1). For example, the control unit 180 is adapted to receive, via a cable 311a, a crankshaft position signal (CPS) from a sensor 310a coupled to the fastening device 239a, or, alternatively, to the crankshaft 240 (not shown).

[0029] Combustion chamber 234a is known communicating with intake manifold 245a and exhaust manifold 246a via respective intake valve 230a and exhaust valve 242a. The control unit 180 is adapted for communication with a fuel injector 243a, the intake valve 230, the spark plug 232a and the exhaust valve 242a. The control unit 180 is adapted to control the fuel injector 243a via a cable 253. The control unit 180 is adapted to control the spark plug 232a via a cable 251. The cables 251 and 253 are in this embodiment parts of the cable 157.

[0030] Intake manifold 245a is shown communicating with throttle body 248 via throttle plate 247. Intake manifold 245a is also shown having fuel injector 243a coupled thereto for delivering liquid fuel in proportion to the pulse width of a signal fed via the cable 253 from the control unit 180. Fuel is delivered to fuel injector 243a by means of a conventional fuel system (not shown) including a fuel tank, fuel pump, and fuel rail.

[0031] In the above arrangements for the cylinder 235a is described. Equivalent arrangements are provided for the cylinders 235b-235e as indicated in Figure 2.

[0032] Figure 4 is illustrating a sequence schedule in time T, according an embodiment of the invention. When a user of the vehicle is giving an engine start indication s450, using for example an ignition key, the start position of the pistons of the cylinders, respectively, is detected either by means of an angular crankshaft detector or an angular cam detector. Alternatively, information being stored in the control unit 180 indicating the start position may be used. This information could be obtained in engine shut of phase, and stored in a non-volatile memory for engine start position. By this alternative, a unique position sensor is not necessary. By knowing the start position of the pistons, the amount of rest fuel can be estimated using for example a fuel estimation model provided in the control unit 180. The information implicitly indicating rest fuel value, in each of the cylinders of the engine, is processed s455 by the control unit 180, so as to obtain synchronization set-up data.

[0033] In a next step, synchronization set-up s460 is implemented by the control unit 180. Fuel injection s465 in accordance with the preceding steps s455 and s460 is thereafter performed in one or several combustion chambers of the engine. Fuel injection is, according to an embodiment, performed individually in each of the cylinders of the engine. After the pre-injection in step s465 is performed the starter of the engine is activated in a step s470 and the engine thus cranked up.

[0034] In the next step engine revving-up s475 injection is synchronized to normal injection. Compensation for the pre-injections in step s465 could be made to one ore

more of the first synchronized injections.

[0035] Figure 5 is illustrating a flowchart depicting a method for controlling fuel injection in a vehicle combustion engine comprising at least one combustion chamber and means for supplying fuel into the combustion chamber. The method is characterized by the steps of detecting a first signal comprising information indicating a desire to start the engine and controlling fuel supply to said combustion chamber in dependence of a second signal, said control being performed before the engine is cranked up by a starter.

[0036] According to one embodiment of the invention said at least one combustion chamber preferably being several combustion chambers.

[0037] According to another embodiment of the invention the information about cylinder status preferably being dependent on a piston position in a cylinder corresponding to said at least one combustion chamber.

[0038] According to one embodiment of the invention a method for use in a motorised vehicle comprising an internal combustion engine comprising at least one combustion chamber is characterized by the step of performing a pre-injection of fuel into at least one of said combustion chamber before a starter cranks up the engine.

[0039] Figure 6 is illustrating a flowchart depicting a subroutine of a method for controlling fuel supply in a vehicle combustion engine in greater detail according to one embodiment of the invention.

[0040] In a first step s610 the control unit 180 is receiving a first signal from the starting device 112 comprising information about that a user wants to start up the engine.

[0041] In a next step s620 the control unit 180 is receiving a second signal, for example crankshaft position signal (CPS), from a sensor 310a. The second signal comprising information, which can be used so as to estimate the amount of rest fuel in respective cylinder of the engine. Alternatively, the second signal comprises information about piston positions in respective cylinder of the engine.

[0042] According to one embodiment crankshaft position signals, from sensors 310a-310e, are received in the control unit 180 in the step s620. According to another embodiment there are information relating to actual crankshaft positions stored in the control unit 180, which data substantially immediately can be used in calculations performed by the control unit 180 when a user wants to crank up the engine again by using the start device.

[0043] In a step s630 a response to the received signals is generated. The response comprising information about a procedure of injecting fuel into a combustion chamber of the engine. According to one embodiment of the invention, the response comprising information about a procedure of injecting fuel into a plurality of combustion chamber of the engine. In this embodiment the injected amount of fuel in the respective combustion chamber are mutually different. According to one embodiment of the invention, the response comprising information about a procedure of injecting fuel into a plurality of combustion

chamber of the engine in a sequential manner. According to one embodiment of the invention, the response comprising information about a procedure of injecting fuel into a plurality of combustion chamber of the engine substantially simultaneously.

[0044] The response is generated in the control unit 180 by means of a computer program stored therein, as described below.

[0045] In a next step s640 the control unit 180 is sending at least one control signal, so as to control fuel injection and combustion in a combustion chamber. The control unit 180 is sending at least one control signal, so as to control devices, such as the intake valve 230a and the spark plug 231a. According to one embodiment the control unit controls fuel injection and combustion in a plurality of cylinders of the engine.

[0046] In a next step s650 the starter 112 of the engine is activated. The starter cranks up the engine.

[0047] In the next step s660 injection is synchronized to normal injection and the engine is revving up. Compensation for the pre-injection in the step s630 could be made to one or more of the first injections. Thereafter the sub-routine ends.

[0048] With reference to Figure 7 there is shown a diagram of one way of embodying an apparatus 700. The above mentioned control unit 180 may include an apparatus 700. The apparatus 700 comprises a non-volatile memory 720, a data processing device 730 and a read/write memory 740. The memory 720 has a first memory portion 750 wherein a computer program, such as an operating system, is stored for controlling the function of the apparatus 700. Further, the apparatus 700 comprises a bus controller 770, a serial communication port 771, I/O-means 772, an A/D-converter 773, a time date entry and transmission unit 774, an event counter 775 and an interrupt controller 776. Even further, the apparatus 700 comprises a data port 799.

[0049] The data processing device 730 may be embodied by, for example, a microprocessor.

[0050] The memory 720 also has a second memory portion 760, where a program for reducing fuel discharge in a vehicle combustion engine is stored. In another embodiment the program for reducing fuel discharge in a vehicle combustion engine is stored on a separate non-volatile recording medium 762. The program may be stored in an executable manner or in a compressed state.

[0051] When, in the following, it is described that the data processing device 730 performs a certain function this is to be understood that the data processing device 730 performs a certain part of the program which is stored in the memory 760 or a certain part of the program which is stored in the recording medium 762.

[0052] An internal clock 777, which is adapted to generate clock cycle pulses having a frequency of F MHz. The internal clock 777 is coupled to the data processing means 730 by means of a data bus 781, and to the bus controller 770 by means of a data bus 780. The data processing device 730 may communicate with a data port

799 by means of a data bus 783. The memory 720 is adapted for communication with the data bus 783 via data bus 785. The separate non-volatile recording medium 762 is adapted to communicate with the data processing device 730 via data bus 789. The read/write memory 740 is adapted to communicate with the data bus 783 via a data bus 785. Internal features 771-775 is fed by the internal clock 777 via a data bus 787 connected to the data bus 780, respectively (only showed for 775 in the figure). The bus controller 770 is fed directly by the data bus 780. Further, the internal features 770-775 are adapted to communicate with the data bus 783 via a data bus 788 (only showed for 775 in the figure). The internal features 771-775 are adapted to communicate with the data bus 782 and each of the internal features 770-775 are adapted for communication with an external unit by a bus 790, respectively (only showed for 775 in the figure).

[0053] The methods described with reference to Figures 4, 5 and 6, respectively, can be performed by the apparatus 700 by means of the data processing device 730 running the program stored in the memory portion 760. When the apparatus 700 runs the program the method described with reference to Figure 4, 5 and/or Figure 6 is executed. Thereby the data processing device 730 is set up to wait for reception of a first signal comprising information indicating start of the engine and a second signal comprising information about cylinder status, such as piston positions in respective cylinder of the engine, on the data port 799, or in the I/O unit 710. When the data is received on the data port 799 said input data is temporarily stored in the read/write memory 740. When all the received input data have been temporarily stored, the data processing device is set up to perform the calculations in a manner described above, so as to control fuel supply in a vehicle combustion engine.

Claims

1. A method for controlling fuel injection in a vehicle combustion engine comprising at least one combustion chamber and means for supplying fuel into the combustion chamber; wherein the following steps are performed:

- detecting a first signal comprising information indicating a desire to start the engine;
- determining an initial position of the pistons in the combustion chambers;
- controlling at which combustion chambers pre-injection is to be performed in dependence of the position of said pistons, **characterised in that** the following steps are additionally performed:

- pre-injection of fuel into one or several combustion chambers of the engine before

- the engine is cranked up by a starter;
- activating the starter of the engine to crank up the engine and controlling the combustion of the engine.
2. A method according to claim 1 **characterized by** the step of:
- acquiring the second signal comprising information about cylinder status in response to said first signal.
3. A method according to claim 1 or 2 **characterized by** controlling said fuel supply to several combustion chambers.
4. A method according to claims 1-3 **characterized by** using a piston position in at least one cylinder as the information about cylinder status.
5. Motor vehicle comprising an internal combustion engine comprising at least one combustion chamber, means for generating a first signal comprising information about a desire to start the engine, an electronic control unit adapted to control fuel supply to said combustion chamber, having determining means for determining an initial position of the pistons in the combustion chambers; control means for controlling at which combustion chambers pre-injection is to be performed in dependence of the position of said pistons, **characterized by** said control means further comprising:
- means for pre-injection of fuel into one or several combustion chambers of the engine before the engine is cranked up by a starter;
- means for activating the starter of the engine to crank up the engine and controlling the combustion of the engine.
6. Motor vehicle according to claim 5 **characterized by** means for generating the second signal comprising information about cylinder status is arranged for communication with the control unit, said second signal is acquired in dependence of the first signal.
7. Motor vehicle according to claim 5 or 6 **characterized by** a computer readable medium is adapted to temporarily store said information comprising cylinder status thereon.
8. Motor vehicle according to claims 5-7 **characterized by** that said at least one combustion chamber is a plurality of combustion chambers.
9. A computer program for causing a computerised apparatus (180; 700) to control fuel supply to a combustion chamber of a combustion engine, comprising
- ing
computer readable code means which, when run on a computerised apparatus (8; 700), causes the computerised apparatus (8; 700) to perform the steps according to any one of claims 1-4.
10. A computer program product comprising a computer readable medium; and a computer program according to claim 9, said computer program being recorded on said computer readable medium.
11. The computer program product according to claim 10, **characterised by** said computer readable medium comprising a memory chip.
12. A computer program comprising computer readable code means for causing a computer to perform the steps of any of the claims 1-4 when said program is run on a computer.
13. A computer program product comprising a computer readable medium; and a computer program according to claim 9, said computer program being recorded on said computer readable medium.
14. A computer readable medium according to claim 12 and 13, **characterised by** said computer readable medium being a propagated signal.
15. The medium according to claim 14, **characterised by** said propagated signal being a carrier wave.
- ### Patentansprüche
1. Verfahren zum Steuern der Treibstoffeinspritzung in einer Fahrzeugbrennkraftmaschine, die zumindest eine Brennkammer und Mittel zum Einbringen von Treibstoff in die Brennkammer umfasst, bei dem die folgenden Schritte ausgeführt werden:
- Erfassen eines ersten Signals, das Informationen umfasst, die den Wunsch die Maschine zu Starten anzeigen;
- Festlegen einer Initialposition des Kolbens in der Brennkammer;
- Steuern in welcher Brennkammer eine Voreinspritzung durchgeführt wird, in Abhängigkeit der Kolbenposition,
- dadurch gekennzeichnet, dass**
zusätzlich folgende Schritte ausgeführt werden:
- Voreinspritzen von Treibstoff in eine oder mehrere Brennkammern der Maschine bevor die Maschine von einem Anlasser angekurbelt wird;

- Aktivieren des Anlassers der Maschine, um die Maschine anzukurbeln, und Steuern der Verbrennung der Maschine.
2. Verfahren nach Anspruch 1, **gekennzeichnet durch** den Schritt:
- Erlangen eines zweiten Signals, das Informationen über den Zylinderstatus umfasst, als Antwort auf das erste Signal.
3. Verfahren nach Anspruch 1 oder 2, **gekennzeichnet durch** Steuern der Treibstoffversorgung zu mehreren Brennkammern.
4. Verfahren nach einem der Ansprüche 1 - 3, **gekennzeichnet durch** Verwendung einer Kolbenposition in zumindest einem Zylinder als Information über den Zylinderstatus.
5. Maschinenfahrzeug, das eine Brennkraftmaschine umfasst, umfassend zumindest eine Brennkammer, Mittel zur Erzeugung eines ersten Signals, das Informationen über den Wunsch umfasst, den Motor zu starten, eine elektronische Steuereinheit, die eingerichtet ist die Treibstoffversorgung in die Brennkraftmaschine zu steuern, die Festlegungsmittel aufweist zum Festlegen einer Initialposition des Kolbens in der Brennkammer; Steuermittel zum Steuern in welcher Brennkammer eine Voreinspritzung durchgeführt wird, in Abhängigkeit der Kolbenposition, **dadurch gekennzeichnet, dass** die Steuermittel ferner umfassen:
- Mittel zur Voreinspritzung von Treibstoff in eine oder mehrere Brennkammern der Maschine, bevor die Maschine von einem Anlasser angekurbelt wird;
- Mittel zum Aktivieren des Anlassers der Maschine, um die Maschine anzukurbeln, und zum Steuern der Verbrennung der Maschine.
6. Maschinenfahrzeug nach Anspruch 5, **dadurch gekennzeichnet, dass** Mittel zum Erzeugen des zweiten Signals, das Informationen über den Zylinderstatus umfasst, für die Kommunikation mit der Steuereinheit angeordnet sind, wobei das zweite Signal in Abhängigkeit des ersten Signals erlangt wird.
7. Maschinenfahrzeug nach Anspruch 5 oder 6, **gekennzeichnet durch** ein Computerlesbares Medium, das eingerichtet ist, die den Zylinderstatus umfassenden Informationen temporär zu speichern.
8. Maschinenfahrzeug nach einem der Ansprüche 5 - 7, **dadurch gekennzeichnet, dass** die zumindest eine Brennkammer eine Vielzahl von Brennkammern ist.
9. Computerprogramm, das eine computergesteuerte Vorrichtung (180; 700) dazu bringt, die Treibstoffversorgung zu einer Brennkammer einer Brennkraftmaschine zu steuern, umfassend computerlesbare Codemittel, welche eine computergesteuerte Vorrichtung (180; 700) dazu bringen, die Schritte nach irgendeinem der Ansprüche 1 - 4 durchzuführen, wenn sie auf einer computergesteuerten Vorrichtung (180; 700) laufen.
10. Computerprogrammprodukt, umfassend ein computerlesbares Medium; und ein Computerprogramm nach Anspruch 9, wobei das Computerprogramm auf dem computerlesbaren Medium aufgenommen wird.
11. Computerprogrammprodukt nach Anspruch 10, **dadurch gekennzeichnet, dass** das computerlesbare Medium einen Speicherchip umfasst.
12. Computerprogramm umfassend computerlesbare Codemittel um einen Computer dazu zu bringen, die Schritte nach irgendeinem der Ansprüche 1 - 4 auszuführen, wenn das Programm auf einem Computer läuft.
13. Computerprogrammprodukt umfassend computerlesbare Codemittel; und ein Computerprogramm nach Anspruch 9, wobei das Computerprogramm auf dem computerlesbaren Medium aufgenommen wird.
14. Computerlesbares Medium nach den Ansprüchen 12 und 13, **dadurch gekennzeichnet, dass** das computerlesbare Medium ein sich fortpflanzendes Signal ist.
15. Medium nach Anspruch 14, **dadurch gekennzeichnet, dass** das sich fortpflanzende Signal eine Trägerwelle ist.

Revendications

1. Procédé de commande de l'injection de carburant dans un moteur à combustion de véhicule, comprenant au moins une chambre de combustion et un moyen pour alimenter en carburant la chambre de combustion ; dans lequel on effectue les étapes suivantes consistant à :
- détecter un premier signal comprenant des informations indiquant un souhait de faire démarrer le moteur ;
- déterminer une position initiale des pistons dans les chambres de combustion ;

- commander dans quelles chambres de combustion doit être effectuée une pré-injection en fonction de la position desdits pistons, **caractérisé en ce que** les étapes suivantes sont également réalisées :
 - pré-injection de carburant dans une ou plusieurs chambres de combustion du moteur avant que le moteur ne soit lancé par un démarreur ; et
 - activation du démarreur du moteur pour lancer ce dernier et commander la combustion du moteur.
2. Procédé selon la revendication 1, **caractérisé par** l'étape consistant à :
- acquérir le second signal comprenant des informations sur la situation du cylindre en réponse audit premier signal.
3. Procédé selon la revendication 1 ou 2, **caractérisé par** la commande de ladite alimentation de carburant à plusieurs chambres de combustion.
4. Procédé selon les revendications 1 à 3, **caractérisé par** l'utilisation d'une position de piston dans au moins un cylindre comme information sur la situation du cylindre.
5. Véhicule à moteur comprenant un moteur à combustion interne, comprenant au moins une chambre de combustion, un moyen pour générer un premier signal comprenant des informations sur un souhait pour faire démarrer le moteur, une unité de commande électronique adaptée pour commander l'alimentation en carburant à ladite chambre de combustion, ayant un moyen de détermination pour déterminer une position initiale des pistons dans les chambres de combustion ;
un moyen de commande pour commander dans quelles chambres de combustion doit être effectuée une pré-injection en fonction de la position desdits pistons, **caractérisé en ce que** ledit moyen de commande comprend en outre :
- un moyen de pré-injection de carburant dans une ou plusieurs chambres de combustion du moteur avant que celui-ci soit lancé par un démarreur ; et
 - un moyen pour activer le démarreur du moteur pour lancer celui-ci et commander la combustion du moteur.
6. Véhicule à moteur selon la revendication 5, **caractérisé en ce que** le moyen pour générer le second signal comprenant des informations sur la situation
- du cylindre est aménagé pour une communication avec l'unité de commande, ledit second signal étant acquis en fonction du premier signal.
7. Véhicule à moteur selon la revendication 5 ou 6, **caractérisé par** un support lisible par ordinateur qui est adapté pour y stocker momentanément lesdites informations comprenant la situation du cylindre.
8. Véhicule à moteur selon les revendications 5 à 7, **caractérisé en ce que** ladite au moins une chambre de combustion est une pluralité de chambres de combustion.
9. Programme informatique pour amener un appareil informatisé (180 ; 700) à commander l'alimentation en carburant à une chambre de combustion d'un moteur à combustion, comprenant :
- un moyen de codage lisible par ordinateur qui, lorsqu'il opère sur un appareil informatisé (8, 700), amène l'appareil informatisé (8 ; 700) à effectuer les étapes selon l'une quelconque des revendications 1 à 4.
10. Produit de programme informatique, comprenant :
- un support lisible par ordinateur ; et
 - un programme informatique selon la revendication 9, ledit programme informatique étant enregistré sur ledit support lisible par ordinateur.
11. Produit de programme informatique selon la revendication 10, **caractérisé en ce que** ledit support lisible par ordinateur comprend une puce mémoire.
12. Programme informatique comprenant un moyen de codage lisible par ordinateur pour amener un ordinateur à effectuer les étapes selon l'une quelconque des revendications 1 à 4 lorsque ledit programme tourne sur un ordinateur.
13. Produit de programme informatique comprenant un support lisible par ordinateur ; et un programme informatique selon la revendication 9, ledit programme informatique étant enregistré sur ledit support lisible par ordinateur.
14. Support lisible par ordinateur selon les revendications 12 et 13, **caractérisé en ce que** ledit support lisible par ordinateur est un signal propagé.
15. Support selon la revendication 14, **caractérisé en ce que** ledit signal propagé est une onde porteuse.

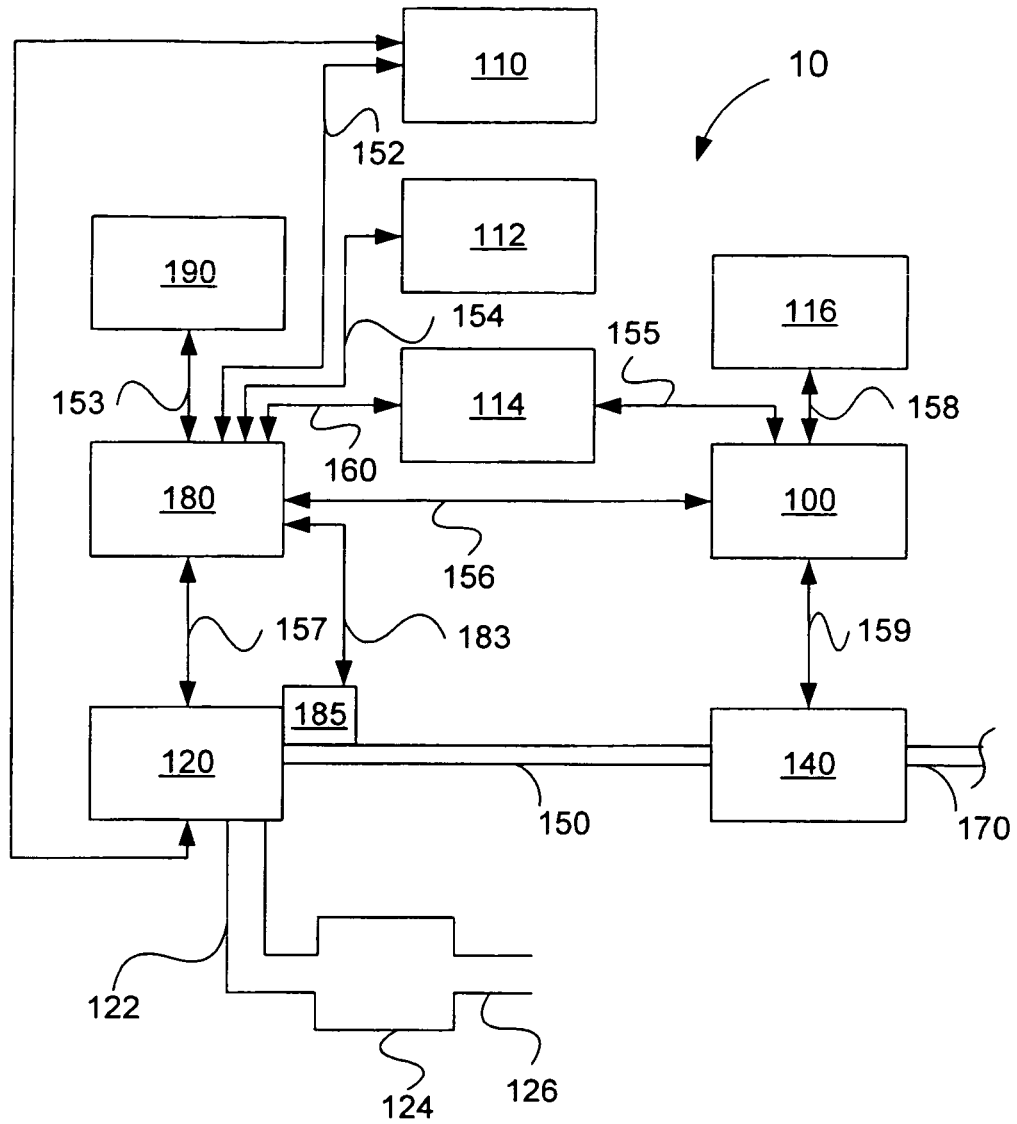


Fig. 1

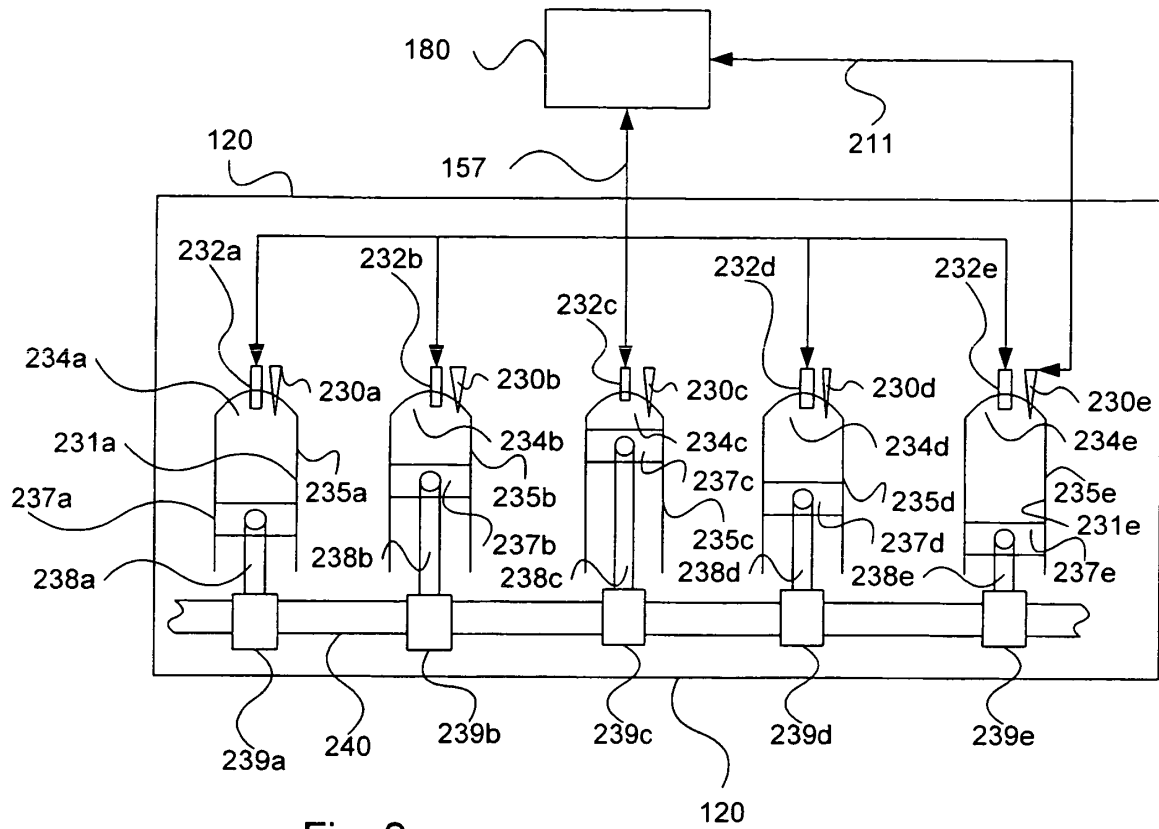


Fig. 2

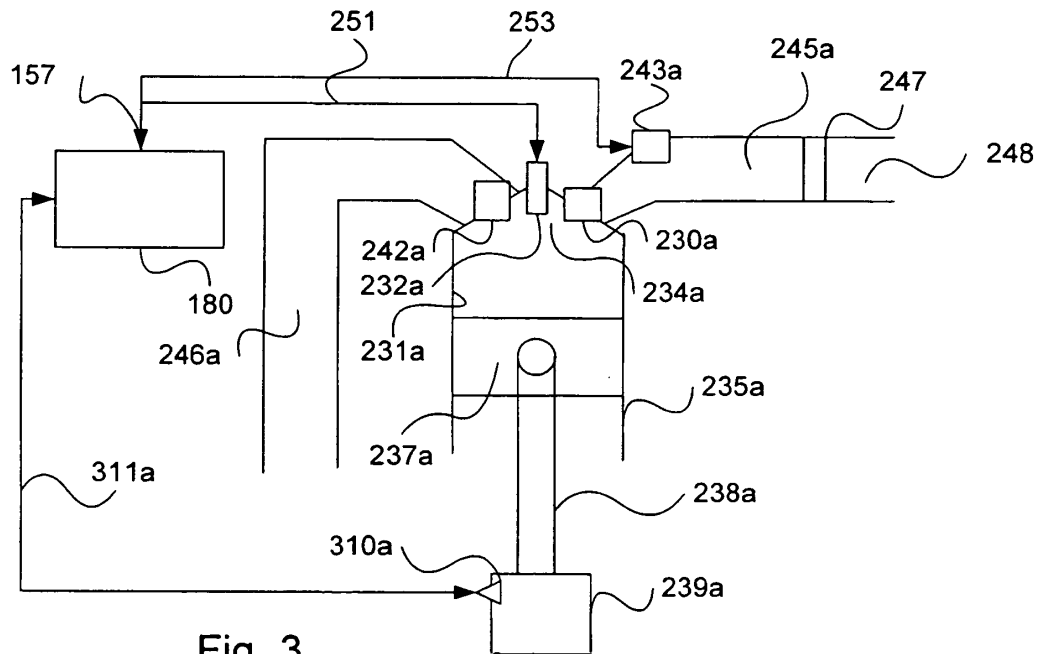


Fig. 3

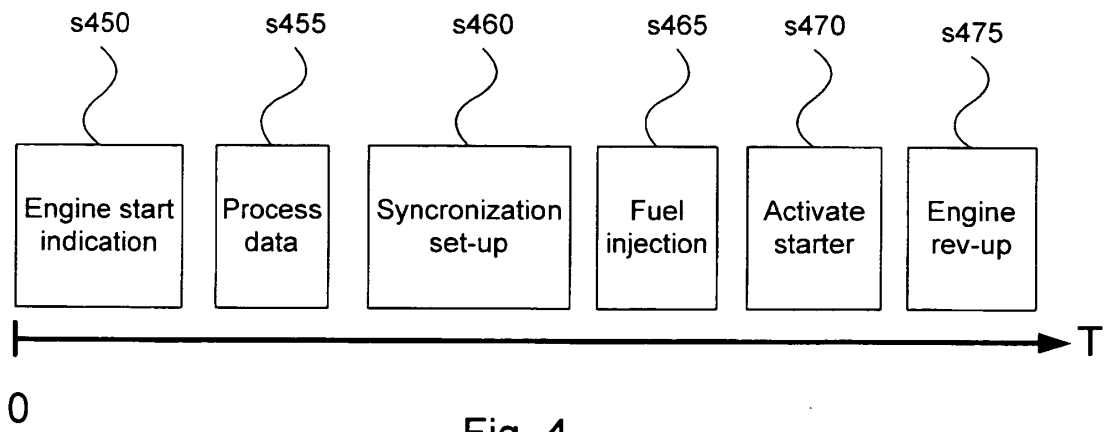


Fig. 4

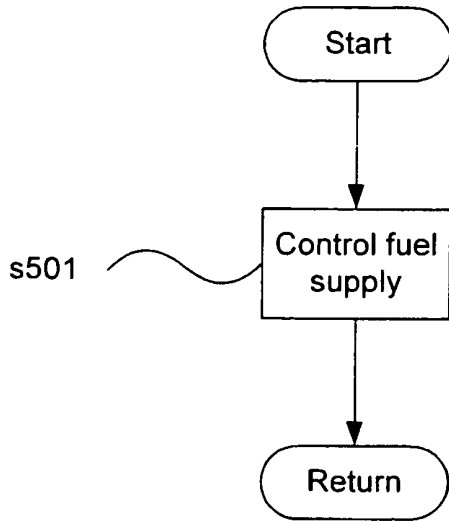


Fig. 5

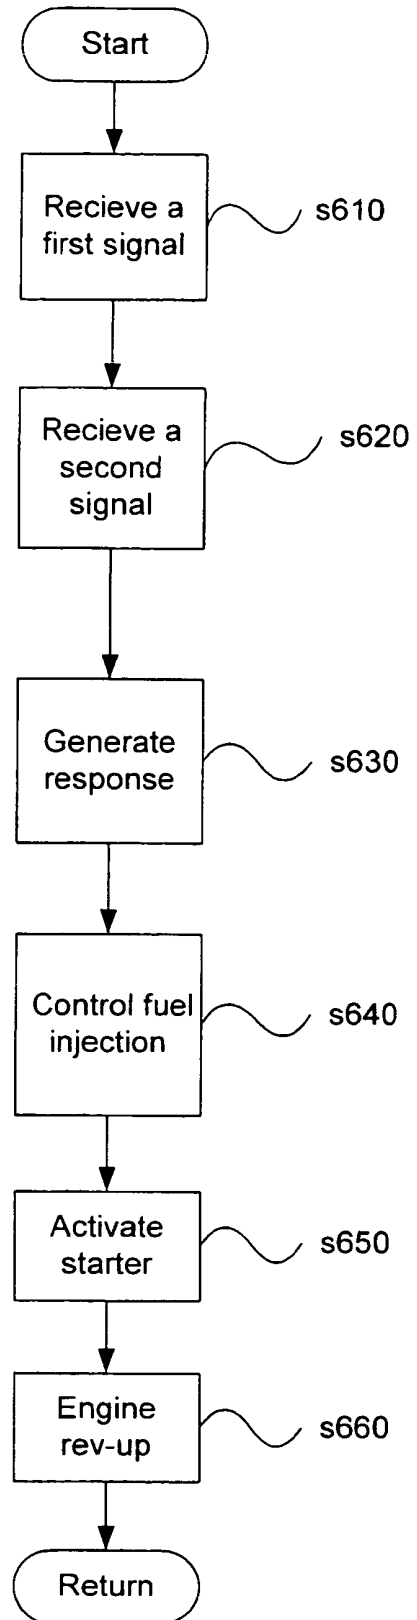


Fig. 6

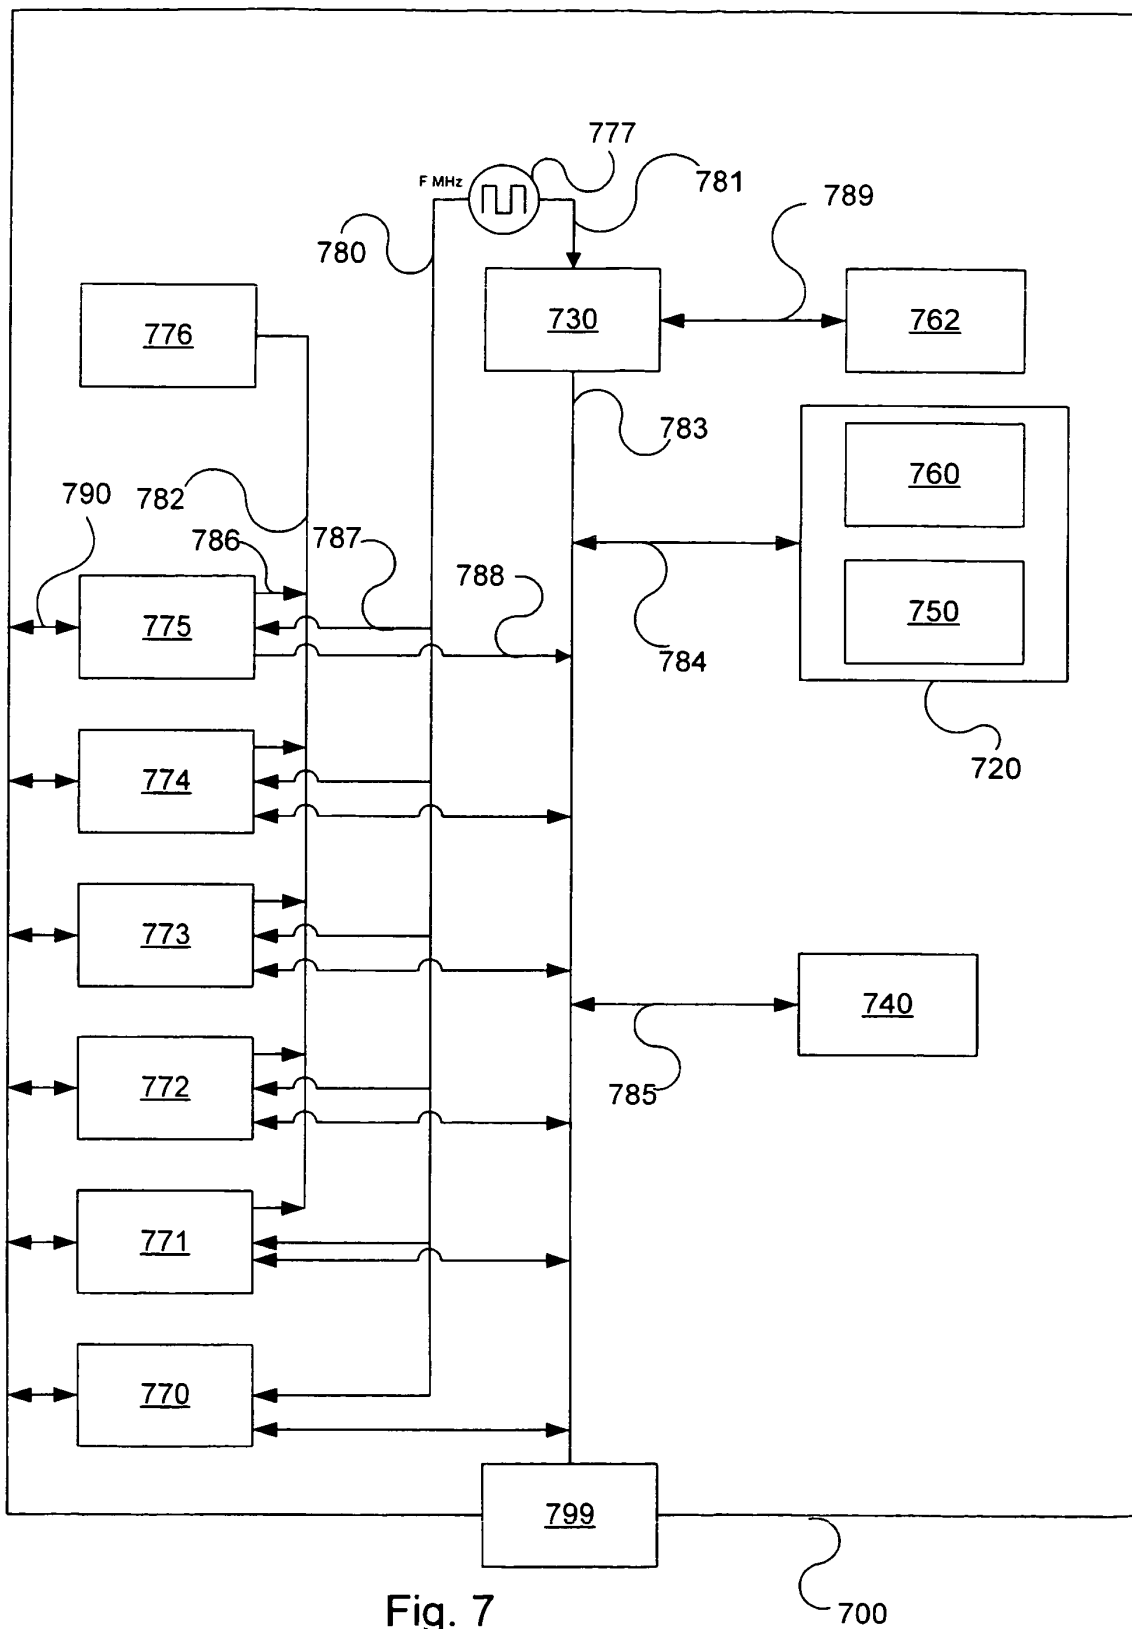


Fig. 7

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6098585 A [0004]