



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 536 437 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**

published in accordance with Art. 158(3) EPC

Note: Bibliography reflects the latest situation

(15) Correction information:

Corrected version no 1 (W1 A1)
INID code(s) 30

(51) Int Cl.7: **H01F 41/06**, B65H 54/28

(86) International application number:

PCT/JP2003/009242

(48) Corrigendum issued on:

23.11.2005 Bulletin 2005/47

(87) International publication number:

WO 2004/021377 (11.03.2004 Gazette 2004/11)

(43) Date of publication:

01.06.2005 Bulletin 2005/22

(21) Application number: **03791182.3**

(22) Date of filing: **22.07.2003**

(84) Designated Contracting States:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR

Designated Extension States:

AL LT LV MK

(72) Inventors:

- **TAKEDA, Kyoji, c/o Tanaka Seiki Co., Ltd.**
Minato-ku, Tokyo 108-0073 (JP)
- **GOTO, Yoshihide, c/o GOTO DENSHI CO., LTD.**
Shibahashi, Sagae-shi, Yamagata 991-0063 (JP)

(30) Priority: **28.08.2002 JP 2002248216**

(71) Applicants:

- **TANAKA SEIKI COMPANY LIMITED**
Tokyo 108-0073 (JP)
- **Goto Denshi Co., Ltd.**
Sagae-shi, Yamagata 991-0063 (JP)


(74) Representative: **Weser, Wolfgang**

Weser & Kollegen,
Patentanwälte,
Radeckestrasse 43
81245 München (DE)

(54) **WINDING DEVICE FOR WIRE MATERIAL WITH RECTANGULAR SECTION**

(57) Wire winding is performed while a guide member (7) is regulating a winding position of a regular-square wire (W) (for example, while moving the wire member in an axial direction in accordance with the number of winding (turns) of the rectangular cross section wire member) such that a side surface of the regular-square wire (W) already wound on an outer periphery of a cylindrical part (4a) of a bobbin (4) closely adheres to a side surface of the regular-square wire (W) about to be wound. Thus, it is possible to form a coil having an excellent characteristic by winding the regular-square wire (W) on the bobbin (4) without making a gap.

FIG. 4A

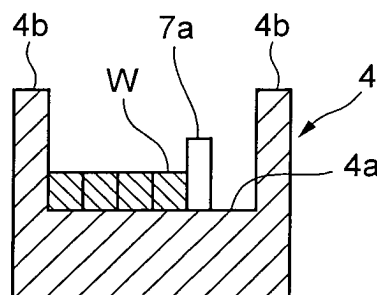

EP 1 536 437 A8