



(11) **EP 1 552 692 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

(15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see
Claims EN 1

(51) Int Cl.:
H04N 7/46 (2006.01) H04N 7/36 (2006.01)

(86) International application number:
PCT/US2003/021735

(48) Corrigendum issued on:
03.04.2013 Bulletin 2013/14

(87) International publication number:
WO 2004/008762 (22.01.2004 Gazette 2004/04)

(45) Date of publication and mention
of the grant of the patent:
14.03.2012 Bulletin 2012/11

(21) Application number: **03764512.4**

(22) Date of filing: **14.07.2003**

(54) **ADAPTIVE WEIGHTING OF REFERENCE PICTURES IN VIDEO DECODING**

ADAPTIVE GEWICHTUNG VON REFERENZBILDERN BEI DER VIDEODECODIERUNG

PONDERATION ADAPTATIVE D'IMAGES DE REFERENCE DANS LE DECODAGE VIDEO

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR

(56) References cited:
US-A- 5 592 228 US-A- 5 781 788
US-A- 6 151 075 US-B1- 6 175 592
US-B1- 6 292 514

(30) Priority: **15.07.2002 US 395843 P**
15.07.2002 US 395874 P
09.04.2003 US 410481

- KIKUCHI: "Multi-frame interpolative prediction with modified syntax" JOINT VIDEO TEAM (JVT) OF ISO/IEC MPEG & ITU-T VCEG(ISO/IEC JTC1/SC29/WG11 AND ITU-T SG16 Q6), XX, XX, no. JVT-C066, 10 May 2002 (2002-05-10), XP030005175
- BOYCE: "Adaptive ref. picture weighting using ref. pic. index" JOINT VIDEO TEAM (JVT) OF ISO/IEC MPEG & ITU-T VCEG(ISO/IEC JTC1/SC29/WG11 AND ITU-T SG16 Q6), XX, XX, no. JVT-D122, 26 July 2002 (2002-07-26), XP030005394
- KIKUCHI: "Multiframe MC using frame interpolation" JOINT VIDEO TEAM (JVT) OF ISO/IEC MPEG & ITU-T VCEG(ISO/IEC JTC1/SC29/WG11 AND ITU-T SG16 Q6), XX, XX, no. JVT-B075, 1 February 2002 (2002-02-01), XP030005075

(43) Date of publication of application:
13.07.2005 Bulletin 2005/28

(60) Divisional application:
12155778.9 / 2 495 977

(73) Proprietor: **Thomson Licensing**
92130 Issy-les-Moulineaux (FR)

(72) Inventor: **BOYCE, Jill, MacDonald**
Manalapan, NJ 07726 (US)

(74) Representative: **Rittner, Karsten**
Deutsche Thomson OHG
European Patent Operations
Karl-Wiechert-Allee 74
30625 Hannover (DE)

EP 1 552 692 B9

DescriptionFIELD OF THE INVENTION

5 **[0001]** The present invention is directed towards video decoders, and in particular, towards utilization of adaptive weighting of reference pictures in video decoders.

BACKGROUND OF THE INVENTION

10 **[0002]** Video data is generally processed and transferred in the form of bit streams. Typical video compression coders and decoders ("CODECs") gain much of their compression efficiency by forming a reference picture prediction of a picture to be encoded, and encoding the difference between the current picture and the prediction. The more closely that the prediction is correlated with the current picture, the fewer bits that are needed to compress that picture, thereby increasing the efficiency of the process. Thus, it is desirable for the best possible reference picture prediction to be formed.

15 **[0003]** In many video compression standards, including Moving Picture Experts Group ("MPEG")-1, MPEG-2 and MPEG-4, a motion compensated version of a previous reference picture is used as a prediction for the current picture, and only the difference between the current picture and the prediction is coded. When a single picture prediction ("P" picture) is used, the reference picture is not scaled when the motion compensated prediction is formed. When bi-directional picture predictions ("B" pictures) are used, intermediate predictions are formed from two different pictures, 20 and then the two intermediate predictions are averaged together, using equal weighting factors of ($\frac{1}{2}$, $\frac{1}{2}$) for each, to form a single averaged prediction. In these MPEG standards, the two reference pictures are always one each from the forward direction and the backward direction for B pictures.

SUMMARY OF THE INVENTION

25 **[0004]** These drawbacks and disadvantages of the prior art are addressed by a method, an apparatus, and a program storage device, according to the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

30 **[0005]** Adaptive weighting of reference pictures in video coders and decoders in accordance with the principles of the present invention are shown in the following exemplary figures, in which:

Figure 1 shows a block diagram for a standard video decoder;

35 Figure 2 shows a block diagram for a video decoder with adaptive bi-prediction;

Figure 3 shows a block diagram for a video decoder with reference picture weighting in accordance with the principles of the present invention;

Figure 4 shows a block diagram for a standard video encoder;

40 Figure 5 shows a block diagram for a video encoder with reference picture weighting in accordance with the principles of the present invention;

Figure 6 shows a flowchart for a decoding process in accordance with the principles of the present invention; and

Figure 7 shows a flowchart for an encoding process in accordance with the principles of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

45 **[0006]** The present invention presents a method and an apparatus for adaptive reference picture weighting factor assignment. In some video sequences, in particular those with fading, the current picture or image block to be coded is more strongly correlated to a reference picture scaled by a weighting factor than to the reference picture itself. Video CODECs without weighting factors applied to reference pictures encode fading sequences very inefficiently. When 50 weighting factors are used in encoding, a video encoder needs to determine both weighting factors and motion vectors, but the best choice for each of these depends on the other, with motion estimation typically being the most computationally intensive part of a digital video compression encoder.

55 **[0007]** In the proposed Joint Video Team ("JVT") video compression standard, each P picture can use multiple reference pictures to form a picture's prediction, but each individual motion block or 8x8 region of a macroblock uses only a single reference picture for prediction. In addition to coding and transmitting the motion vectors, a reference picture index is transmitted for each motion block or 8x8 region, indicating which reference picture is used. A limited set of possible reference pictures is stored at both the encoder and decoder, and the number of allowable reference pictures is transmitted.

[0008] In the JVT standard, for bi-predictive pictures (also called "B" pictures), two predictors are formed for each motion block or 8x8 region, each of which can be from a separate reference picture, and the two predictors are averaged together to form a single averaged predictor. For bi-predictively coded motion blocks, the reference pictures can both be from the forward direction, both be from the backward direction, or one each from the forward and backward directions. Two lists are maintained of the available reference pictures that may be used for prediction. The two reference pictures are referred to as the list 0 and list 1 predictors. An index for each reference picture is coded and transmitted, $red_idx_l_0$ and $ref_idx_l_1$, for the list 0 and list 1 reference pictures, respectively. Joint Video Team ("JVT") bi-predictive or "B" pictures allows adaptive weighting between the two predictions, i.e.,

$$Pred = [(P_0)(Pred_0)] + [(P_1)(Pred_1)] + D,$$

where P_0 and P_1 are weighting factors, $Pred_0$ and $Pred_1$ are the reference picture predictions for list 0 and list 1 respectively, and D is an offset.

[0009] Two methods have been proposed for indication of weighting factors. In the first, the weighting factors are determined by the directions that are used for the 10 reference pictures. In this method, if the $ref_idx_l_0$ index is less than or equal to $ref_idx_l_1$, weighting factors of $(\frac{1}{2}, \frac{1}{2})$ are used, otherwise $(2, -1)$ factors are used.

[0010] This first method for indicating weighting factors is described in Kikuchi: "Multi-frame interpolative prediction with modified syntax" Joint Video Team (JVT) of ISO/IEC MPEG & ITU-T VCEG (ISO/IEC JTC1/SC29/WG 11 and ITU-T SG 16 Q.6), no. JVT-C066, 10 May 2002, XP 030005175.

[0011] In the second method offered, any number of weighting factors is transmitted for each slice. Then a weighting factor Index is transmitted for each motion block or 8x8 region of a macroblock that uses bi-directional prediction. The decoder uses the received weighting factor index to choose the appropriate weighting factors, from the transmitted set, to use when decoding the motion block or 8x8 region. For example, if three weighting factors were sent at the slice layer, they would correspond to weight factor indices 0, 1 and 2, respectively.

[0012] All statements herein reciting principles, aspects, and embodiments of the invention, as well as specific examples thereof, are intended to encompass both structural and functional equivalents thereof. Additionally, it is intended that such equivalents include both currently known equivalents as well as equivalents developed in the future, i.e., any elements developed that perform the same function, regardless of structure.

[0013] Thus, for example, it will be appreciated by those skilled in the art that the block diagrams herein represent conceptual views of illustrative circuitry embodying the principles of the invention. Similarly, it will be appreciated that any flow charts, flow diagrams, state transition diagrams, pseudocode, and the like represent various processes which may be substantially represented in computer readable media and so executed by a computer or processor, whether or not such computer or processor is explicitly shown.

[0014] The functions of the various elements shown in the figures may be provided through the use of dedicated hardware as well as hardware capable of executing software in association with appropriate software. When provided by a processor, the functions may be provided by a single dedicated processor, by a single shared processor, or by a plurality of individual processors, some of which may be shared. Moreover, explicit use of the term "processor" or "controller" should not be construed to refer exclusively to hardware capable of executing software, and may implicitly include, without limitation, digital signal processor ("DSP") hardware, read-only memory ("ROM") for storing software, random access memory ("RAM"), and non-volatile storage. Other hardware, conventional and/or custom, may also be included. Similarly, any switches shown in the figures are conceptual only. Their function may be carried out through the operation of program logic, through dedicated logic, through the interaction of program control and dedicated logic, or even manually, the particular technique being selectable by the implementer as more specifically understood from the context.

[0015] As shown in Figure 1, a standard video decoder is indicated generally by the reference numeral 100. The video decoder 100 includes a variable length decoder ("VLD") 110 connected in signal communication with an inverse quantizer 120. The inverse quantizer 120 is connected in signal communication with an inverse transformer 130. The inverse transformer 130 is connected in signal communication with a first input terminal of an adder or summing junction 140, where the output of the summing junction 140 provides the output of the video decoder 100. The output of the summing junction 140 is connected in signal communication with a reference picture store 150. The reference picture store 150 is connected in signal communication with a motion compensator 160, which is connected in signal communication with a second input terminal of the summing junction 140.

[0016] Turning to Figure 2, a video decoder with adaptive bi-prediction is indicated generally by the reference numeral 200. The video decoder 200 includes a VLD 210 connected in signal communication with an inverse quantizer 220. The inverse quantizer 220 is connected in signal communication with an inverse transformer 230. The inverse transformer 230 is connected in signal communication with a first input terminal of a summing junction 240, where the output of the

summing junction 240 provides the output of the video decoder 200. The output of the summing junction 240 is connected in signal communication with a reference picture store 250. The reference picture store 250 is connected in signal communication with a motion compensator 260, which is connected in signal communication with a first input of a multiplier 270.

5 [0017] The VLD 210 is further connected in signal communication with a reference picture weighting factor lookup 280 for providing an adaptive bi-prediction ("ABP") coefficient index to the lookup 280. A first output of the lookup 280 is for providing a weighting factor, and is connected in signal communication to a second input of the multiplier 270. The output of the multiplier 270 is connected in signal communication to a first input of a summing junction 290. A second output of the lookup 280 is for providing an offset, and is connected in signal communication to a second input of the summing junction 290. The output of the summing junction 290 is connected in signal communication with a second input terminal of the summing junction 240.

10 [0018] Turning now to Figure 3, a video decoder with reference picture weighting is indicated generally by the reference numeral 300. The video decoder 300 includes a VLD 310 connected in signal communication with an inverse quantizer 320. The inverse quantizer 320 is connected in signal communication with an inverse transformer 330. The inverse transformer 330 is connected in signal communication with a first input terminal of a summing junction 340, where the output of the summing junction 340 provides the output of the video decoder 300. The output of the summing junction 340 is connected in signal communication with a reference picture store 350. The reference picture store 350 is connected in signal communication with a motion compensator 360, which is connected in signal communication with a first input of a multiplier 370.

15 [0019] The VLD 310 is further connected in signal communication with a reference picture weighting factor lookup 380 for providing a reference picture index to the lookup 380. A first output of the lookup 380 is for providing a weighting factor, and is connected in signal communication to a second input of the multiplier 370. The output of the multiplier 370 is connected in signal communication to a first input of a summing junction 390. A second output of the lookup 380 is for providing an offset, and is connected in signal communication to a second input of the summing junction 390. The output of the summing junction 390 is connected in signal communication with a second input terminal of the summing junction 340.

20 [0020] As shown in Figure 4, a standard video encoder is indicated generally by the reference numeral 400. An input to the encoder 400 is connected in signal communication with a non-inverting input of a summing junction 410. The output of the summing junction 410 is connected in signal communication with a block transformer 420. The transformer 420 is connected in signal communication with a quantizer 430. The output of the quantizer 430 is connected in signal communication with a variable length coder ("VLC") 440, where the output of the VLC 440 is an externally available output of the encoder 400.

25 [0021] The output of the quantizer 430 is further connected in signal communication with an inverse quantizer 450. The inverse quantizer 450 is connected in signal communication with an inverse block transformer 460, which, in turn, is connected in signal communication with a reference picture store 470. A first output of the reference picture store 470 is connected in signal communication with a first input of a motion estimator 480. The input to the encoder 400 is further connected in signal communication with a second input of the motion estimator 480. The output of the motion estimator 480 is connected in signal communication with a first input of a motion compensator 490. A second output of the reference picture store 470 is connected in signal communication with a second input of the motion compensator 490. The output of the motion compensator 490 is connected in signal communication with an inverting input of the summing junction 410.

30 [0022] Turning to Figure 5, a video encoder with reference picture weighting is indicated generally by the reference numeral 500. An input to the encoder 500 is connected in signal communication with a non-inverting input of a summing junction 510. The output of the summing junction 510 is connected in signal communication with a block transformer 520. The transformer 520 is connected in signal communication with a quantizer 530. The output of the quantizer 530 is connected in signal communication with a VLC 540, where the output of the VLC 440 is an externally available output of the encoder 500.

35 [0023] The output of the quantizer 530 is further connected in signal communication with an inverse quantizer 550. The inverse quantizer 550 is connected in signal communication with an inverse block transformer 560, which, in turn, is connected in signal communication with a reference picture store 570. A first output of the reference picture store 570 is connected in signal communication with a first input of a reference picture weighting factor assignor 572. The input to the encoder 500 is further connected in signal communication with a second input of the reference picture weighting factor assignor 572. The output of the reference picture weighting factor assignor 572, which is indicative of a weighting factor, is connected in signal communication with a first input of a motion estimator 580. A second output of the reference picture store 570 is connected in signal communication with a second input of the motion estimator 580.

40 [0024] The input to the encoder 500 is further connected in signal communication with a third input of the motion estimator 580. The output of the motion estimator 580, which is indicative of motion vectors, is connected in signal communication with a first input of a motion compensator 590. A third output of the reference picture store 570 is connected in signal communication with a second input of the motion compensator 590. The output of the motion

compensator 590, which is indicative of a motion compensated reference picture, is connected in signal communication with a first input of a multiplier 592. The output of the reference picture weighting factor assignor 572, which is indicative of a weighting factor, is connected in signal communication with a second input of the multiplier 592. The output of the multiplier 592 is connected in signal communication with an inverting input of the summing junction 510.

5 [0025] Turning now to Figure 6, an exemplary process for decoding video signal data for an image block is indicated generally by the reference numeral 600. The process includes a start block 610 that passes control to an input block 612. The input block 612 receives the image block compressed data, and passes control to an input block 614. The input block 614 receives at least one reference picture index with the data for the image block, each reference picture index corresponding to a particular reference picture. The input block 614 passes control to a function block 616, which determines a weighting factor corresponding to each of the received reference picture indices, and passes control to an optional function block 617. The optional function block 617 determines an offset corresponding to each of the received reference picture indices, and passes control to a function block 618. The function block 618 retrieves a reference picture corresponding to each of the received reference picture indices, and passes control to a function block 620. The function block 620, in turn, motion compensates the retrieved reference picture, and passes control to a function block 622. The function block 622 multiplies the motion compensated reference picture by the corresponding weighting factor, and passes control to an optional function block 623. The optional function block 623 adds the motion compensated reference picture to the corresponding offset, and passes control to a function block 624. The function block 624, in turn, forms a weighted motion compensated reference picture, and passes control to an end block 626.

10 [0026] Turning now to Figure 7, an exemplary process for encoding video signal data for an image block is indicated generally by the reference numeral 700. The process includes a start block 710 that passes control to an input block 712. The input block 712 receives substantially uncompressed image block data, and passes control to a function block 714. The function block 714 assigns a weighting factor for the image block corresponding to a particular reference picture having a corresponding index. The function block 714 passes control to an optional function block 715. The optional function block 715 assigns an offset for the image block corresponding to a particular reference picture having a corresponding index. The optional function block 715 passes control to a function block 716, which computes motion vectors corresponding to the difference between the image block and the particular reference picture, and passes control to a function block 718. The function block 718 motion compensates the particular reference picture in correspondence with the motion vectors, and passes control to a function block 720. The function block 720, in turn, multiplies the motion compensated reference picture by the assigned weighting factor to form a weighted motion compensated reference picture, and passes control to an optional function block 721. The optional function block 721, in turn, adds the motion compensated reference picture to the assigned offset to form a weighted motion compensated reference picture, and passes control to a function block 722. The function block 722 subtracts the weighted motion compensated reference picture from the substantially uncompressed image block, and passes control to a function block 724. The function block 724, in turn, encodes a signal with the difference between the substantially uncompressed image block and the weighted motion compensated reference picture along with the corresponding index of the particular reference picture, and passes control to an end block 726.

15 [0027] In the present exemplary embodiment, for each coded picture or slice, a weighting factor is associated with each allowable reference picture that blocks of the current picture can be encoded with respect to. When each individual block in the current picture is encoded or decoded, the weighting factor(s) and offset(s) that correspond to its reference picture indices are applied to the reference prediction to form a weight predictor. All blocks in the slice that are coded with respect to the same reference picture apply the same weighting factor to the reference picture prediction.

20 [0028] Whether or not to use adaptive weighting when coding a picture can be indicated in the picture parameter set or sequence parameter set, or in the slice or picture header. For each slice or picture that uses adaptive weighting, a weighting factor may be transmitted for each of the allowable reference pictures that may be used for encoding this slice or picture. The number of allowable reference pictures is transmitted in the slice header. For example, if three reference pictures can be used to encode the current slice, up to three weighting factors are transmitted, and they are associated with the reference picture with the same index.

25 [0029] If no weighting factors are transmitted, default weights are used. In one embodiment of the current invention, default weights of $(\frac{1}{2}, \frac{1}{2})$ are used when no weighting factors are transmitted. The weighting factors may be transmitted using either fixed or variable length codes.

30 [0030] Unlike typical systems, each weighting factor that is transmitted with each slice, block or picture corresponds to a particular reference picture index. Previously, any set of weighting factors transmitted with each slice or picture were not associated with any particular reference pictures. Instead, an adaptive bi-prediction weighting index was transmitted for each motion block or 8x8 region to select which of the weighting factors from the transmitted set was to be applied for that particular motion block or 8x8 region.

35 [0031] In the present embodiment, the weighting factor index for each motion block or 8x8 region is not explicitly transmitted. Instead, the weighting factor that is associated with the transmitted reference picture index is used. This dramatically reduces the amount of overhead in the transmitted bitstream to allow adaptive weighting of reference pictures.

[0032] This system and technique may be applied to either Predictive "P" pictures, which are encoded with a single predictor, or to Bi-predictive "B" pictures, which are encoded with two predictors. The decoding processes, which are present in both encoder and decoders, are described below for the P and B picture cases. Alternatively, this technique may also be applied to coding systems using the concepts similar to I, B, and P pictures.

[0033] The same weighting factors can be used for single directional prediction in B pictures and for bi-directional prediction in B pictures. When a single predictor is used for a macroblock, in P pictures or for single directional prediction in B pictures, a single reference picture index is transmitted for the block. After the decoding process step of motion compensation produces a predictor, the weighting factor is applied to predictor. The weighted predictor is then added to the coded residual, and clipping is performed on the sum, to form the decoded picture. For use for blocks in P pictures or for blocks in B pictures that use only list 0 prediction, the weighted predictor is formed as:

$$\text{Pred} = W0 * \text{Pred0} + D0 \quad (1)$$

[0034] where W0 is the weighting factor associated with the list 0 reference picture, D0 is the offset associated with the list 0 reference picture, and Pred0 is the motion-compensated prediction block from the list 0 reference picture.

[0035] For use for blocks in B pictures which use only list 0 prediction, the weighted predictor is formed as:

$$\text{Pred} = W1 * \text{Pred1} + D1 \quad (2)$$

where W1 is the weighting factor associated with the list 1 reference picture, D1 is the offset associated with the list 1 reference picture, and Pred1 is the motion-compensated prediction block from the list 1 reference picture.

[0036] The weighted predictors may be clipped to guarantee that the resulting values will be within the allowable range of pixel values, typically 0 to 255. The precision of the multiplication in the weighting formulas may be limited to any pre-determined number of bits of resolution.

[0037] In the bi-predictive case, reference picture indexes are transmitted for each of the two predictors. Motion compensation is performed to form the two predictors. Each predictor uses the weighting factor associated with its reference picture index to form two weighted predictors. The two weighted predictors are then averaged together to form an averaged predictor, which is then added to the coded residual.

[0038] For use for blocks in B pictures that use list 0 and list 1 predictions, the weighted predictor is formed as:

$$\text{Pred} = (P0 * \text{Pred0} + D0 + P1 * \text{Pred1} + D1) / 2 \quad (3)$$

[0039] Clipping may be applied to the weighted predictor or any of the intermediate values in the calculation of the weighted predictor to guarantee that the resulting values will be within the allowable range of pixel values, typically 0 to 255.

[0040] Thus, a weighting factor is applied to the reference picture prediction of a video compression encoder and decoder that uses multiple reference pictures. The weighting factor adapts for individual motion blocks within a picture, based on the reference picture index that is used for that motion block. Because the reference picture index is already transmitted in the compressed video bitstream, the additional overhead to adapt the weighting factor on a motion block basis is dramatically reduced. All motion blocks that are coded with respect to the same reference picture apply the same weighting factor to the reference picture prediction.

[0041] These and other features and advantages of the present invention may be readily ascertained by one of ordinary skill in the pertinent art based on the teachings herein. It is to be understood that the teachings of the present invention may be implemented in various forms of hardware, software, firmware, special purpose processors, or combinations thereof.

[0042] Most preferably, the teachings of the present invention are implemented as a combination of hardware and software. Moreover, the software is preferably implemented as an application program tangibly embodied on a program storage unit. The application program may be uploaded to, and executed by, a machine comprising any suitable architecture. Preferably, the machine is implemented on a computer platform having hardware such as one or more central processing units ("CPU"), a random access memory ("RAM"), and input/output ("I/O") interfaces. The computer platform may also include an operating system and microinstruction code. The various processes and functions described herein may be either part of the microinstruction code or part of the application program, or any combination thereof, which may be executed by a CPU. In addition, various other peripheral units may be connected to the computer platform such

as an additional data storage unit and a printing unit.

[0043] It is to be further understood that, because some of the constituent system components and methods depicted in the accompanying drawings are preferably implemented in software, the actual connections between the system components or the process function blocks may differ depending upon the manner in which the present invention is programmed. Given the teachings herein, one of ordinary skill in the pertinent art will be able to contemplate these and similar implementations or configurations of the present invention.

[0044] Although the illustrative embodiments have been described herein with reference to the accompanying drawings, it is to be understood that the present invention is not limited to those precise embodiments, and that various changes and modifications may be effected therein by one of ordinary skill in the pertinent art without departing from the scope of the invention as claimed.

Claims

1. A method (600) for decoding video data for a picture having a plurality of blocks, the method comprising:

receiving (614) the video data, the received video data including a single reference picture index for predicting a block of the plurality of blocks and including coded data for the block, the received single reference picture index corresponding to a single particular reference picture; and decoding by predicting the block using the single particular reference picture corresponding to the single reference picture index and using a weighting factor associated with the single particular reference picture and corresponding to the single received reference picture index, wherein the single received reference picture index determines both the single particular reference picture and the weighting factor.

2. A method as defined in Claim 1, wherein predicting comprises:

motion compensating (620) a block from the single particular reference picture to form a motion compensated block; weighting (622) the motion compensated block using the weighting factor to form a weighted motion compensated block; determining an offset (617); and adjusting (623) the weighted motion compensated block using the offset to form an adjusted weighted motion compensated block.

3. A method as defined in Claim 2, further comprising adding the adjusted weighted motion compensated block to residual data for the block of the picture to predict the block of the picture.

4. A method as defined in any of claims 1 to 3, further comprising receiving a set of weighting factors for the picture.

5. A method as defined in any of claims 1 to 3, further comprising receiving a set of weighting factors for a slice of the picture.

6. A method as defined in any of claims 1 to 5, further comprising receiving a slice header for a slice of the picture, and wherein the received slice header includes data indicating a number of allowable reference pictures for the slice.

7. A method as defined in any of claims 4 to 6, wherein each weighting factor of the set of weighting factors corresponds to a separate reference picture, and corresponds to only one reference picture.

8. A method as defined in any of claims 4 to 7, wherein each allowable reference picture has only one corresponding weighting factor from the set of weighting factors.

9. An apparatus (300) configured to perform one or more of the methods of claims 1-8.

10. A program storage device readable by machine, tangibly embodying a program of instructions executable by the machine to perform program steps for decoding video data, the program steps including the steps of one or more of the methods of claims 1-8.

Patentansprüche

1. Verfahren (600) zum Decodieren von Videodaten für ein Bild mit mehreren Blöcken, wobei das Verfahren umfasst:

5 Empfangen (614) der Videodaten, wobei die empfangenen Videodaten einen einzelnen Referenzbildindex zum Vorhersagen eines Blocks der mehreren Blöcke enthalten und codierte Daten für den Block enthalten, wobei der empfangene einzelne Referenzbildindex einem bestimmten einzelnen Referenzbild entspricht; und
 10 Decodieren durch Vorhersagen des Blocks unter Verwendung des bestimmten einzelnen Referenzbilds, das dem einzelnen Referenzbildindex entspricht und unter Verwendung eines Gewichtungsfaktors, der dem bestimmten einzelnen Referenzbild zugeordnet ist und entsprechend dem einzelnen empfangenen Referenzbildindex, wobei der einzelne empfangene Referenzbildindex sowohl das bestimmte einzelne Referenzbild als auch den Gewichtungsfaktor bestimmt.

2. Verfahren nach Anspruch 1, bei dem das vorhersagen umfasst:

15 Bewegungskompensieren (620) eines Blocks von einem bestimmten einzelnen Referenzbild zum Bilden eines bewegungskompensierten Blocks;
 20 Gewichten (622) des bewegungskompensierten Blocks unter Verwendung des Gewichtungsfaktors zum Bilden eines gewichteten bewegungskompensierten Blocks;
 25 Bestimmen eines Versatzes (617); und
 30 Anpassen (623) des gewichteten bewegungskompensierten Blocks unter Verwendung des Versatzes zum Bilden eines angepassten gewichteten bewegungskompensierten Blocks.

3. Verfahren nach Anspruch 2, das ferner das Addieren des angepassten gewichteten bewegungskompensierten Blocks mit Restdaten für den Block des Bildes zum Vorhersagen des Blocks des Bildes umfasst.

4. Verfahren nach einem der Ansprüche 1 bis 3, das ferner das Empfangen eines Satzes von Gewichtungsfaktoren für das Bild umfasst.

30 5. Verfahren nach einem der Ansprüche 1 bis 3, das ferner das Empfangen eines Satzes von Gewichtungsfaktoren für einen Streifen des Bildes umfasst.

35 6. Verfahren nach einem der Ansprüche 1 bis 5, das ferner das Empfangen eines streifenanfangsblocks für einen Streifen des Bildes umfasst und bei dem der empfangene Streifenanfangsblock Daten enthält, die eine Anzahl zulässiger Referenzbilder für den Streifen angeben.

7. Verfahren nach einem der Ansprüche 4 bis 6, bei dem der Gewichtungsfaktor des Satzes von Gewichtungsfaktoren einem getrennten Referenzbild entspricht und nur einem Referenzbild entspricht.

40 8. Verfahren nach einem der Ansprüche 4 bis 7, bei dem jedes zulässige Referenzbild nur einen entsprechenden Gewichtungsfaktor aus dem Satz von Gewichtungsfaktoren aufweist.

9. Vorrichtung (300), die zum Ausführen eines oder mehrerer der Verfahren der Ansprüche 1-8 konfiguriert ist.

45 10. Programmspeichervorrichtung, die durch eine Maschine lesbar ist, wobei die Programmspeichervorrichtung ein Programm von Anweisungen verkörpert, die durch die Maschine ausführbar sind, um Programmschritte zum Decodieren von Videodaten auszuführen, wobei die Programmschritte die Schritte eines oder mehrerer der Verfahren der Ansprüche 1-8 enthalten.

50 **Revendications**

55 1. Procédé (600) de décodage de données vidéo pour une image disposant d'une pluralité de blocs, le procédé comprenant : la réception (614) des données vidéo, les données vidéo reçues comprenant un index d'images de référence unique permettant la prédiction d'un bloc de la pluralité de blocs et comprenant des données codées pour le bloc, l'index d'images de référence unique correspondant à une image de référence donnée unique ; et décodant en prédisant le bloc à l'aide de l'image de référence donnée unique correspondant à l'index d'images de référence unique et à l'aide d'un facteur de pondération associé à l'image de référence donnée unique et corres-

pendant à l'index d'images de référence reçu unique, dans lequel l'index d'images de référence reçu unique détermine à la fois l'image de référence donnée unique et le facteur de pondération.

- 5
2. Procédé selon la revendication 1, dans lequel la prédiction comprend les étapes suivantes :

la compensation de mouvement (620) d'un bloc de l'image de référence donnée unique afin de former un bloc au mouvement compensé ; la pondération (622) du bloc à mouvement compensé utilisant le facteur de pondération pour former un bloc à mouvement compensé pondéré ;

10 la détermination d'un décalage (617) ; et

l'ajustement (623) du bloc à mouvement compensé pondéré à l'aide du décalage pour former un bloc à mouvement compensé pondéré ajusté.

- 15 3. Procédé selon la revendication 2, comprenant en outre l'addition du bloc à mouvement compensé pondéré ajusté à des données résiduelles pour le bloc de l'image afin de prédire le bloc de l'image.

4. Procédé selon l'une quelconque des revendications 1 à 3, comprenant en outre la réception d'une série de facteurs pondérés pour l'image,

- 20 5. Procédé selon l'une quelconque des revendications 1 à 3, comprenant en outre la réception d'une série de facteurs pondérés pour une section de l'image,

6. Procédé selon l'une quelconque des revendications 1 à 5, comprenant en outre la réception d'une section de titre pour une section de l'image, et dans lequel le titre de section reçu comprend des données indiquant plusieurs images de référence admissibles pour la section.

- 25 7. Procédé selon l'une quelconque des revendications 4 à 6, dans lequel chaque facteur de pondération de la série de facteurs de pondération correspond à une image de référence différente, et ne correspond qu'à une seule image de référence.

- 30 8. Procédé selon l'une quelconque des revendications 4 à 7, dans lequel chaque image de référence admissible n'a qu'un seul facteur de pondération correspondant dans la série de facteurs de pondération.

9. Appareil (300) configuré pour mettre en oeuvre un ou plusieurs des procédés des revendications 1 à 8.

- 35 10. Dispositif de stockage de programmes lisible à la machine, matérialisant de manière tangible un programme d'instructions exécutables par la machine pour réaliser les étapes du programme de décodage de données vidéo, les étapes du programme incluant les étapes de l'un ou plusieurs des procédés des revendications 1 à 8.

40

45

50

55

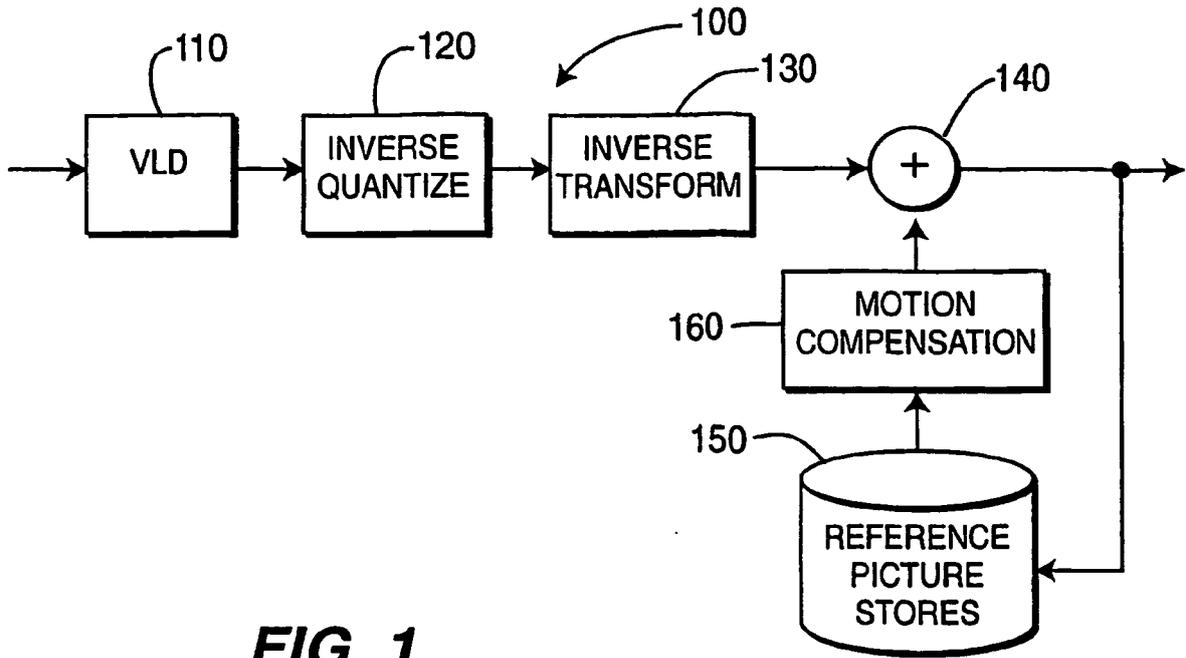


FIG. 1

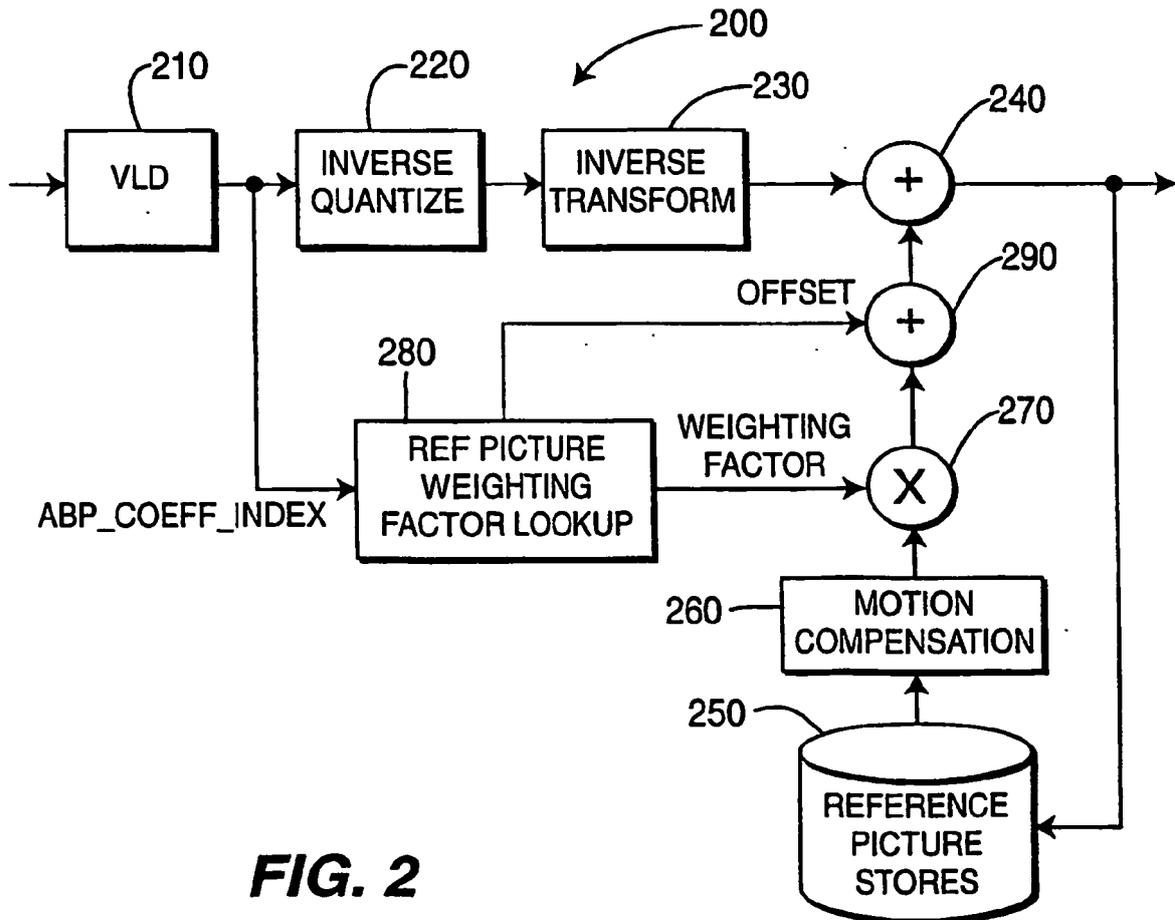


FIG. 2

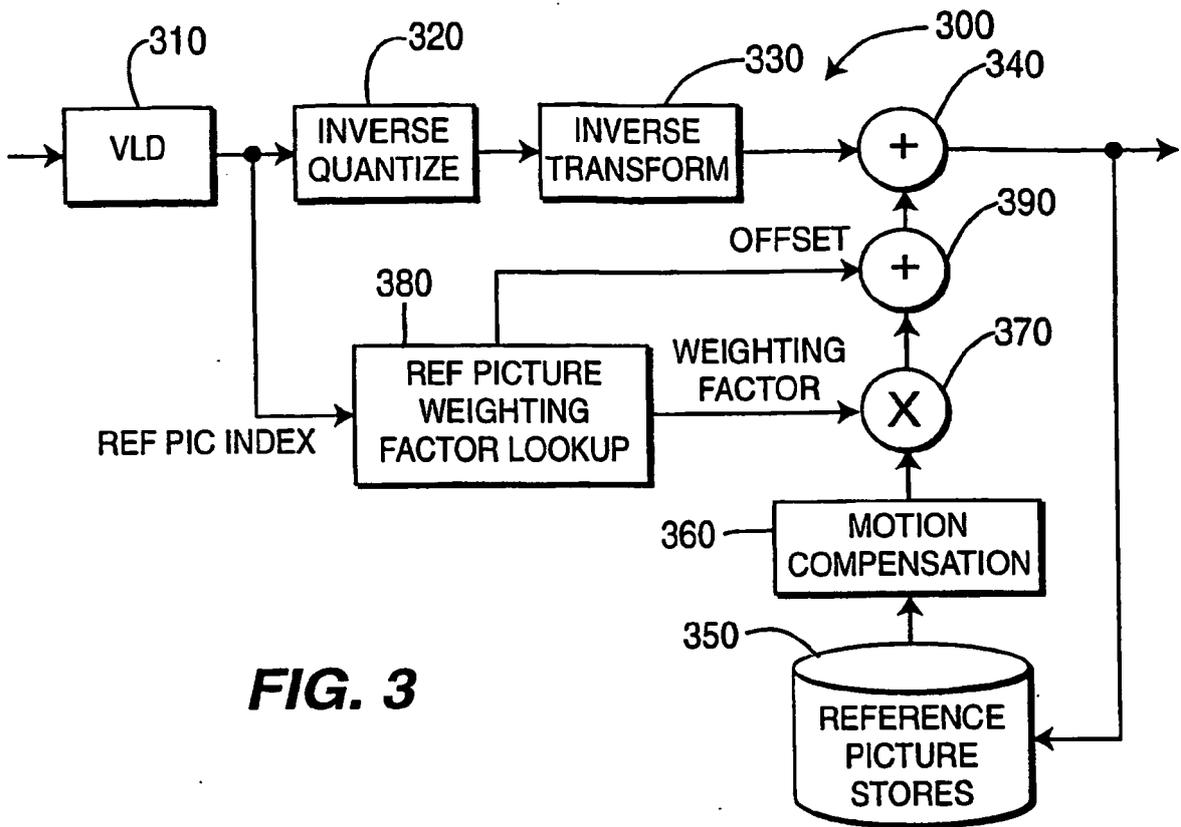


FIG. 3

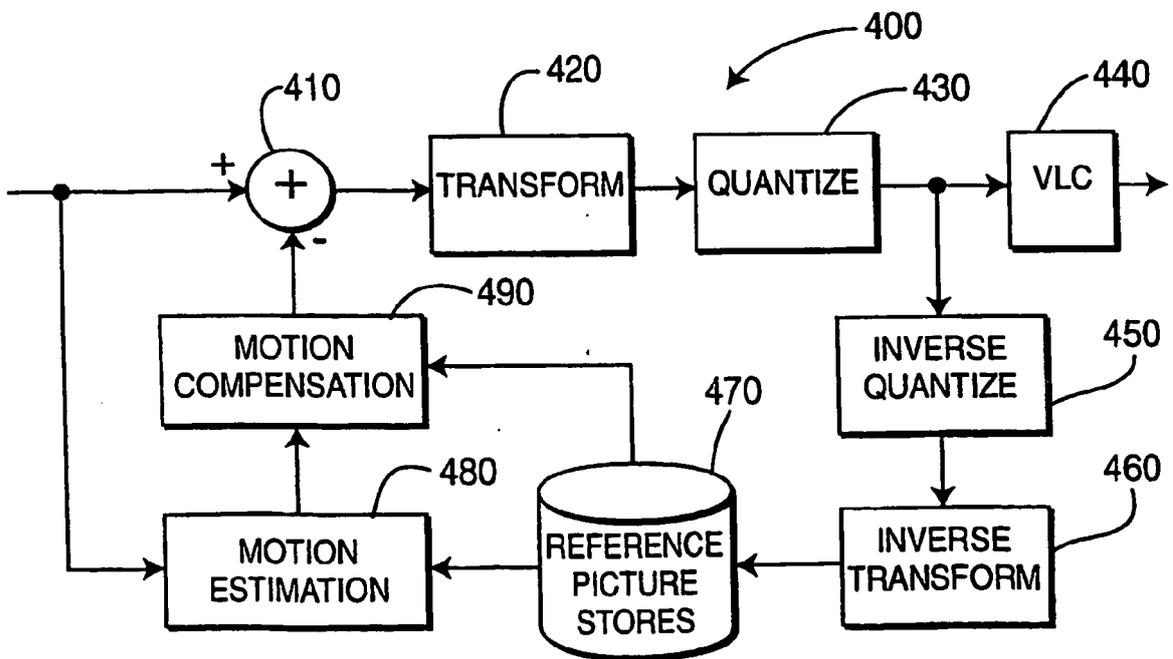


FIG. 4

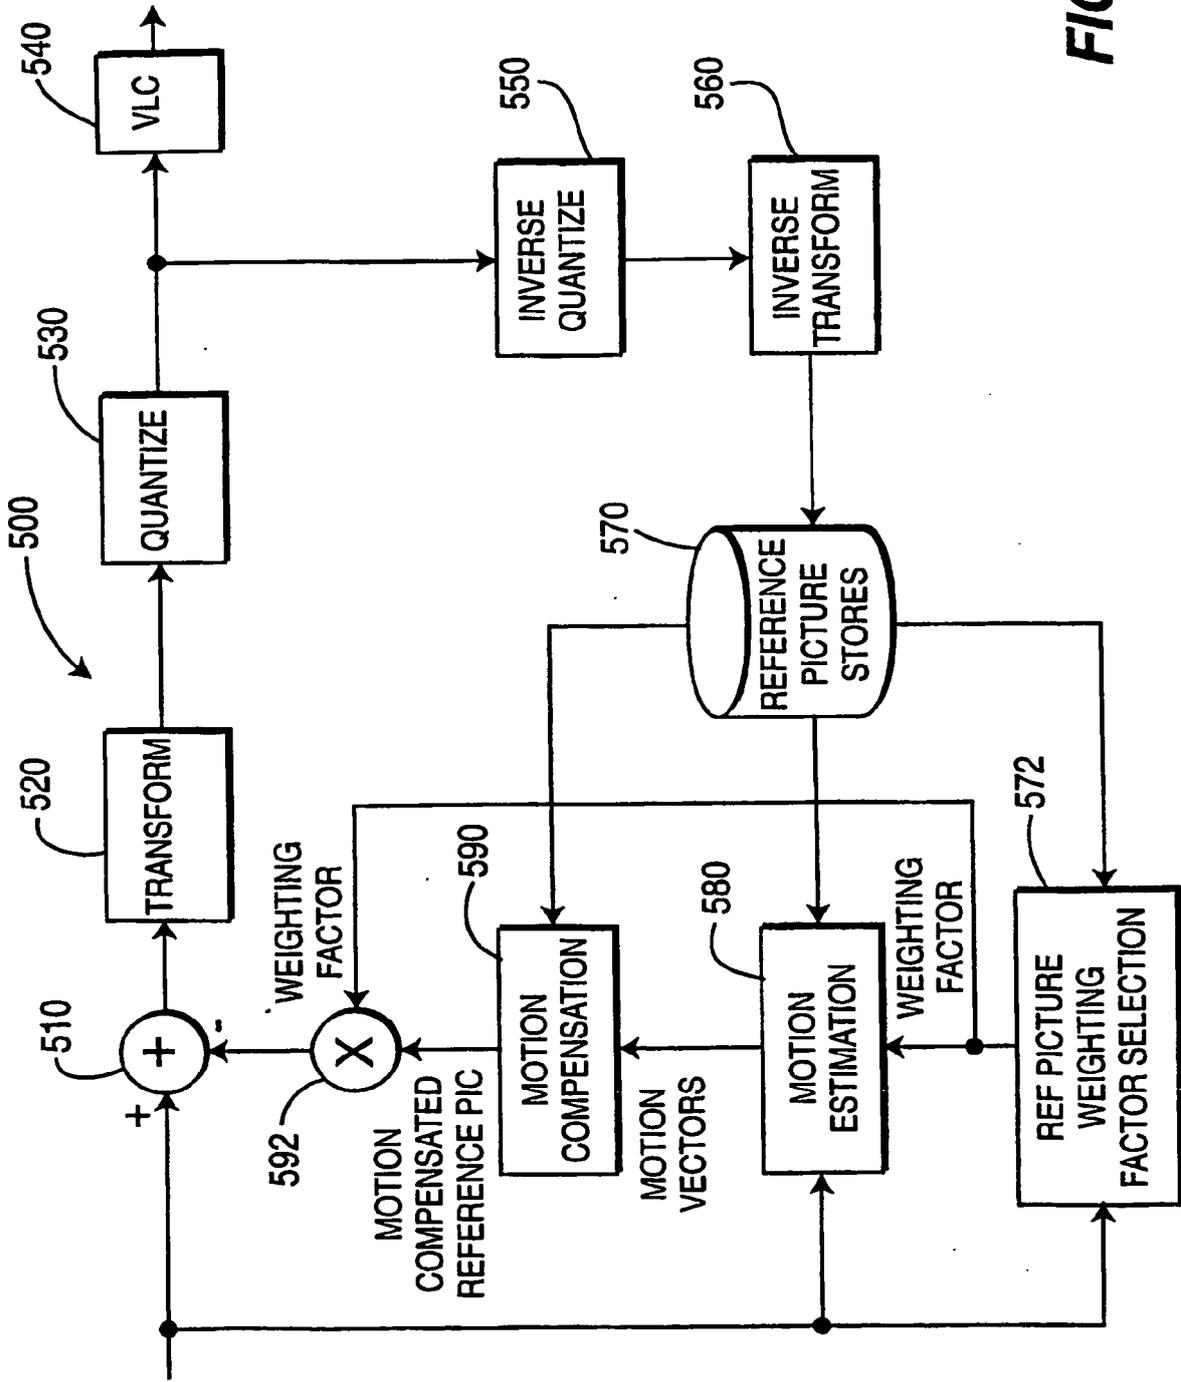


FIG. 5

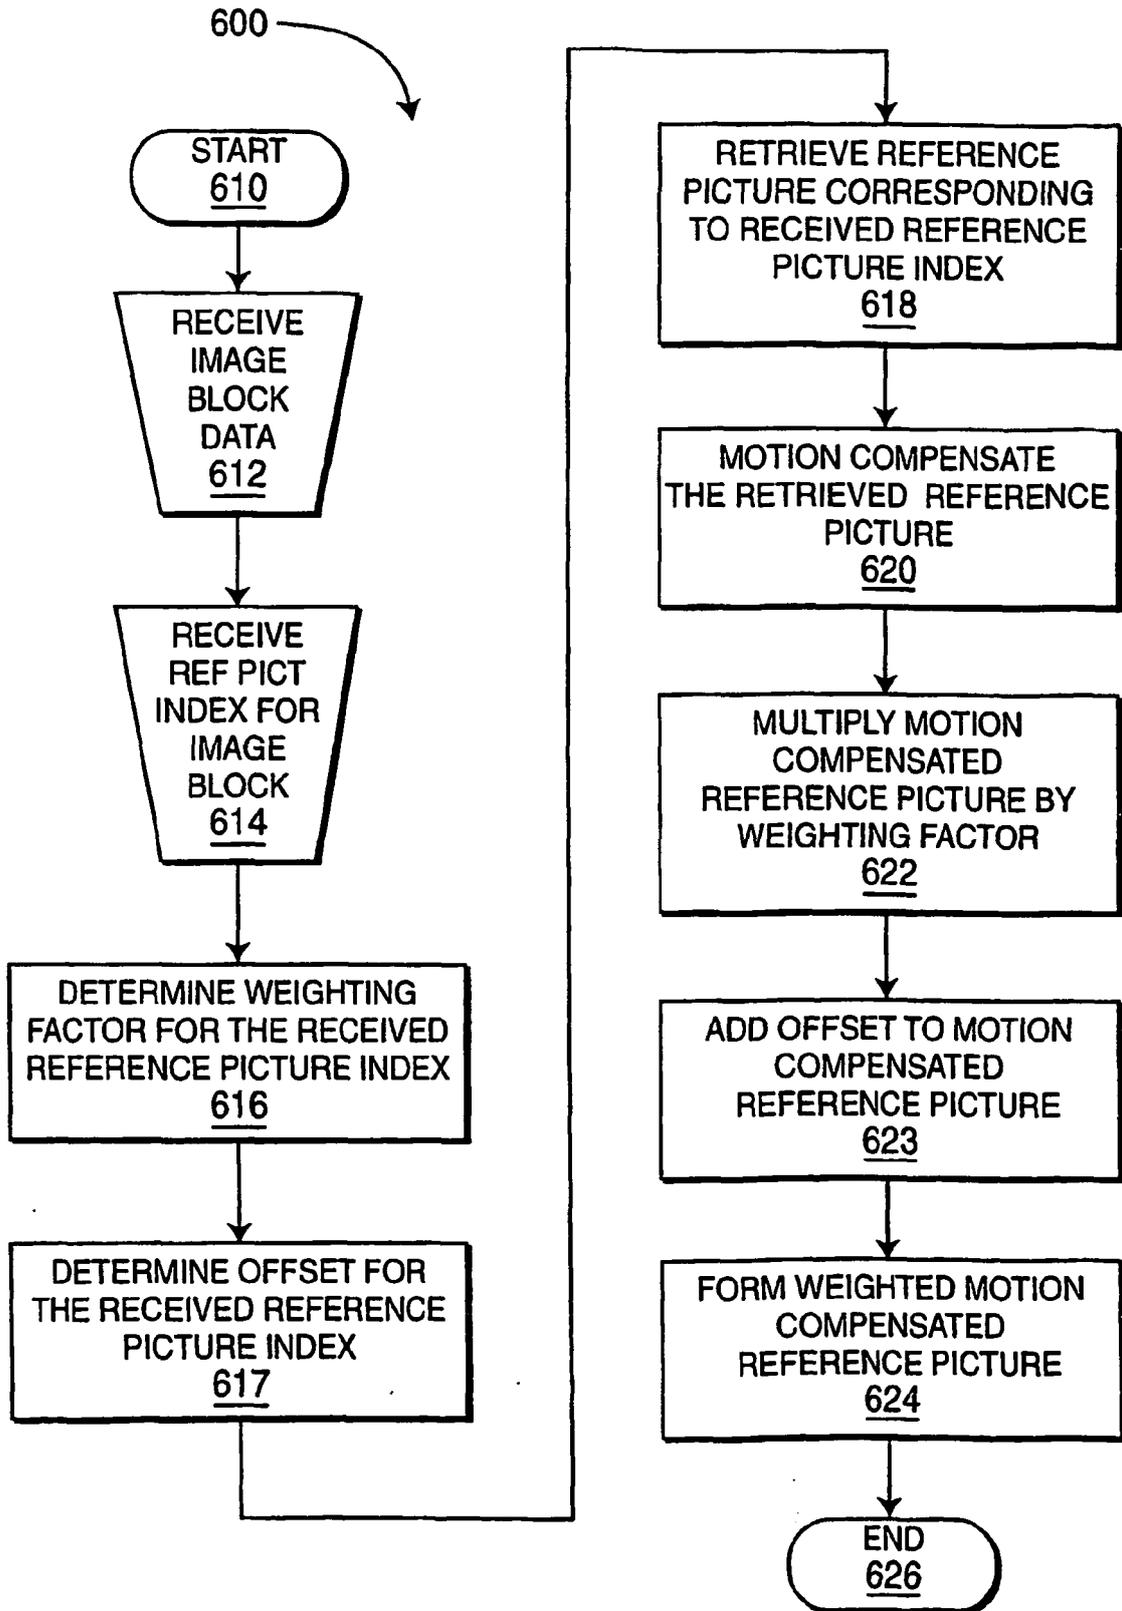


FIG. 6

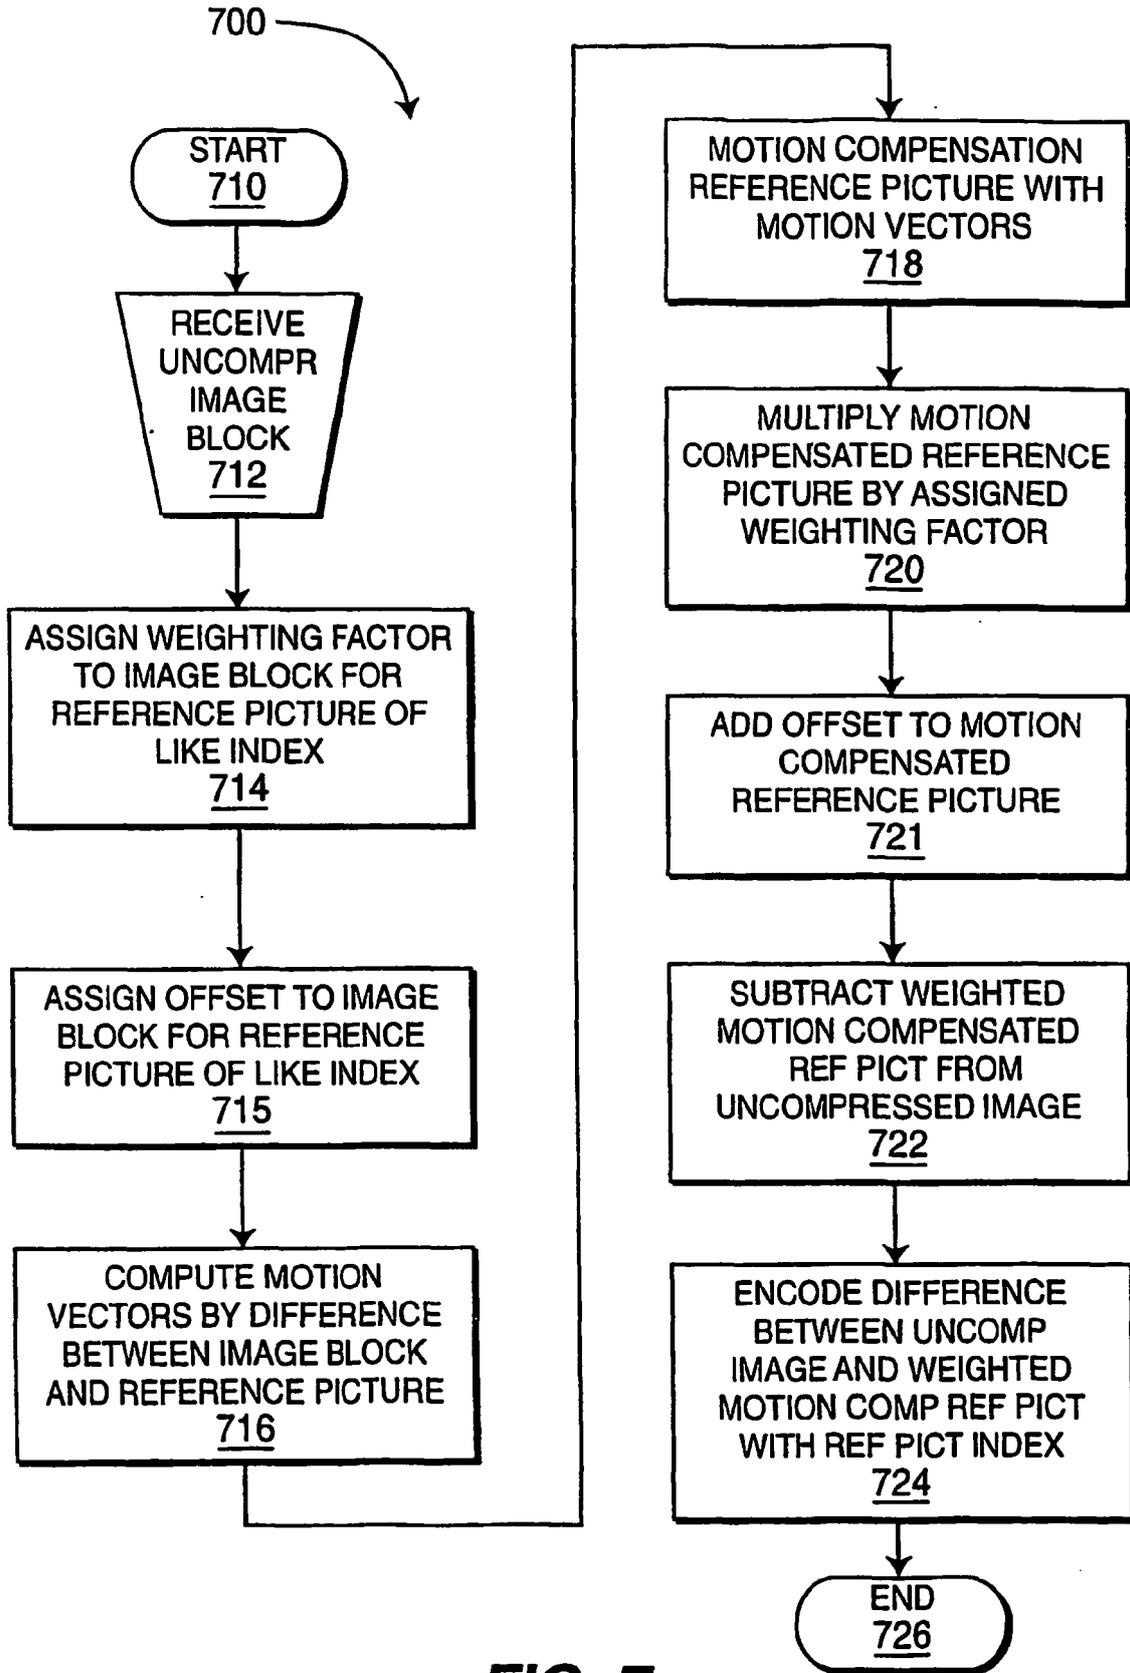


FIG. 7