



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 553 656 A1**

(12) **EUROPÄISCHE PATENTANMELDUNG**

(43) Date of publication:
13.07.2005 Bulletin 2005/28

(51) Int Cl.7: **H01P 1/26**

(21) Application number: **04017576.2**

(22) Date of filing: **24.07.2004**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR**
Designated Extension States:
AL HR LT LV MK

(71) Applicant: **HIROSE ELECTRIC CO., LTD.**
Shinagawa-ku Tokyo (JP)

(72) Inventor: **Nishimura, Hiroaki**
Shinagawa-ku Tokyo (JP)

(30) Priority: **31.07.2003 JP 2003204458**

(74) Representative: **Pätzold, Herbert, Dr.-Ing.**
Steubstrasse 10
82166 Gräfelfing (DE)

(54) **Termination device**

(57) The termination device to connect with the other piece of a coaxial connector in the coaxial connector, which comprises a first component comprised of a terminal to electrically connect with the center conductor of the other piece of the coaxial connector and an outer conductive piece to electrically connect with the outer conductor of the other piece of the coaxial connector, and a second component comprised of a ground conductive piece to electrically connect with the outer con-

ductor of the first component, a relay section to elastically connect with the terminal of the first component at least in the axial direction, and a resistive element that is electrically connected with the ground conductive piece and the relay section and electrically connects between the ground connector and the center conductor of the other piece of the coaxial connector.

EP 1 553 656 A1

Description

[0001] The present invention relates to a termination (device), especially the one intended for high frequency applications.

[0002] For example, U.S. Patent No. 5,047,737 discloses an example of a conventional termination. Fig. 4 is a perspective view of the conventional termination, and Fig. 5 shows the cross-sectional view taken along the line 5-5 of Fig. 4. This termination 80 is comprised of a conductive piece 81 to electrically connect with the center conductor 81 of the other piece of the coaxial connector, a ground conductive piece 82 to electrically connect with an outer conductor of the other piece of the coaxial connector, and a resistive element 83 that is electrically connected between the conductor 81 and the ground conductive piece 82.

[0003] As described in the U.S. Patent '737, in order to ground the coaxial impedance of the conductor 81 with the termination, the shape of the ground conductive piece needs to be carefully controlled. More specifically, the variance of the distance 85 in a cavity 84 between the resistive element 83 and the ground conductive piece 82 is important. In this case, in order to achieve generally constant resistance in any portion of the resistive element 83, the distance 85 between the resistive element 83 and the ground conductive piece 82 in the direction vertical to the axial direction of the resistive element 83 needs to be varied so as to form a suspended substrate line. However, it is difficult to form a smooth line.

[0004] As fully illustrated in Fig. 5, in the U.S. Patent, in order to solve the problem, in the cavity 84 between the resistive element 83 and the ground conductive piece, the ground conductive piece has a step-like surface and the surface is tapered down to the connecting section between the resistive element 83 and the ground conductive piece 82. However, with such step-like variance of the distance, it is impossible to provide a termination having stable performances especially for high frequency applications.

[0005] In addition, coaxial impedance that can be used (grounded) with a termination is usually determined by the ratio of outer diameter of a connecting section between the resistive element 83 and the conductor 81 to the outer diameter of the cavity around the connecting section. Especially in a high frequency termination, the former outer diameter has to be extremely small. However, the size of this outer diameter is easily affected by the height of the solder (not illustrated) applied for anchoring the resistive element to the conductor 81. Since it has been difficult to control the amount of the solder in the conventional termination, it has been difficult to achieve constant precision of the termination.

[0006] Furthermore, for example, the stress generated during the connection between termination and the connector significantly affects a relatively weak portion such as a soldered portion between the resistive ele-

ment 83 and the conductor 81, and this stress has mechanically and electrically substantial impact on the termination. Therefore, there has been a demand of means to efficiently eliminate such stress.

[0007] In view of the above problems in the conventional techniques, an objective of the present invention is to provide a termination having stable performances.

[0008] The above objective is achieved by the present invention as claimed in claim 1.

[0009] Embodiments of the invention will now be described by way of example with reference to the accompanying drawings, in which:

Fig. 1 is a cross-sectional view of the termination (device) of the invention, which is taken along the centerline;

Fig. 2 is a cross-sectional view of the first component housed inside the termination, which is taken along the centerline;

Fig. 3 is a cross-sectional view of the second component housed inside the termination, which is taken along the centerline;

Fig. 4 is a perspective view of the conventional termination; and

Fig. 5 is a cross-sectional view of Fig. 5, which is taken along the line 5-5 of Fig. 4.

1. Whole constitution

[0010] Fig. 1 shows a cross-sectional view taken along the centerline of the termination of this invention, and Figs. 2 and 3 show cross-sectional views of the first and the second components to be housed in the termination, respectively.

[0011] The termination (device) 1 of this invention is comprised of a lock screw 2, the first component 4 and the second component 6, which can be housed inside the lock screw 2. Any of the lock screw 2, the first component 4, and the second component 6 can be separated from each other. Unless it is stated, it is considered that all those components are made of a conductive material. 1-1. Lock screw

[0012] Referring now to Fig. 1, the construction of the lock screw will be described below. This lock screw 2 forms the outermost part of the termination 1, and works as a housing component to hold and house the first component 4 and the second component 6.

[0013] The lock screw 2 is comprised of three screw components that can be coaxially connected to each other. More specifically, it is comprised of a first screw component 20 to connect the termination 1 with the other piece of the coaxial connector, a second screw component to support the first screw component at its one end and mainly to house the first component 4 and the

second component 6, and a third screw component that can be screwed into the second screw component at the other end, which is opposite side to the first screw component. The lock screw 2 can further comprise a lid to cover the end surface of the third screw component 22, which is opposite side to the first screw component.

[0014] The first screw component 20 is bored so as to have a hollow structure having a specified diameter throughout its length around the center axis, whereby one end of the second screw component 21 can be housed therein.

[0015] The second screw component 21 is bored so as to have a hollow structure having a specified diameter throughout its length around the center axis, whereby a part of the first component 4 and the second component 6 can be housed therein. In addition, the second screw component 21 has a relatively small hole 23 on its end at the first screw component 20 side, so that the first component 4 and the second component housed in the second screw component 21 will not come off from the hole 23.

[0016] One end of the third screw component 22 is partially bored to a specified depth in order to house a part of the second component 6. A screw slot 29 can be provided on the other end of the third screw component so as to make screwing the third screw component 22 easy with a screwdriver.

[0017] The inside of the first screw component 20 is partially threaded on the opposite side of the second screw component 21. By connecting this threaded section 25 with a specified portion of the other piece of the coaxial connector, for example, with a threaded part (not illustrated) provided so as to surround the coaxial cable in the axial direction, the lock screw 2 can be connected with the other piece of the coaxial connector via the first screw component 20. Here, in order to easily connect the first screw component 20 with the other piece of the coaxial connector, the first screw component 20 can be rotated around its center axis with respect to the second screw component 21 and the third screw component 21 even after assembling of the lock screw 2.

[0018] On the other hand, the inner surface 26 of the second screw component 21 and the outer surface 27 of the third screw component 22 are also threaded for connecting between the second and the third screw components. Through those threaded sections 26 and 27, the second screw component 21 and the third screw component 22 are anchored to each other. After inserting the first component 4 and then the second component 6 into the second screw component 21 in a specified direction, and then closing the second screw component 21 with the third screw component 22, the first component 4 and the second component 6 are "substantially completely" housed and held in the lock screw 2, and the distance between the first component 4 and the second component 6 can be maintained constant at least in the axial direction. Here, the terms "substantially completely" are used because a part (a first male terminal

41) of the first component 4 is still exposed to the outside of the lock screw 2 even after the first component 4 and the second component 6 are completely housed and held in the lock screw 2. This exposed first male terminal 41 is intended to connect with the connecting terminal of the other piece of the coaxial connector.

[0019] In the above-described Working Examples, the connection with the other piece of the coaxial connector is made through the threaded section of the first screw component 20, but it can be made through a "push-on lock" mechanism ("simple lock" mechanism). As easily understood, the connection with the other piece of the coaxial connector is not limited to those methods. In addition, the first screw component 20 can be provided on the other piece of the coaxial connector. 1-2. First component

[0020] In next, referring to Fig. 2, the constitution of the first component will be described below. The first component 4 has a generally cylindrical shape corresponding to the shape of the inner surface of the second screw component 21, and is comprised of a terminal member 43 having a first male terminal 41 and a second male terminal 42 on the respective ends of the center conductor 40, and the outer conductor 44 that is supported and fixed to the terminal member 43, surrounding the outer surface of the terminal member 43.

[0021] The terminal member 43 and the outer conductor 44 can be anchored to each other with resin. After inserting the terminal member 43 into the outer conductor 44 and then adjusting the positions of matching holes 45, 46 by matching those holes, the terminal member 43 and the outer conductor 44 can be anchored to each other in a desired direction by pouring resin 47 into the matching holes 45 and 46. As shown in the figure, since the matching holes 45 and 46 are provided in a direction that crosses the axial direction, the anchored terminal member 43 and outer conductor 44 have strong resistance against a force in the axial direction.

[0022] When the termination 1 is used, the terminal member 43 is electrically connected with the center conductor (not illustrated) of the other piece of the coaxial connector and receives electric signals. On the other hand, the outer conductor 44 is connected with the outer conductor (not illustrated) of the other piece of the coaxial connector and receives electric signals.

[0023] The signals received by the first male terminal 41 are then transmitted to the second component 6 (see Fig. 3) via the center conductor 40 and the second male terminal 42. In order to connect between the second male terminal 42 and the second component, the second male terminal 42 has a hole 50 having a relative large diameter α on its one end, and also has a guiding hole 51 having a relative small diameter at the deepest position of the hole 50 so as to make the connection easy. 1-3. Second component

[0024] In next, referring to Fig. 3, the constitution of the second component will be described below. The second component 6 is comprised of the ground con-

ductive piece 60 having a generally cylindrical shape corresponding to the shape of the inner surface of the second screw component 21, the relay section 61 used in the middle of the connection with the first component 4, and a chip-type planar resistive element 62 that is connected with both the ground conductive piece 60 and the relay section 61.

[0025] The relay section 61 is further comprised of the connecting terminal 64 to connect with the resistive element 62, a cylindrical union 66 and a relay tube 67 that are respectively provided at the ground conductive piece side and the first component side of the flange 65 of the connecting terminal 64. The resistive element 62 is connected with the ground conductive piece 60 at its one end, and with the relay section at the other end.

[0026] Through this connection, the ground conductive piece 60 can be electrically connected with the center conductor of the other piece of the coaxial connector. In addition, the ground conductive piece 60 is electrically connected (see Fig. 1) with the end surface of the outer conductor (see Figs. 1 and 2) of the first component at its end section 63 that faces the cavity 69, and therefore the ground conductive piece can be also connected with the outer conductor of the other piece of the coaxial connector.

[0027] The features of this invention will be even more fully described below.

[0028] The resistive element 62 is anchored to the ground conductive piece by pressing it into a slot 68, which is provided in the deepest portion of the cavity 69 of the ground conductive piece 60 in the axial direction, or by connecting them with solder. As described above, the variance of the distance β in the cavity between the resistive element 62 and the ground conductive piece 60 in a direction vertical to the axial direction of the resistive element is critical. In the present invention, the ground conductive piece has a step-like tapered surface 71 such that the distance β becomes gradually and smoothly smaller towards the slot 68. Especially, in the high frequency termination 1, since the length of the resistive element in the axial direction is short, and the variance of the distance between the resistive element 62 and the ground conductive piece 60 tends to be larger than general termination 1, it is extremely effective to have such tapered step-like surface 71.

[0029] On the other hand, the resistive element 62 is pressed between slit members 72a and 72b that have semicircular cross-section and form a slit between them. By applying solder 73 around the slit 72, the resistive element 62 is anchored therein. Here, it is not fully illustrated in the figure, but the solder 73 is applied all around the slit 72 (since this figure is a cross-sectional view taken along the centerline, how solder is applied is not fully illustrated). As is well known, since the amplitude of the frequency usable in this termination is determined by the ratio of the size of the outer diameter γ of the connecting section between the resistive element 62 and the connecting terminal 64 to the outer diameter δ (see Fig. 2)

of the cavity in the outer conductor 44, it is preferred to control the outer diameter γ around the slit to an ideal size. Especially in the termination for high frequency applications, e.g. 65 GHz, the outer diameter γ around the slit has to be extremely small, about 0.8 mm, depending on the cut-off frequency. For this reason, in this invention, the amount of solder is controlled by having a union 66 that substantially surrounds the slit 72 and then applying solder inside the union 66. According to this constitution, since the solder 73 will hardly leak from the outside of the union 66, ideal coaxial size can be easily achieved even at the soldered portion. Therefore, according to this invention, high frequency termination can be stably provided.

[0030] Further referring to Figs. 1-3, how to solve the stress generated when the termination is connected with the connector will be described below. This stress is troublesome especially for the high frequency termination. To solve this problem, in this invention, the first component 4 and the second component 6 are elastically connected at least in the axial direction by a spring structure, using the relay tube 67 of the second component 6 and the second male terminal 42 of the first component 4. To achieve the spring structure, the relay tube 67 has a slotted section 74 that has a slot(s) along a direction parallel to the axial direction on the connecting side with the first component. In addition, at least the portion 75 near the end of the relay tube 67 having the slotted section 74 becomes narrower towards the end. The diameter ε of the end is designed to be slightly smaller than the diameter α (see Fig. 2) of the opening on the end of the second male terminal 42 of the first component 4. Here, as shown in the figure, the narrower end of the relay tube 67 is not provided all along the slotted section, but preferably provided only around a portion to be inserted into the second male terminal 42. According to this constitution, the relay tube 67 can be even more reinforced.

[0031] In such constitution, when the first component 4 and the second component 6 are moved close to each other in the axial direction, the guiding section 7 that extends in the axial direction from the center of end surface of the connecting terminal 64 of the second component 6 is first guided to the hole 50 provided on the end surface of the second male terminal 42 of the first component 4. When those components are moved even closer to each other, the guiding section 77 that extends in the axial direction from the center of the end surface of the connecting terminal 64 is guided into the guiding hole located in the deepest portion of the hole 50, and simultaneously the slotted section of the relay tube 67 is elastically deformed while the relay tube is pressed in the axial direction into the hole provided on the end surface of the second male terminal 42.

[0032] As is clear, according to this connecting method, for example, not only the stress in the axial direction, which can be generated when connected with the connector, but also the stress in the cross direction can be

eliminated. Therefore, for example, the stress that can be generated in the soldered portion between the resistive element 62 and the connecting terminal 64, which is easily damaged, can be effectively eliminated. Furthermore, as described above, the distance between the relay tube 67 and the second male terminal 42 is controlled by the dimension of the housing portion of the fix screw 2. However, since the relay tube 67 is elastically connected with the second male terminal 42, dimensional precision is not seriously required even in the housing portion of the lock screw 2. In addition, as generally understood, on the both ends of the termination, for example, on the respective ends of the first male terminal 41 and the ground conductive piece 60, the dimensional precision is seriously required for maintaining the performances. However, according to the present invention, the dimensional error can be adjusted by the elastic connection between the relay tube 67 and the second male terminal 42, even such serious precision required on the ends of the termination can be maintained. 1-4. Other components

[0033] In the above embodiments, the relay tube 67 of the second component 6, which has a slotted section, is attached into the hole provided at the second male terminal of the first component 4. However, the relay tube 67 does not have to be attached into a hole, as long as it is attached to a mechanism that can prevent the second component from coming off from the first component by elastic deformation of the slotted section. For example, it can be a structure comprised of a simple upper plate and lower plate.

[0034] In addition, as a means to control the amount of solder, the tubular union 66 having a circular cross section is used in the above embodiments, but a tubular union having a rectangular cross section can be also used. In other words, it is satisfactory as long as the means for control the amount of solder is provided so as to surround generally whole soldered portion.

[0035] According to this invention, the termination having stable performances can be provided. Furthermore, by the tapered surface of the ground conductive piece, the distance between the ground conductive piece and the resistive element can be even more smoothly varied. In addition, by the means for controlling the amount of solder around the connecting section between the resistive element and the conductor, the amount of solder applied for the connection can be controlled. Moreover, by the relay section provided in the termination between the portion to be connected with the connector and the ground conductive piece, for example, the stress generated when the termination and the connector are connected can be effectively eliminated.

[0036] Here, the present invention can be applied to general terminations, and has great advantage especially when it is used for high frequency applications.

Claims

1. A termination device which is connected to the other piece of a coaxial connector in the axial direction, comprising:

a first component comprised of:

a terminal piece to electrically connect with the center conductor of said other piece of the coaxial connector; and
an outer conductive piece to electrically connect with the outer conductor of said other piece of the coaxial connector; and

a second component comprised of:

a ground conductive piece to electrically connect with said outer conductive piece of said first component;
a relay piece to elastically connect with said terminal piece of said first component at least in the axial direction; and
a resistive element that is electrically connected with said ground conductive piece and said relay piece, and electrically connects between said ground conductive piece and said center conductor of said other piece of the coaxial connector.

2. The termination device of claim 1, wherein said relay piece of said second component has a slotted section, and said terminal piece of said first component has a locking section to prevent said second component from possibly coming off from the first component by elastic deformation of said slotted section, and said terminal piece of said first component and said relay piece of said second component are elastically connected by pressing said slotted section into said locking section in the axial direction so as to elastically deform said slotted section.
3. The termination device of claim 2, wherein said relay piece having said slotted section is tapered down to its end, and the narrower section of said relay piece is provided only around the portion to be inserted into said locking section.
4. The termination device according to claim 1, wherein said relay piece of said second component has a guiding section that extends in the axial direction from said relay piece, and said terminal piece of said first component has a guiding hole to guide said guiding section.
5. A termination device, comprising:

a first component comprised of:

a terminal piece to electrically connect with the center conductor of the other piece of the coaxial connector; and
 an outer conductive piece to electrically connect with the outer conductor of said other piece of the coaxial connector; and

a second component comprised of:

a ground conductive piece to electrically connect with said outer conductive piece of said first component;
 a relay piece to connect with said terminal piece of said first component; and
 a planar resistive element that is connected with said ground conductive piece and said relay piece and electrically connects between said ground conductive piece and said center conductor of said other piece of the coaxial connector,

wherein said ground conductive piece has a step-like tapered surface, whereby the distance between said resistive element and said tapered surface in the direction vertical to the axial direction of said resistive element becomes smaller towards the connecting section between said ground conductive piece and said resistive element.

6. A termination, comprising:

a first component comprised of:

a terminal piece to electrically connect with a center conductor of the other piece of the coaxial connector; and
 an outer conductive piece to electrically connect with an outer conductor of the other piece of the coaxial connector;

a second component comprised of:

a ground conductive piece to electrically connect with said outer conductive piece of said first component;
 a relay section to connect with said terminal piece of said first component; and
 a resistive element that is connected with said ground conductive piece and said relay section and electrically connects between said ground conductive piece and said center conductor of the other piece of the coaxial connector; and
 a means for controlling the amount of solder to apply on a connecting section between said resistive element and said relay section.

7. The termination of claim 6, wherein said means for controlling the amount of solder is a tubular member that surrounds said connecting section.

8. The termination according to claim 1, further comprising a housing component to house said first component and said second component, and to maintain the connection between said first and said second components.

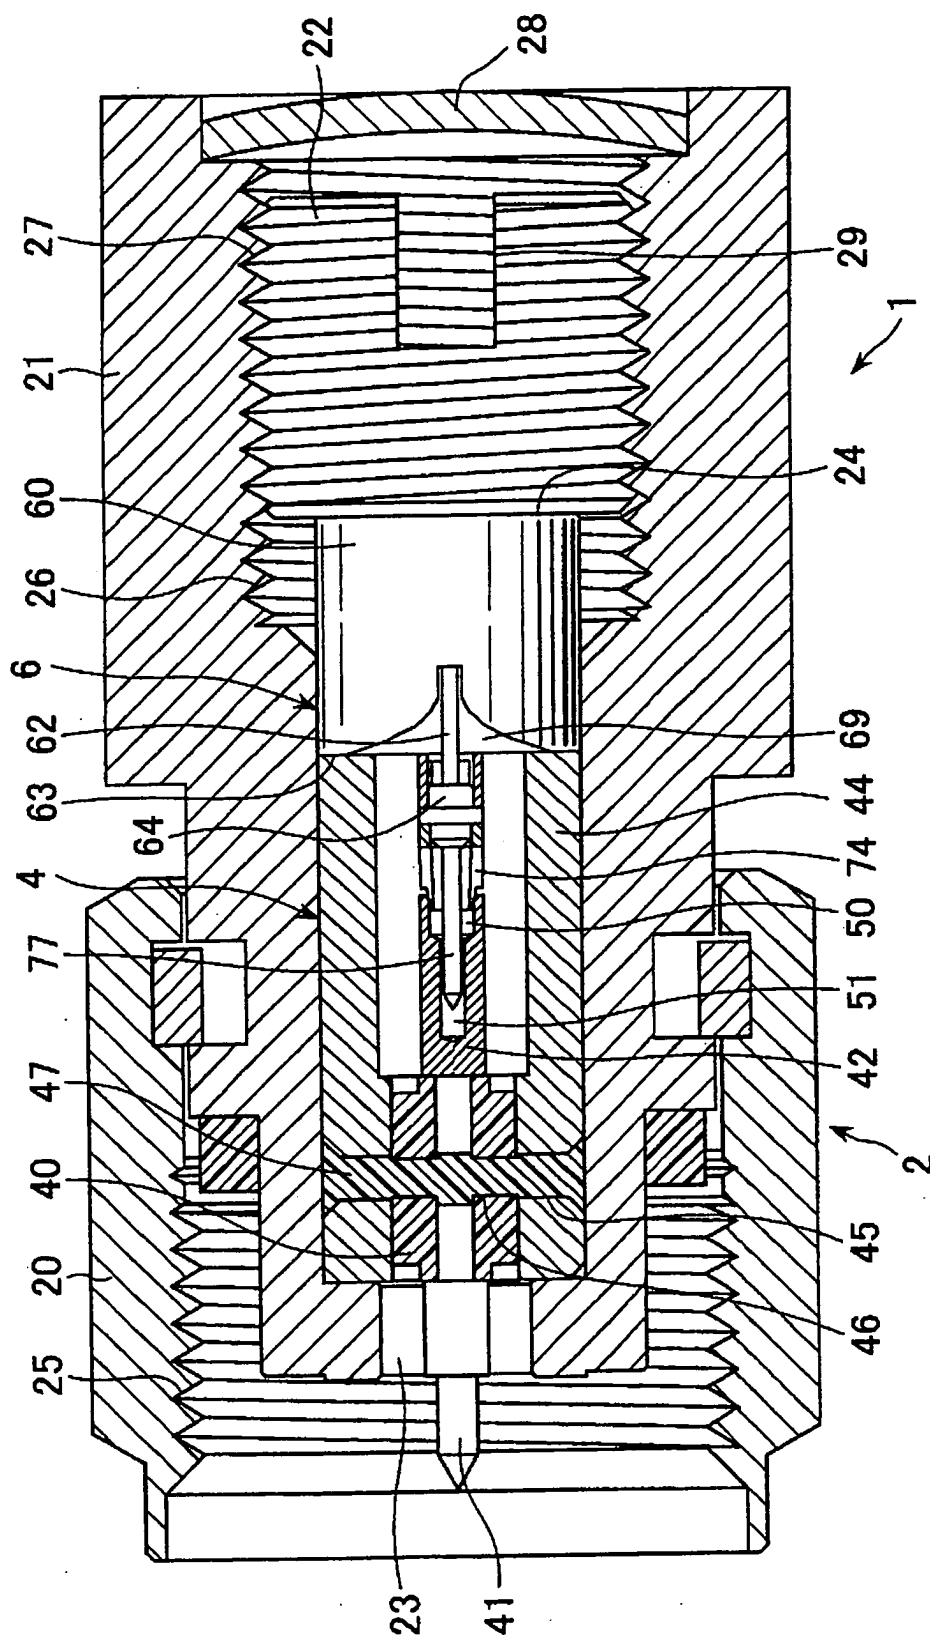


FIG.1

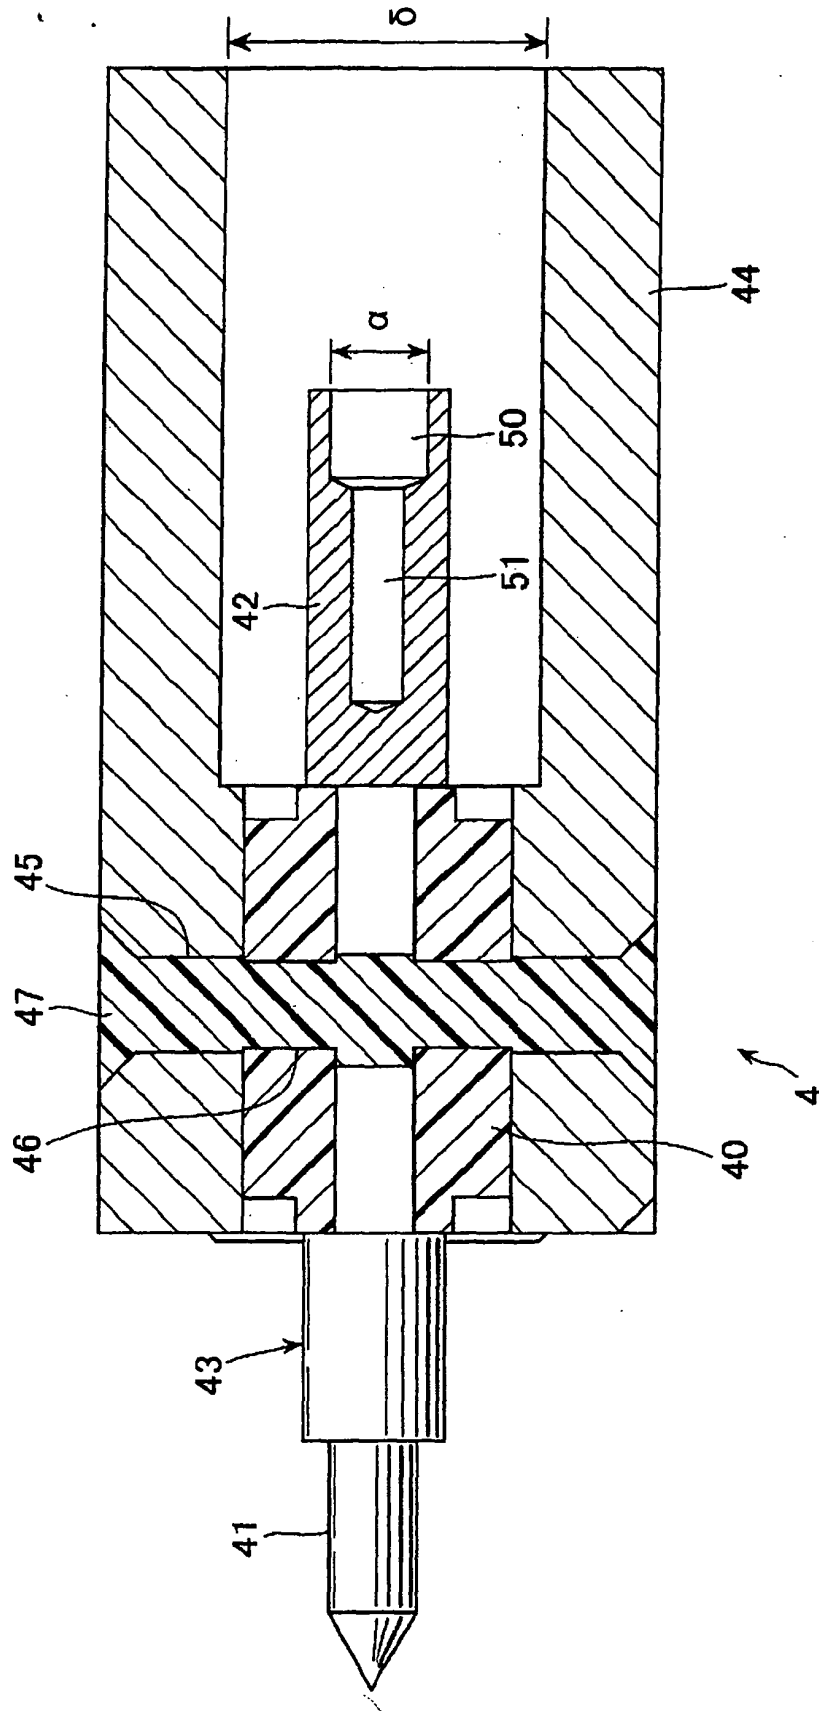


FIG. 2

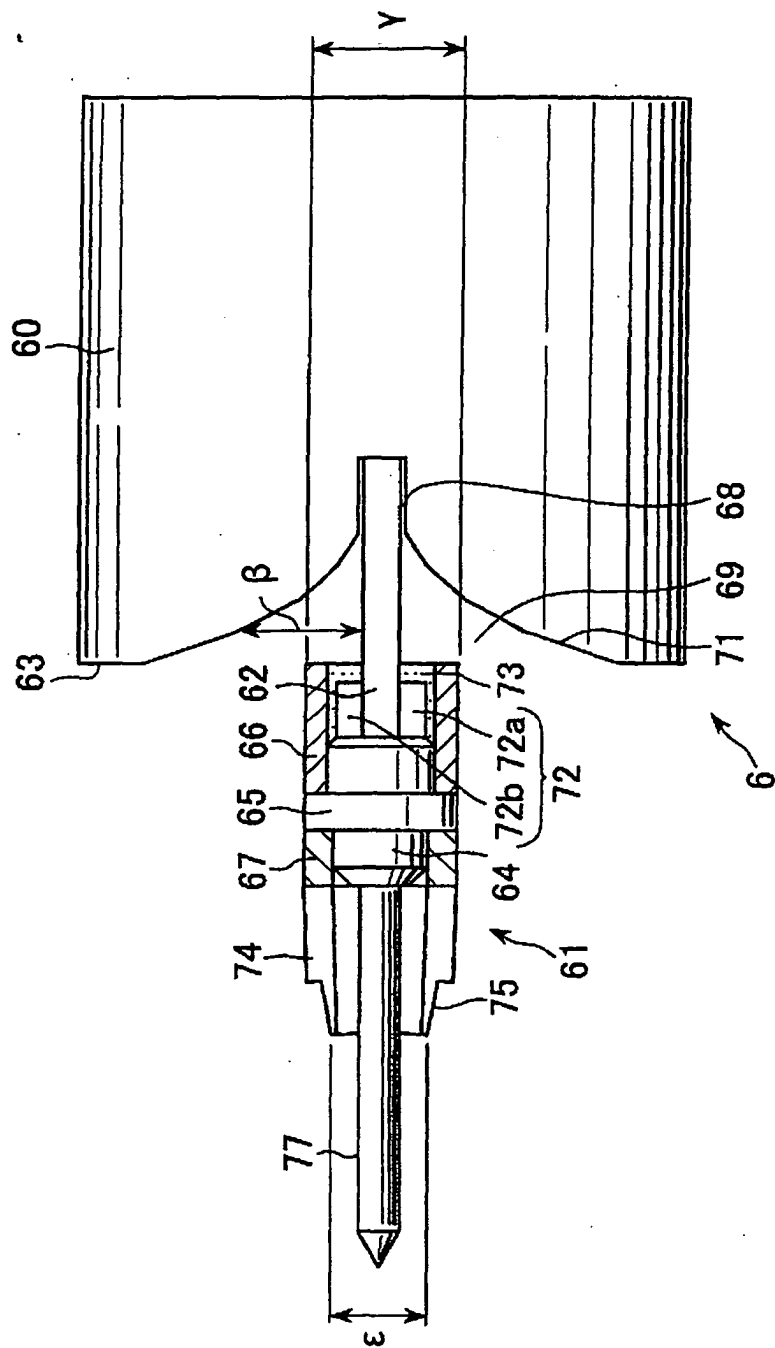


FIG. 3

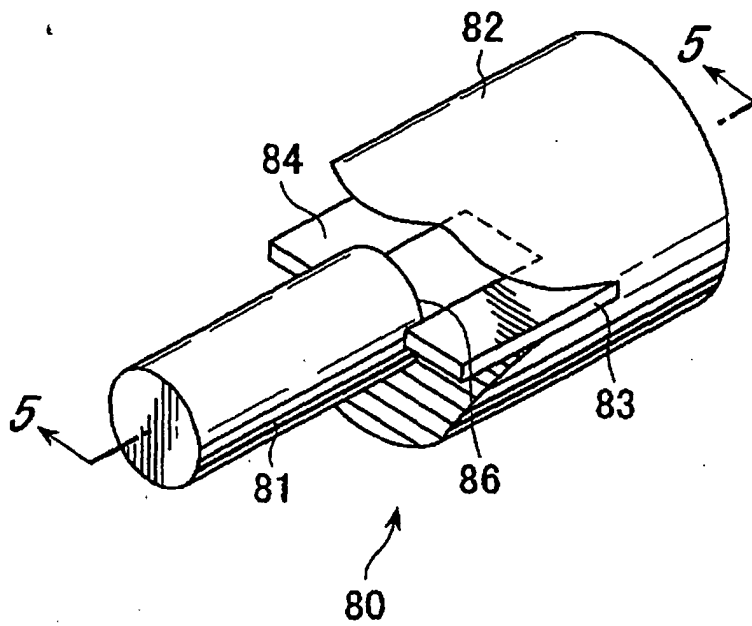


FIG. 4

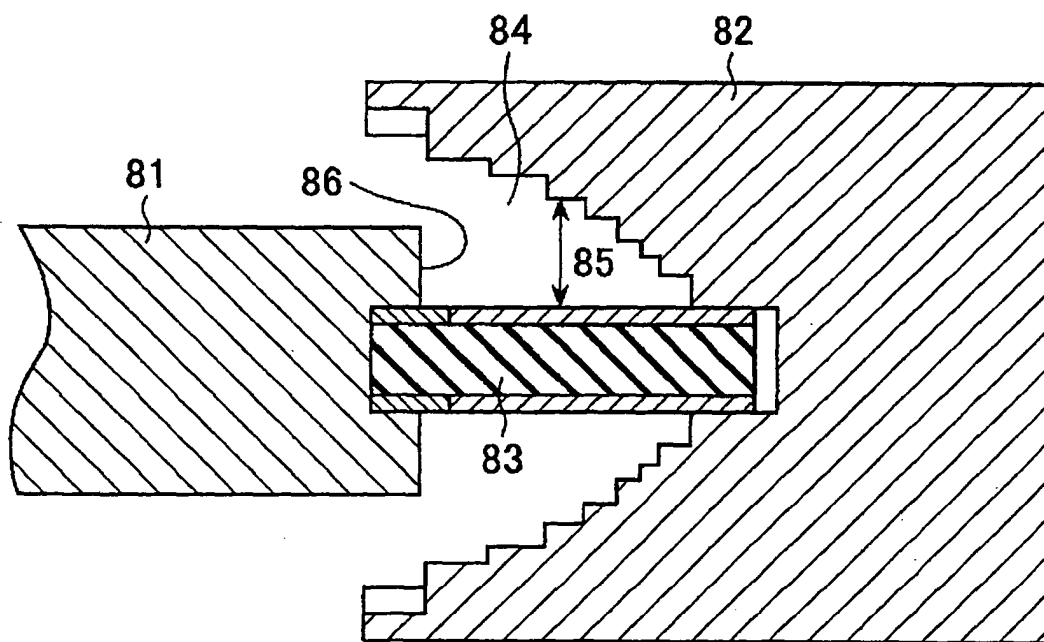


FIG. 5



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 01 7576

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	PATENT ABSTRACTS OF JAPAN vol. 017, no. 253 (E-1367), 19 May 1993 (1993-05-19) -& JP 04 372204 A (MURATA MFG CO LTD), 25 December 1992 (1992-12-25) * abstract; figures 1,4 *	1,5,6	H01P1/26
A	US 3 384 819 A (RINKEL SHERMAN A) 21 May 1968 (1968-05-21) * column 2, line 66 - column 4, line 47; figure 1 *	1,5,6	
A	US 3 324 424 A (BARKER LESTER R) 6 June 1967 (1967-06-06) * the whole document *	1,5,6	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H01P
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 16 September 2004	Examiner Den Otter, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

2

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 01 7576

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-09-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 04372204	A	25-12-1992	NONE	
US 3384819	A	21-05-1968	NONE	
US 3324424	A	06-06-1967	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82