



(11) **EP 1 555 421 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
13.03.2013 Bulletin 2013/11

(51) Int Cl.:
F02M 25/07 (2006.01)

(21) Application number: **05000942.2**

(22) Date of filing: **18.01.2005**

(54) **Exhaust gas recirculation device of internal combustion engine**

Abgasrückführeinrichtung einer Brennkraftmaschine

Dispositif de recirculation de gaz d'échappement d'un moteur à combustion interne

(84) Designated Contracting States:
DE

(30) Priority: **19.01.2004 JP 2004009960**

(43) Date of publication of application:
20.07.2005 Bulletin 2005/29

(73) Proprietor: **MAHLE Filter Systems Japan
Corporation
Toshima-ku
Tokyo (JP)**

(72) Inventors:
• **Komai, Hiroyuki
Toshima-ku
Tokyo 171-0014 (JP)**

• **Ariyama, Masahiro
Toshima-ku
Tokyo 171-0014 (JP)**
• **Arita, Eriya
Toshima-ku
Tokyo 171-0014 (JP)**

(74) Representative: **Grünecker, Kinkeldey,
Stockmair & Schwanhäusser
Leopoldstrasse 4
80802 München (DE)**

(56) References cited:
**WO-A1-03/062625 WO-A1-03/098026
US-A1- 2004 107 949**

EP 1 555 421 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates in general to exhaust gas recirculation (viz., EGR) devices of an internal combustion engine, which feed part of the exhaust gas of the engine back to an intake side of the engine to reduce nitrogen oxides (NOx) in the exhaust gas, and more particularly to the EGR devices of a type that has a gas cooling means for cooling EGR gas.

2. Description of the Rotated Art

[0002] Hitherto, various EGR devices of an internal combustion engine have been proposed and put into practical use particularly in the field of wheeled motor vehicles. Some of them are of a gas cooling type that has a means for cooling EGR gas to achieve an efficient feeding of the EGR gas, which has been thermally expanded, to an intake side of the engine. However, in case just after engine starting wherein the engine temperature is low and/or under a low load operation of the engine, such cooling of EGR gas is not preferable. Actually, in such cases of the engine, the cooling of EGR gas tends to cause increase of particulates as well as nitrogen oxides (NOx) in the exhaust gas discharged from the engine.

[0003] For solving such drawbacks, measures are proposed by two Japanese Laid-open Patent Applications which are Tokuhyohei-9-508691 and Tokkai-2003-328864. In the former measure, a bypass passage is provided outside of a gas cooling passage. In the latter measure, a bypass passage is provided inside of a gas cooling passage like a nest. In both measures, when the gas cooling is not necessary, the EGR gas is fed back to the intake side of the engine through the bypass passage.

[0004] Another example of a bypass passage provided inside of an EGR Cooling device is given in document WO 03/098626.

SUMMARY OF THE INVENTION

[0005] However, even the measures of the published applications have the following new drawbacks due to their inherent constructions. That is, in the former measure, the EGR device has a bulky construction causing a difficulty with which the EGR device is mounted to the engine, and in the latter measure, the EGR device fails to exhibit a satisfied ability for cooling EGR gas fed back to the engine.

[0006] It is therefore an object of the present invention to provide an exhaust gas recirculation device of an internal combustion engine, which is free of the above-mentioned drawbacks.

[0007] That is, according to the present invention, there is provided an exhaust gas recirculation device of an internal combustion engine, which can suitably control the temperature of EGR gas without enlarging the size of the device and sacrificing the gas cooling ability.

[0008] More specifically, according to the present invention, there is provided an exhaust gas recirculation device of an internal combustion engine, which can control the temperature of EGR gas in accordance with an operation condition of the engine.

[0009] In accordance with a first aspect of the present invention, there is provided an exhaust gas recirculation device of an internal combustion engine, which comprises a first elongate casing having gas inlet and outlet ports at axially opposed ends; a second elongate casing received in the first elongate casing to define therebetween an axially extending space, the second elongate casing including a first gas flow passage and a water flow passage that surrounds the first gas flow passage, the first gas flow passage having an inlet part exposed to the gas inlet port and an outlet part exposed to the gas outlet port; a third elongate casing received in the axially extending space to define between the first elongate casing and the third elongate casing a bypass passage and between the third elongate casing and the second elongate casing a second gas flow passage, the bypass passage and the second gas flow passage having each an inlet part exposed to the gas inlet port and an outlet part exposed to the gas outlet port; and a gas flow rate controller installed in either one of the gas inlet and outlet ports of the first elongate casing to control a gas flow rate among the bypass passage, the first gas flow passage and the second gas flow passage.

[0010] In accordance with a second aspect of the present invention, there is provided an exhaust gas recirculation device of an internal combustion engine, comprising a first elongate casing having gas inlet and outlet ports at axially opposed ends; a second elongate casing received in the first elongate casing to define therebetween an axially extending space, the second elongate casing including a first gas flow passage and a water flow passage that surrounds the first gas flow passage, the first gas flow passage having an inlet part exposed to the gas inlet port and an outlet part exposed to the gas outlet port; a third elongate casing received in the axially extending space to define between the first elongate casing and the third elongate casing a bypass passage and between the third elongate casing and the second elongate casing a second gas flow passage, the bypass passage and the second gas flow passage having each an inlet part exposed to the gas inlet port and an outlet part exposed to the gas outlet port; and a gas flow rate controller installed in the gas inlet port of the first elongate casing to control a rate between the amount of gas flowing in both the first and second gas flow passages and the amount of gas flowing in the bypass passage.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] Other objects and advantages of the present invention will become apparent from the following description when taken in conjunction with the accompanying drawings, in which:

Fig. 1 is a sectional view of an exhaust gas recirculation device which is a first embodiment of the present invention;

Fig. 2 is a view taken from the direction of the arrow "A" of Fig. 1;

Fig. 3 is a side view of the exhaust gas recirculation device of the first embodiment;

Fig. 4 is a view similar to Fig. 1, but showing an exhaust gas recirculation device of a second embodiment of the present invention;

Fig. 5 is a view taken from the direction of the arrow "B" of Fig. 4; and

Fig. 6 is a view similar to Fig. 1, but showing an exhaust gas recirculation device of a third embodiment of the present invention.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0012] In the following, three embodiments 100, 200 and 300 of the present invention will be described in detail with reference to the accompanying drawings.

[0013] For ease of understanding, various directional terms, such as, right, left, upper, lower, rightward and the like are used in the following description. However, such terms are to be understood with respect to only a drawing or drawings on which a corresponding part or portion is shown.

[0014] Referring to Figs. 1 to 3 of the drawings, there is shown an exhaust gas recirculation (EGR) device 100 which is a first embodiment of the present invention.

[0015] Although not shown in the drawings, the EGR device 100 is arranged in an EGR piping that has an EGR gas inlet exposed to an interior of an exhaust passage of an associated internal combustion engine and an EGR gas outlet exposed to an interior of an air intake passage of the engine.

[0016] As is well seen from Fig. 1, the EGR device 100 comprises a cylindrical housing (or first elongate casing) 1 that has inlet and outlet ports 2 and 3 at axially opposed ends thereof. To the inlet and outlet ports 2 and 3 of the housing 1, there are connected respective flanges 4A and 4B. Upon assembly in the EGR piping, the flanges 4A and 4B are connected through bolts (not shown) to their counterparts (viz., flanges) of the piping. Of course, in place of the bolts, soldering, welding, brazing and the like may be used for connecting the device 100 to the piping.

[0017] Within the cylindrical housing 1, there is coaxially disposed a cylindrical casing (or second elongate casing) 5. As will become apparent hereinafter, the cylindrical casing 5 serves as a means for cooling EGR gas

directed to the air intake passage of the engine.

[0018] The cylindrical casing 5 is of a double tube type including coaxially arranged inner and outer tubes 5a and 5b which have respective axial ends hermetically soldered to form therebetween a cylindrical water passage 6. Preferably, the inner and outer tubes 5a and 5b are constructed of a thin metal plate such as a stainless steel or the like.

[0019] As shown in Fig. 1, the outer tube 5b has at axially opposed portions thereof respective openings (no numerals) to which water inlet and outlet pipes 7 and 8 are connected through soldering or the like. These water inlet and outlet pipes 7 and 8 are connected through respective tubes (not shown) to outlet and inlet portions of a source of a cooling water, such as a source of engine cooling water. As shown, the cylindrical housing 1 has depressed apertures (no numerals) through which the water inlet and outlet pipes 7 and 8 extend radially outward. Under operation of the associated engine, the cooling water is led into the cylindrical water passage 6 through the water inlet pipe 7 and returned back to the source of the cooling water through the water outlet pipe 8. As will be described in detail hereinafter, during flowing of the cooling water in the cylindrical water passage 6, a heat exchanging is carried out between the cooling water and EGR gas flowing in and outside of the cylindrical casing 5.

[0020] As shown, between the cylindrical housing 1 and the cylindrical casing 5, there is coaxially arranged a cylindrical partition tube (or third elongate casing) 9. The partition tube 9 has portions (no numerals) secured to the water inlet and outlet pipes 7 and 8, so that the tube 9 is stably held in the housing 1. Due to provision of the cylindrical partition tube 9, there is defined a cylindrical bypass passage 10 between an inner surface of the cylindrical housing 1 and an outer surface of the cylindrical partition tube 9.

[0021] In the cylindrical casing 5, there is defined a first gas cooling passage 11 that is cylindrical in shape, and between an inner surface of the cylindrical partition tube 9 and an outer surface of the cylindrical casing 5 (more specifically, the outer tube 5b), there is defined a second gas cooling passage 12 that is cylindrical in shape.

[0022] As shown in Fig. 1, the bypass passage 10, the first gas cooling passage 11 and the second gas cooling passage 12 have respective inlet portions exposed to the inlet port 2 of the cylindrical housing 1 and respective outlet portions exposed to the outlet port 3 of the cylindrical housing 1. Thus, each of the passages 10, 11 and 12 permits EGR gas to flow therein from the inlet port 2 toward the outlet port 3.

[0023] As is understood from the drawing, only EGR gas flowing in the first and second gas cooling passages 11 and 12 is permitted to carry out a heat exchanging with the cooling water flowing in the water passage 6 of the cylindrical casing 5. That is, the EGR gas flowing in the bypass passage 10 is not permitted to carry out such heat exchanging with the cooling water in the water pas-

sage 6.

[0024] For improving the heat exchanging between EGR gas in the first gas cooling passage 11 and the cooling water in the water passage 6, the inner tube 5a of the cylindrical case 5 has at its inner surface a plurality of heat exchanging fins 13 soldered thereto, and for the same reason between EGR gas in the second gas cooling passage 12 and the cooling water in the water passage 6, the outer tube 5b of the cylindrical case 5 is formed with a bellows or corrugated portion 14.

[0025] As shown, the respective apertured portions of the cylindrical housing 1, the cylindrical partition tube 9 and the outer tube 5b to which the water inlet or outlet pipe 7 or 8 is secured are intimately pressed and coupled to one another, so that the cylindrical casing 5 and the cylindrical partition tube 9 are tightly and stably held in the cylindrical housing 1.

[0026] In the cylindrical housing 1 near the inlet port 2, there is arranged a gas flow rate controller 15 that adjusts a gas flow rate among the bypass passage 10, the first gas cooling passage 11 and the second gas cooling passage 12.

[0027] As is understood from Figs. 1, 2 and 3, the gas flow rate controller 15 is installed in the flange 4A connected to the inlet port 2 of the cylindrical housing 1.

[0028] As is seen from Figs. 1 and 2, the gas flow rate controller 15 comprises a pair of butterfly valves which are arranged in a parallel manner. Each butterfly valve includes a pivot shaft 16a that extends perpendicular to an axis of the cylindrical housing 1, and a valve plate 16 that is secured to the pivot shaft 16a to pivot therewith. As is seen from the drawings, the two pivot shafts 16a and 16a are symmetrically arranged with respect to the axis of the first gas cooling passage 11.

[0029] As is understood from Figs. 1 and 2, each valve plate 16 has a semicircular shape whose rounded outer periphery becomes in coincidence with the cylindrical inner surface of an inlet of the second gas cooling passage 12 when the valve plate 16 takes an inclined position (viz., the position shown by the dot-dash line) that will be described in the following.

[0030] As is seen from Fig. 1, when the valve plates 16 and 16 are in their flat positions as shown by the solid line, the EGR gas is led into all the bypass passage 10 and the first and second gas cooling passages 11 and 12 freely, more specifically, without being obstructed by the valve plates 16 and 16, while, when the valve plates 16 and 16 are in their inclined positions as shown by the dot-dash line, the amount of EGR gas led to the first and second gas cooling passages 11 and 12 is greatly reduced as compared with the amount of EGR gas led to the bypass passage 10. As is seen from the drawing, when the valve plates 16 and 16 take the inclined positions, shorter base parts of the valve plates 16 and 16 become close to each other thereby limiting the passage defined between the valve plates 16 and 16.

[0031] Referring to Figs. 2 and 3, there is shown an actuating mechanism for the gas flow rate controller 15.

That is, the angular position of the valve plates 16 and 16 of the gas flow rate controller 15 is controlled by the actuating mechanism that is powered by a negative pressure produced in the intake passage of the engine.

[0032] As is seen from Fig. 2, the two pivot shafts 16a have extending portions that are exposed to the outside of the cylindrical housing 1.

[0033] As is seen from Fig. 3, the exposed extending portions of the pivot shafts 16a are actuated by a diaphragm type actuator 17 through respective link mechanisms 19 and 19.

[0034] That is, each link mechanism 19 comprises a first link 19a having one end fixed to the pivot shaft 16a, and a second link 19b having one end pivotally connected to the other end of first link 19a through a pivot pin 19c. The other ends of the second links 19b and 19b of the two link mechanisms 19 and 19 are pivotally connected through a pivot pin 19d to a plunger 18 of the actuator 17. The actuator 17 is mounted to the outer surface of the cylindrical housing 1 and powered by a negative pressure produced in a throttle zone of the intake passage of the associated internal combustion engine.

[0035] Although not well shown in the drawings, the diaphragm type actuator 17 comprises generally a casing and a diaphragm installed in the casing to define therein a work chamber. The diaphragm has the other end of the plunger 18 fixed thereto, and the work chamber is connected through a tube to the throttle zone of the intake passage of the engine. Although not shown in the drawing, a pressure controller is arranged in the tube so that the negative pressure applied to the actuator 17 is controlled in accordance with an operation condition of the engine.

[0036] In place of the diaphragm type actuator 17, an electric type actuator or a hydraulic type actuator may be used.

[0037] Referring back to Fig. 1, the actual inlet of the bypass passage 10 is positioned much closer to the inlet port 2 of the cylindrical housing 1 than that of the cylindrical casing 5 is positioned. As is seen from this drawing, each valve plate 16 of the gas flow rate controller 15 is positioned and arranged to pivotally move the rounded outer periphery thereof in a limited zone that is defined in the inlet portion of the cylindrical housing 1 between the actual inlet of the bypass passage 10 and that of the cylindrical casing 5.

[0038] When the associated engine is in operation keeping its temperature relatively high, the pressure controller controls the negative pressure applied to the actuator 17 in such a manner that the valve plates 16 and 16 take their flat positions as shown by the solid line. In this condition, the EGR gas is led freely to all the bypass passage 10 and the first and second gas cooling passages 11 and 12. During the flow of EGR gas in the first and second gas cooling passages 11 and 12, heat exchanging is carried out between EGR gas and the cooling water in the water passage 6, and thus, the EGR gas directed to the air intake passage of the engine is suitably

cooled. As is described hereinabove, this is advantageous for reducing nitrogen oxides (NOx) and particulates in the exhaust gas discharged from the engine.

[0039] While, when, like in case just after engine starting, the engine temperature is relatively low, the pressure controller controls the negative pressure applied to the actuator 17 in such a manner that the valve plates 16 and 16 take their inclined positions as shown by the dot-dash line. Under this condition, almost all EGR gas is led to the bypass passage 10 bypassing the first and second gas cooling passages 11 and 12. Thus, the EGR gas directed to the air intake passage of the engine is not cooled. It is to be noted that under this condition, the gas left in the second gas cooling passage 12 serves as a heat insulating layer and thus the EGR gas flowing in the bypass passage 10 is not affected or cooled by the cooling water in the water passage 6. Thus, ironical increase of nitrogen oxides (NOx) and particulates in the exhaust gas, which would occur when the engine temperature is low, is suppressed or at least minimized.

[0040] As is described hereinabove, the pressure controller arranged between the actuator 17 and the throttle zone of the intake passage of the engine is so constructed that the negative pressure applied to the actuator 17 is controlled in accordance with the operation condition of the engine. This means that the angular position of the two valve plates 16 and 16, that is, the rate between the amount of EGR gas flowing in both the first and second gas cooling passages 11 and 12 and the amount of EGR gas flowing in the bypass passage 10 is continuously controlled in accordance with the operation condition of the engine. Thus, the temperature of EGR gas fed back to the intake passage of the engine can be suitably controlled in accordance with the engine operation condition.

[0041] As is mentioned hereinabove, by operating the gas flow rate controller 15 of the EGR device 100 in accordance with the engine operation condition, the flow rate between the amount of EGR gas flowing in both the first and second gas cooling passages 11 and 12 and the amount of EGR gas flowing in the bypass passage 10 is optimally controlled.

[0042] In the EGR device 100, the three gas flow passages 10, 11 and 12 and the cooling water passage 6 are defined by the three cylindrical members 1, 9 and 5 which are coaxially assembled. Thus, the EGR device 100 can have a compact size, which is quite advantageous when mounting the device 100 to a limited space such as an engine room of current wheeled motor vehicles.

[0043] In the EGR device 100, in case of reducing EGR gas flow in the first and second gas cooling passages 11 and 12 (that is, in case of increasing EGR gas flow in the bypass passage 10), the valve plates 16 and 16 of the gas flow rate controller 15 are pivoted outward with respect to the axis of the cylindrical housing 1. In this case, the valve plates 16 and 16 can serve as a guide means through which the EGR gas flow is smoothly guided toward the bypass passage 10. While, in case of increasing

EGR gas flow in the first and second gas cooling passages 11 and 12 (that is, in case of reducing EGR gas flow in the bypass passage 10), the valve plates 16 and 16 are pivoted inward to take the flat positions that are in parallel with the axis of the cylindrical housing 1. In this case, the valve plates 16 and 16 have substantially no effect on the flowing of EGR gas in the first and second gas cooling passages 11 and 12.

[0044] In the foregoing description, the gas flow rate controller 15 is described to be arranged in the inlet port 2 of EGR device 100. However, if desired, such controller 15 may be arranged in the outlet port 3 of the device 100.

[0045] In the foregoing description, the gas flow rate controller 15 is described to be constructed to have the two valve plates 16 and 16. However, if desired, the gas flow rate controller 15 may have only one valve plate or more than two valve plates.

[0046] Referring to Figs. 4 and 5, there is shown an exhaust gas recirculation (EGR) device 200 which is a second embodiment of the present invention.

[0047] Since the EGR device 200 of this second embodiment is similar in construction to the EGR device 100 of the above-mentioned first embodiment, the following description on the second embodiment 200 will be directed to only parts or portions that are different from those of the first embodiment 100.

[0048] As shown in Fig. 4, in this second embodiment 200, the water inlet and outlet pipes 7 and 8 are arranged to project radially outward from axially and diametrically opposite portions of the cylindrical housing 1. As shown, the measures with which the water inlet or outlet pipe 7 or 8 is integrally connected to the depressed apertures of the cylindrical housing 1, the cylindrical partition tube 9 and the outer tube 5b of the cylindrical casing 5 are substantially the same as the measures mentioned in the first embodiment 100.

[0049] As is seen from Fig. 4, in this second embodiment 200, a slide-rotary type gas flow rate controller 115 is employed.

[0050] That is, the flow rate controller 115 comprises a conical guide member 20 that is connected at its larger peripheral edge to an inlet edge of the cylindrical partition tube 9. Due to provision of a conical wall of the guide member 20, the EGR gas flow in the inlet port 2 toward the inlet of the bypass passage 10 is smoothly carried out.

[0051] As is seen from Figs. 4 and 5, particularly Fig. 5, the conical wall of the conical guide member 20 is formed with four identical sector openings 21 that are circumferentially arranged at evenly spaced intervals. Thus, when, as is seen from Fig. 4, these openings 21 are kept open, the EGR gas in the inlet port 2 is permitted to flow toward the first and second gas cooling passages 11 and 12 through the openings 21.

[0052] Referring back to Fig. 4, a conical valve member 22 is coaxially and rotatably received in the conical guide member 20.

[0053] As is seen from Figs. 4 and 5, particularly Fig. 5, a conical wall of the conical valve member 22 is formed

with four identical sector openings 23 that are circumferentially arranged at evenly spaced intervals and identical in shape and size to the four openings 21 of the above-mentioned conical guide member 20.

[0054] As is seen from Fig. 4, the conical valve member 22 has a center portion from which a control rod 24 extends axially outward (viz., leftward in the drawing) through a center opening (no numeral) of the conical guide member 20. Although not shown in the drawing, a leading end of the control rod 24 is connected to an actuator so that the control rod 24 is rotated about its axis in accordance with an operation condition of the associated internal combustion engine.

[0055] When, due to turning of the conical valve member 22 to a first given angular position, the sector openings 23 of the conical valve member 22 become in coincidence with the sector openings 21 of the conical guide member 20, the gas flow rate controller 115 assumes a full-open position. While, when, due to turning of the conical valve member 22 to a second given angular position, the sector openings 23 of the conical valve member 22 are fully closed by a solid portion of the conical wall of the conical guide member 20, the gas flow rate controller 115 assumes a full-close position. Thus, when, due to turning of the control rod 24, the conical valve member 22 is turned between the first and second given angular positions, an open degree of the sector openings 21 of the conical guide member 20 is varied.

[0056] In the EGR device 200 of this second embodiment, due to provision of the conical guide member 20, the EGR gas in the inlet port 2 can be smoothly led to the inlet of the bypass passage 10. When the flow rate controller 115 takes the full-close position, the sector openings 23 of the conical valve member 22 are fully and intimately closed by the solid part of the conical guide member 20. Thus, in this condition, almost all of EGR gas in the inlet port 2 can be led to the bypass passage 10. Due to the nature of the flow rate controller 115 of this slide - rotary type, undesired play, which would cause a noise in operation, is suppressed or at least minimized.

[0057] Referring to Fig. 6, there is shown an exhaust gas circulation (EGR) device 300 which is a third embodiment of the present invention.

[0058] Since, like the above-mentioned second embodiment 200, the EGR device 300 of this third embodiment is similar in construction to the EGR device 100 of the first embodiment, the following description on the third embodiment 300 will be directed to only parts or portions that are different from those of the first embodiment 100.

[0059] As is seen from Fig. 6, in this third embodiment 300, the water inlet and outlet pipes 7 and 8 are arranged to project radially outward from axially opposite and diametrically opposite portions of the cylindrical housing 1, like the above-mentioned second embodiment 200. Furthermore, the measures with which the water inlet or outlet pipe 7 or 8 is integrally connected to the depressed apertures of the cylindrical housing 1, the cylindrical par-

titution tube 9 and the outer tube 5b of the cylindrical casing 5 are substantially the same as the measures mentioned in the first embodiment 100.

[0060] As is understood from the drawing, in the EGR device 300 of the third embodiment, the inner tube 5a of the cylindrical case 5 is entirely formed with a bellows or corrugated portion 25 in place of the heat exchanging fins (13, see Fig. 1) of the first embodiment 100. The outer tube 5b of the cylindrical case 5 is formed with the bellows or corrugated portion 14, like in the first and second embodiments 100 and 200.

[0061] As is seen from the drawing, in this third embodiment 300, a bimetal type gas flow rate controller 215 is used.

[0062] That is, the flow rate controller 215 comprises a circular frame 31 that is fitted in the inlet port 2 of the cylindrical housing 1, and a pair of temperature sensitive valve plates 30 and 30 that are made of a bimetal material and have base ends held by the circular frame 31. Preferably, the valve plates 30 and 30 are made of a shape memory alloy.

[0063] Each valve plate 30 has a semicircular shape whose rounded outer periphery becomes in coincidence with the cylindrical inner surface of the inlet of the second gas cooling passage 12 when the valve plate 30 takes a largely bent position. Denoted by numeral 32 is a conical gas inlet member that is fixed to the inlet port 2 of the cylindrical housing 1 for smoothing the flow of EGR gas toward the inlet port 2.

[0064] As is seen from the drawing, when the valve plates 30 and 30 are in their generally flat positions as shown by the broken line, the EGR gas is led into all the bypass passage 10 and the first and second gas cooling passages 11 and 12 freely, more specifically, without being obstructed by the valve plates 30 and 30, while, when the valve plates 30 and 30 are in their largely bent positions as shown by the solid line, the amount of EGR gas led to the first and second gas cooling passages 11 and 12 is greatly reduced as compared with the amount of EGR gas led to the bypass passage 10.

[0065] When the associated engine is in operation keeping its temperature relatively high, the temperature of the exhaust gas discharged from the engine is relatively high, and thus, the temperature of EGR gas directed toward the EGR device 300 is relatively high. Under this condition, the temperature sensitive valve plates 30 and 30 take the generally flat positions as shown by the broken line. In this condition, the EGR gas is led to all the bypass passage 10 and the first and second gas cooling passages 11 and 12 as is described hereinabove. During the flow of EGR gas in the first and second gas cooling passages 11 and 12, heat exchanging is carried out between EGR gas and the cooling water in the water passage 6, and thus, the EGR gas directed to the air intake passage of the engine is suitably cooled.

[0066] While, when, like in case just after engine starting, the engine temperature is relatively low, the temperature of the exhaust gas discharged from the engine is

relatively low and thus, the temperature of EGR gas directed toward the EGR device 300 is relatively low. Under this condition, the temperature sensitive valve plates 30 and 30 take the largely bent positions as shown by the solid line. In this condition, almost all EGR gas is led to the bypass passage 10 bypassing the first and second gas cooling passages 11 and 12. Thus, the EGR gas directed to the air intake passage of the engine is not cooled.

[0067] In the EGR device of this third embodiment 300, the temperature sensitive valve plates 30 and 30 serve as an actuator. In other words, in this third embodiment 300, there is no need of using a separate actuator such as one that is actually used in the above-mentioned first and second embodiments 100 and 200. Thus, much compact, simple and light weight construction is expected in the EGR device 300 of this third embodiment.

[0068] In the foregoing explanation, the housing 1, the partition tube 9 and the casing 5 are described to have a cylindrical shape. However, if desired, such members 1, 9 and 5 may be of a type that has a rectangular, pentagonal or other polygonal cross section.

[0069] The entire contents of Japanese Patent Application 2004-009960 filed January 19, 2004 are incorporated herein by reference.

[0070] Although the invention has been described above with reference to the embodiments of the invention, the invention is not limited to such embodiments as described above. Various modifications and variations of such embodiments may be carried out by those skilled in the art, in light of the above description.

Claims

1. An exhaust gas recirculation device of an internal combustion engine, comprising:

a first elongate casing having gas inlet and outlet ports at axially opposed ends;
 a second elongate casing received in the first elongate casing to define therebetween an axially extending space, the second elongate casing including a first gas flow passage and a water flow passage that surrounds the first gas flow passage, the first gas flow passage having an inlet part exposed to the gas inlet port and an outlet part exposed to the gas outlet port;
 a third elongate casing received in the axially extending space to define between the first elongate casing and the third elongate casing a bypass passage and between the third elongate casing and the second elongate casing a second gas flow passage, the bypass passage and the second gas flow passage having each an inlet part exposed to the gas inlet port and an outlet part exposed to the gas outlet port; and
 a gas flow rate controller installed in either one

of the gas inlet and outlet ports of the first elongate casing to control a gas flow rate among the bypass passage, the first gas flow passage and the second gas flow passage.

2. An exhaust gas recirculation device as claimed in Claim 1, in which the gas flow rate controller is constructed to control the rate between the amount of gas flowing in both the first and second gas flow passages and the amount of gas flowing in the bypass passage.
3. An exhaust gas recirculation device as claimed in Claim 1, in which the gas flow rate controller is installed in the gas inlet port of the first elongate casing and comprises:

a valve member that is movable between a first position wherein the gas flow from the inlet port toward the bypass passage, the first gas flow passage and the second gas flow passage is freely carried out without being obstructed by the valve plate and a second position wherein the gas flow from the inlet port toward the first and second gas flow passages is reduced as compared with the gas flow from the inlet port toward the bypass passage.

4. An exhaust gas recirculation device as claimed in Claim 3, further comprising an actuating mechanism that continuously moves the valve member between the first and second positions.

5. An exhaust gas recirculation device as claimed in Claim 4, in which the valve member comprises:

a pair of pivot shafts arranged in the inlet port in a parallel manner; and
 a pair of valve plates secured respectively to the pivot shafts to pivot therewith,
 wherein the pivot shafts being actuated to rotate about respective axes thereof by the actuating mechanism.

6. An exhaust gas recirculation device as claimed in Claim 5, in which the actuating mechanism comprises:

an actuator mounted to the first elongate casing; and
 a pair of link mechanisms, each being operatively interposed between the actuator and corresponding one of the pivot shafts.

7. An exhaust gas recirculation device as claimed in Claim 6, in which the actuator is a diaphragm type actuator powered by a negative pressure produced in a throttle zone of an intake passage of the engine.

8. An exhaust gas recirculation device as claimed in Claim 6, in which each of the link mechanisms comprises:

a first link having one end fixed to corresponding one of the pivot shafts; 5
a second link having one end pivotally connected to the other end of the first link and the other end pivotally connected to a plunger of the actuator. 10

9. An exhaust gas recirculation device as claimed in Claim 1, in which the second elongate casing is of a double tube type comprising coaxially arranged inner and outer tubes which have respective axial ends to form therebetween the water flow passage, the inner tube defining therein the first gas flow passage. 15

10. An exhaust gas recirculation device as claimed in Claim 9, in which the inner tube is formed with heat exchanging means, and in which the outer tube is formed with a bellows or corrugated portion. 20

11. An exhaust gas recirculation device as claimed in Claim 10, in which the heat exchanging means is one of a plurality of fins soldered to an inner surface of the inner tube and a bellows or corrugated portion formed on the inner tube. 25

12. An exhaust gas recirculation device as claimed in Claim 1, further comprising water inlet and outlet pipes each having an inner end exposed to the water flow passage of the second elongate casing. 30

13. An exhaust gas recirculation device as claimed in Claim 12, in which the water inlet and outlet pipes are arranged at axially opposed and diametrically same positions of the first elongate casing. 35

14. An exhaust gas recirculation device as claimed in Claim 12, in which the water inlet and outlet pipes are arranged at axially opposed and diametrically opposed positions of the first elongate casing. 40

15. An exhaust gas recirculation device as claimed in Claim 4, in which the gas flow rate controller comprises:

a conical guide member secured to the third elongate casing, the conical guide member being formed at a conical wall thereof with a plurality of first openings; 50
a conical valve member coaxially and rotatably received in the conical guide member, the conical valve member being formed at a conical wall thereof with a plurality of second openings, the conical valve member being turned between an open position wherein the first and second open-

ings are mated and a close position wherein the first and second openings are not mated; and a control rod having one end that passes through a center opening of the conical guide member to be secured to a center portion of the conical valve member, the control rod having the other end connected to the actuator.

16. An exhaust gas recirculation device as claimed in Claim 15, in which the conical wall of the conical guide member is arranged to smooth EGR gas flow from the gas inlet port of the first elongate casing toward an inlet of the bypass passage.

17. An exhaust gas recirculation device as claimed in Claim 4, in which gas flow rate controller comprises:

a frame member fitted in the gas inlet port of the first elongate casing; and
a pair of thermally sensitive valve plates, each having a base end that is held by the frame member and a free portion that shows a deformation when applied with a heat, the free portion being flexed by the heat between a first position wherein the gas flow from the gas inlet port toward the bypass passage, the first gas flow passage and the second gas flow passage is freely carried out without being obstructed by the valve plates and a second position wherein the gas flow from the gas inlet port toward the first and second gas flow passages is reduced as compared with the gas flow from the gas inlet port toward the bypass passage, wherein the thermally sensitive valve plates are so arranged that the free portion of each valve plate takes the second position when the gas led into the gas inlet port of the first elongate casing is relatively low.

18. An exhaust gas recirculation device as claimed in Claim 17, in which the thermally sensitive valves plates are constructed of a bimetal or a shape memory alloy.

19. An exhaust gas recirculation device as claimed in Claim 18, further comprising a conical gas inlet member that is fixed to the gas inlet port of the first elongate casing to smooth the gas flow toward the gas inlet port.

20. An exhaust gas recirculation device of an internal combustion engine, comprising:

a first elongate casing having gas inlet and outlet ports at axially opposed ends;
a second elongate casing received in the first elongate casing to define therebetween an axially extending space, the second elongate cas-

ing including a first gas flow passage and a water flow passage that surrounds the first gas flow passage, the first gas flow passage having an inlet part exposed to the gas inlet port and an outlet part exposed to the gas outlet port; a third elongate casing received in the axially extending space to define between the first elongate casing and the third elongate casing a bypass passage and between the third elongate casing and the second elongate casing a second gas flow passage, the bypass passage and the second gas flow passage having each an inlet part exposed to the gas inlet port and an outlet part exposed to the gas outlet port; and a gas flow rate controller installed in the gas inlet port of the first elongate casing to control a rate between the amount of gas flowing in both the first and second gas flow passages and the amount of gas flowing in the bypass passage.

Patentansprüche

1. Abgasrückführungsvorrichtung einer Brennkraftmaschine, aufweisend:

ein erstes langgestrecktes Gehäuse mit Gaseinlass- und Gasauslass-Öffnungen an axial gegenüberliegenden Enden;
 ein zweites langgestrecktes Gehäuse, aufgenommen in dem ersten langgestreckten Gehäuse, um dazwischen einen sich axial erstreckenden Raum zu bilden, wobei das zweite langgestreckte Gehäuse einen ersten Gasströmungskanal und einen Wasserströmungskanal, der den ersten Gasströmungskanal umgibt, enthält, der erste Gasströmungskanal ein Einlassteil, freigelegt zu der Gaseinlassöffnung, und ein Auslassteil, freigelegt zu der Gasauslassöffnung, hat;
 ein drittes langgestrecktes Gehäuse, aufgenommen in dem sich axial erstreckenden Raum, um zwischen dem ersten langgestreckten Gehäuse und dem dritten langgestreckten Gehäuse einen Bypasskanal, und zwischen dem dritten langgestreckten Gehäuse und dem zweiten langgestreckten Gehäuse einen zweiten Gasströmungskanal zu bilden, wobei der Bypasskanal und der zweite Gasströmungskanal jeweils ein Einlassteil, freigelegt zu der Gaseinlassöffnung, und ein Auslassteil, freigelegt zu der Gasauslassöffnung, hat; und
 eine Gasströmungsraten-Steuerungseinrichtung, installiert in einer von der Gaseinlassöffnung oder Gasauslassöffnung des ersten langgestreckten Gehäuses, um eine Gasströmungsrate zwischen dem Bypasskanal, dem ersten Gasströmungskanal und dem zweiten Gas-

strömungskanal, zu steuern.

2. Abgasrückführungsvorrichtung nach Anspruch 1, in der die Gasströmungsraten-Steuerungseinrichtung gebildet ist, um die Rate zwischen der Gasmenge, die in sowohl dem ersten, als auch dem zweiten Gasströmungskanal strömt, und die Gasmenge, die in dem Bypasskanal strömt, zu steuern.

3. Abgasrückführungsvorrichtung nach Anspruch 1, in der die Gasströmungsraten-Steuerungseinrichtung in der Gaseinlassöffnung des ersten langgestreckten Gehäuses installiert ist und aufweist:

ein Ventiltteil, das bewegbar ist zwischen einer ersten Position, in der die Gasströmung von der Einlassöffnung in Richtung zu dem Bypasskanal, dem ersten Gasströmungskanal und dem zweiten Gasströmungskanal frei erfolgt, ohne durch die Ventilplatte behindert zu werden, und einer zweiten Position, in der der Gasstrom von der Gaseinlassöffnung in Richtung zu dem ersten und zweiten Gasströmungskanal reduziert ist, im Vergleich mit dem ersten Gasstrom von der Gaseinlassöffnung in Richtung zu dem Bypasskanal.

4. Abgasrückführungsvorrichtung nach Anspruch 3, außerdem aufweisend eine Betätigungsvorrichtung, die fortlaufend das Ventiltteil zwischen der ersten und zweiten Position bewegt.

5. Abgasrückführungsvorrichtung nach Anspruch 4, in der das Ventiltteil aufweist:

ein Paar von Drehwellen, parallel angeordnet in der Einlassöffnung; und
 ein Paar von Ventilplatten, jeweils an den Drehwellen befestigt, um sich mit ihnen zu drehen, wobei die Drehwellen betätigt werden, um deren jeweilige Achsen durch die Betätigungsvorrichtung zu drehen.

6. Abgasrückführungsvorrichtung nach Anspruch 5, in der die Betätigungsvorrichtung aufweist:

einen Betätiger, montiert an dem langgestreckten Gehäuse; und
 ein Paar von Verbindungsvorrichtungen, jede betrieblich zwischen den Betätiger und die entsprechende eine der Drehwellen eingesetzt.

7. Abgasrückführungsvorrichtung nach Anspruch 6, in der der Betätiger ein Betätiger vom Diaphragma-Typ ist, angetrieben durch einen Unterdruck, erzeugt in der Drosselzone eines Einlasskanales der Brennkraftmaschine.

8. Abgasrückführungsvorrichtung nach Anspruch 6, in der jede der Verbindungsvorrichtungen aufweist:

eine erste Verbindung, die ein Ende hat, befestigt an der entsprechenden einen der Drehwellen; 5
eine zweite Verbindung, die ein Ende hat, schwenkbar verbunden mit dem anderen Ende der ersten Verbindung und das andere Ende schwenkbar verbunden mit einem Kolben des Betätigers. 10

9. Abgasrückführungsvorrichtung nach Anspruch 1, in der das zweite langgestreckte Gehäuse von einem Doppelrohr- Typ ist, aufweisend coaxial angeordnet ein Innen- und ein Außen- Rohr, die jeweils axiale Enden haben, um dazwischen den Wasserströmungskanal zu bilden, wobei das Innenrohr darin den ersten Gasströmungskanal bildet. 15

10. Abgasrückführungsvorrichtung nach Anspruch 9, in der das Innenrohr mit einer Wärmeaustauscheinrichtung gebildet ist und in der das Außenrohr mit einem faltenbalgartigen oder gewellten Abschnitt gebildet ist. 20 25

11. Abgasrückführungsvorrichtung nach Anspruch 10, in der die Wärmeaustauscheinrichtung eine von einer Mehrzahl von Rippen ist, gelötet an eine innere Oberfläche des Innenrohres, und ein faltenbalgartigen oder gewellter Abschnitt, gebildet an dem Innenrohr. 30

12. Abgasrückführungsvorrichtung nach Anspruch 1, außerdem aufweisend Wassereinlass- und Wasserauslass- Rohre, wobei jedes ein inneres Ende hat, freigelegt zu dem Wasserströmungskanal des zweiten langgestreckten Gehäuses. 35

13. Abgasrückführungsvorrichtung nach Anspruch 12, in der die Wassereinlass- und -auslassrohre an axial gegenüberliegenden und in Umfangsrichtung denselben Abschnitten des ersten langgestreckten Gehäuses angeordnet sind. 40 45

14. Abgasrückführungsvorrichtung nach Anspruch 12, in der die Wassereinlass- und -auslassrohre an axial gegenüberliegenden und diametral gegenüberliegenden Abschnitten des ersten langgestreckten Gehäuses angeordnet sind. 50

15. Abgasrückführungsvorrichtung nach Anspruch 4, in der die Gasströmungsraten- Steuerungseinrichtung aufweist: 55

ein konisches Führungsteil, befestigt an dem dritten langgestreckten Gehäuse,
wobei das konische Führungsteil an einer koni-

schen Wand desselben mit einer Mehrzahl von ersten Öffnungen gebildet ist;

ein konisches Ventiltteil coaxial und drehbar in dem konischen Führungsteil aufgenommen ist, wobei das konische Ventiltteil an einer konischen Wand desselben mit einer Mehrzahl von zweiten Öffnungen gebildet ist, das konische Ventiltteil gedreht wird zwischen einer offenen Position, in der die ersten und zweiten Öffnungen zueinander passend sind, und einer geschlossenen Position, in der die ersten und zweiten Öffnungen zueinander nicht passend sind; und einen Steuerstab, der ein Ende hat, das durch eine mittlere Öffnung des konischen Führungsteils hindurchgeht, um an einem Mittelabschnitt des konischen Ventiltteiles befestigt zu werden, wobei das andere Ende des Steuerstabes, mit dem Betätiger verbunden ist.

16. Abgasrückführungsvorrichtung nach Anspruch 15, in der die konische Wand des konischen Führungsteiles angeordnet ist, die EGR- Gasströmung von der Gaseinlassöffnung des ersten langgestreckten Gehäuses in Richtung zu einem Einlass des Bypass-Kanales zu glätten. 25

17. Abgasrückführungsvorrichtung nach Anspruch 4, in der die Gasströmungsraten- Steuerungseinrichtung aufweist:

ein Rahmenteil, eingesetzt in die Gaseinlassöffnung des ersten langgestreckten Gehäuses; und

ein Paar von thermisch empfindsamen Ventilplatten, wobei jede ein Basisende hat, das durch das Rahmenteil gehalten wird, und einen freien Abschnitt, der eine Verformung zeigt, wenn mit einer Wärme beaufschlagt wird, wobei der freie Abschnitt durch die Wärme zwischen einer ersten Position, in der der Gasstrom aus der Gaseinlassöffnung in Richtung zu dem Bypasskanal, dem ersten Gasströmungskanal und dem zweiten Gasströmungskanal frei ausgeführt wird, ohne durch die Ventilplatten behindert zu werden, und einer zweiten Position, in der der Gasstrom von der ersten Gaseinlassöffnung in Richtung zu dem ersten und zweiten Gasströmungskanal im Vergleich mit dem ersten Gasstrom von der Gaseinlassöffnung in Richtung zu dem Bypasskanal reduziert ist, gebogen wird, wobei die thermisch empfindsamen Ventilplatten so angeordnet sind, dass der freie Abschnitt von jeder Ventilplatte die zweite Position einnimmt, wenn das Gas, geführt in die Gaseinlassöffnung des ersten langgestreckten Gehäuses, relativ gering ist.

18. Abgasrückführungsvorrichtung nach Anspruch 17,

in der die thermisch empfindsamen Ventilplatten aus einem Bimetall oder einer Formgedächtnislegierung gebildet sind.

19. Abgasrückführungsvorrichtung nach Anspruch 18, außerdem aufweisend ein konisches Gaseinleitungsteil, das an der Gaseinlassöffnung des ersten langgestreckten Gehäuses befestigt ist, um den Gasstrom in Richtung zu der Gaseinlassöffnung zu glätten. 5 10

20. Abgasrückführungsvorrichtung einer Brennkraftmaschine, aufweisend:

ein erstes langgestrecktes Gehäuse mit Gaseinlass- und Gassauslass- Öffnungen an axial gegenüberliegenden Enden; 15
ein zweites langgestrecktes Gehäuse, aufgenommen in dem ersten langgestreckten Gehäuse, um dazwischen einen sich axial erstreckenden Raum zu bilden, wobei das zweite langgestreckte Gehäuse einen ersten Gasströmungskanal und einen Wasserströmungskanal, der den ersten Gasströmungskanal umgibt, enthält, der erste Gasströmungskanal ein Einlassteil, freigelegt zu der Gaseinlassöffnung, und ein Auslassteil, freigelegt zu der Gassauslassöffnung, hat; 20
ein drittes langgestrecktes Gehäuse, aufgenommen in dem sich axial erstreckenden Raum, um zwischen dem ersten langgestreckten Gehäuse und dem dritten langgestreckten Gehäuse einen Bypasskanal, und zwischen dem dritten langgestreckten Gehäuse und dem zweiten langgestreckten Gehäuse einen zweiten Gasströmungskanal zu bilden, wobei der Bypasskanal und der zweite Gasströmungskanal jeweils ein Einlassteil, freigelegt zu der Gaseinlassöffnung, und ein Auslassteil, freigelegt zu der Gassauslassöffnung, hat; und 25
eine Gasströmungsraten- Steuerungseinrichtung, installiert in der Gaseinlassöffnung des ersten langgestreckten Gehäuses, um eine Rate zu steuern zwischen der Gasmenge, die in sowohl dem ersten, als auch in dem zweiten Gasströmungskanal strömt, und der Gasmenge, die in dem Bypasskanal strömt. 30 35 40 45

Revendications 50

1. Dispositif de recirculation des gaz d'échappement EGR, soit Exhaust Gas Recirculation, d'un moteur à combustion interne, comprenant :

un premier boîtier allongé comportant des orifices d'entrée et de sortie de gaz à des extrémités axialement opposées ;

un deuxième boîtier allongé logé dans le premier boîtier allongé pour définir entre eux un espace qui s'étend axialement, le deuxième boîtier allongé comprenant un premier passage d'écoulement de gaz et un passage d'écoulement d'eau qui entoure le premier passage d'écoulement de gaz, le premier passage d'écoulement de gaz comportant une partie d'entrée exposée à l'orifice d'entrée de gaz et une partie de sortie exposée à l'orifice de sortie de gaz ;
un troisième boîtier allongé logé dans l'espace qui s'étend axialement pour définir un passage de dérivation entre le premier boîtier allongé et le troisième boîtier allongé et pour définir un deuxième passage d'écoulement de gaz entre le troisième boîtier allongé et le deuxième boîtier allongé, le passage de dérivation et le deuxième passage d'écoulement de gaz comportant chacun une partie d'entrée exposée à l'orifice d'entrée de gaz et une partie de sortie exposée à l'orifice de sortie de gaz ; et
un contrôleur de débit de gaz installé dans un orifice parmi les orifices d'entrée et de sortie de gaz du premier boîtier allongé pour contrôler un débit de gaz entre le passage de dérivation, le premier passage d'écoulement de gaz et le deuxième passage d'écoulement de gaz.

2. Dispositif de recirculation des gaz d'échappement selon la revendication 1, dans lequel le contrôleur de débit de gaz est construit pour contrôler le rapport entre la quantité de gaz qui s'écoule dans les premier et deuxième passages d'écoulement de gaz et la quantité de gaz qui s'écoule dans le passage de dérivation.

3. Dispositif de recirculation des gaz d'échappement selon la revendication 1, dans lequel le contrôleur du débit de gaz est installé dans l'orifice d'entrée de gaz du premier boîtier allongé et comprend :

un élément de vanne qui peut être déplacé entre une première position dans laquelle l'écoulement de gaz depuis l'orifice d'entrée vers le passage de dérivation, le premier passage d'écoulement de gaz et le deuxième passage d'écoulement de gaz s'effectue librement sans être obstrué par la plaque de vanne, et une deuxième position dans laquelle l'écoulement de gaz depuis l'orifice d'entrée vers les premier et deuxième passages d'écoulement de gaz est réduit par rapport à l'écoulement de gaz depuis l'orifice d'entrée vers le passage de dérivation.

4. Dispositif de recirculation des gaz d'échappement selon la revendication 3, comprenant en outre un mécanisme d'actionnement qui déplace continuellement l'élément de vanne entre les première et

deuxième positions.

5. Dispositif de recirculation des gaz d'échappement selon la revendication 4, dans lequel l'élément de vanne comprend :

une paire d'axes de pivotement agencés parallèlement dans l'orifice d'entrée ; et
une paire de plaques de vanne fixées respectivement aux axes de pivotement pour y pivoter, dans lequel les axes de pivotement sont actionnés par le mécanisme d'actionnement pour tourner autour d'axes respectifs correspondants.

6. Dispositif de recirculation des gaz d'échappement selon la revendication 5, dans lequel le mécanisme d'actionnement comprend :

un actionneur monté sur le premier boîtier allongé ; et
une paire de mécanismes de liaison chacun interposé de manière opérationnelle entre l'actionneur et un des axes de pivotement correspondant.

7. Dispositif de recirculation des gaz d'échappement selon la revendication 6, dans lequel l'actionneur est un actionneur de type diaphragme alimenté par une pression négative produite dans une zone d'étranglement d'un passage d'admission du moteur.

8. Dispositif de recirculation des gaz d'échappement selon la revendication 6, dans lequel chacun des mécanismes de liaison comprend :

une première liaison dont une extrémité est fixée à un des axes de pivotement correspondant ;
une deuxième liaison dont une extrémité est connectée de façon pivotante à l'autre extrémité de la première liaison et l'autre extrémité est connectée de façon pivotante à un piston de l'actionneur.

9. Dispositif de recirculation des gaz d'échappement selon la revendication 1, dans lequel le deuxième boîtier allongé est du type à double tube, comprenant des tubes interne et externe agencés coaxialement et ayant des extrémités axiales respectives, qui forment entre eux le passage d'écoulement d'eau, le tube interne définissant en son intérieur le premier passage d'écoulement de gaz.

10. Dispositif de recirculation des gaz d'échappement selon la revendication 9, dans lequel le tube interne est formé avec un moyen d'échange de chaleur, et dans lequel le tube externe est formé avec un soufflet ou une partie ondulée.

11. Dispositif de recirculation des gaz d'échappement selon la revendication 10, dans lequel le moyen d'échange de chaleur est un moyen parmi une pluralité d'ailettes soudées à une surface interne du tube interne et un soufflet ou une partie ondulée formée sur le tube interne.

12. Dispositif de recirculation des gaz d'échappement selon la revendication 1, comprenant en outre des tubes d'entrée et de sortie d'eau ayant chacun une extrémité interne exposée au passage d'écoulement d'eau du deuxième boîtier allongé.

13. Dispositif de recirculation des gaz d'échappement selon la revendication 12, dans lequel les tubes d'entrée et de sortie d'eau sont agencés à des positions axialement opposées et diamétralement identiques du premier boîtier allongé.

14. Dispositif de recirculation des gaz d'échappement selon la revendication 12, dans lequel les tubes d'entrée et de sortie d'eau sont agencés à des positions axialement opposées et diamétralement opposées du premier boîtier allongé.

15. Dispositif de recirculation des gaz d'échappement selon la revendication 4, dans lequel le contrôleur de débit de gaz comprend :

un élément de guidage conique fixé au troisième boîtier allongé, l'élément de guidage conique étant formé sur une paroi conique correspondante avec une pluralité de premières ouvertures ;
un élément de vanne conique logé coaxialement et de manière rotative dans l'élément de guidage conique, l'élément de vanne conique étant formé sur une paroi conique correspondante avec une pluralité de deuxièmees ouvertures, l'élément de vanne conique étant tourné entre une position ouverte dans laquelle les première et deuxième ouvertures sont accouplées et une position fermée dans laquelle les première et deuxième ouvertures ne sont pas accouplées ;
et
une tige de contrôle ayant une extrémité qui traverse une ouverture centrale de l'élément de guidage conique pour être fixée à une partie centrale de l'élément de vanne conique, la tige de contrôle ayant l'autre extrémité connectée à l'actionneur.

16. Dispositif de recirculation des gaz d'échappement selon la revendication 15, dans lequel la paroi conique de l'élément de guidage conique est agencée pour lisser l'écoulement des gaz EGR depuis l'orifice d'entrée de gaz du premier boîtier allongé vers une entrée du passage de dérivation.

17. Dispositif de recirculation des gaz d'échappement selon la revendication 4, dans lequel le contrôleur de débit de gaz comprend :

un élément d'encadrement agencé dans l'orifice d'entrée de gaz du premier boîtier allongé ; et une paire de plaques de vanne thermosensibles qui ont chacune une extrémité de base maintenue par l'élément d'encadrement et une partie libre qui présente une déformation lorsque de la chaleur lui est appliquée, la partie libre étant fléchie par la chaleur entre une première position dans laquelle l'écoulement de gaz depuis l'orifice d'entrée de gaz vers le passage de dérivation, le premier passage d'écoulement de gaz et le deuxième passage d'écoulement de gaz s'effectue librement sans être obstrué par les plaques de vanne, et une deuxième position dans laquelle l'écoulement de gaz depuis l'orifice d'entrée de gaz vers les premier et deuxième passages d'écoulement de gaz est réduit par rapport à l'écoulement de gaz depuis l'orifice d'entrée de gaz vers le passage de dérivation, dans lequel les plaques de vanne thermosensibles sont agencées de telle sorte que la partie libre de chaque plaque de vanne prend la deuxième position lorsque le débit de gaz mené dans l'orifice d'entrée de gaz du premier boîtier allongé est relativement faible.

5
10
15
20
25
30

18. Dispositif de recirculation des gaz d'échappement selon la revendication 17, dans lequel les plaques de vanne thermosensibles sont construites à partir d'un bimétal ou d'un alliage à mémoire de forme.

35

19. Dispositif de recirculation des gaz d'échappement selon la revendication 18, comprenant en outre un élément d'entrée de gaz conique qui est fixé à l'orifice d'entrée de gaz du premier boîtier allongé pour lisser l'écoulement de gaz vers l'orifice d'entrée de gaz.

40

20. Dispositif de recirculation des gaz d'échappement d'un moteur à combustion interne, comprenant :

un premier boîtier allongé comportant des orifices d'entrée et de sortie de gaz à des extrémités axialement opposées ;
un deuxième boîtier allongé logé dans le premier boîtier allongé pour définir entre eux un espace qui s'étend axialement, le deuxième boîtier allongé comprenant un premier passage d'écoulement de gaz et un passage d'écoulement d'eau qui entoure le premier passage d'écoulement de gaz, le premier passage d'écoulement de gaz comportant une partie d'entrée exposée à l'orifice d'entrée de gaz et une partie de sortie exposée à l'orifice de sortie de gaz ;
un troisième boîtier allongé logé dans l'espace

45
50
55

qui s'étend axialement pour définir un passage de dérivation entre le premier boîtier allongé et le troisième boîtier allongé et pour définir un deuxième passage d'écoulement de gaz entre le troisième boîtier allongé et le deuxième boîtier allongé, le passage de dérivation et le deuxième passage d'écoulement de gaz comportant chacun une partie d'entrée exposée à l'orifice d'entrée de gaz et une partie de sortie exposée à l'orifice de sortie de gaz ; et
un contrôleur de débit de gaz installé dans l'orifice d'entrée de gaz du premier boîtier allongé pour contrôler un rapport entre la quantité de gaz qui s'écoule dans les premier et deuxième passages d'écoulement de gaz et la quantité de gaz qui s'écoule dans le passage de dérivation.

FIG.1

100

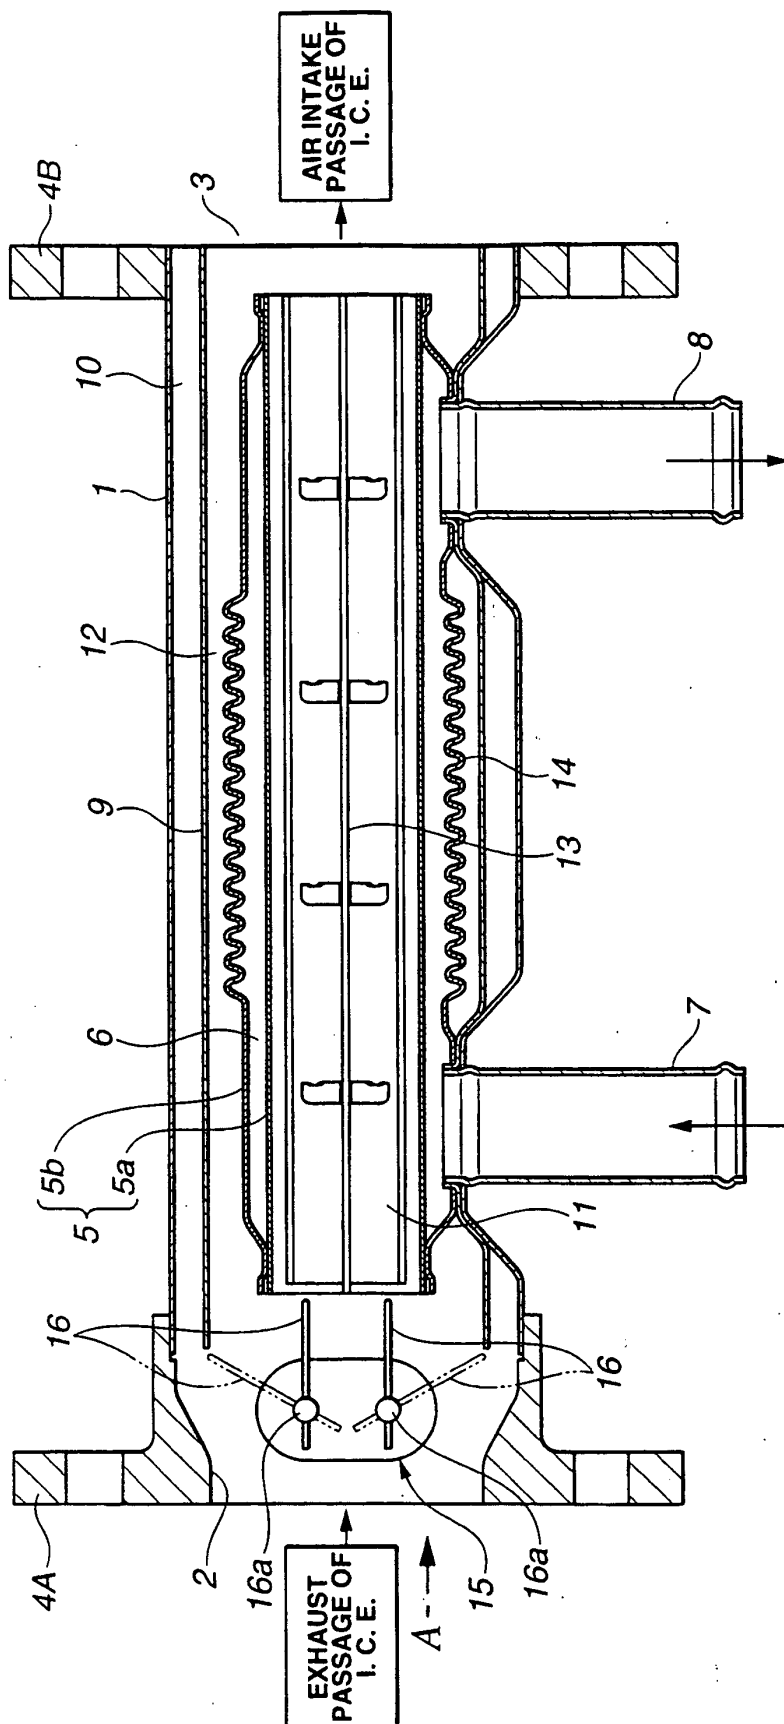


FIG.2

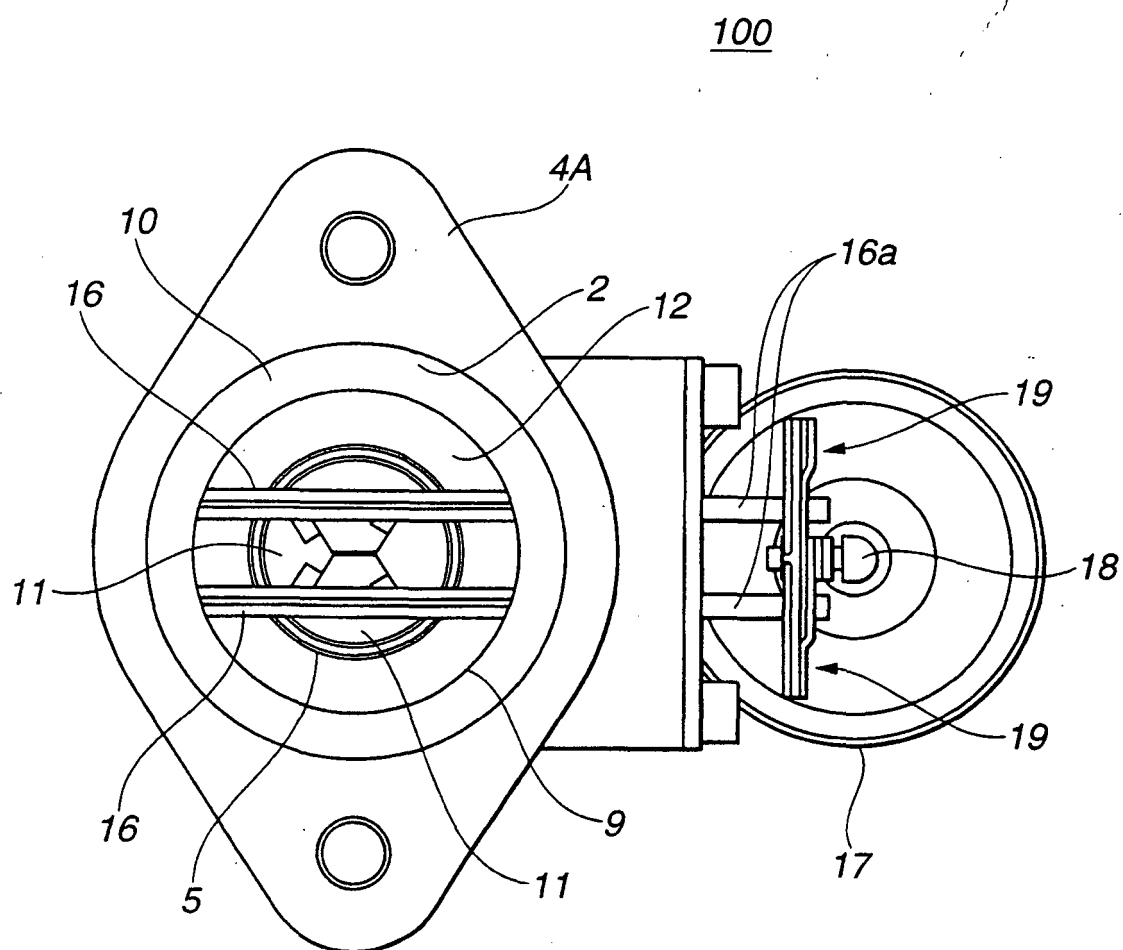


FIG. 3

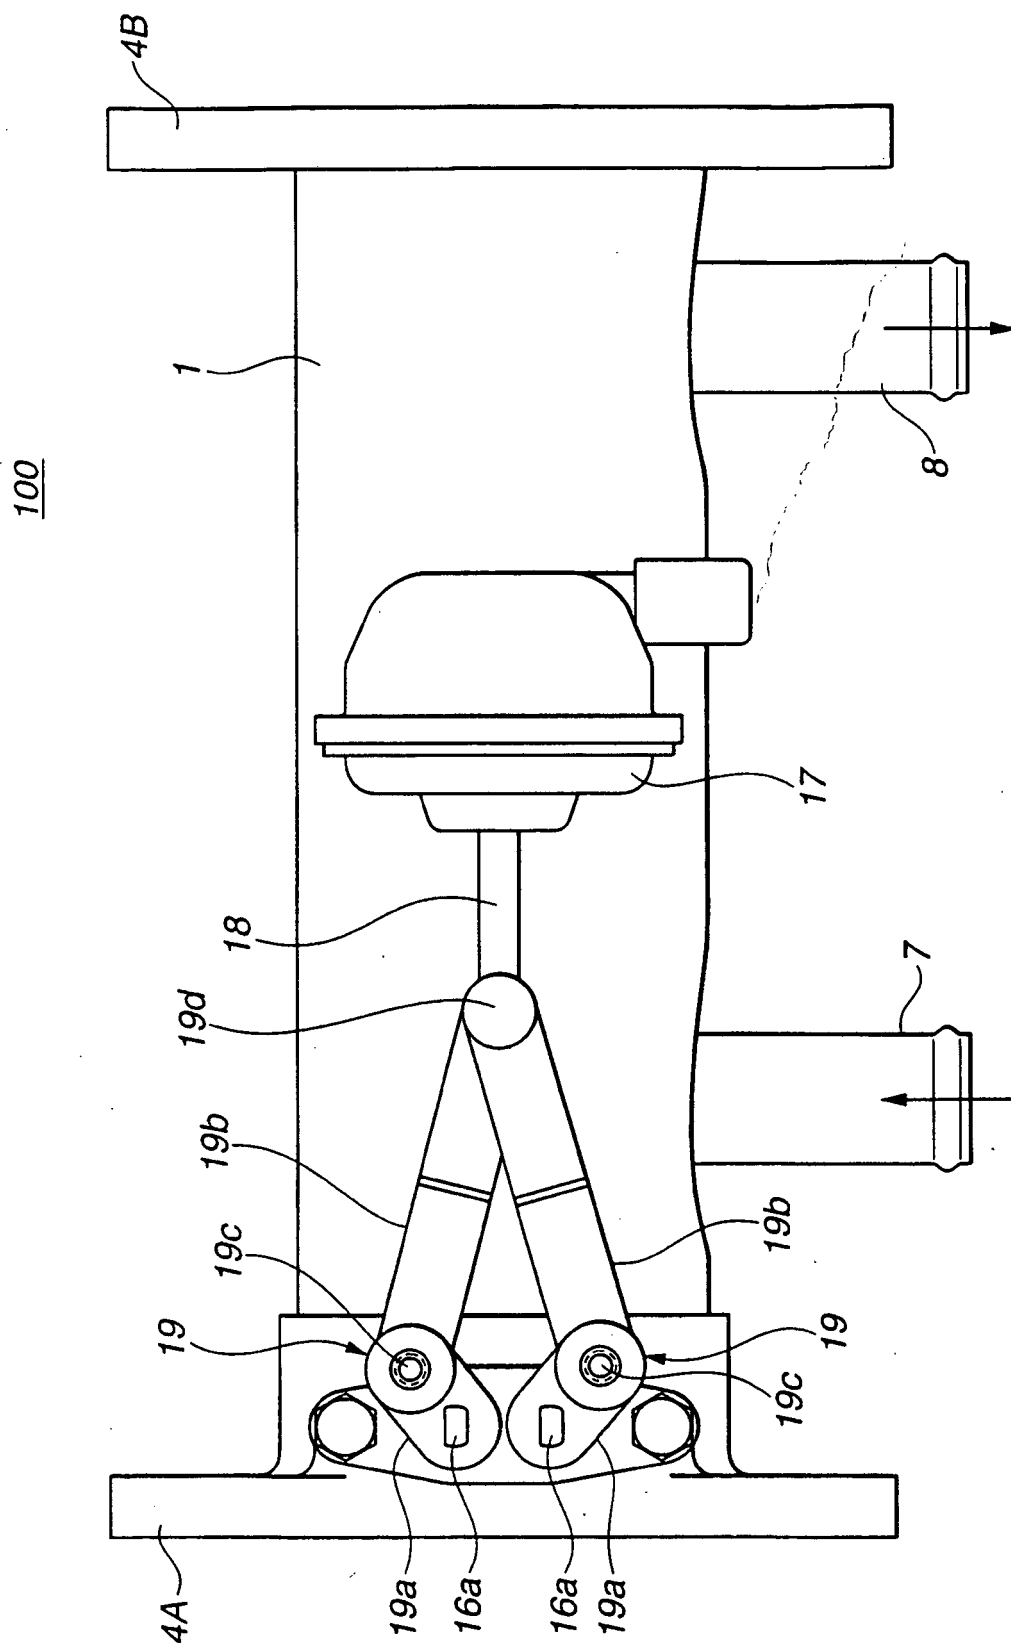


FIG. 4

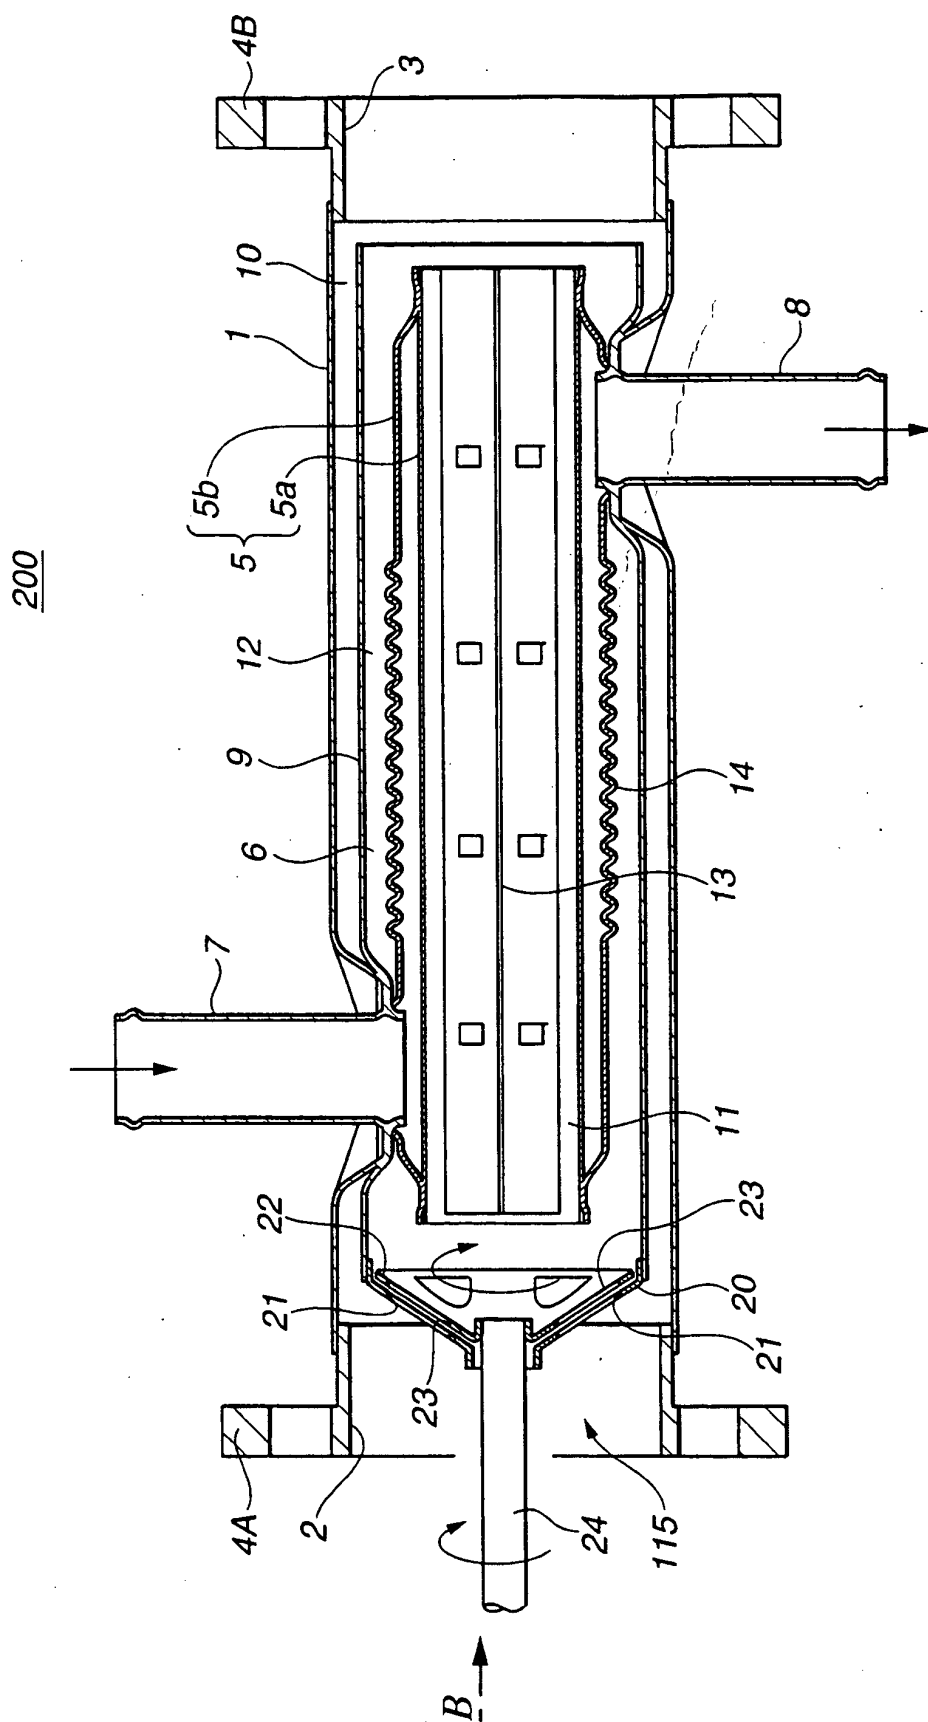


FIG.5


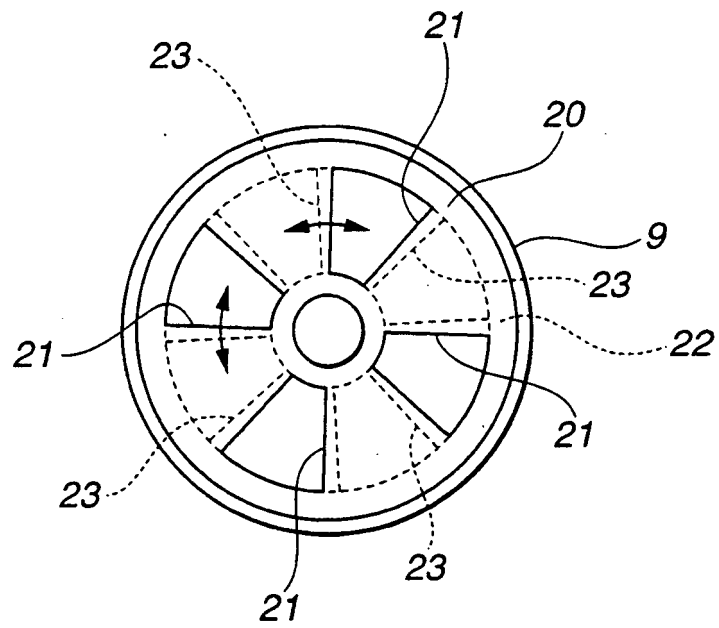


FIG.6

300

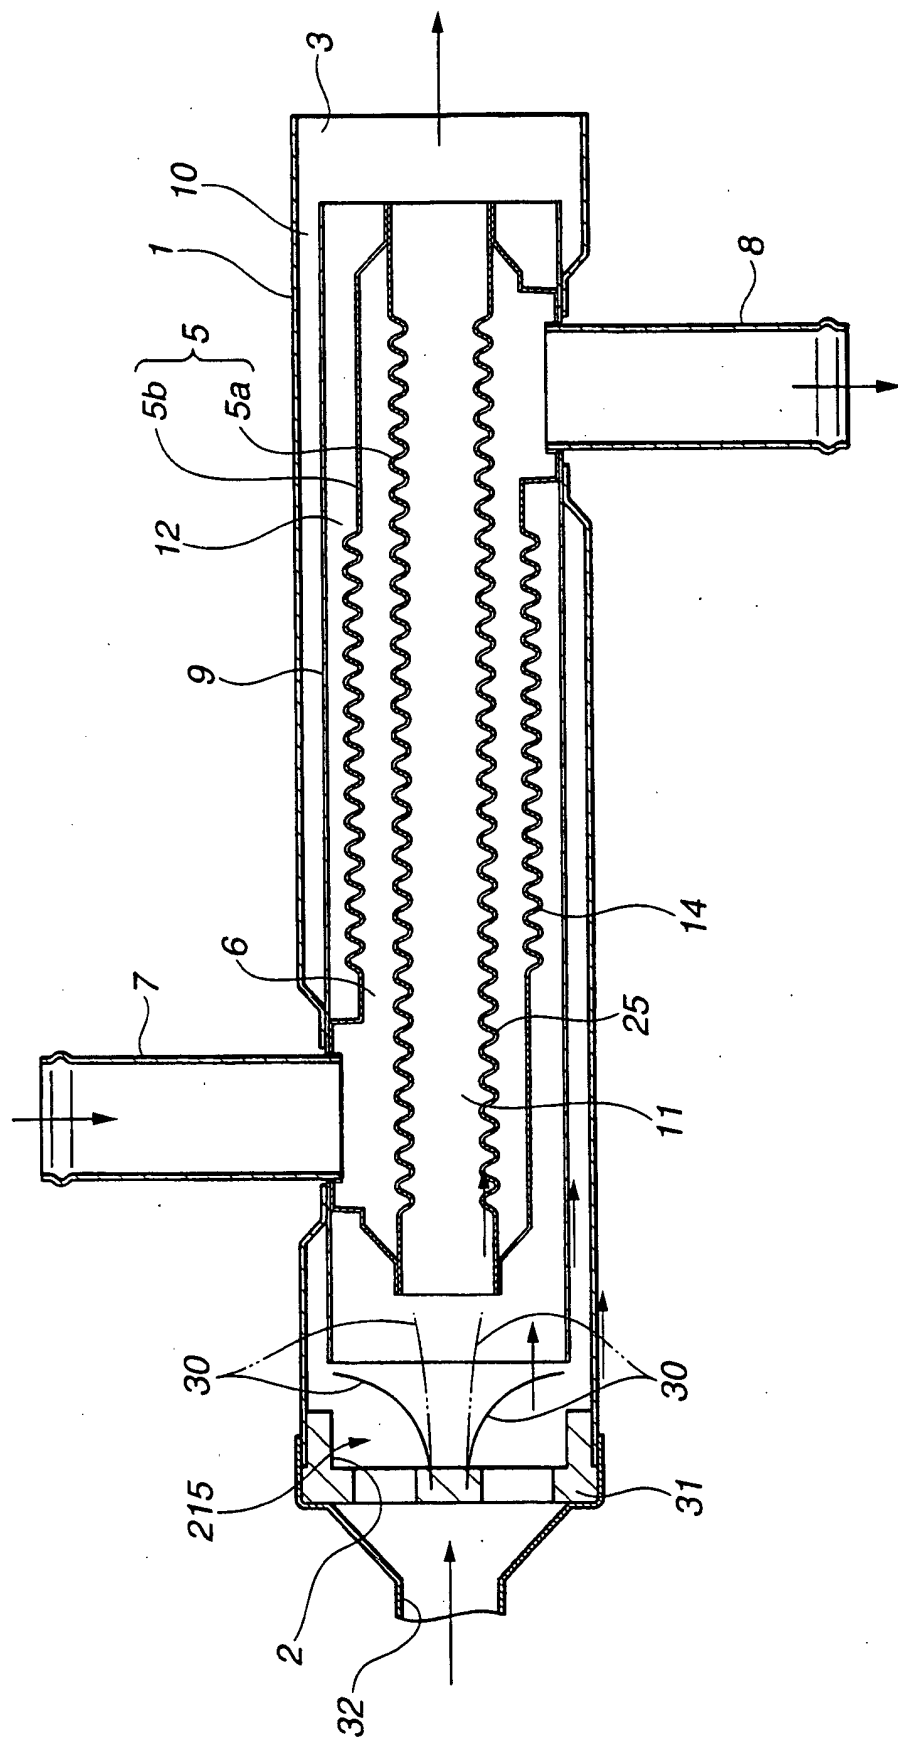

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP TOKUHYOHEI9508691 B [0003]
- JP TOKKAI2003328864 B [0003]
- WO 03098626 A [0004]
- JP 2004009960 A [0069]