

(19)



(11)

**EP 1 558 832 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
**14.11.2007 Bulletin 2007/46**

(21) Application number: **03810726.4**

(22) Date of filing: **24.09.2003**

(51) Int Cl.:  
**E21B 10/26** <sup>(2006.01)</sup> **E21B 7/28** <sup>(2006.01)</sup>

(86) International application number:  
**PCT/SE2003/001485**

(87) International publication number:  
**WO 2004/042183 (21.05.2004 Gazette 2004/21)**

(54) **A REAMER ASSEMBLY**

REAMERANORDNUNG

ENSEMBLE DE TREPAN ALESEUR

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HU IE IT LI LU MC NL PT RO SE SI SK TR**

(30) Priority: **07.11.2002 SE 0203286**

(43) Date of publication of application:  
**03.08.2005 Bulletin 2005/31**

(73) Proprietor: **Atlas Copco Secoroc AB  
737 25 Fagersta (SE)**

(72) Inventor: **VIRTANEN, Stefan  
S-738 34 Norberg (SE)**

(74) Representative: **Karlström, Lennart et al  
Noréns Patentbyrå AB,  
Box 10198  
100 55 Stockholm (SE)**

(56) References cited:  
**US-A- 2 823 900 US-A- 3 885 638  
US-A- 4 515 227 US-A- 4 635 738**

**EP 1 558 832 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

**[0001]** The present invention relates to a reamer drill assembly, i.e. a drill for widening a drilled pilot hole or for widening a hole that has been widened in a first step in a down-the-hole drilling operation.

**[0002]** Reamers, of this kind include a shank for attachment of the drill to the end of a down-the-hole hammer drill, a conical drill bit, and to a pilot body disposed on one end of the drill bit. The pilot body has a somewhat smaller outer diameter than that of the pre-drilled pilot hole, so as to enable the pilot body to slide down in the pre-drilled pilot hole and therewith guide the drill to follow the pilot hole.

**[0003]** One problem with such reamers is that if the drill bit, or crown, is slightly oblique and therewith causes the pilot body to contact the edge of the pilot hole, there is a risk that the shank will break or fracture, resulting in operational breakdowns and stoppages. Such breakages can also lead to other complications, for instance the need to fish up the drill bit lost down the drill hole.

**[0004]** Another problem is that larger drill cuttings may find it difficult to fall down in the pilot hole and therewith leave the drill location. Large cuttings that are able to fall down in the pilot hole despite their large size are liable to fasten in and block the hole, so as to present an obstacle to the pilot body, which lacks a cutter, and therewith halt drilling until the cuttings can be removed.

**[0005]** One example of a reamer of the above kind is known from US-A-3,885,638. Even if this reamer includes cutters on the end of the pilot body to solve some of the problems with cuttings blocking the pilot hole, this reamer includes a pilot body and is thus sensitive to contacts with the pilot hole edge or side walls. US-A-4,515,227 does also show a prior art reamer.

**[0006]** Another drawback with such reamers is that a reamer must be made available for each size of pilot hole, so that the pilot body will be able to pass down through the hole and therewith guide the reamer during the reaming process.

**[0007]** Accordingly, one object of the present invention is to provide a novel reamer assembly which allows all of these problems and drawbacks to be avoided.

**[0008]** This object is achieved in that the conical configuration of the drill bit of the reamer is divided into at least three segments which are terminated with a transverse end surface which directly connects said conical segments, and in that a drill button is provided in at least three of said segments with said buttons disposed equidistantly from the centre axis of the drill bit.

**[0009]** The invention will now be described in more detail by way of example only, with reference to the accompanying drawings, in which **Figure 1** is a schematic illustration of a known reamer assembly used in rock drilling operations; **Figure 2** is a corresponding view of an inventive reamer assembly for use in rock drilling operations; **Figure 3** is a schematic illustration of a common plane projection of the drill buttons in one segment of the

reamer; **Figure 4** illustrates schematically and in perspective a reamer constructed in accordance with the invention; and **Figure 5** is an end view of the reamer shown in Fig. 4, as seen from the side of the drill.

**[0010]** Fig. 1 thus shows a reamer assembly 1 used to drill in rock 2 in order to widen a predrilled pilot hole 3. The reamer 1 includes a shank 4 and a conical drill bit 5 attached to the shank 4. Attached to the conical surfaces of the drill bit are a number of drill buttons 6 which are adapted to carry out the actual rock drilling and rock removing operation.

**[0011]** Arranged on the end of the bit or crown 5 distal from the shank 4 is a generally cylindrical pilot body 7 which projects slightly outwards from the conical drill bit 5. The pilot body 7 has an outer diameter that is slightly smaller than the inner diameter of the pilot hole 3, therewith enabling the pilot body to guide the reamer 1 so that said drill will cut away or otherwise remove rock 2 symmetrically around the centre of the pilot hole and so that the widened hole will follow the earlier drilled pilot hole 3.

**[0012]** Figure 2 illustrates a reamer assembly 11 constructed in accordance with the present invention. The main difference between this drill and the earlier known drill 1 shown in Fig. 1 is that the novel inventive reamer assembly 11 lacks a guide pilot body. Instead, the drill buttons 16 are relied upon to guide the reamer in the pilot hole. In the case of reamers designed in accordance with the present invention, the drill buttons 16 are given precise positions in the drill bit 15 of the reamer 11 so that combined action of said buttons will ensure that the reamer 11 is guided in the pilot hole 3 when drilling in rock 12. In other respects the reamer 11 has generally the same design as the reamer shown in Fig. 1, in other words includes a shank 14 and a generally conical drill bit 15.

**[0013]** According to the present invention, the conical surface of the drill bit 15 of the reamer 11 is divided into a plurality of segments 18 each containing a plurality of drill buttons 16. These buttons 16 have mutually the same positions in respective segments 18, in other words each segment contains buttons that are situated at mutually the same distance from the centre axis of the drill bit/reamer as the buttons in other segments. Thus, the button 16a in the segment 18 is the same distance from the centre axis of the reamer as the button 16a' in the segment 18'; see Figs 4 and 5. Similarly, the button 16c in the segment 18 is situated at the same distance from the centre axis of the reamer as the button 16c' in the segment 18'.

**[0014]** By placing the buttons 16 in the drill bit 15 in this way, the buttons are themselves able to guide the reamer 11 when drilling in rock 12, so as to cause the drilled hole to follow the pilot hole 13.

**[0015]** The various buttons 16 of each segment 18 are positioned so as to lie at different radial distances from the axial centre of the drill bit, so that at least one button of each segment will be able to guide the reamer towards the edge of the pilot hole. As will be seen from the common plane projection shown in Fig. 3, the buttons

16 will lie adjacent one another or overlap each other to some extent. This will ensure that at least one button 16 of each segment 18 will always be able to support against the edge of a pilot hole and therewith guide the reamer along the hole.

[0016] With the aid of different vertical chain lines 19a, 19b and 19c, Fig. 3 shows how different buttons 16a, 16b and 16c will be those buttons that function as guides in a pilot hole whose wall follows the lines 19a, 19b or 19c. Thus, as a result of the close-by or overlapping relationship of respective buttons 16, there will always be one button in each segment 18 that is able to guide the reamer in the pilot hole. Also shown are those buttons 16d and 16e that lie further out towards the edge 20 of the drill bit 15. These latter buttons do not normally have a guiding effect, but are always those buttons that cut or remove rock irrespective of whether the edge of the pilot hole follows the line 19a, the line 19b or the line 19c.

[0017] Those buttons that are furthest in towards the centre of the drill bit on its conical segments, i.e. the buttons 16a, are those which determine the smallest size of the pilot hole with which the reamer can be used. For example, it has been possible with the aid of the present invention to widen a pilot hole with a diameter of from about 150 mm to about 205 mm with one and the same reamer.

[0018] The buttons 16 are preferably placed in mutually the same pattern in each of the segments. Moreover, several buttons may be placed equidistantly from the centre of the drill bit in one and the same segment. See in particular Fig. 5.

[0019] The drill bit 15 must include at least three segments 18, in order to achieve correct guidance of the reamer 11. There are four segments in the case of the illustrated embodiment, although this number may be greater depending on the size of the drill 11.

[0020] The segments 18 are joined together at the end of the drill bit 15, by a planar or slightly concave transverse end surface 21. Drill buttons 22 are also provided in the transverse end surface 21 of the drill bit. The function of these latter buttons is not to cut away rock, but to grind down any cuttings that may have fallen down and fastened in the pilot hole. When drilling a blind hole, these buttons 22 will also support against the bottom of the hole so as to prevent material damage to the drill bit 15.

[0021] Thus, an inventive reamer assembly enables one and the same reamer to be used with pre-drilled pilot holes of mutually different sizes, although within certain limits of course, as distinct from the earlier case where it was necessary to use different reamers adapted to the size of respective pilot holes.

[0022] Because an inventive reamer lacks a pilot body, there is less risk of the drill being subjected to bending loads that result in breaking of the drill shank.

[0023] The design of the inventive reamer also lowers the risk of the drill being stopped by cuttings that remain in the pilot hole, by virtue of the fact that the buttons 22 situated on the end 21 of the drill bit 15 are able to grind

away said cuttings. Drill cuttings can move past the drill bit and fall down through the pilot hole more easily than was previously the case, due to the absence of an obstructive pilot body.

5 [0024] The inventive reamer is also better than prior art reamers when reaming blind holes, since the risk of material damage to the drill bit is considerably less than in the case of prior art reamers that include a pilot body. Another advantage afforded by the invention is that a drill bit that does not include a pilot body is lighter than one that does.

10 [0025] As will be apparent from the above description, the inventive reamer may be divided into more than three segments, wherein buttons in at least three segments are placed at mutually the same distance from the axial centre of the drill bit, as defined in the accompanying claims, so as to obtain the necessary stability in guiding the drill bit. The buttons in remaining segments may conveniently be positioned differently.

## Claims

1. A reamer assembly (11) for widening a drilled pilot hole or for widening a hole that has been widened in a first step in a down-the-hole drilling operation, wherein the reamer assembly includes a shank (14) for attachment of the reamer to the end of a down-the-hole hammer drill and a conical drill bit or crown (15), wherein the conical bit (15) of the reamer is divided into at least three segments (18); and in that at least three of said segments (18) include drill buttons (16) that are disposed equidistantly from the centre axis of the drill bit, **characterised in that** the conical bit segments (18) are terminated with a transverse end surface (21) which directly connects said conical segments.
2. A reamer assembly according to Claim 1, **characterised in that** each segment (18) includes a plurality of drill buttons (16a - 16e).
3. A reamer assembly according to Claim 2, **characterised in that** the drill buttons (16a - 16e) are placed in mutually the same pattern in each of said segments (18).
4. A reamer assembly according to Claim 2 or 3, **characterised in that** a plurality of drill buttons (16) in one and the same segment are disposed equidistantly from the centre of the drill bit (15).
5. A reamer assembly according to any one of the preceding Claims, **characterised in that** the drill buttons (16a - 16e) of one segment are disposed so as to lie close to or to slightly overlap each other in a common plane projection. (Fig. 3).


6. A reamer assembly according to any one of the preceding Claims, **characterised in that** drill buttons (22) are provided in the transverse end surface (21) of the drill bit (15).


#### Patentansprüche

1. Räumleinrichtungsbaugruppe (11) zum Aufweiten eines gebohrte Pilotlochs oder zum Aufweiten eines Loches, das bei einem ersten Schritt bei einer Tiefloch-Bohroperation aufgeweitet wurde, wobei die Räumleinrichtungsbaugruppe einen Schaft (14), der zur Befestigung der Räumleinrichtung am Ende einer Tiefloch-Schlagbohrereinrichtung dient, und einen konischen Bohrmeißel oder eine -krone (15) beinhaltet, wobei der konische Bohrmeißel (15) der Räumleinrichtung in mindestens drei Segmente (18) unterteilt ist, und mindestens drei der Segmente (18) Bohrknöpfe (16) beinhaltet, die äquidistant zur Mittelachse des Bohrmeißels angeordnet sind, **dadurch gekennzeichnet, dass** die konischen Bohrmeißelsegmente (18) in einer Transversal-Endfläche (21) enden, welche die konischen Segmente direkt verbindet,
2. Räumleinrichtungsbaugruppe nach Anspruch 1, **dadurch gekennzeichnet, dass** jedes Segment (18) eine Mehrzahl von Bohrknöpfen (16a - 16e) beinhaltet.
3. Räumleinrichtungsbaugruppe nach Anspruch 2, **dadurch gekennzeichnet, dass** in jedem der Segmente (18) die Bohrknöpfe (16a - 16e) zueinander in dem gleichen Muster angeordnet sind.
4. Räumleinrichtungsbaugruppe nach Anspruch 2 oder 3, **dadurch gekennzeichnet, dass** in ein- und demselben Segment eine Mehrzahl von Bohrknöpfen (16) äquidistant zum Mittelpunkt des Bohrmeißels (15) angeordnet sind.
5. Räumleinrichtungsbaugruppe nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** die Bohrknöpfe (16a - 16e) eines einzigen Segmentes so angeordnet sind, dass sie bei Projektion in eine gemeinsame Ebene (Fig. 3) nahe beieinander liegen oder einander geringfügig überlappen.
6. Räumleinrichtungsbaugruppe nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** Bohrknöpfe (22) in der Transversal-Endfläche (21) des Bohrmeißels (15) vorgesehen sind.

#### Revendications

1. Ensemble de trépan aléreur (11) destiné à élargir un trou pilote préalablement foré, ou à élargir un trou déjà élargi dans une première étape par une opération de forage descendant dans le trou, l'ensemble de trépan aléreur comprenant un arbre (14) pour fixer le trépan aléreur à l'extrémité d'un marteau foreur, et un foret ou couronne conique (15), le foret conique (15) du trépan aléreur étant divisé en au moins trois segments (18), et ces au moins trois segments (18) comprenant des boutons de forage (16) équidistants de l'axe central du foret, **caractérisé en ce que** les segments de foret coniques (18) se terminent par une surface d'extrémité transversale (21) qui les connecte directement.
2. Ensemble de trépan aléreur selon la revendication 1, **caractérisé en ce que** chaque segment (18) comprend une pluralité de boutons de forage (16a-16e).
3. Ensemble de trépan aléreur selon la revendication 2, **caractérisé en ce que** les boutons de forage (16a-16e) sont placés mutuellement dans la même configuration dans chacun des segments (18).
4. Ensemble de trépan aléreur selon l'une des revendications 2 ou 3, **caractérisé par** une pluralité de boutons de forage (16) équidistants du centre du foret (15) dans un seul et même segment.
5. Ensemble de trépan aléreur selon l'une des revendications précédentes, **caractérisé en ce que** les boutons de forage (16a-16e) d'un segment sont disposés de manière à se situer tout près les uns des autres ou à se recouvrir légèrement les uns les autres dans une projection sur un plan commun (figure 3).
6. Ensemble de trépan aléreur selon l'une des revendications précédentes, **caractérisé par** des boutons de forage (22) dans la surface d'extrémité transversale (21) du foret (15).

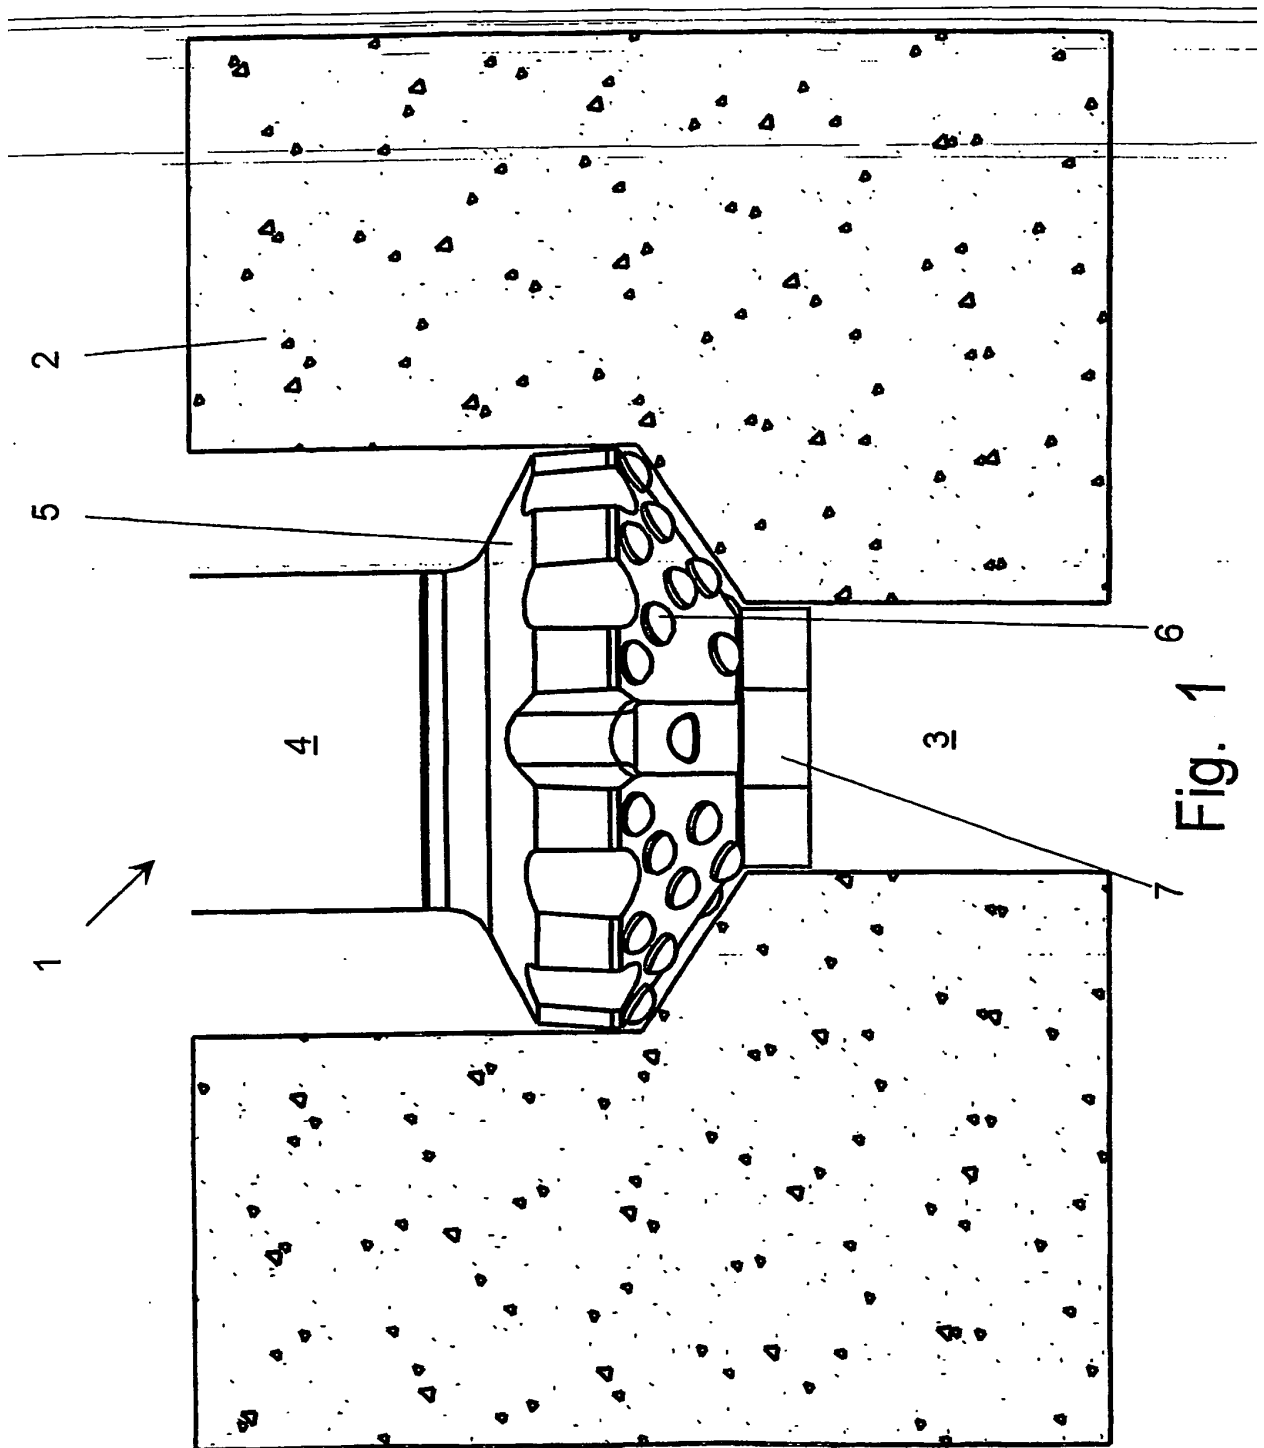

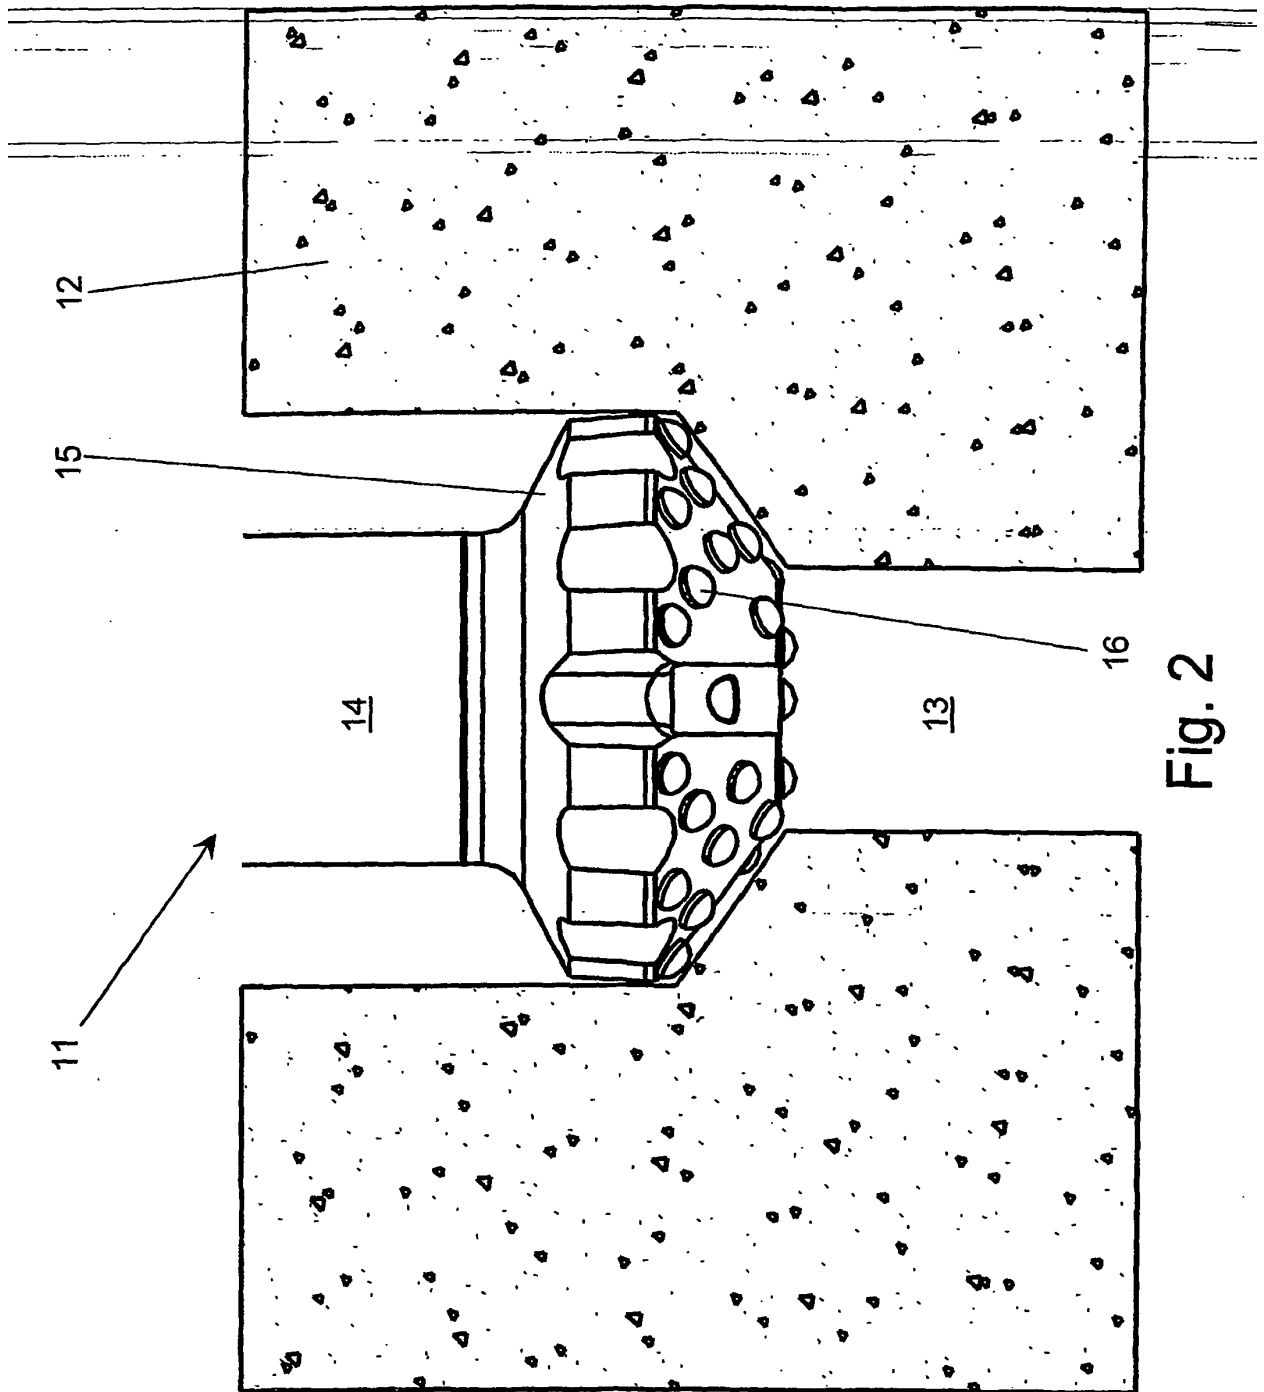

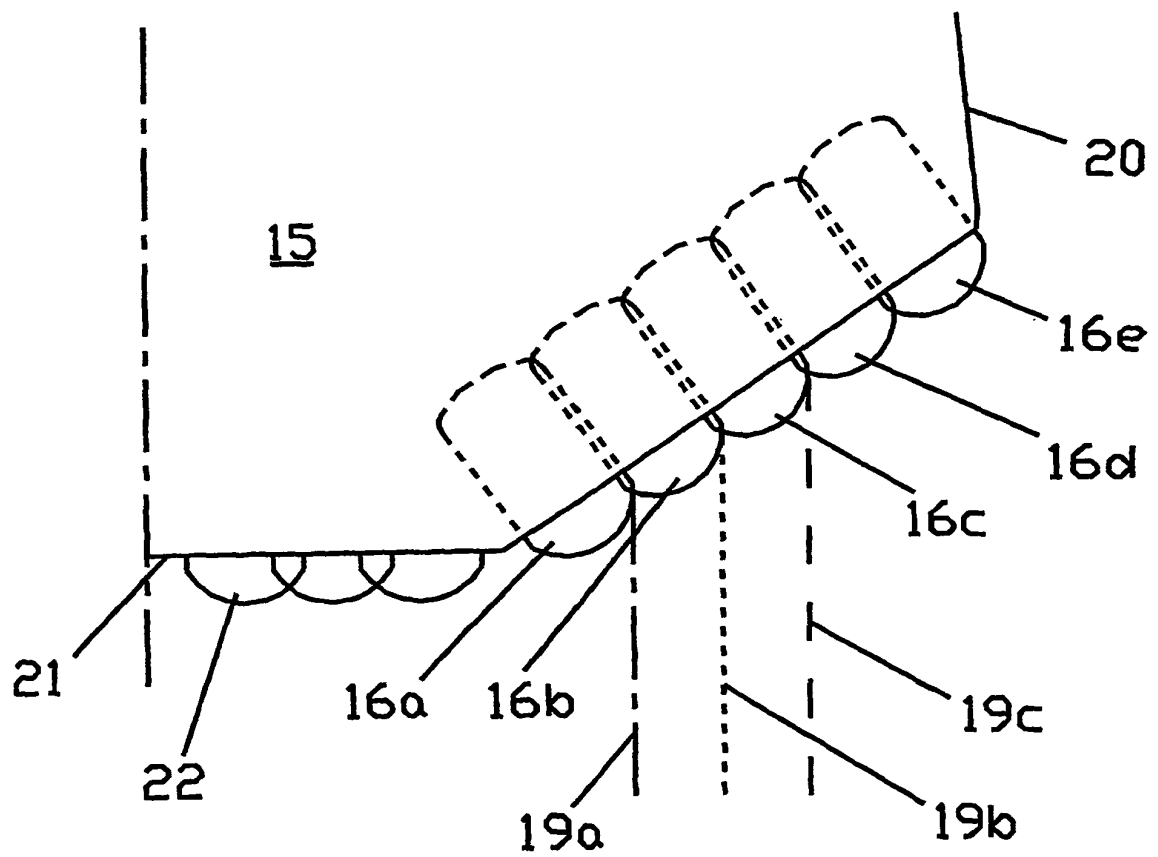


Fig. 3


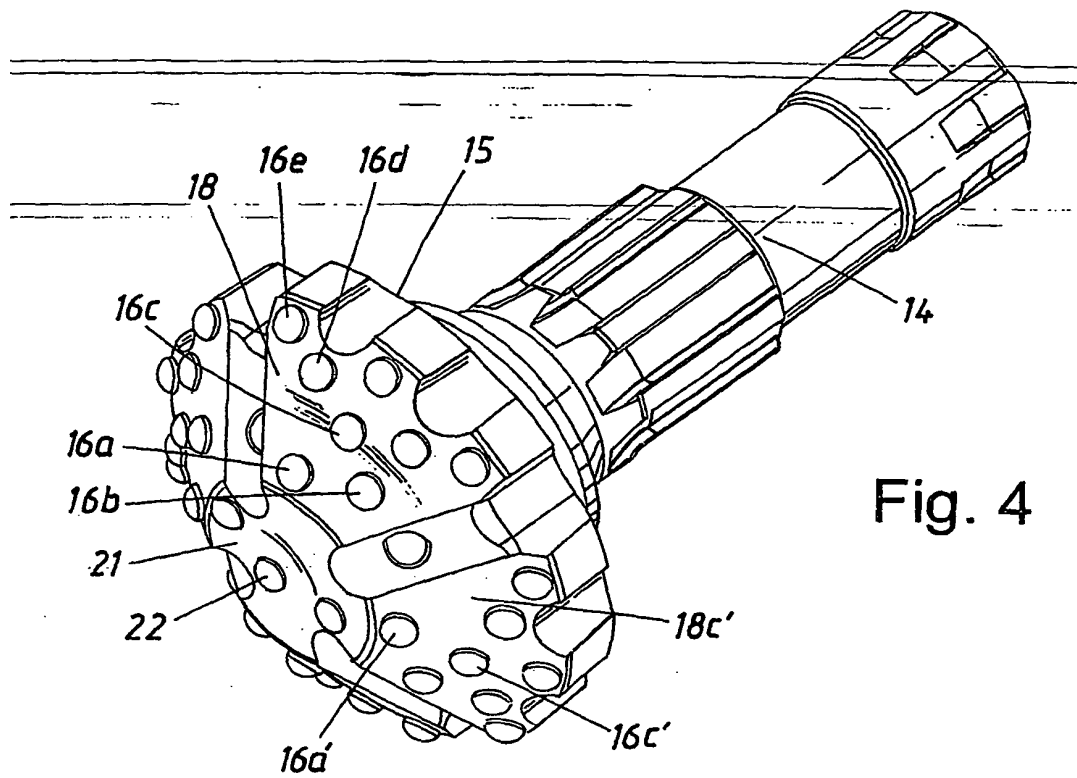


Fig. 4

Fig. 5

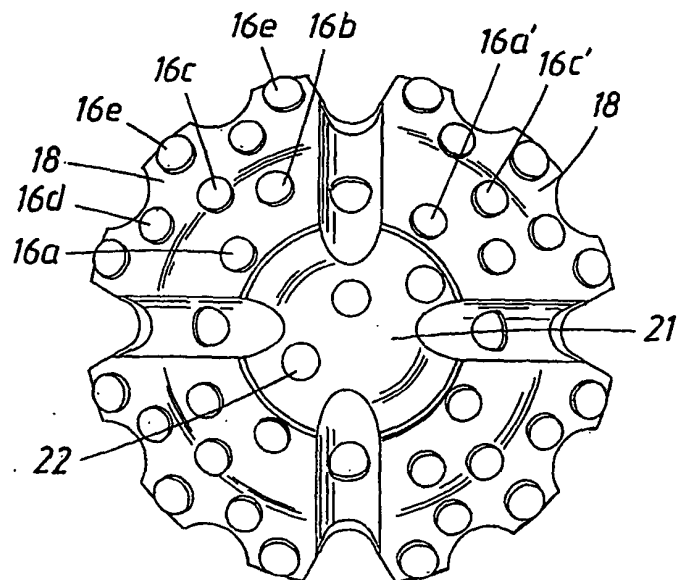

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 3885638 A [0005]
- US 4515227 A [0005]