



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 559 821 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
03.08.2005 Bulletin 2005/31

(51) Int Cl.7: **D04B 15/32**

(21) Application number: **04001386.4**

(22) Date of filing: **22.01.2004**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**
Designated Extension States:
AL LT LV MK

(72) Inventor: **Wang, Ping-Shih**
Jui-Fang Chen Taipei Hsien (TW)

(74) Representative: **Weise, Reinhard, Dipl.-Ing.**
Reinhard-Skuhra-Weise & Partner
Patentanwälte
Postfach 44 01 51
80750 München (DE)

(71) Applicant: **Pai Lung Machinery Mill Co. Ltd.**
Taipei Hsien (TW)

(54) **Improved circular knitting machine**

(57) An improved circular knitting machine aims to provide an improved structure and installation for cams. It includes a saddle plate (10) forming an angle to the horizontal surface with the cams mounting thereon in an inclined manner, and a sinker drum (50) surrounded by the saddle plate. The sinker drum has an inclined surface (52) formed in a continuous circular ring in the shape of a conical shallow tray so that the sinker drum has a concave surface. The sinker drum has sinker

troughs (51) formed thereon for housing sinkers (40) in an inclined manner. The cam has one end fastened to the saddle plate (10) in an inclined manner and the other end forming a convex surface to be in contact with the concave surface. The cam (20) has a driving path formed on the bottom side thereof to allow the sinkers (40) to be movable therein. The sinker drum (50) may be rotated to drive the sinkers (40) to move smoothly in the cam (20).

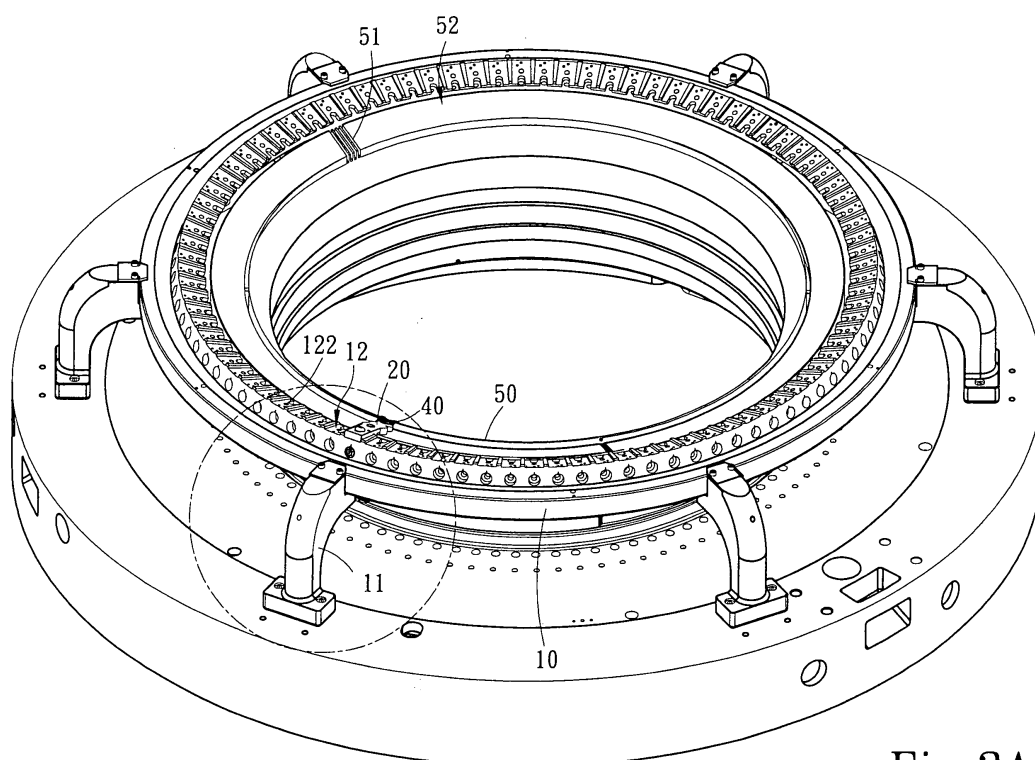


Fig.3A

EP 1 559 821 A1

Description

FIELD OF THE INVENTION

[0001] The present invention relates to an improved circular knitting machine that has a saddle plate with matching cams and sinkers assembled thereon in an inclined manner, and a sinker drum with a concave surface forming a continuous circular ring in the shape of a conical shallow tray to allow the cams and the sinker drum to form a concave and convex surface contact thereby to achieve a smooth match between sinkers and cams.

BACKGROUND OF THE INVENTION

[0002] Conventional circular knitting machines generally include sinkers driven by a cam. The cam has a driving path to move the sinkers to and fro to perform a knitting operation.

[0003] The sinker is engaged with a preset driving path as shown in FIG. 1A. During a knitting operation, the lug 62 of the sinker 61 is engaged with the driving path 64 of the cam 63 so that the sinker 61 is moved according to the driving path 64 to perform the knitting operation. The cam 63 is mounted horizontally on the machine deck. The sinker 61 is also mounted horizontally.

[0004] Referring to FIGS. 1A and 2, the sinker 61 is located on a sinker drum 60 which rotates at a high speed during knitting operation, and the sinker 61 is driven by the driving path 64 to move reciprocally to and fro rapidly. When the sinker drum 60 rotates at high speed, the sinker 61 is forced outwards due to a centrifugal force, but is retained by the driving path 64 of the cam 63. Meanwhile the lug 62 moves along the driving path 64. The centrifugal force generates a great force on the sinker 61 (indicated by an arrow in FIG. 2). As a result, the lug 62 does not move as smoothly as desired along the driving path 64. The contact surface 66 and contact angle 67 between the driving path 64 and the lug 62 form many stress concentration points. The continuous centrifugal force creates severe friction and wear. As a result, the lifetime of the sinker 61 and the cam 63 significantly decreases.

[0005] Moreover, as shown in FIG. 1B the cam 63 is mounted horizontally on the machine deck and the sinker 61 also is mounted horizontally. But the sinker drum 60 is a circular barrel with a plurality of cams 63 mounted thereon adjacent to one another in an annular fashion. There is a gap 65 formed between two neighboring and horizontal cams 63. This resulting connection is not continuous between cams 63. Hence during high speed rotation, interference or interruption can occur with the to and fro reciprocal movements of the sinker 61.

SUMMARY OF THE INVENTION

[0006] Therefore the object of the invention is to provide an improved circular knitting machine that has a saddle plate with inclined holding surfaces and a sinker drum with an inclined surface so that the matching cams and sinkers are also coupled in an inclined manner. The cams and the sinker drum form a concave and convex arched contact surface so that a gap is less likely to occur. As a result, when the sinker drum rotates, the sinker may be moved along the driving path more smoothly without interference or interruption.

[0007] The driving path provided in the invention can also reduce the centrifugal force of the sinker and prevent the lug from hitting the cam. Therefore, the service life of the sinker and cam may increase.

[0008] The foregoing, as well as additional objects, features and advantages of the invention will be more readily apparent from the following detailed description, which proceeds with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009]

FIG. 1A is a perspective view of conventional cams and sinkers mounted in a horizontal manner.

FIG. 1B is a fragmentary enlarged schematic view according to FIG. 1A.

FIG. 2 is a schematic view of a conventional cam and sinker in a coupled condition.

FIG. 3A is a perspective view of the invention.

FIG. 3B is a fragmentary enlarged schematic view according to FIG. 3A.

FIG. 4 is a perspective view of a cam and a sinker of the invention in a coupled condition.

FIG. 5 is a perspective view of the cam and the sinker according to FIG. 4 in an inverse condition.

FIG. 6 is a side view of a sinker of the invention.

FIG. 7 is a cross section taken on line 7-7 in FIG. 6.

FIG. 8 is a cross section taken on line 8-8 in FIG. 6.

FIG. 9 is a side view of the invention showing the cam mounted in an inclined manner

FIG. 10 is a schematic view of force analysis of the sinker of the invention when subject to a dynamic force.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0010] Please referring to FIG. 3A, the improved circular knitting machine according to the invention includes:

a sinker drum 50 located on an inner ring of the annular knitting section of a knitting machine. It is formed in the shape of a conical shallow tray with

an inner surface formed in a small concave surface 52 (the concave surface is formed in a fined fashion and recognizable only by viewing the entire annular ring). The perimeter of the sinker drum 50 has sinker troughs 51 formed thereon in an equally spaced manner for holding sinkers 40 therein. The sinker drum 40 rotates at high speed during knitting operation;

a saddle plate 10 (referring to FIG. 3B) which is formed in an inclined manner and supported by a plurality of bracing brackets 11 on the outer perimeter for mounting securely on the machine deck of the circular knitting machine. The saddle plate 10 has an inner perimeter forming a plurality of holding surfaces 12 in an equally spaced manner. Each of the holding surfaces 12 is formed in an inclined manner and forms an included angle with the horizontal surface so that the entire saddle plate 10 also is inclined. The holding surface 12 has a screw hole 122 which is also formed in an inclined manner and the inclination is alterable according to the change of the included angle;

a cam 20 (referring to FIGS. 4 and 5) which has a fastening section 24 on one end and a contact section 25 on another end. The fastening section 24 is fastened to the holding section 12 in an inclined manner through the screw hole 122. There is an adjusting means 30 located on a lower side of the fastening section 24 to adjust the position of the cam 20. The contact section 25 has an irregular and curved driving path 21 formed on a lower side (depending on installation condition). The cam 20 is installed on each holding surface 12 of the saddle plate 10 and forms a circular array with other cams along the saddle plate 10. The fastening section 24 has a contact plane 22 in contact with the holding surface 12 (referring to FIGS. 6 and 7).

[0011] The contact section 25 that has the driving path 21 formed thereon has a fine convex surface 23 in contact with the concave surface 52 of the conical shallow tray of the sinker drum 50 (referring to FIGS. 6 and 8) so that the convex surface 23 and the concave surface 52 form a close concave and convex contact therefore the gap between every two neighboring cams 20 may be minimized or eliminated. Thereby when the sinker drum 50 rotates and the sinker 40 is moved in the driving path 21, interference or interruption on the sinker 40 may be minimized for a smooth operation.

[0012] The sinker 40 has a lug 41 on one end that can slide along the driving path 21 of the cam 20, and the other end wedged in the sinker trough 51 of the sinker drum 50. The sinker 40 is movable because of the lug 41 driven by the driving path 21. As the cam 20 is inclined, the sinker 40 also is inclined at an angle.

[0013] As previously discussed, the saddle plate 10 and the sinker drum 50 are installed in an inclined manner. The cam 20 and the sinker 40 also are mounted

thereon in an inclined manner. This is the main feature of the invention to achieve the desired results (referring to FIGS. 9 and 10).

[0014] When the sinker drum 50 rotates at high speed, the sinker 40 generates a centrifugal force F (indicated by an arrow in the drawings). As the centrifugal force F applied on the sinker 40 at comprising a horizontal centrifugal component force F_1 and a vertical centrifugal component force F_2 formed on the inclined surface. The sinker 40 has a gravity force W which also effects a horizontal gravity component force W_1 and a vertical gravity component force W_2 on the inclined surface. The horizontal gravity component force W_1 is opposite to the horizontal centrifugal component force F_1 and thus can offset a portion of the horizontal centrifugal component force F_1 . As a result, the impact force of the lug 41 on the driving path 21 resulting from the centrifugal force F may be reduced. This not only makes moving the lug 41 in the driving path 21 smoother but increases the service life of the sinker 40 and cam 20.

[0015] While the preferred embodiment of the invention has been set forth for the purpose of disclosure, modifications of the disclosed embodiment of the invention as well as other embodiments thereof may occur to those skilled in the art. Accordingly, the appended claims are intended to cover all embodiments which do not depart from the spirit and scope of the invention.

Claims

1. An improved circular knitting machine for reducing wear to sinkers and cams from centrifugal force, comprising:

a saddle plate having a first inclined surface which has a plurality of holding surfaces formed thereon;

a sinker drum surrounded by the saddle plate having a second inclined surface which has a plurality of sinker troughs formed thereon, the second inclined surface being formed in an annular ring and shaped like a conical shallow tray so that the sinker drum forms a concave surface;

a plurality of sinkers housed in the sinker troughs in an inclined manner; and

a plurality of cams each having a fastening section on one end and a contact section on the other end, the contact end having a convex surface in contact with the concave surface of the sinker drum, the contact section having a driving path formed on the bottom side thereof to allow the sinkers to move.

2. The improved circular knitting machine of claim 1, wherein the fastening section of the cam is in contact with the holding surface on a plane.

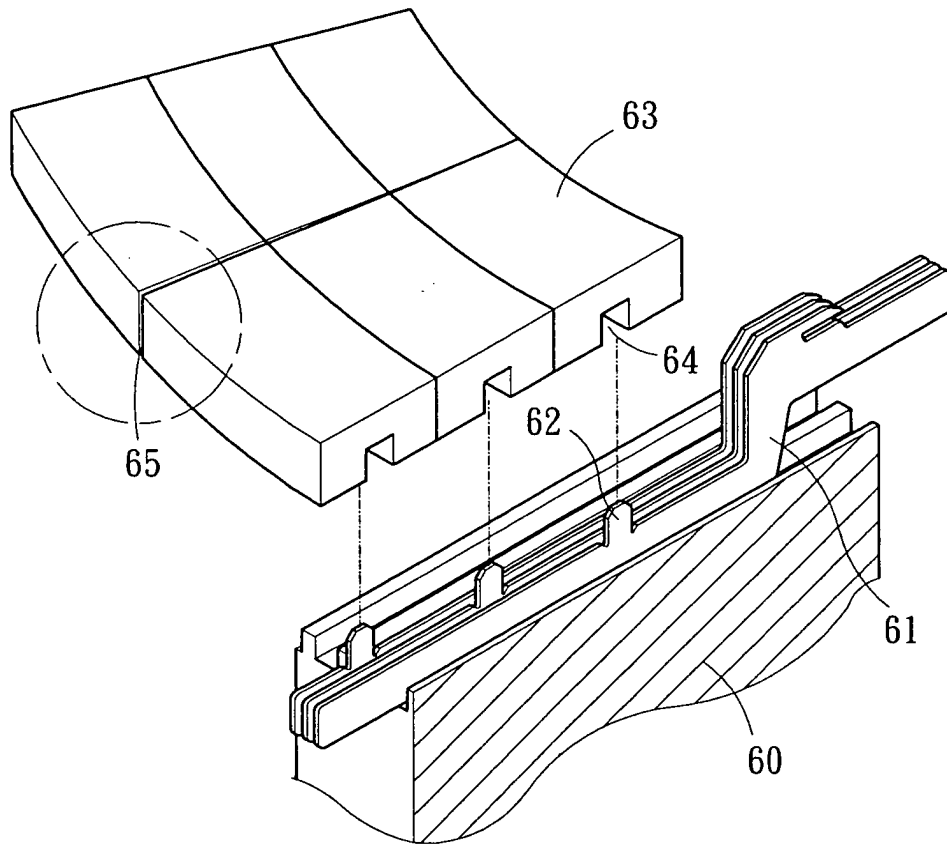


Fig.1A PRIOR ART

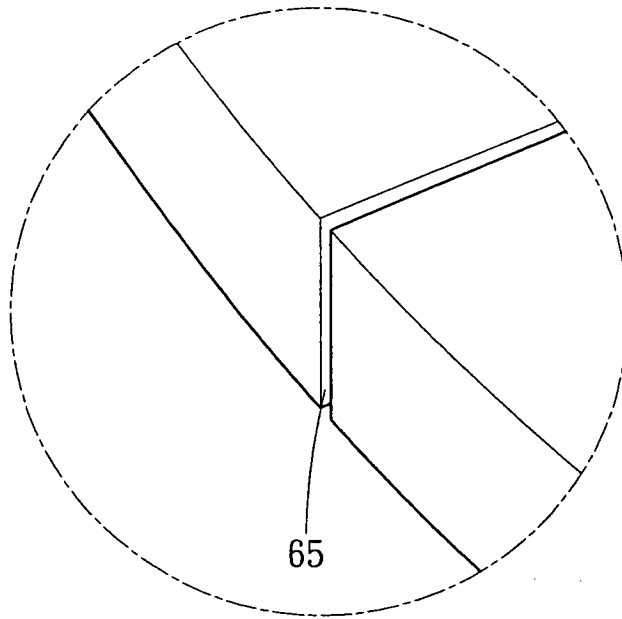


Fig.1B PRIOR ART

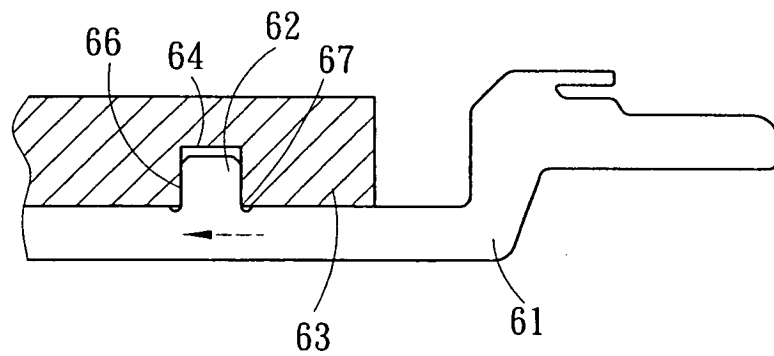


Fig.2 PRIOR ART

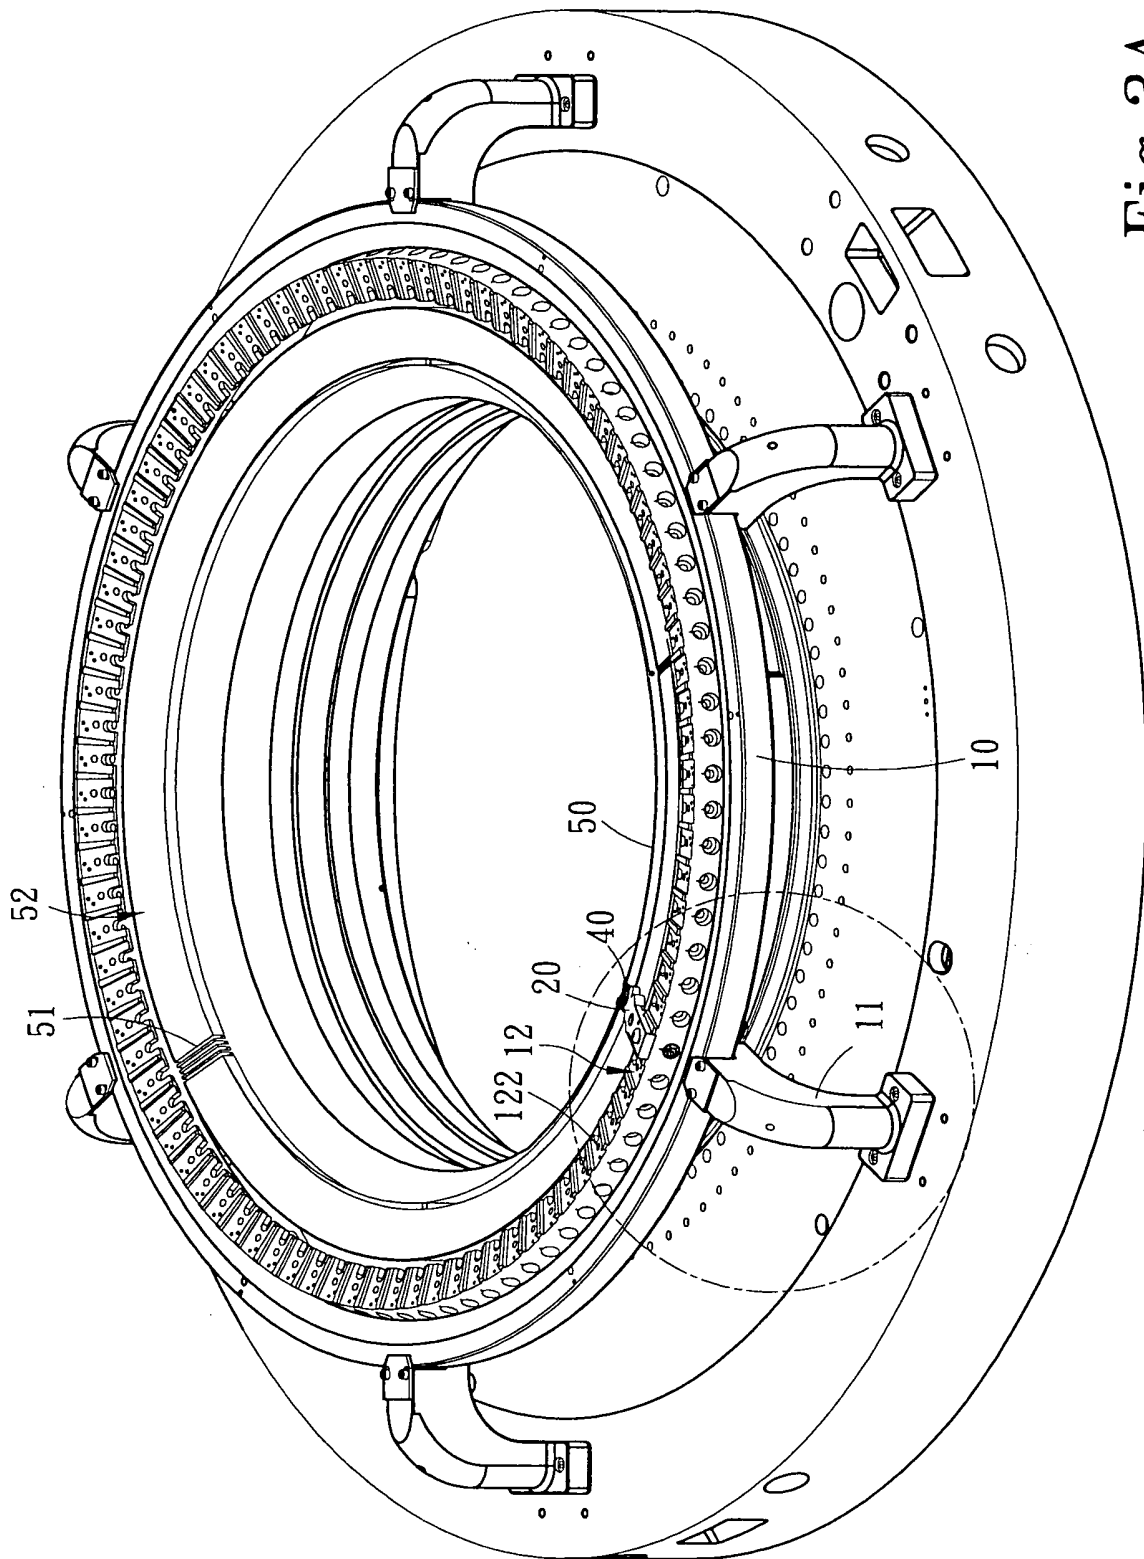


Fig.3A

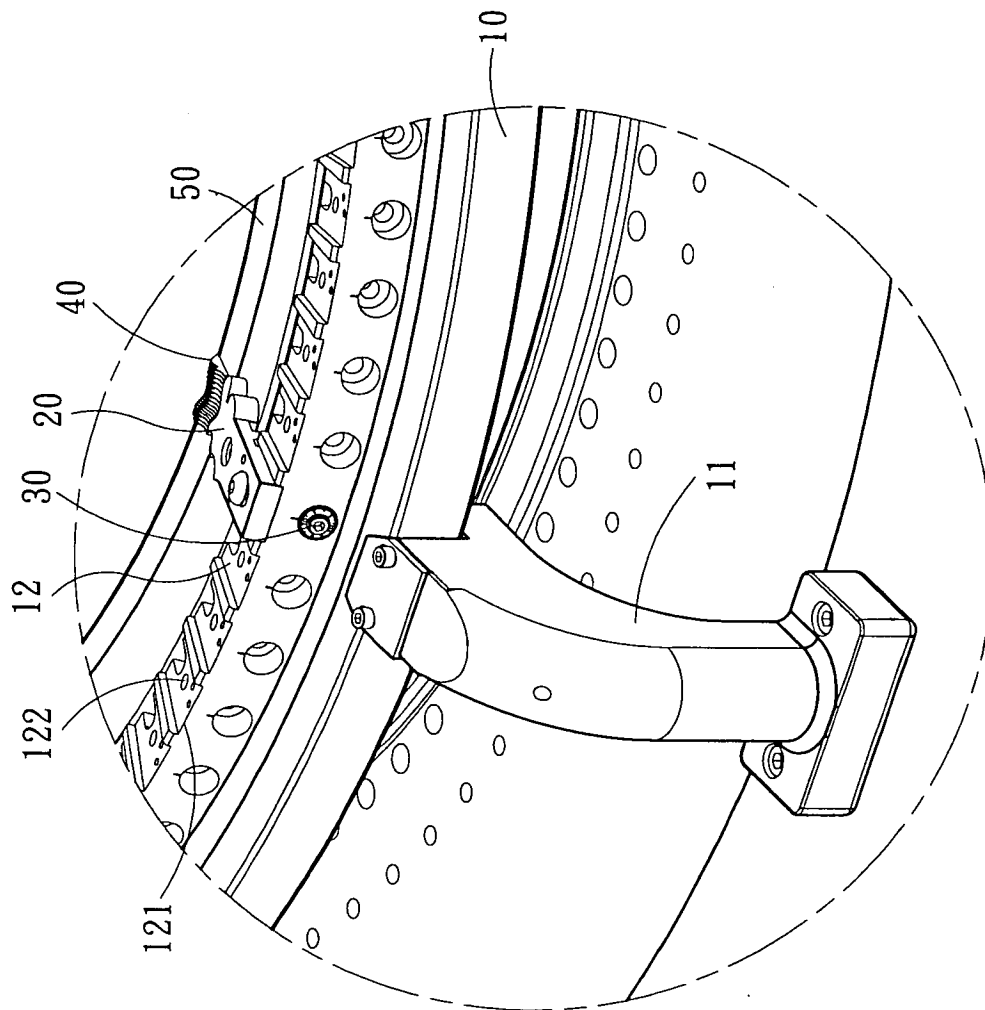


Fig. 3B

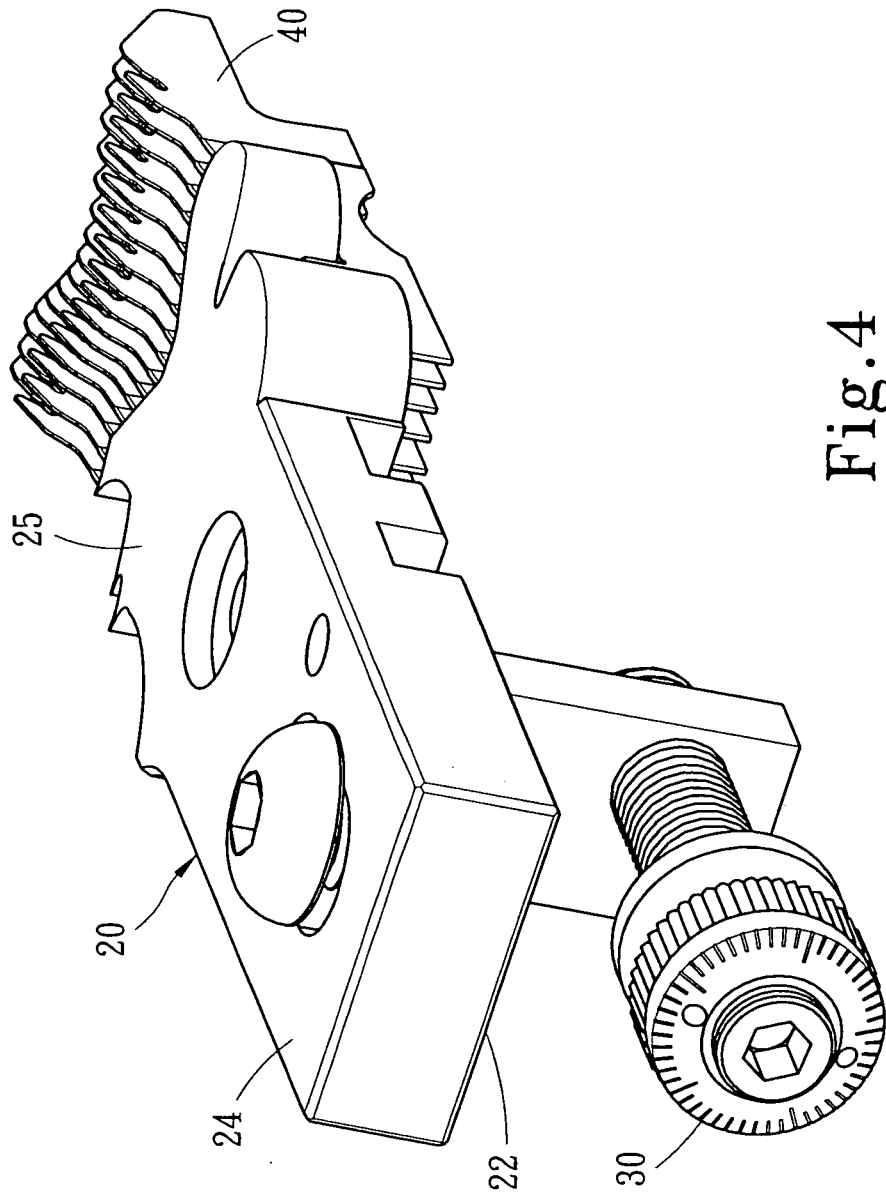


Fig. 4

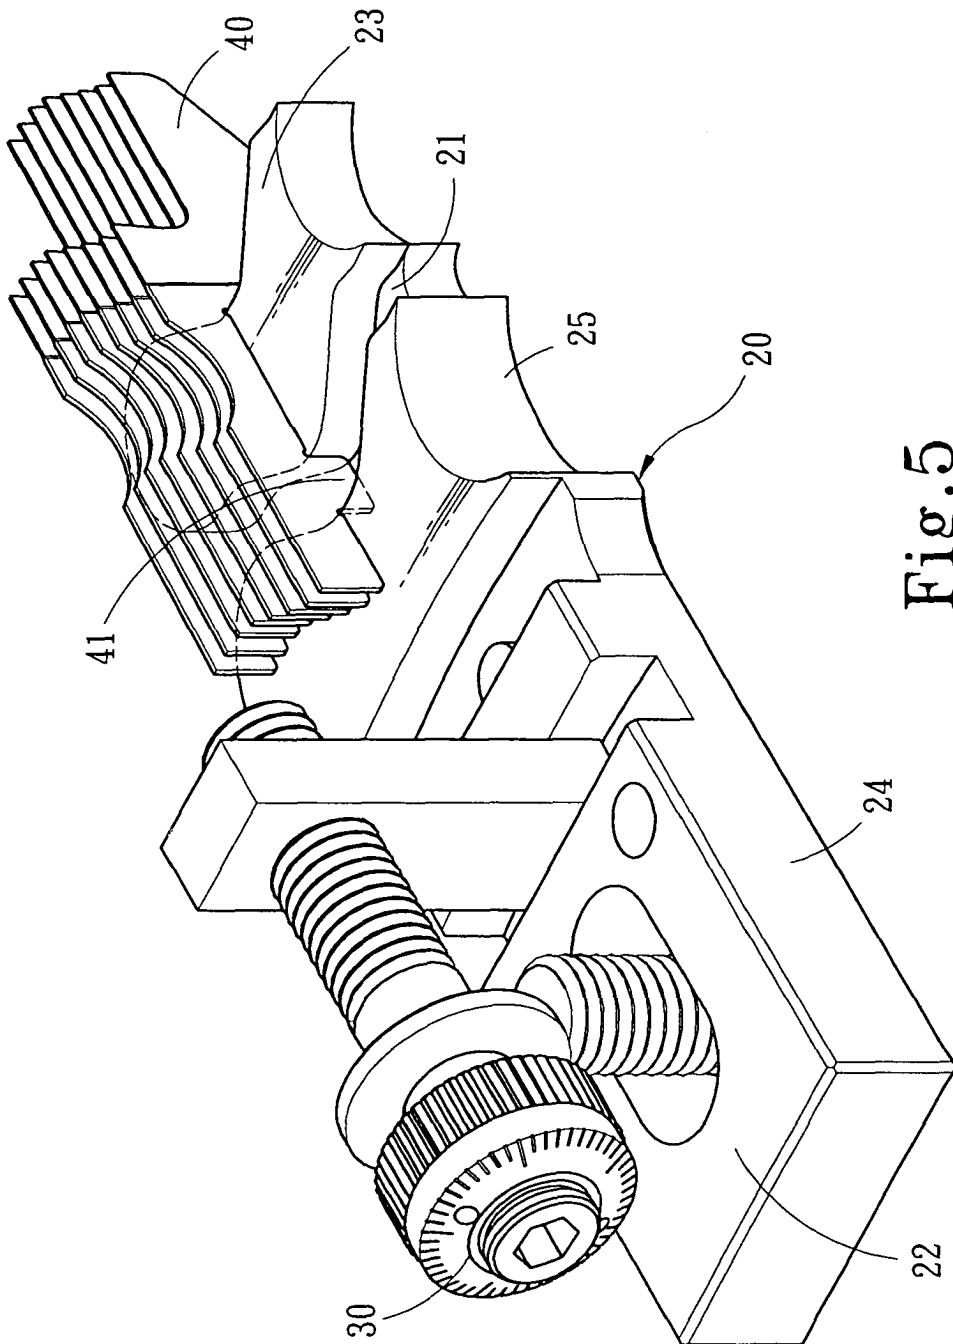


Fig. 5

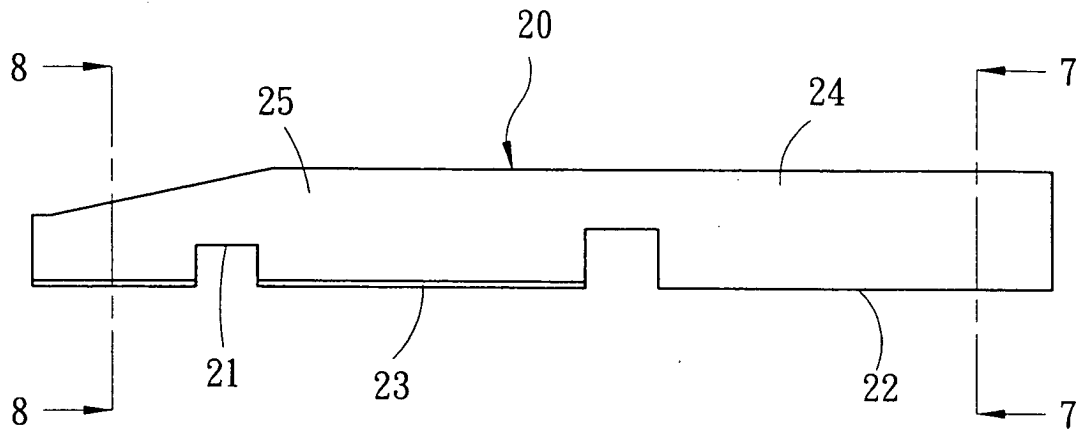


Fig. 6

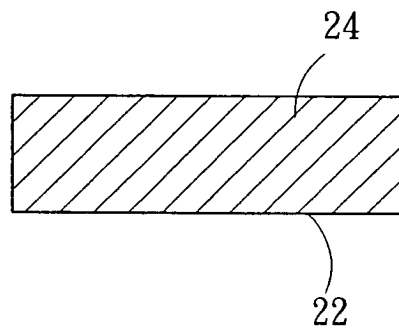


Fig. 7

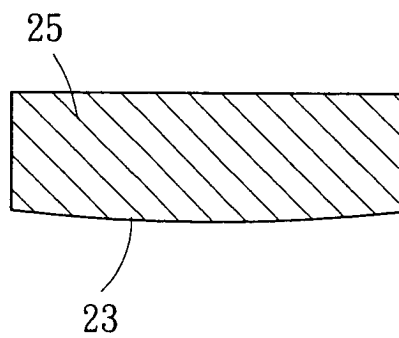


Fig. 8

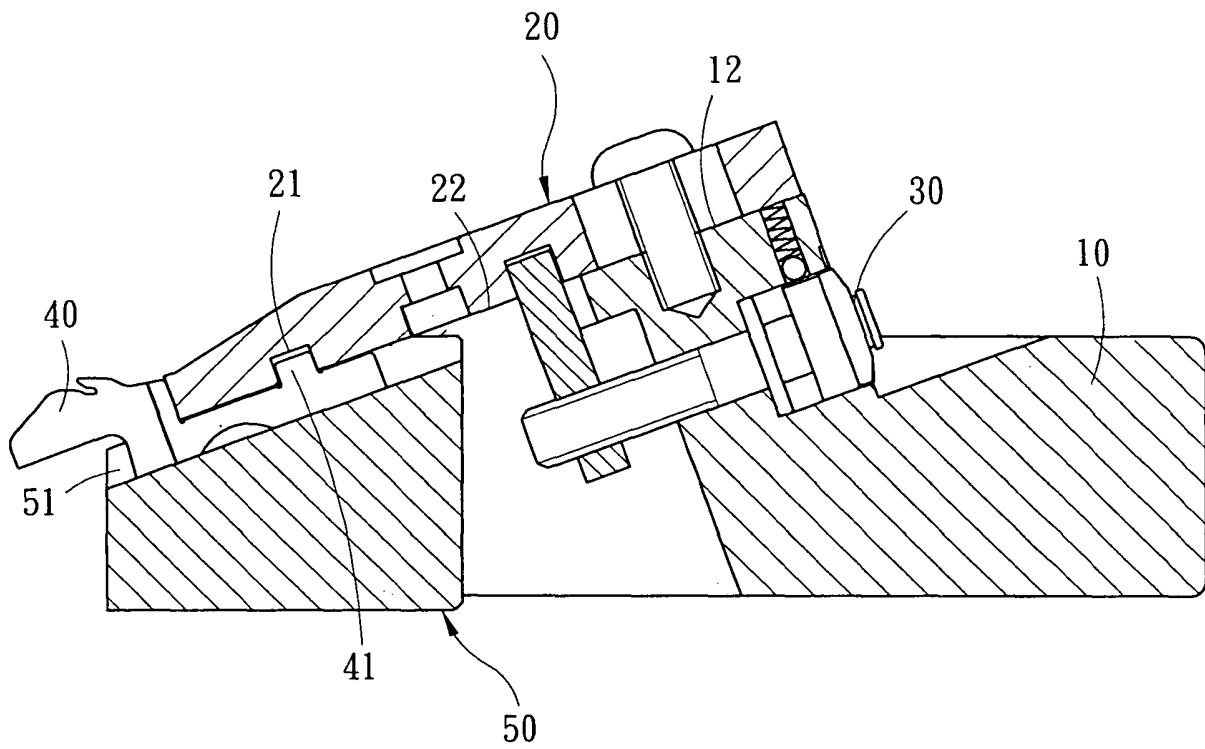


Fig.9

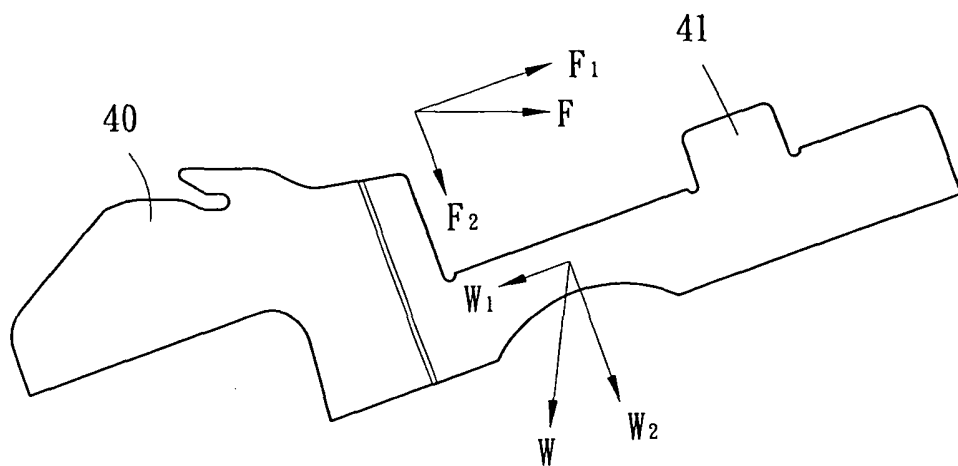


Fig.10



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 00 1386

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 402 034 A (PRECISION FUKUHARA WORKS LTD) 12 December 1990 (1990-12-12) * column 4, lines 18-44; figure 1 *	1,2	D04B15/32
A	FR 2 639 659 A (LU SA H0) 1 June 1990 (1990-06-01) * page 3, line 29 - page 4, line 9; figure 1 *	1,2	
A	EP 0 478 855 A (PRECISION FUKUHARA WORKS LTD) 8 April 1992 (1992-04-08) * column 4, line 49 - column 5, line 16; figure 1 *	1,2	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			D04B
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 29 June 2004	Examiner Dreyer, C
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03/82 (P04/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 00 1386

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-06-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0402034	A	12-12-1990	JP 3008840 A	16-01-1991
			DE 69008239 D1	26-05-1994
			DE 69008239 T2	10-11-1994
			EP 0402034 A1	12-12-1990
			ES 2053110 T3	16-07-1994
			KR 9705846 B1	21-04-1997

FR 2639659	A	01-06-1990	FR 2639659 A1	01-06-1990

EP 0478855	A	08-04-1992	EP 0478855 A1	08-04-1992
