

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 563 930 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
17.08.2005 Bulletin 2005/33

(51) Int Cl. 7: B22D 29/00

(21) Application number: 05008776.6

(22) Date of filing: 23.05.2001

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU

MC NL PT SE TR

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 27.07.2000 US 627109
19.09.2000 US 665354
09.05.2001 US 852256

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
01939335.4 / 1 303 373

(71) Applicant: Consolidated Engineering Company, Inc.
Kennesaw, Georgia 30144-3651 (US)

(72) Inventors:

- Crafton, Scott P.
Marietta GA 30064 (US)

- Crafton, Paul M.
Kennesaw GA 30144 (US)
- Knobloch, Volker R.
Woodstock GA 30189 (US)
- Lewis, James L. , J.
Kennesaw GA 30152 (US)
- French, Ian
Kennesaw GA 30152 (US)

(74) Representative: Hofstetter, Alfons J., Dr.rer.nat.
Hofstetter, Schurack & Skora
Balanstrasse 57
81541 München (DE)

Remarks:

This application was filed on 21 - 04- 2005 as a divisional application to the application mentioned under INID code 62.

(54) Method and apparatus for assisting removal of sand moldings from castings

(57) The present invention generally comprises a method for enhancing the breakdown and removal of a sand mold from a casting formed within the mold to speed up the exposure of the casting to heat treatment temperatures and enhance the breakdown and reclamation of sand from the sand molds. According to the present invention, the method of dislodging a mold from a casting can include placing one or more explosive charges or organic or thermally degradable materials at one or more selected locations within exterior walls of the mold. An additional embodiment includes a method of dislodging a mold from a casting formed within the casting by stimulating the mold with a high energy pulsation.

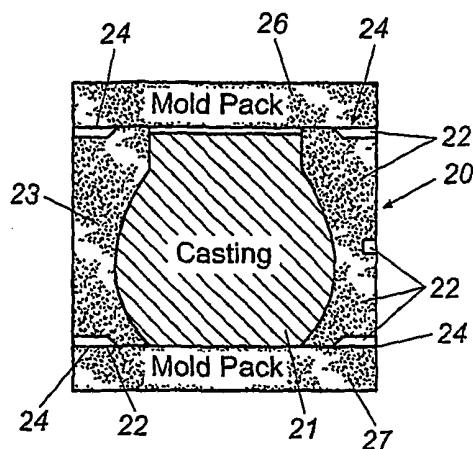


Fig. 2A

Description

[0001] The present invention relates generally to the manufacturing of metal castings and more particularly to manufacturing castings within sand mold packs.

[0002] A traditional casting process for forming metal castings generally employs a mold or die, such as a permanent, metal die or a sand mold, having the exterior features of a desired casting, such as a cylinder head, formed on its interior surfaces.

[0003] A sand core comprised of sand and a suitable binder material and defining the interior features of the casting is typically placed within the die to further define the features of the casting. Sand cores generally are used to produce contours and interior features within the metal castings, and the removal and reclaiming of the sand materials of the cores from the castings after the casting process is completed is a necessity.

[0004] Depending upon the application, the binder for the sand core and/or sand mold may comprise a phenolic resin binder, a phenolic urethane "cold box" binder, or other suitable organic binder material. The die or mold is then filled with a molten metallic alloy, which is allowed to cool to a certain, desired degree to cause the alloy to solidify. After the alloy has solidified into a casting, the casting is then moved to a treatment furnace or furnaces for further processing, including heat-treating, reclamation of the sand from the sand cores, and aging. Heat treating and aging are processes that condition metallic alloys so that they will be provided with different physical characteristics suited for different applications. Heat treating may include processing and/or thermal processing.

[0005] Sand molds and/or cores generally are removed from the casting prior to completion of heat treatment. The sand mold sand/or cores are typically separated from their castings by one or a combination of means. For example, sand may be chiselled away from the casting or the casting may be physically shaken or vibrated to break-up the sand molds and internal sand cores within the castings and remove the sand. In addition, as the sand molds and castings are passed through a heat treatment and/or thermal sand removal furnace, the organic or thermally degradable binder for the sand molds and cores, generally is broken down or combusted by exposure to the high temperatures for heat treating the castings to a desired metal properties so that the sand from the molds and cores can be removed from the castings and reclaimed, leaving the finished, heat-treated castings. Such furnace systems and methods of heat treating castings are found in U. S. Patent Nos. 5,957,188, 5,829,509, and 5,439,045. Once the sand is removed from the casting, heat treating and aging of the casting generally are completed in subsequent steps.

[0006] Technology such as that disclosed in the above mentioned patents is driven, for example, by competition, increasing costs of raw material, energy, labor, waste disposal, and environmental regulations. These

factors continue to mandate improvements in the field of heat-treating and reclamation of sand from such metal castings.

[0007] The present invention comprises a method and system for enhancing the removal of sand molds from castings formed within sand molds. According to the present invention, the method of dislodging a mold from a casting can include placing one or more explosive charges or organic or thermally degradable materials at one or more selected locations within exterior walls of the mold. The explosive charges are detonated at specific times in the process so as to cause the mold to fracture and break into pieces. The broken pieces may then be dislodged from the casting.

[0008] Additionally, score lines may be added to the mold containing the explosive charges or organic or thermally degradable or reactive materials. The score lines are operatively placed in combination with the explosive charge (s) and/or organic or thermally degradable materials in predetermined locations to enhance the breaking down and dislodging of portions of the mold from the casting upon initiation of the explosive charge (s). After the mold has been dislodged, heat treatment of the casting may begin or continue.

[0009] An additional embodiment includes a method of dislodging a mold from a casting formed within the casting by stimulating the mold with a high energy pulsation. The mold typically fractures after being stimulated by the high energy pulse and the fractured pieces may then be dislodged from the casting. The high energy pulsation typically includes a shock wave, pressure wave, acoustical wave, or combination thereof produced from either mechanical means, cannons, pressurized gasses and electromechanical means. Additionally, score lines may also be applied to the mold to aid in breaking down and dislodging the mold from the casting.

[0010] Various objects, features and advantages of the present invention will become apparent to those skilled in the art upon reading the following specification, when taken in conjunction with the accompanying drawings.

[0011] In the drawings:

Figs. 1A-1B are cross sectional views of a sand mold, illustrating the formation of score lines at desired locations thereon and the resultant fracture of the mold along the score lines;

Figs. 2A-2B are cross sectional views of a sand mold and casting, illustrating the use of score lines and explosive charges placed within the sand mold and fracture and dislodging of the mold upon initiation of the explosive charges;

Fig. 3 depicts a cross sectional view of a mold passing through an energy pulse chamber within or adjacent a treatment furnace, illustrating the mold pack and casting being treated with high energy pulses;

Figs. 4A-4B illustrates the application of a pressu-

rized fluid to a mold for breakdown of the mold; and Figs. 5A-5B illustrates movement of the molds through an oxygen enriched chamber for applying a flow of oxygen to promote combustion of the organic or thermally degradable binder of the molds.

[0012] The present invention generally comprises a method for enhancing the breakdown and removal of a sand mold from a casting formed within the mold to speed up the exposure of the casting to heat treatment temperatures and enhance the breakdown and reclamation of sand from the sand molds. The mold may be removed from around its casting either prior to the introduction of the sand mold and casting into a heat treatment furnace or unit, or within the heat treatment furnace or unit itself for heat treatment and sand reclamation within the unit. An example heat treatment furnace system for heat treatment of castings and at least partial breakdown and removal of sand molds and sand cores and reclamation of sand is shown in U. S. Patent Nos. 5,294,994, 5,565,046, 5,738,162, and 5,957,188 and U. S. Patent Application Serial No. 09/313,111, filed July 27, 2000. By enhancing the breakdown and removal of the sand molds from their castings, the castings are more rapidly exposed to the ambient heating environment of the heat treatment furnace or chamber.

[0013] Less energy and time thus are required to increase the temperature of the casting to achieve the desired treatment and resulting metal properties of the casting when the mold is removed from the casting.

[0014] The method of dislodging a mold from a casting can include scoring the sand mold. The scored mold is typically a "precision sand mold" generally comprised of a foundry sand material and a phenolic resin, phenolic urethane, or other suitable organic binder that generally decompose and/or combust when exposed to heat treatment temperatures for treating most castings, as is conventionally known. The sand molds can also include semi-permanent type molds formed from a combination of standard binder materials and a metal such as steel. The mold typically fractures and breaks along the score lines set into the mold as the binder material combusts to facilitate the dislodging and removal of the mod from the casting contained therein.

[0015] The score lines generally are placed at predetermined locations along or about the sides and/or top and bottom of each mold, with these locations generally selected to be optimal for breaking down the mold. The placing of the score lines in such predetermined locations is dependent upon the shape of the mold and the casting formed within the mold.

[0016] The term "scoring" can include any type of cut, line, scratch, indentation, groove or other such markings made into the top, bottom and/or side walls of the mold by any mechanism including cutting blades, milling devices and other, similar automatically and/or manually operated cutting or grooving devices. The scoring generally may take place on the exterior of the mold, but is

not limited only to the exterior surfaces of the mold, and it will be understood that the interior surfaces of the mold also can be scored or grooved, in addition to or alternatively of the scoring of the exterior surfaces. Each mold

5 may be scored by any conventional means such as by molded or scratched lines placed or formed on the exterior and/or interior surfaces of the mold during formation of the mold, or at some point thereafter, up to the introduction of the mold, with a casting therein, into a heat treatment furnace.

[0017] A force may further be applied to the mold to enhance the fracture and breaking of the mold into various pieces, which can then be easily dislodged or dropped away from the casting. Such a force may be 10 applied to the inner walls of the mold, to the outer walls of the mold or a combination of the two. The force applied to the inner walls of the mold typically results from the thermal expansion of the casting within the mold, with the expansion of the casting further being enhanced or accelerated by heating the casting using radiant energy, inductive energy or a combination thereof. The energy sources used to heat the casting may include electromagnetic energy, lasers, radio waves, microwaves and combinations thereof.

15 **[0018]** The energy sources used to heat the mold and/or casting may also include lasers, radio waves, microwaves, or other forms of electromagnetic energy and/or combinations thereof. In general, these and other energy sources are radiated toward the exterior or directed 20 to specific areas of the mold or casting for the purpose of heating the mold and casting to cause thermal expansion leading to mold and/or core sand fracture or breakdown. Alternately, inductive energy involves enveloping the casting and mold in a field of electromagnetic energy

25 which induces a current within the casting leading to the heating of the metal, and to a lesser degree, the mold.

[0019] Typically, with the molds being insulative rather than conductive, inductive energy generally offers some limited heating effect directly within the mold, but not to 30 the degree of the heat generated within the casting. Of course there may be other methods of heating and expanding the casting for fracturing the molding.

[0020] Additionally, score lines can be added to the 35 mold or by the mold itself to aid in the dislodging of the mold from the casting or mold in conjunction with the application of force thereto.

[0021] Pulsations of energy also may be applied within specially designed process chambers such as for example a furnace. Design features may include the capability of withstanding pulsations and resultant effects, 50 provide for the transportation of mold/casting into and out of the chamber to provide precise control of the pulsation.

[0022] The energy pulsations generally enhance to 55 some degree heat transfer to the mold cores and castings. The pulsations also promote mass transport of decomposed binder gases out of the mold and cores, oxygen bearing process gas to the mold and cores, and

loosen sand out of the casting. The pulsations may occur at both low or high frequencies, where low frequency pulsations would generally be utilized to generate a force for fracturing the mold or cores and the higher frequencies would be employed to enhance the transfer, mass transport and some fracturing on a smaller scale. Higher frequency pulsations induce vibration effects to some degree within the casting to promote the mechanical effects of the above process.

[0023] Furthermore, the mold and/or cores may be broken down by the application of any or all of these energy sources to the mold and/or cores to promote the decomposition of the organic or thermally chemical binder of the sand mold and/or core, which binder breaks down in the presence of heat thus facilitating the degradation of the mold. Additionally, the mold may be broken down by the application of a high pressure fluid (s) such as air, products of combustion, oxygen enriched gases or other fluid materials to the exterior walls of the mold.

[0024] Furthermore, a direct application of force in the form of shock waves, pressure waves, acoustical waves, or a combination thereof can be applied to the mold, cores, or casting to aid in fracturing and breaking the mold into pieces. In one embodiment, the mold and/or core is stimulated with a high energy pulsation for direct application of a force, which may also penetrate the walls of the mold and cause heating of the mold to further aid in the combustion of the mold binder and the resultant breaking down of the mold. The pulsation energy may be a constantly recurring or intermittent force and can be in the form of shock waves, pressure waves, acoustical waves, or any combination thereof produced by mechanical, electromechanical and/or other known means such as compression cannons or pressurized gasses. Alternatively, low power explosive charges or organic or thermally degradable materials can be placed in the mold and set off or initiated by the heating of the mold to assist in break up and dislodging of the mold from about its casting.

[0025] In greater detail, the present invention envisions several alternative embodiments and/or methods for performing this function of dislodging or breaking up the sand molds prior to or during heat treatment of the castings. It will also be understood that any of the described methods can be used in conjunction with or separately from one another. These various methods are illustrated in Figs. 1A through 5B.

[0026] As illustrated in Figs. 1A and 1B, a sand mold 10 with a casting 11 therein is shown with at least one, and typically multiple, score lines 12 or relief lines formed in the exterior side walls 13 of the mold 10. The score/relief lines 12 typically will be cut or otherwise formed as grooves or notches in the exterior side walls of the mold and act as break lines for the exterior walls of the mold pack. It is also possible to cut or form the score/relief lines 12A in the interior walls 14 of the mold as shown in Fig. 1 A and/or in the top and bottom walls

16 and 17 of the mold 10.

[0027] As further illustrated in Fig. 1B, these score/relief lines weaken the mold walls so as to predetermine the locations and positions of the fracture or breaking apart of the mold 10, such that as a force F is applied to the walls of the mold, walls of the mold are caused to crack and break apart along these score/relief lines as illustrated at 18 in Fig. 1B. Typically, this force F includes the exertion of pressure against the interior walls 14 of the mold 10 by the castings themselves due to the thermal expansion of the metal of the castings as they are subjected to heating or elevated temperatures for heat treating the castings. As the metal of the castings expands in response to heat in the heat treatment furnace, it presses against and urges the walls of the mold outwardly, causing the mold to crack and break apart at the points of weakness therein created by the score/relief lines. As a result, sections or portions of the mold will be readily and easily dislodged from the mold and its casting generally prior to or during an initial phase of the heat treatment process for the castings, rather than the mold simply breaking down and slowly degrading as its binder material is combusted over time in the heat treatment furnace.

[0028] Figs. 2A-2B illustrate a first embodiment of the present invention for breaking down and dislodging a mold 20 from a casting 21 formed therein. In this method, low impact explosive charges 22 are mounted at one or more points within the side walls 23 of the mold pack 20. The explosive charges generally are strategically located within the mold pack structure, generally near critical joints 24 within walls, such as between the side walls 23 and the top and bottom walls 26 and 27, so as to dislodge the mold from the casting, while still retaining the casting intact. As additionally shown in Fig. 2B, after explosion of the low intensity explosive charges, gaps or channels 28 are formed in the mold pack 20, extending deeply through the side walls and upper and lower portions of the mold. As a result, the mold is substantially weakened at or along these channels or gaps such that the mold tends to readily break apart in sections or pieces along these channels 28 in response to presence from the thermal expansion of the castings and/or as the binder materials of the mold is combusted for ease of removal of the mold from its casting.

[0029] Still a further embodiment of the present invention for breaking apart and enhancing the removal of mold 30 and from the castings is illustrated in Fig. 3. In this embodiment of the present invention, vibratory forces of nature to promote fracture of mold/core sand is applied to the molds in the high-energy pulses or waves 32 which are directed at the molds 30 as they are passed through a process chamber 33, which typically is positioned in front of or at the input end of a heat treatment furnace so that the molds and castings generally pass therethrough prior to heat treatment of the castings. The high-energy pulses of variable frequency or wavelength are typically directed at the side walls 34 and/or upper

portions or top walls 36 of the molds from one or more pulsation or wave generators 37 mounted within the chamber. Such high energy pulsations or waves would typically be generated in the form of shock waves, pressure waves, or acoustical waves propagated through the atmosphere of the process chamber.

[0030] Alternatively, electromagnetic energy could be pulsed or radiated onto the walls of the molds as described to promote fracture, heat absorption, binder degradation, or other process effect for the purpose of dislodging mold and core sand from the casting. Such electromagnetic radiation would be in the form of lasers, radio waves, microwaves, or other form that would result in the process effects described above.

[0031] The high energy pulses directed towards the molds stimulate the molds and cause them to vibrate without requiring physical contact with the mold packs. As the pulsations pass through the molds, the stimulation and vibration of the molds tends to cause fracturing and breaking apart of the molds. The pulsation may be either a sustained pulse or directed as discrete pulses. The discrete pulses may be administered at regular intervals. Pulsations administered in sustained or discrete fashion would be carefully controlled in terms of frequency, interval of application, and intensity, so as to accomplish the process effects without harming the casting. In addition, the molds can also be scored or pre-stressed/weakened, at selected points as discussed above and as indicated at 38 in Fig. 3, so as to facilitate or promote the breaking apart of the molds as they are vibrated or otherwise impacted by the high energy pulses. The molds accordingly are caused to be broken down and dislodged from their castings as the castings are moved into a heating chamber of the heat treatment furnace or other processing of the castings. In addition, as discussed in U. S. Patent Application Serial No. 09/627,109, filed July 27, the energy pulses further typically cause the castings within the molds to be heated, which further results in thermal expansion of the castings so as to apply a force against the interior side walls of the molds to further facilitate and enhance the breaking apart of the molds.

[0032] For enhancing the breakdown and removal of a sand mold from a casting 51 formed therein (or, for example, as discussed in regard to this embodiment, removal of sand cores located within the casting) it is possible - as illustrated in Figs. 4A-4B - that a series of nozzle stations 42 generally are positioned at specific locations or positions along the path of travel of the mold/ core laden casting into or within a heat treatment furnace, either as a part of the heat treatment furnace, such as in an initial or prechamber, or placed in front of or prior to the heat treatment furnaces, to aid in the removal of the sand core from the castings. The number of nozzle stations can vary as needed, depending upon the core print or design of the casting being formed in the mold. Each of the nozzle stations or assemblies 42 generally includes a series of nozzles 43 mounted and ori-

ented at known or registered positions about the side walls 44, top or upper walls 46 and/or lower or bottom walls 47 of the molds 40 corresponding to known, indexed positions of the cores and castings⁴¹. The

5 number of nozzles in each nozzle station is variable, depending upon the core prints of the castings, such that different types of castings having differing core prints can utilize an optionally different arrangement or number of nozzles per nozzle station. The nozzles also 10 may be automatically controlled through a control system for the heat treatment station or furnace that can be operated remotely to cause the nozzles to move to various desired positions about the side walls 44 and top and bottom walls 46 and 47 of the mold as indicated by 15 arrows 48 and 48' and 49 and 49' in Figs. 4A and 4B.

[0033] Each of the nozzles is typically supplied with a high-pressure heated media. The high-pressure media may include air, thermal oils, water or other known fluid materials that are directed at the side walls 44, top wall 20 46 and/or bottom wall 47 of each mold/core under high pressure, typically in the range of 0,344 bar to 3,102 bar (5 psig to 45 psig), although greater or lesser pressures also can be used as required for the particular casting application. These fluid pressures are converted to high 25 fluid velocities at the nozzle exit which delivers the energy of the fluid to the mold/core and applies forces sufficient to at least partially fracture and/or otherwise degrade the mold and/or cores. High fluid velocities typically cause or promote higher heat transfer to the casting, mold, and cores which has added benefit in breaking down mold and core sands. The pressurized fluid flows, which are administered by the nozzles, can be applied in continuous flows or as intermittent blasts that impact or contact the mold walls to cause the mold walls 30 to fracture or crack and can promote more rapid decomposition and/or combustion of the binder materials of the sand molds to help at least partially degrade or break down the mold.

[0034] Figs.5A-5B illustrate still a further alternative 40 embodiment of the present invention for enhancing the breakdown and removal of molds 90 from castings 91 contained therein. In this embodiment, prior to or as the molds 90 and their castings are moved into a heat treatment furnace or chamber 92, they are passed through 45 a low velocity oxygen chamber 93. The oxygen chamber generally is an elongated autoclave or similar pressurized heating chamber capable of operating under higher than ambient pressures. The oxygen chamber 93 is provided with an enriched oxygenated environment and 50 includes a high pressure upstream side 94 and a low pressure downstream side 96 that are positioned opposite each other to assist in drawing an oxygen flow therebetween.

[0035] As the molds are passed through the low velocity oxygen chambers of the heating chamber 93, heated oxygen gas is directed at and is forced through the molds, as indicated by arrows 97 (Fig.5A) and 97' (Fig.5B). The oxygen gas is drawn or flows under pres-

sure from the high atmospheric pressure side to the low atmospheric pressure side of the oxygen chamber, so that the oxygen gas is urged or forced into and possibly through the mold sand/or cores. As a result, a percentage of the oxygen gas is combusted with the binder materials of the sand molds/cores, so as to enhance the combustion of the binder material within the heating chamber. This enhanced combustion of the binder materials of the molds and cores are further supplied with energy from the enhanced combustion of the binder material thereof and the oxygen, which helps enhance and/or speed up the breakdown and removal of the molds from their castings.

[0036] This breakdown of the molds can be further assisted by scoring or forming relief lines in the molds, as discussed in greater detail above, so as to pre stress/weaken the molds so that as the binder materials are combusted, the mold walls will tend to crack or fracture so that the molds will break and fall away from their castings in sections or pieces.

[0037] In addition, the enhanced combustion of the binder materials further serves as an additional, generally conductive heat source to thus increase the temperature of the castings in the mold packs and facilitate combustion of the binder materials of the sand cores for ease of removal and reclamation. As a result, the castings are raised to their heat treatment temperatures more rapidly, which helps reduce the residence time of the castings in the heat treatment furnace that is required to properly and completely heat treat the castings, as discussed in copending U. S. Patent Application serial No. 09/627,109, filed July 27, 2000.

Claims

1. A method of dislodging a mold from a casting formed therein, comprising: placing at least one explosive charge at a selected location within exterior walls of the mold; detonating the explosive charge such that the mold fractures and breaks into pieces; and dislodging the pieces of the mold from the casting.
2. The method of claim 1, wherein the mold is comprised of sand and a binder.
3. The method of claim 1 further including scoring the mold by forming score lines in exterior walls of the mold.
4. The method of claim 3, wherein the score lines are operatively placed in combination with the explosive charge in predetermined locations for breaking down and dislodging portions of the mold from the casting.
5. The method of claim 1, wherein the pieces of the

mold are dislodged from the casting prior to heat treating the casting.

6. The method of claim 1, wherein dislodging the pieces of the mold comprises heating the casting to cause expansion of the casting.
7. The method of claim 6, wherein heating the casting comprises applying energy to the casting from an energy source selected from the group consisting of radiant energy, inductive energy and combinations thereof.
8. The method of claim 7, wherein the energy source is selected from the group consisting of electromagnetic energy, lasers, radio waves, microwaves, and combinations thereof.
9. The method of claim 1, and wherein the mold is formed from sand and a degradable binder that is combusted as and the mold is heated under elevated pressures in an enriched oxygen atmosphere to facilitate breakdown and dislodging of the mold from the casting.
10. The method of claim 1, and further including directing a high pressure fluid at exterior walls of the mold.
11. The method of claim 10, wherein the high pressure fluid comprises heated air, thermal oils or water.
12. A method of dislodging a mold from a casting formed therein, comprising: stimulating the mold with a high energy pulsation; fracturing the mold; and dislodging the mold from the casting.
13. The method of claim 12, wherein the high energy pulsation is applied as a shock wave.
14. The method of claim 12, wherein the shock wave is produced from at least one of the following: mechanical means, cannons, pressurized gasses and electromechanical means, and a combination thereof.
15. The method of claim 12 further comprising scoring the mold by forming score lines in exterior walls of the mold.
16. The method of claim 15, wherein the score lines are operatively placed in predetermined locations for breaking down and dislodging portions of the mold from the casting.
17. The method of claim 12, wherein pieces of the mold are dislodged from the casting prior to heat treating the casting.

18. The method of claim 12, wherein dislodging the mold from the casting includes heating the casting so as to cause the casting to expand.

19. The method of claim 18, wherein heating the casting comprises applying energy to the coating from an energy source selected from the group consisting of radiant energy, inductive energy and combinations thereof. 5

20. The method of claim 19, wherein the energy source is selected from the group consisting of electromagnetic energy, lasers, radio waves, microwaves, and combinations thereof. 10

21. The method of claim 12, and wherein the mold is formed from sand and a degradable binder and dislodging the mold from the casting comprises combusting the binder as the mold is heated under elevated pressures in an enriched oxygen atmosphere to facilitate breakdown of the mold. 15 20

22. The method of claim 12, wherein stimulating the casting with a high energy pulsation includes directing a high pressure fluid at exterior walls of the mold with a force sufficient to cause the mold to fracture. 25

23. The method of claim 22, wherein the high pressure fluid comprises heated air, thermal oils or water. 30

35

40

45

50

55

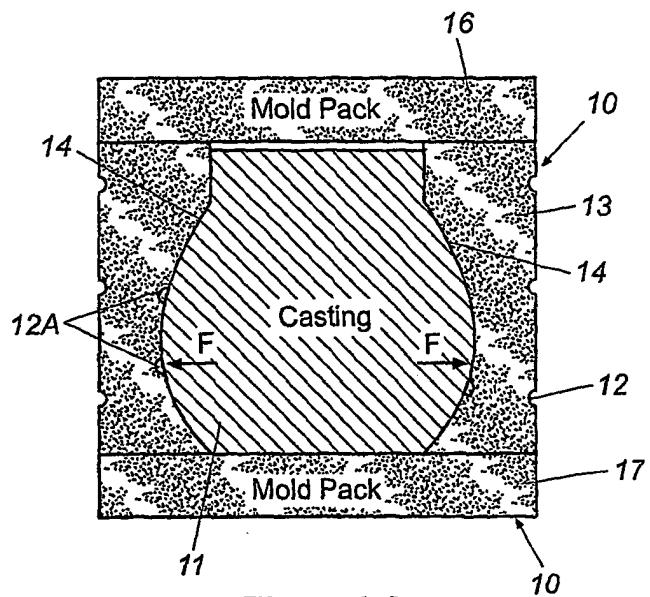


Fig. 1A

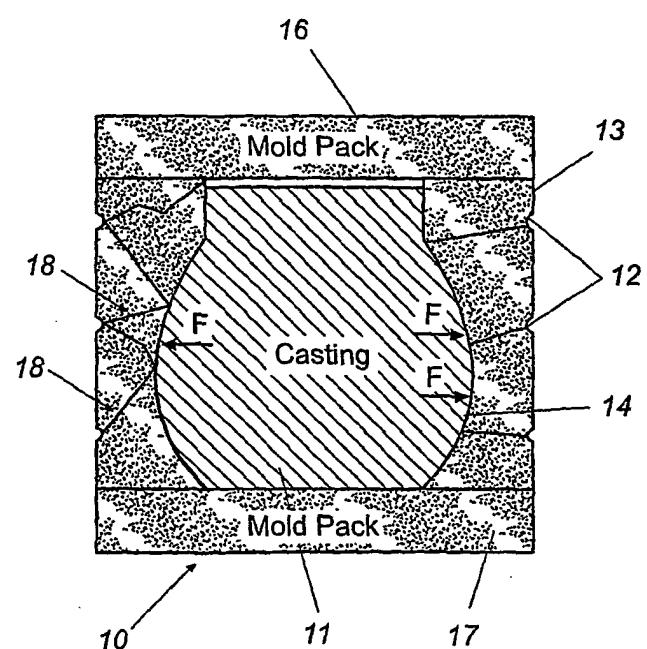
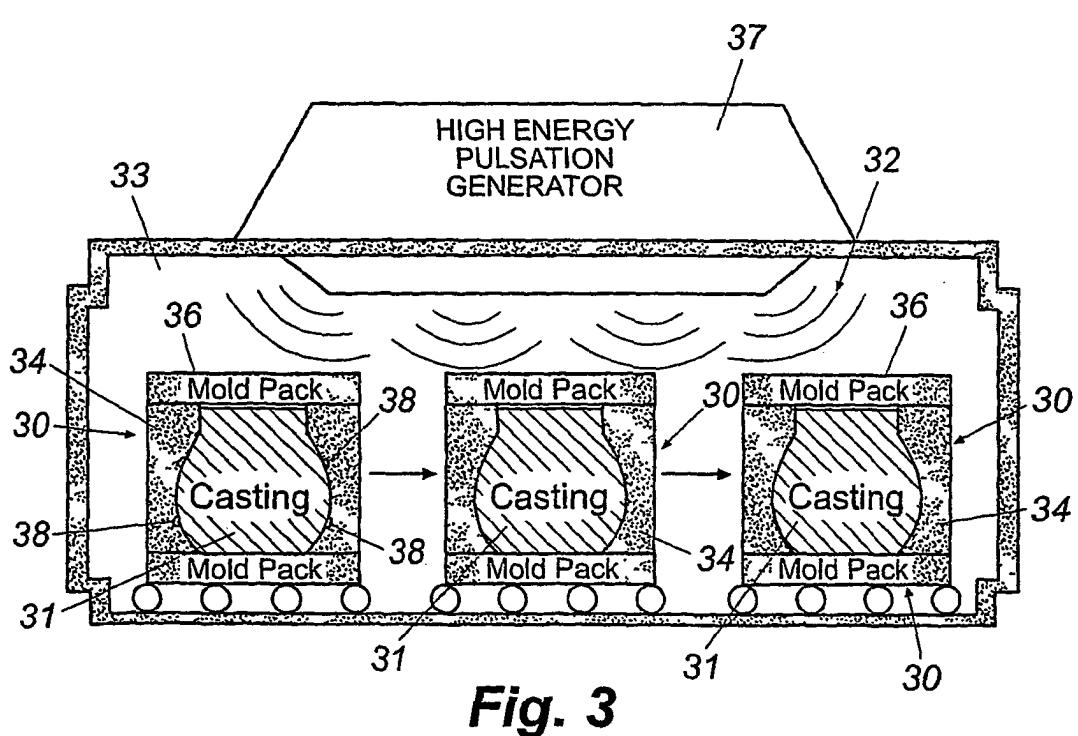
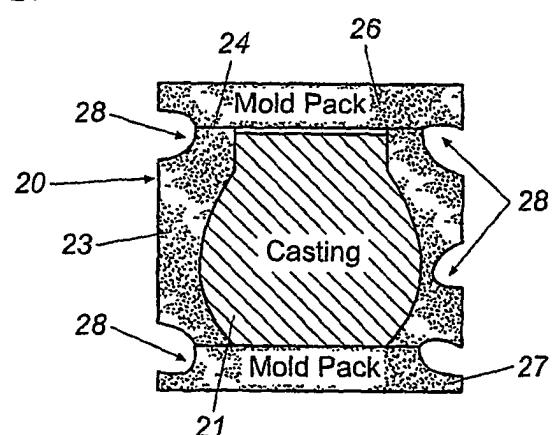
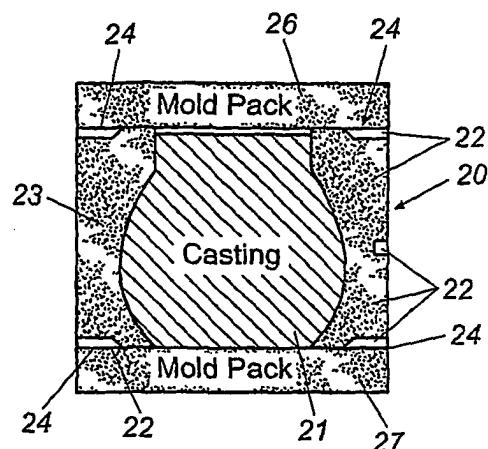


Fig. 1B



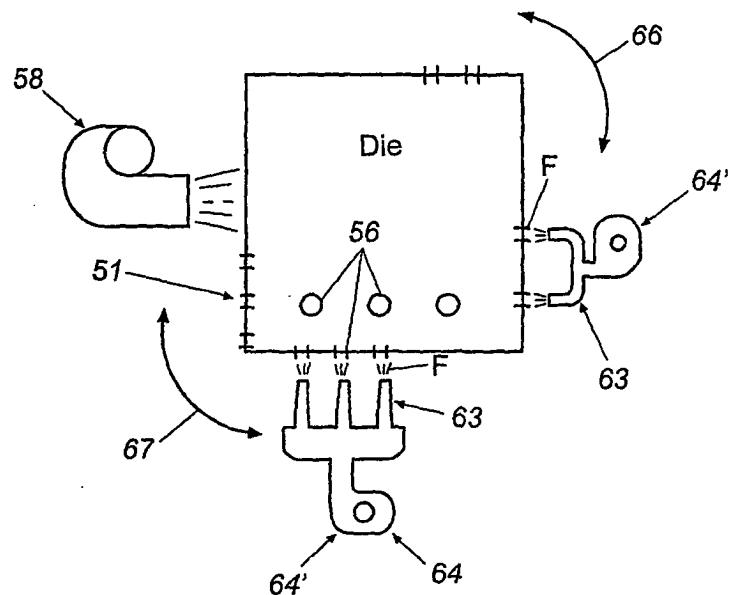


Fig. 4A

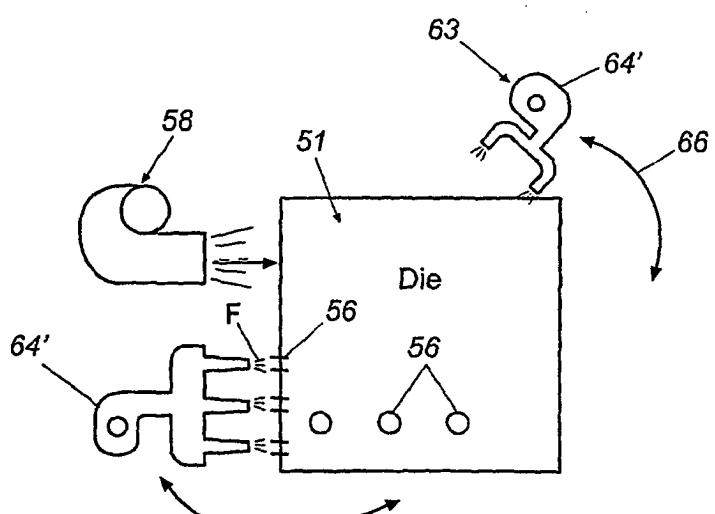


Fig. 4B

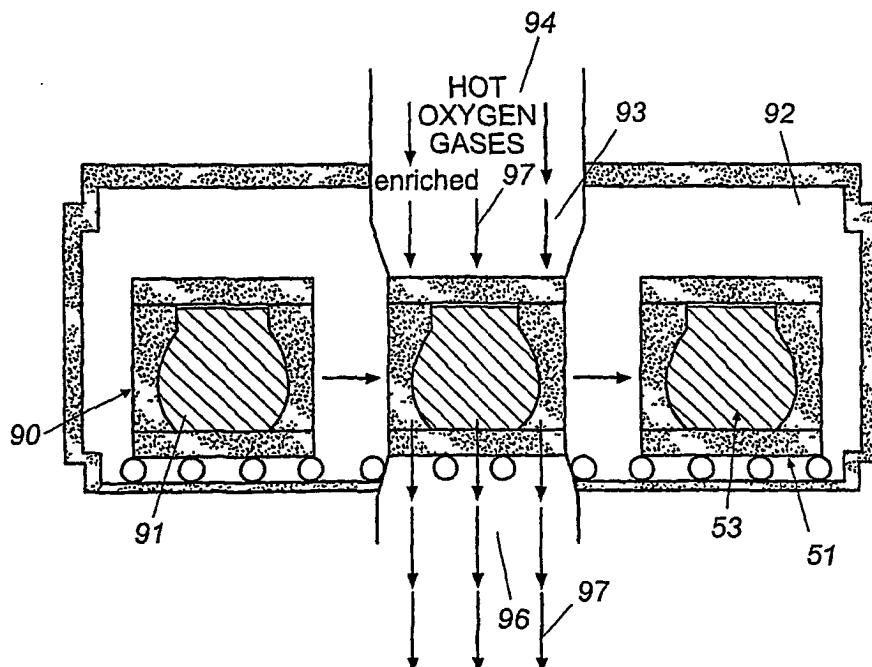


Fig. 5A

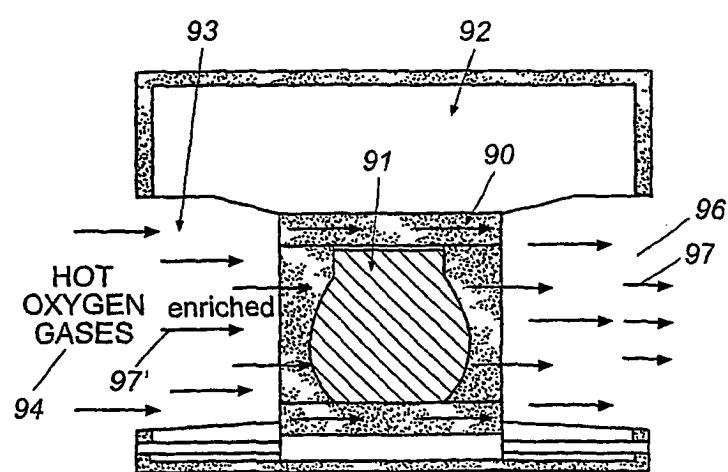


Fig. 5B



DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
X	GB 2 248 569 A (* PEEL JONES COPPER PRODUCTS LIMITED) 15 April 1992 (1992-04-15) * claims 1-24; figures 1-5 *	1-23	B22D29/00
Y	DE 10 30 974 B (AMAG-HILPERT-PEGNITZHUETTE A. G) 29 May 1958 (1958-05-29) * the whole document *	1-23	
Y	US 3 743 692 A (VINTON C,US ET AL) 3 July 1973 (1973-07-03) * claim 1; figures 1,2 *	1-23	
Y	US 4 089 702 A (ENOKSSON ET AL) 16 May 1978 (1978-05-16) * claim 1 *	1-23	
Y	US 4 374 538 A (RICE ET AL) 22 February 1983 (1983-02-22) * claim 1; figures 1-6 *	1-23	
X	US 4 802 525 A (HEINE ET AL) 7 February 1989 (1989-02-07) * claims 1-4; figure 1 *	12-23	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
X	US 5 778 963 A (PARILLE ET AL) 14 July 1998 (1998-07-14) * claim 1 *	12-23	B22D
A	DE 19 62 182 A1 (WAKAMATSU SHARYO K.K) 27 August 1970 (1970-08-27) * claim 1; figure 1 *	1-23	
The present search report has been drawn up for all claims			
5	Place of search Munich	Date of completion of the search 18 May 2005	Examiner Lombois, T
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			
T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

**CLAIMS INCURRING FEES**

The present European patent application comprised at the time of filing more than ten claims.

Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):

No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.

As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.

Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:

None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. claims: 1-11

A method of dislodging a mold from a casting formed therein using at least one EXPLOSIVE CHARGE at a selected location
WITHIN EXTERIOR WALL OF THE MOLD

2. claims: 12-23

A method of dislodging a mold from a casting formed therein using a stimulation of the mold with a HIGH ENERGY PULSATION

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 05 00 8776

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-05-2005

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
GB 2248569	A	15-04-1992	AU EP WO	1553492 A 0636188 A1 9321349 A1	18-11-1993 01-02-1995 28-10-1993
DE 1030974	B	29-05-1958	NONE		
US 3743692	A	03-07-1973	CA DE FR GB IT JP JP	974730 A1 2322760 A1 2189151 A1 1375528 A 980692 B 49052129 A 51031017 B	23-09-1975 10-01-1974 25-01-1974 27-11-1974 10-10-1974 21-05-1974 04-09-1976
US 4089702	A	16-05-1978	SE DE FR GB JP SE	390213 B 2556557 A1 2294788 A1 1488101 A 51088432 A 7416110 A	06-12-1976 24-06-1976 16-07-1976 05-10-1977 03-08-1976 21-06-1976
US 4374538	A	22-02-1983	NONE		
US 4802525	A	07-02-1989	DE EP JP	3543062 C1 0224672 A1 62134164 A	14-05-1987 10-06-1987 17-06-1987
US 5778963	A	14-07-1998	NONE		
DE 1962182	A1	27-08-1970	NONE		