



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 568 297 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
31.08.2005 Bulletin 2005/35

(51) Int Cl.7: **A47C 1/03**

(21) Application number: **04254176.3**

(22) Date of filing: **13.07.2004**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR**
Designated Extension States:
AL HR LT LV MK

(72) Inventors:
• **Norman, Christopher J.**
Bryon Center Michigan 49315 (US)
• **Karsten, Gary L.**
Wyoming Michigan 49059 (US)


(30) Priority: **27.02.2004 US 788692**

(74) Representative:
Miller, James Lionel Woolverton et al
Kilburn & Strode,
20 Red Lion Street
London WC1R 4PJ (GB)

(71) Applicant: **Steelcase Development Corporation**
Caledonia, MI 49316 (US)

(54) Chair with functional armrest

(57) A seating unit (1) includes a frame (2), a seat (4), and a pair of armrests (6) movably mounted to the frame for movement between forward and rearward positions. The armrests are biased into the forward position, and each armrest includes a device (17) selectively retaining the armrest in the rearward position. Movement of the armrest releases the device such that the armrest moved to the forward position due to the bias.

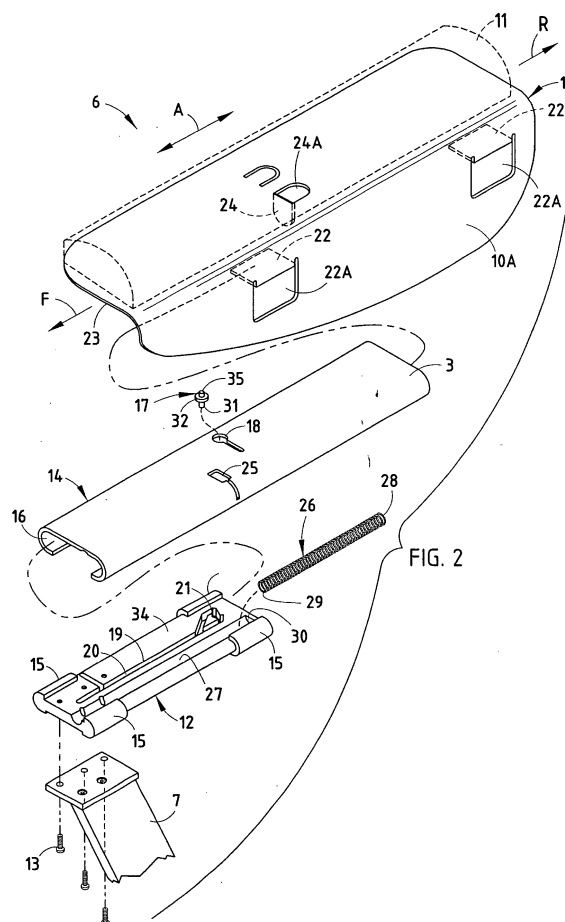

EP 1 568 297 A1

Description

[0001] Seating units such as office chairs may include armrests to support the forearms of a seated user. Such armrests are often padded, and may include various positional adjustment features to accommodate the needs of a particular user. Such adjustment features may include height adjustment, side-to-side adjustment, and/or front to rear adjustment. Such adjustment may require that a user manipulate a release lever or the like to unlock the adjustment mechanism to permit movement of the armrest.

[0002] Also, in use, the armrest may contact the edge of a desk or the like, potentially resulting in damage to the armrest. Such contact may also limit the movement of the chair itself and limit the ability of the user to get as close to the desk as desired. U.S. Patent No. 5,931,537 does disclose an adjustable armrest assembly including detent arrangement wherein an armrest will move from a normal use position to a retracted position when the chair is moved such as when the armrest engages a desk. However, known adjustment mechanisms may be somewhat awkward or difficult to use, and may not permit a user to quickly and easily lock the armrest in the desired position.

[0003] The invention aims to alleviate at least to a certain extent the problems of the prior art.

[0004] Various aspects of the invention are set out in the independent claims.

[0005] A number of optional features are monitored in the dependent claims.

[0006] One aspect of the present invention is an adjustable armrest for a chair including a base and a support member slidably coupled to the base for movement in first and second directions between first and second positions relative to the base, wherein the support member is biased into the first position. The armrest includes a device selectively retaining the support member in the second position, and the device includes a catch and a removable retaining member that is engagable with the catch to retain the support member in the second position. The retaining member disengages from the catch upon movement of the support member to permit movement of the support member relative to the base.

[0007] Another aspect of the present invention is a seating unit including a frame, a seat, and a pair of armrests movably mounted to the frame for movement between forward and rearward positions. The armrests are biased into the forward position, and each armrest includes a device selectively retaining the armrest in the rearward position. Movement of the armrest releases the device such that the armrest moves to the forward position due to the bias.

[0008] Yet another aspect of the present invention is a seating unit including a frame, a seat, a backrest, and a pair of armrests movably mounted to the frame for movement between forward and rearward positions. The armrests are biased into the forward position, and

a heart and pawl device operably interconnects the armrest with the frame. The heart and pawl device selectively retains the armrest in the rearward position, and biases the armrest towards the forward position.

[0009] These and other features, advantages, and objects of the present invention will be further understood and appreciated by those skilled in the art by reference to the following specification, claims, and appended drawings.

Fig. 1 is a perspective view of a seating unit according to one aspect of the present invention;

Fig. 2 is an exploded perspective view of an armrest according to another aspect of the present invention;

Fig. 2A is an enlarged view of the heart-shaped portion of the track in the slide block of Fig. 2;

Fig. 3 is a fragmentary side elevational view of an armrest according to another aspect of the present invention;

Fig. 4 is an end view of the armrest of Fig. 3;

Fig. 5 is an exploded perspective view of an armrest having the heart and pawl mechanism of Figs. 6 and 6A;

Fig. 5A is an exploded perspective view showing the heart and pawl mechanism of the armrest of Fig. 5 from another perspective;

Fig. 6 is a plan view of a heart and pawl mechanism according to one aspect of the present invention, wherein the armrest is in the forward position;

Fig. 6A shows the armrest of Fig. 6 wherein the armrest is held in the rear position by the heart and pawl mechanism;

Fig. 6B is a schematic drawing of an armrest having side-to-side adjustment according to another aspect of the present invention;

Fig. 6C is a schematic drawing of an armrest having rotational adjustment according to another aspect of the present invention;

Fig. 6D is a schematic drawing of an armrest having height adjustment according to another aspect of the present invention;

Fig. 7 is an exploded perspective view of an armrest according to yet another aspect of the present invention, wherein the armrest includes an angular adjustment mechanism;

Fig. 7A is an enlarged view of another version of the angular adjustment mechanism of Fig. 7; and

Fig. 8 is an exploded perspective view of the armrest of Fig. 7 from another perspective.

[0010] For purposes of description herein, the terms "upper," "lower," "right," "left," "rear," "front," "vertical," "horizontal," and derivatives thereof shall relate to the invention as oriented in Fig. 1. However, it is to be understood that the invention may assume various alternative orientations and step sequences, except where expressly specified to the contrary. It is also to be un-

derstood that the specific devices and processes illustrated in the attached drawings and described in the following specification are simply exemplary embodiments of the inventive concepts defined in the appended claims. Hence, specific dimensions and other physical characteristics relating to the embodiments disclosed herein are not to be considered as limiting, unless the claims expressly state otherwise.

[0011] With reference to Fig. 1, a seating unit such as a chair 1 for offices and the like includes a frame 2, a chair base 3 for supporting the chair on a floor surface, a seat 4, and a backrest 5. The armrests 6 are connected to the frame by support members 7, and may be moved forwardly and rearwardly as indicated by the arrow "A".

[0012] With further reference to Fig. 2, each armrest assembly 6 may include a support member 10 having a padded cushion 11 for supporting the forearm of a seated user. An armrest base member such as slide block 12 is secured to the armrest support member 7 by screws 13, and is slidably received in a guide member 14. The slide block 12 may be made of a relatively strong material, such as aluminum, and the guide member 14 may be made of a low-friction polymer or other suitable material. The guide member 14 is generally C-shaped in cross section, and slide block 12 includes raised pads 15 at each corner having cylindrical surface portions that slidably engage the curved inner surface 16 of guide member 14. A pin 17 extends through a keyhole shaped opening 18 in guide member 14, and into a slot or track 19 formed in slide block 12 to form what is sometimes referred to as a "push-push mechanism". A push-push mechanism is a device that secures a useful component at one end of a stroke when pushed and released a first time, but then releases the component when pushed in the same direction and released a second time.

[0013] There are different ways to construct a push-push mechanism. As illustrated, the track 19 includes an elongated linear portion 20, and a heart-shaped end portion 21. When assembled, the guide member 14 is positioned between tabs 22 and horizontal web 23 of support member 10. Support member 10 is made of a sheet metal material, and tabs 22 are formed by making U-shaped cuts in vertical side web 10A of support member 10. Tabs 22 are then bent inwardly to form openings 22A. A downwardly extending tab 24 of support member 10 extends through opening 25, and provides a stop for a spring 26. Tab 24 is formed in a similar manner to tabs 22, and forms an opening 24A after tab 24 is bent downwardly. When assembled, spring 26 is positioned within channel 27 of slide block 12, with a first end 28 of spring 26 contacting an end 30 of channel 27, and a second end 29 of spring 26 contacts tab 24 of support member 10. Spring 26 is in compression to thereby bias the support member 10 in the forward direction as indicated by the arrow "F". When assembled, the lower end 31 of pin 17 is received in track 19, and shoulder 32 of pin 17 is sandwiched between the upper web 33 of guide mem-

ber 14 and the upper surface 34 of slide block 12. Upper end 35 of pin 17 is slidably received in the elongated opening 18 in guide member 14. In use, when the support member 10 is in the forward position, the pin 17 will engage the elongated portion 20 of track 19. As the support member 10 is pushed rearwardly in the direction of the arrow "R" the pin 17 will travel along track 19 until it encounters the heart-shaped portion 21.

[0014] With further reference to Fig. 2A, as the end portion 31 of pin 17 travels along the track 19 in the direction of the arrow "B", it will encounter an angled portion or lobe 36 of track 19, and contact angled sidewall 37. Pin 17 will eventually also contact sidewall portion 38, thereby preventing further rearward motion of support member 10. If the force on support member 10 is then released, the spring 26 will begin to shift the support member 10 in the forward direction, causing the end 31 of pin 17 to engage notch or corner 39, thereby retaining the support member 10 in the rearward position. If a user then applies another rearward force to the support member 10, the pin 31 will then travel in the direction indicated by the arrow "D" until it contacts sidewall 40. If the force is then released, the pin 17 will travel as indicated by the arrows E and F and return to the elongated portion 20 of track 19, and the spring 26 will push the support member 10 back to the forward position. The pin 17 may be biased by a spring or the like (not shown) in the direction of the arrow "G" to ensure that the pin 17 shifts into engagement with notch 39 when the force on the support member 10 is released immediately after the support 10 is pushed to the rearward most position wherein end 31 of pin 17 contacts sidewalls portions 37 and 38.

[0015] With reference to Figs. 3 and 4, an armrest 50 according to another aspect of the present invention includes a support member 51 that is similar to the support member 7 described above for connecting the armrest 50 to a seating unit such as the office chair 1 of Fig. 1 described in detail above. A padded cushion 52 is secured to a structural member 53. The structural member 53 has a shallow C-shape in cross section with a web 54, sidewalls 55, and lips 56 forming channels 57 that slidably receive extensions 58 of a slide block 59 that is secured to the support member 51. A "heart and pawl" device 60 includes a rod 61 that is pivotably connected to a clevis 62 on structural member 53. Pins 63 interconnect an opposite end 64 of heart and pawl device 60 to the slide block 59. Heart and pawl device 60 is a commercially available prior art unit that is available from Lord Corporation, and includes an internal heart and pawl mechanism (not shown) and an internal spring (also not shown) biasing the rod 61 outwardly from the cylindrical section 65 of device 60 to thereby bias the structural member 53 and cushion 52 in the direction of the arrow "F". In use, if a force is applied to the cushion 52 in the direction of the arrow "R", the cushion will slide rearwardly to the rearward position designated 66, and the heart and pawl device 60 will latch to retain the cush-

ion 52 and structural member 53 in the rearward position 66. If a force is again applied in the direction of the arrow R, the heart and pawl device 60 will release, and the bias of rod 61 will push the cushion 52 and structural member 53 in the direction of the arrow "F" until it reaches the forward most position wherein the heart and pawl device 60 is fully extended.

[0016] With further reference to Figs. 5 and 5A, an armrest 70 according to another aspect of the present invention includes a support structure 71 for connecting to a chair frame. Support structure 71 includes a square boss 72 extending from an upper end 73 of the support structure. The square boss 72 is slidably received in an elongated slot 75 in a slide member 74. When assembled, a fastener 76 extends through an opening 77 in a detent member 78 and into a threaded opening 79 on boss 72. Retainer member 78 includes a cylindrical lower extension 80 that is received in an opening 81 in block 82. When assembled, a padded cushion 83 is secured to the slide member 74, and the block 82 is positioned within channel 84 of slide member 74. An elongated flexible wire 85 has a curved end portion 86 that is rigidly fixed to the slide member 74 via a threaded fastener 87 and washer 88 that are received in a threaded opening 89. Wire 85 includes a transversely (upwardly) extending end portion 90 that is received in track 91 of block 82. Spring 92 includes a first end 93 that interconnects to a connector 94 on block 82 (see also Figs. 6 and 6A). When assembled, spring 92 is positioned within channel 95 of block 82, and a second end 96 of spring 92 is connected to a connector 97 on slide member 74. The spring 92 is tensioned to bias the slide member 74 and padded cushion 83 in the forward direction indicated by the arrow "F".

[0017] With reference to Figs. 6 and 6A, end 90 of wire 85 is received in track 91 of block 82 to form a heart and pawl device. In use, if a force is applied to the slide member 74 in the direction of the arrow R to move the armrest in the rearward direction, the end 90 of wire 85 will initially travel along the straight portion 98 of track 91 from the forward most position illustrated in Fig. 6. End 90 eventually contacts the heart-shaped raised portion 99, and travels along track section 100 until it contacts the corner 101. If the force on the slide member 74 is then released, the end 90 will contact extension 102 and member 74 will shift forward slightly in the direction of the arrow F, until the end 90 is positioned in corner 103 as illustrated in Fig. 6A. Because the spring 92 biases member 74 in the direction of the arrow F, the end 90 is thereby retained in corner 103, and the slide member 74 and cushion 83 are retained in the rearward position of Fig. 6A. If a force is then applied to the slide member 74 in the direction of the arrow R when in the position illustrated in Fig. 6A, the end 90 of wire 85 will again contact extension 102, and shift into the U-shaped portion of the track 104 until it contacts corner 105. If the force acting on slide member 74 is then released, slide member 74 will then slide forward in the direction of the

arrow F, and end 90 of wire 85 will travel through the track portion 106 and through straight portion 98 of track 91 due to the bias of spring 92 until slide member 74 returns to the forward most position illustrated in Fig. 6.

[0018] In addition to the fore and aft adjustment of the armrest described above, it is contemplated that the present invention of a push-push mechanism can be used on a variety of different armrests and in a variety of different furniture applications. For example, an armrest including the present push-push mechanism may also include the adjustment features illustrated schematically in Figs. 6B, 6C and 6D. More specifically, the armrest 6 may be movable side-to-side relative to the support 7 as indicated by the arrow "S"; Fig. 6B. For example, the side-to-side adjustment mechanism may be a mechanism as illustrated in U.S. Patent Nos. 5,971,484 or 5,439,267, the entire contents of each of which are hereby incorporated by reference. Also, armrest 6 could rotate about a vertical axis 108 relative to support 7 as indicated by the arrow "Z"; Fig. 6C. The mechanism for providing such rotation may be a mechanism as disclosed in U.S. Patent No. 5,971,484, the entire contents of which are hereby incorporated by reference. Also, armrest 6 may be vertically adjustable relative to support 7 as illustrated by the arrow "V"; Fig. 6D. The mechanism for providing vertical adjustment may be the mechanism of the aforementioned U.S. Patent No. 5,971,484. It will be readily understood that an armrest according to the present invention could have all of the adjustment features illustrated in Figs. 6B, 6C, 6D or any combination thereof. Alternately, the armrest could only have the fore-to-aft heart and pawl movement described in more detail above.

[0019] With further reference to Figs. 7, 7A and 8, an armrest 110 according to yet another aspect of the present invention includes a block 82, slide member 74, wire 85 and spring 92 that are substantially the same as discussed in more detail above in connection with Figs. 5-6A. Because this heart and pawl mechanism was described in detail above, it will not be further discussed in connection with the armrest of Figs. 7, 7A and 8. The armrest 110 includes a height adjustment mechanism 111 that telescopically interconnects lower member 112 to upper member 113. Mechanism 111 may be of the type discussed above in connection with Fig. 6D that is operated (released) by button 130.

[0020] The armrest 110 also includes rotational adjustment provided by detent member 78 and block 82. As illustrated in Fig. 8, detent members 135 are received in channels 137 of detent member 78, and are biased outwardly by springs 136. Cylindrical extension 80 of detent member 78 is rotatably received in opening 81 in block 82. Square opening 138 in detent member 78 engages square boss 139 of plate 114, such that detent member 78 does not rotate relative to the base 112. When assembled, detent members 135 are biased into engagement with notches 141 formed in arcuate detent sidewalls 140 of block 82. Rotation of the slide member

74 and cushion 83 about a vertical axis causes block 82 to rotate because it is positioned within channel 84 of slide member 74. As the block 82 rotates, the detent members 135 slide along the detent sidewall 140 and engage the notches 141 to retain the block 82 at a selected angular position.

[0021] Fig. 7A illustrates another version of the rotational adjustment mechanism. The mechanism of Fig. 7A includes smooth sidewalls 140A, but includes detents 141A in the surface 82A of block 82. Detent members are received in vertical channels (not shown) in detent member 78, and are biased downwardly by springs 136A to thereby provide rotational adjustment including detents to retain the armrest at a selected angular position.

[0022] In addition to the rotational detent devices just described, the rotational adjustment may include smooth detent walls 140A in combination with the detent members 135 of Fig. 8 to thereby provide continuous rotational adjustment, without detents. If this arrangement is utilized, detent members 135 may be made of a relatively high friction material to engage the sidewall 14A and thereby retain the armrest in the selected angular position.

[0023] In the foregoing description, it will be readily appreciated by those skilled in the art that modifications may be made to the invention without departing from the concepts disclosed herein. Such modifications are to be considered as included in the following claims, unless these claims by their language expressly state otherwise.

Claims

1. An adjustable armrest for a chair, comprising:

an armrest base member;
a support member slidably coupled to the armrest base member for movement in first and second directions between first and second positions relative to the base, wherein the support member is biased into the first position; and
a device selectively retaining the support member in the second position, the device including a catch and a movable retaining member that is engagable with the catch to retain the support member in the second position, the retaining member disengaging from the catch upon movement of the support member to permit movement of the support member relative to the armrest base member.

2. The adjustable armrest of claim 1, wherein:

the device includes a push-push mechanism.

3. The adjustable armrest of claim 2, wherein the

push-push mechanism includes a track having a heart-shaped end portion forming the catch.

4. The adjustable armrest of claim 3, wherein:

the track is formed in the armrest base member; the retaining member is rotatably attached to the support member and includes an extension engaging the track.

5. The adjustable armrest of claim 4, wherein:

the track includes an elongated generally straight portion, and the heart-shaped end portion is angled relative to the straight portion.

6. The adjustable armrest of claim 5, wherein:

the heart-shaped portion of the track includes two lobes that intersect to form a notch, and the track includes an extension adjacent the notch that pushes the extension of the retaining member into the notch.

7. The adjustable armrest of claim 4, wherein:

the support member includes a padded cushion to support a user's forearm.

8. The adjustable armrest of claim 1, including:

a spring biasing the support member into the first position.

9. The adjustable armrest of claim 1, wherein:

the first position comprises a forward position wherein the support member is extended forwardly;
the second position comprises a rearward position wherein the support member is retracted rearwardly; and
the retaining member disengages from the catch upon rearward motion of the support member.

10. The adjustable armrest of claim 9, wherein:

the support member is movably coupled to the base to permit side-to-side adjustment of the position of the support member.

11. The adjustable armrest of claim 9, wherein:

the support member is rotatably coupled to the base to permit rotational adjustment of the support member.

12. The adjustable armrest of claim 11, wherein:

the support member rotates about a generally vertical axis.

5

13. The adjustable armrest of claim 9, wherein:

the support member is movably mounted to the base to permit vertical movement of the support member to provide height adjustment.

10

14. The adjustable armrest of claim 1, including:

friction members acting on the armrest base member and support member to provide a first relatively high sliding friction when the support member is moved in a first direction relative to the armrest base member, and to provide a second lower friction when the support member is moved in a second direction relative to the armrest base member.

15

20

15. The adjustable armrest of claim 14, wherein:

the armrest base member includes a slide member having opposite sides;
the support member includes a guide member extending around the opposite sides and slidably engaging the slide member.

25

30

16. The adjustable armrest of claim 15, wherein:

the guide member is made of a polymer material and has a C-shaped cross section forming a channel; and wherein:

35

the slide block is disposed in the channel.

17. The adjustable armrest of claim 16, wherein:

40

the slide member includes an elongated channel having a heart-shaped end portion; and including:

a pin slidably engaging the guide member and the channel.

45

18. The adjustable armrest of claim 17, including:

a spring that is compressed to bias the support member into the first position.

50

19. The adjustable armrest of claim 18, wherein:

the slide block defines four corners, each includes a raised surface portion having a contour that closely matches inner surface portions of the guide member.

55

20. The adjustable armrest of claim 19, wherein:

the slide block includes a channel; and the spring is disposed in the channel.

21. A seating unit, comprising:

a frame;
a seat;
a backrest;
a pair of armrests movably mounted to the frame for movement between forward and rearward positions, wherein the armrests are biased into the forward position;
each armrest including a device selectively retaining the armrests in the rearward position, wherein movement of the armrests releases the device such that the armrests move to the forward position due to the bias.

22. The seating unit of claim 21, wherein:

the devices include an elongated track having a heart-shaped portion forming a catch, and a movable retaining member engaging the track.

23. The seating unit of claim 22, wherein:

the armrests each include a armrest base member connected to the frame, and a support member slidably coupled to the armrest base member;
the track is formed in the armrest base member;
the retaining member is rotatably attached to the support member and includes an extension engaging the track.

24. The seating unit of claim 23, wherein:

the track includes an elongated generally straight portion, and the heart-shaped end portion is angled relative to the straight portion.

25. The seating unit of claim 24, wherein:

the heart-shaped portion of the track includes two lobes that intersect to form a notch, and the track includes an extension adjacent the notch that pushes the extension of the retaining member into the notch.

26. The seating unit of claim 21, wherein:

the devices release upon rearward movement of the armrest.

27. The seating unit of claim 21, wherein:

the armrests each include a armrest base member connected to the frame, and a support member slidably coupled to the armrest base member;
 the armrest base member includes a slide member having opposite sides;
 the support member includes a guide member extending around the opposite sides and slidably engaging the slide member.

the frame, and a support member slidably coupled to the armrest base member;
 the support member is movably mounted to the base to permit vertical movement of the support member to provide height adjustment.

28. A seating unit, comprising:

a frame;
 a seat;
 a backrest;
 a pair of armrests movably mounted to the frame for movement between forward and rearward positions, wherein the armrests are biased into the forward position;
 a heart and pawl device operably interconnecting the armrests with the frame to selectively retain the armrests in the rearward position, the heart and pawl device biasing the armrests towards the forward position.

29. The seating unit of claims 21 or 28, wherein:

the armrests each include a armrest base member connected to the frame, and a support member slidably coupled to the armrest base member;
 the support member is movably coupled to the armrest base member to permit side-to-side adjustment of the position of the support member.

30. The seating unit of claims 21 or 28, wherein:

the armrests each include a armrest base member connected to the frame, and a support member slidably coupled to the armrest base member;
 the support member is rotatably coupled to the armrest base member to permit rotational adjustment of the support member.

31. The seating unit of claim 28, wherein:

the armrests each include a armrest base member connected to the frame, and a support member slidably coupled to the armrest base member;
 the support member rotates about a generally vertical axis.

32. The seating unit of claims 21 or 28, wherein:

the armrests each include a base connected to

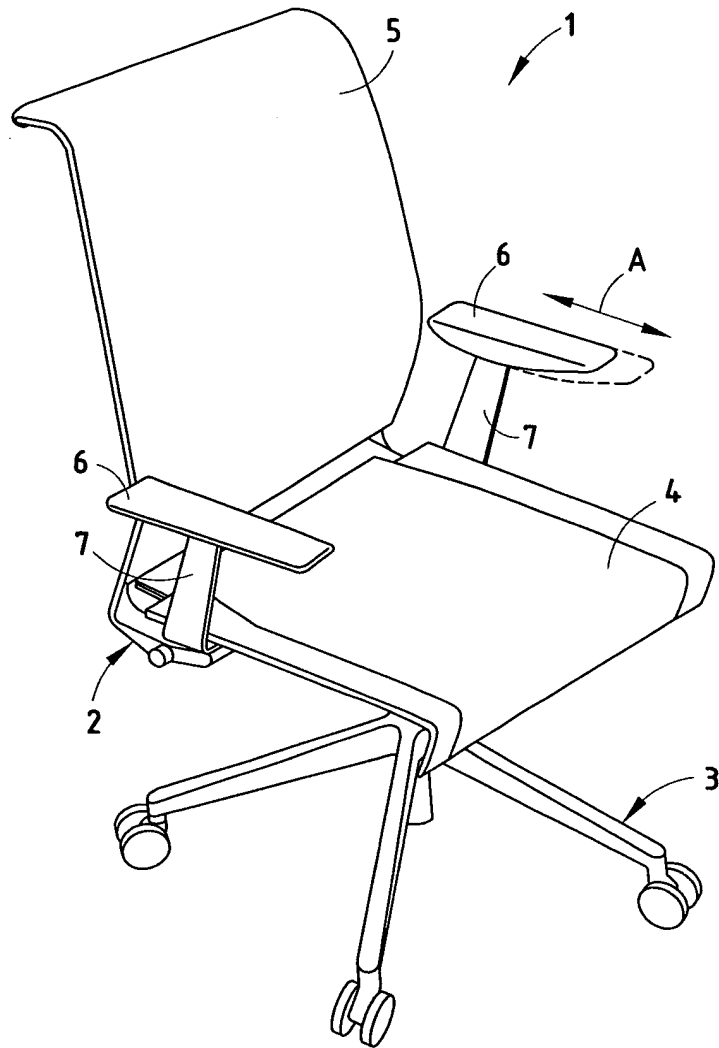
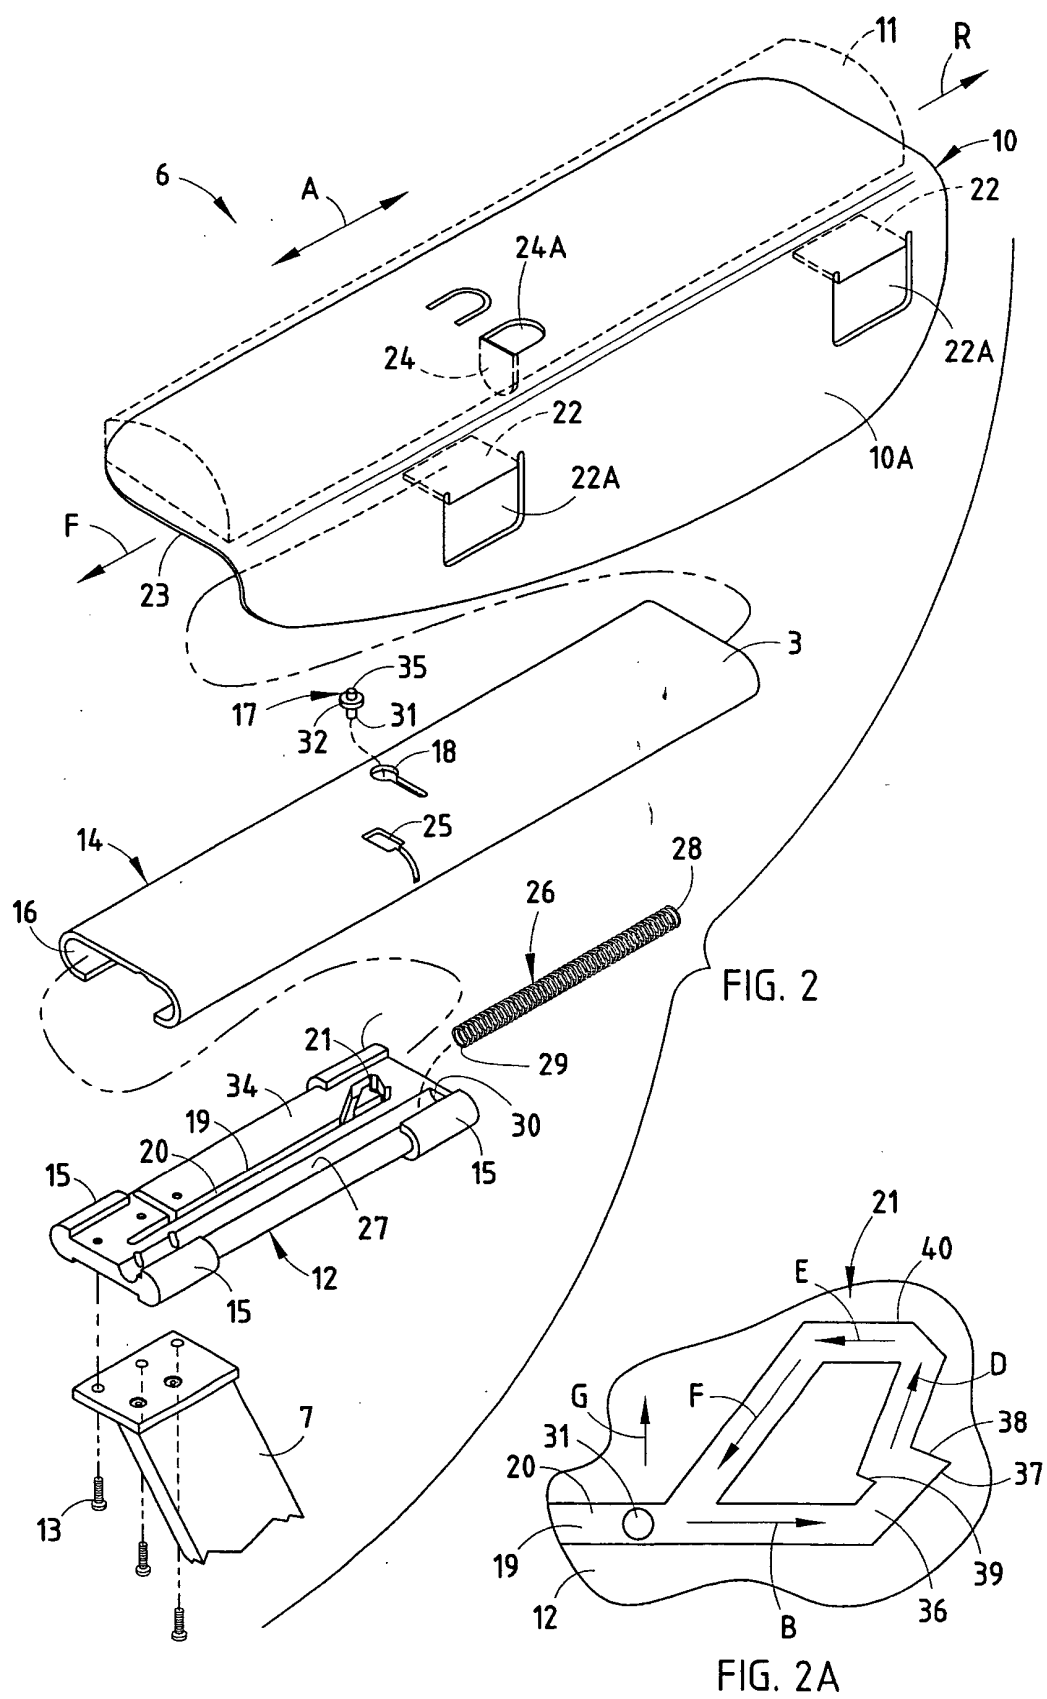


FIG. 1



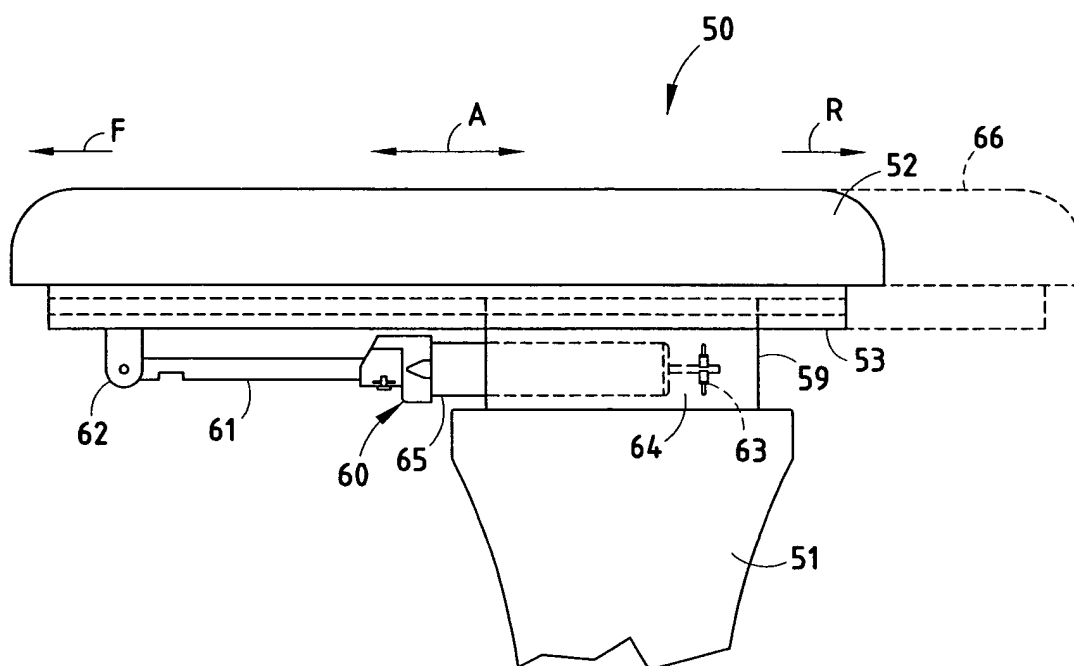


FIG. 3

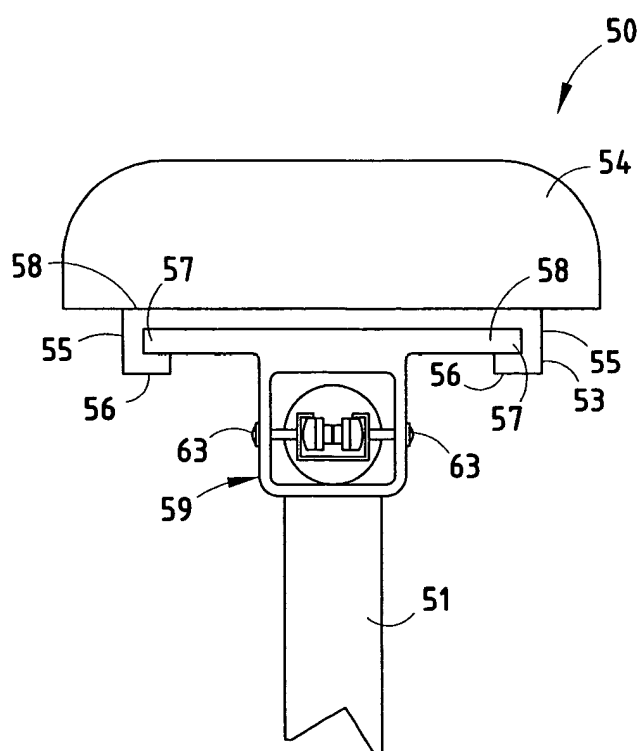


FIG. 4

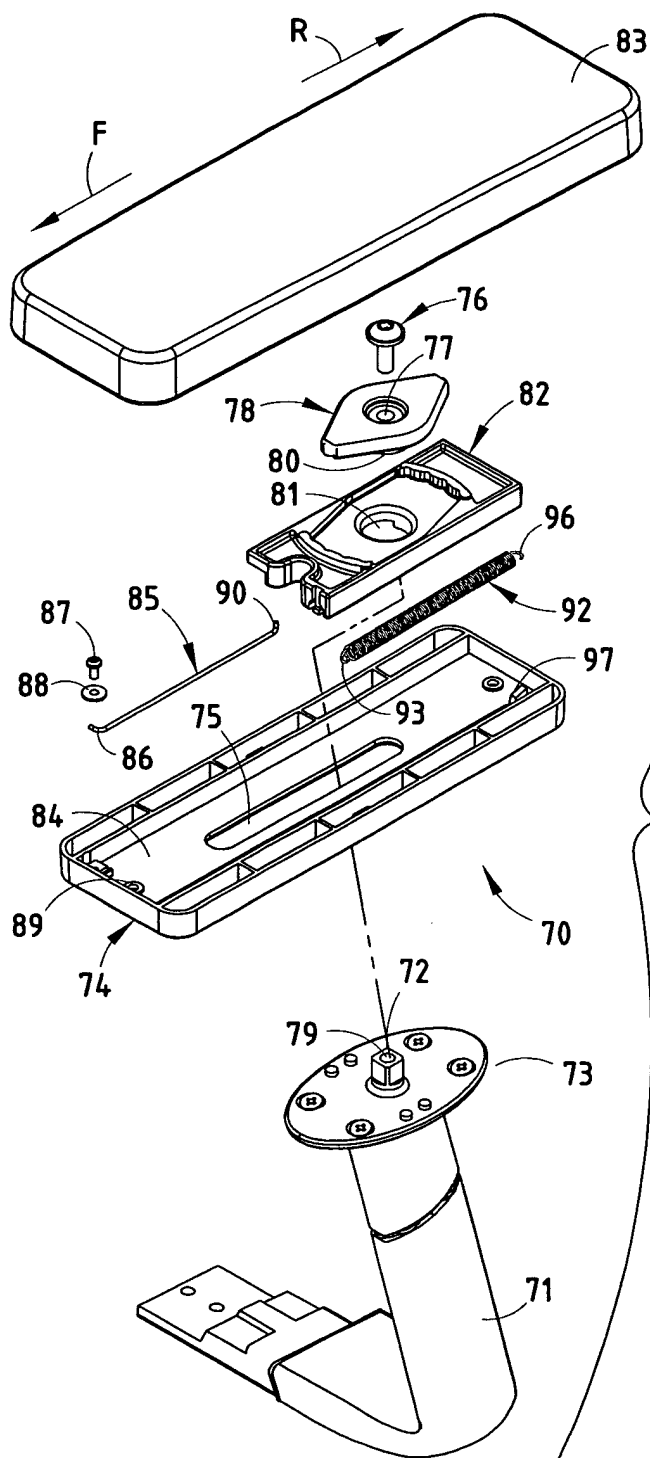


FIG. 5

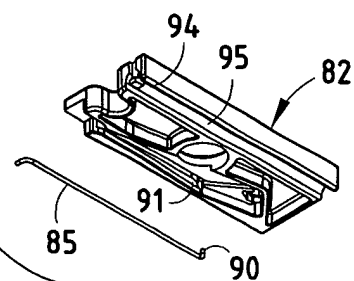


FIG. 5A

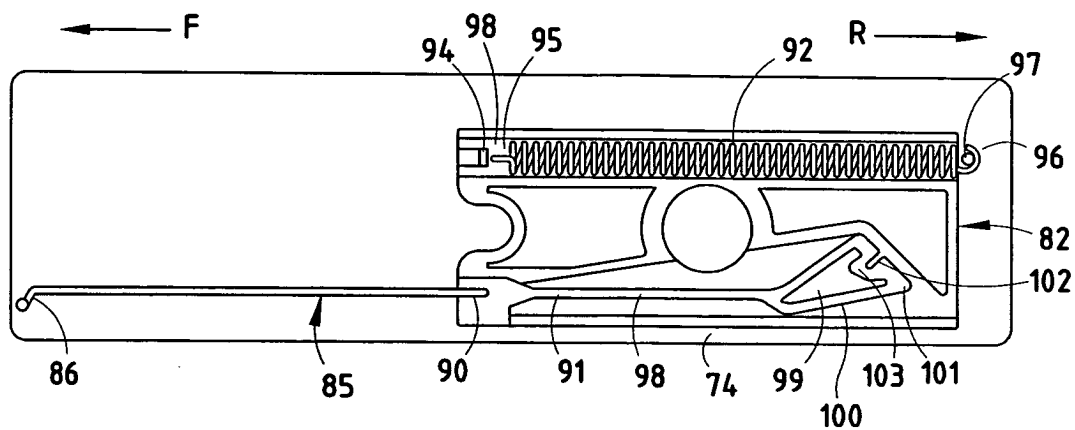


FIG. 6

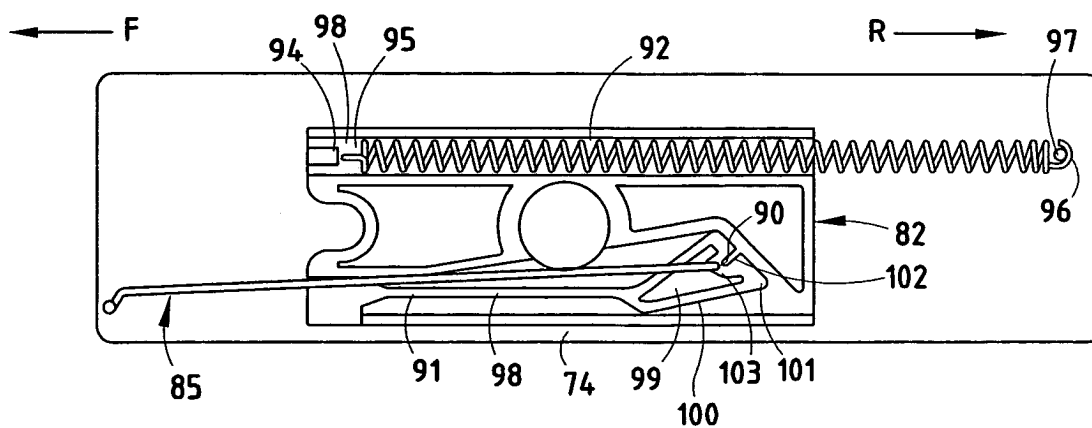
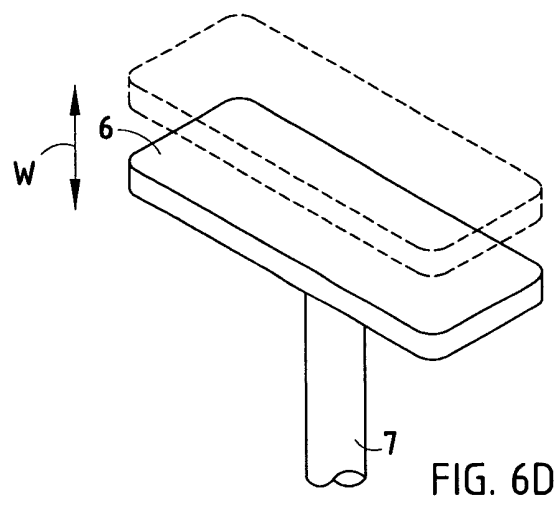
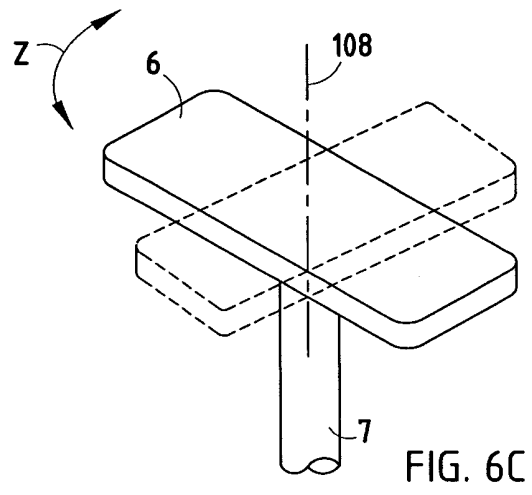
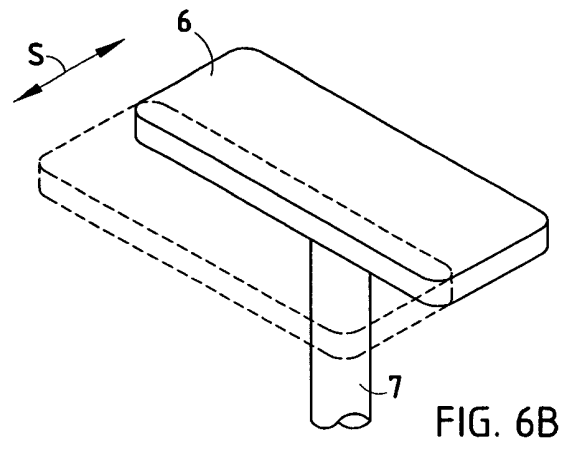


FIG. 6A



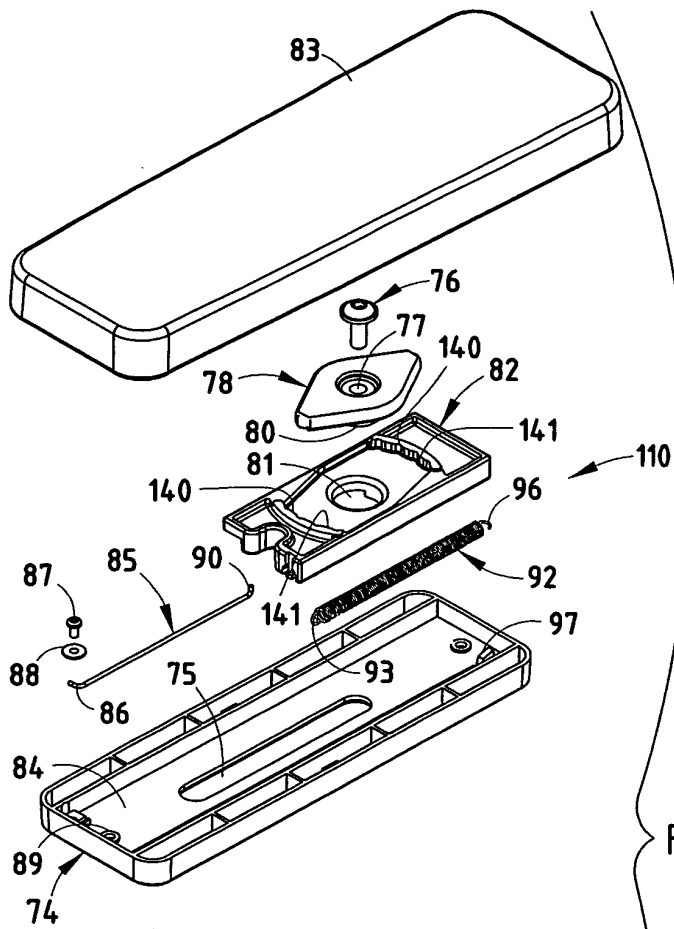


FIG. 7


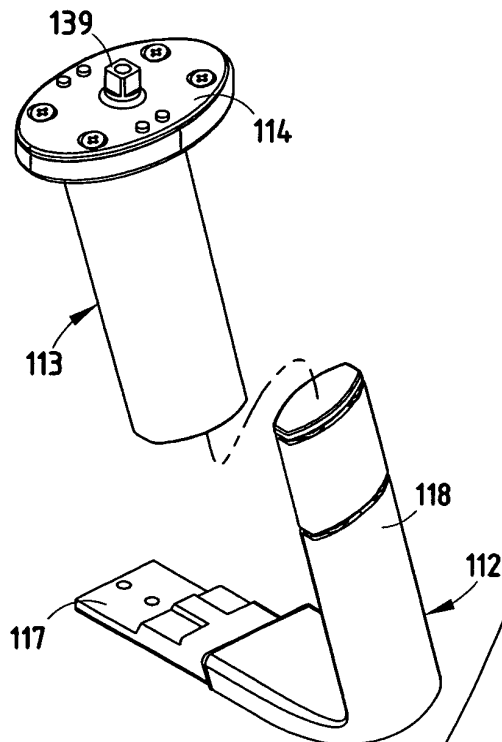


FIG. 7A



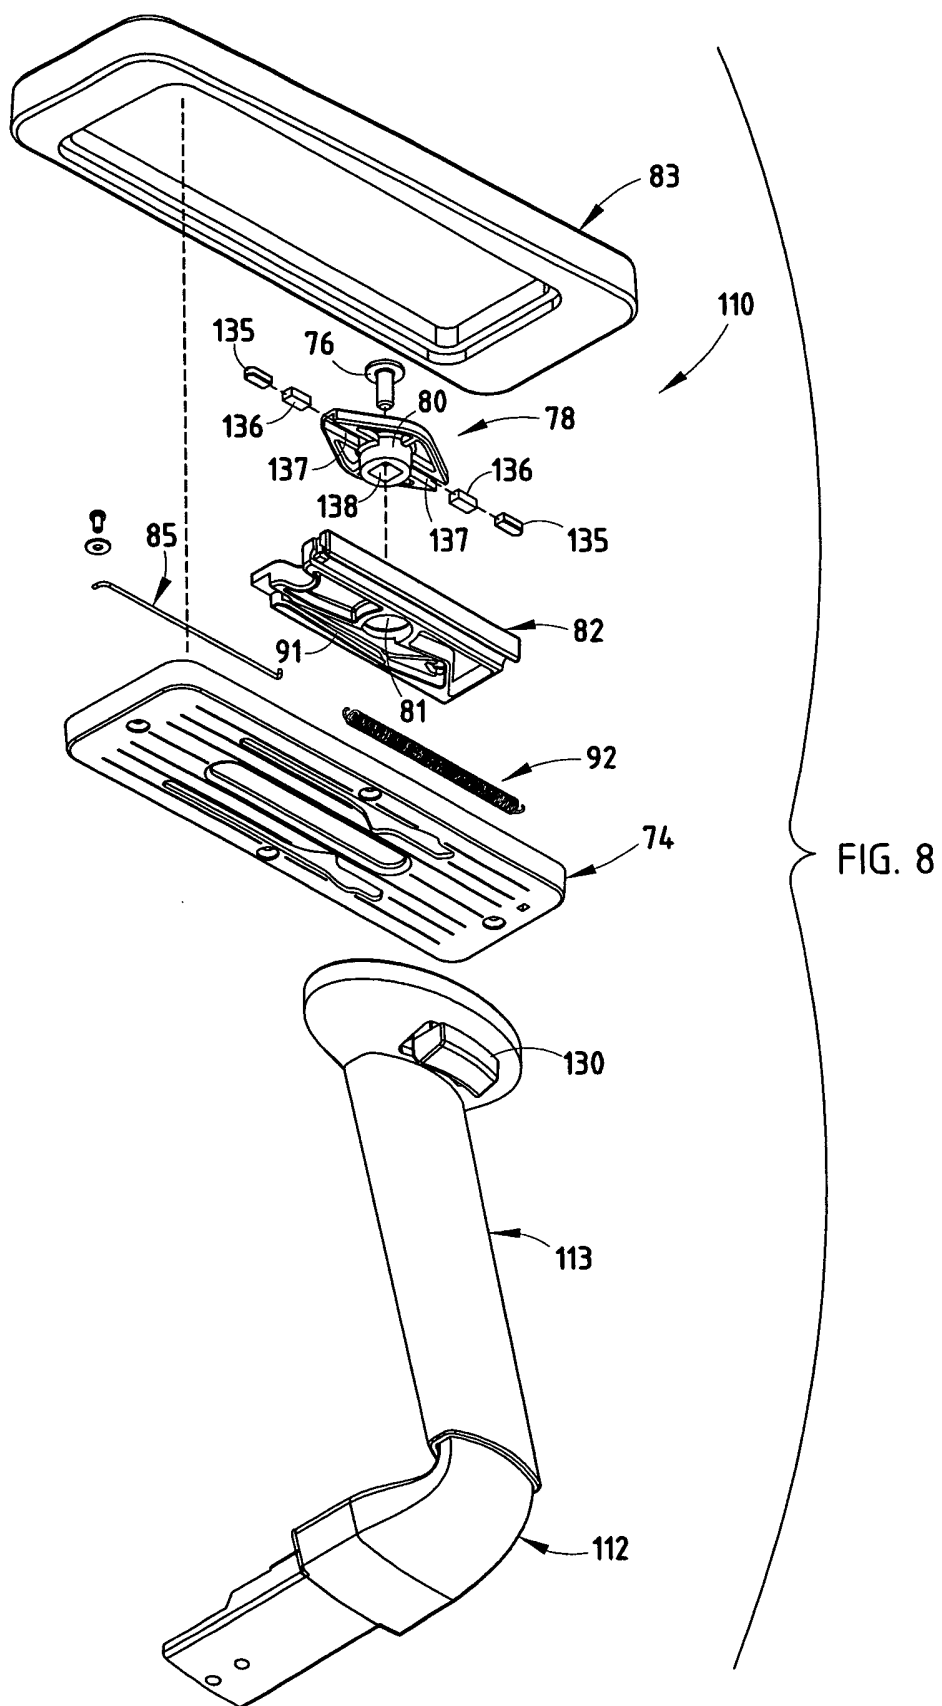

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 25 4176

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	EP 0 958 765 A (FROLI) 24 November 1999 (1999-11-24) * column 5, line 45 - column 8, line 50; figures *	1	A47C1/03
A	US 6 343 840 B1 (CHUANG) 5 February 2002 (2002-02-05)		
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			A47C
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 23 March 2005	Examiner VandeVondele, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 25 4176

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-03-2005

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
EP 0958765	A	24-11-1999	DE	29809099 U1		08-07-1999
			DE	29901666 U1		16-03-2000
			AT	245922 T		15-08-2003
			DE	59906411 D1		04-09-2003
			DK	958765 T3		17-11-2003
			EP	0958765 A2		24-11-1999
			ES	2205633 T3		01-05-2004
			HK	1026127 A1		17-12-2004
			PT	958765 T		31-12-2003

US 6343840	B1	05-02-2002	US	6315362 B1		13-11-2001
