



(11) **EP 1 574 348 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
26.12.2007 Bulletin 2007/52

(51) Int Cl.:
B41J 15/16^(2006.01) B65H 23/025^(2006.01)

(21) Application number: **05447053.9**

(22) Date of filing: **10.03.2005**

(54) **Tensioning system for printing devices**

Spannvorrichtung für Drucker

Système de tension pour imprimantes

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR**

(30) Priority: **10.03.2004 US 552441 P
08.10.2004 EP 04447223**

(43) Date of publication of application:
14.09.2005 Bulletin 2005/37

(73) Proprietor: **Mutoh Europe N.V.
8400 Oostende (BE)**

(72) Inventors:
• **Fonteyne, Rik
8400 Oostende (BE)**

• **Dely, Nele
8400 Oostende (BE)**

(74) Representative: **Van Malderen, Joëlle et al
pronovem - Office Van Malderen
Avenue Josse Goffin 158
1082 Bruxelles (BE)**

(56) References cited:
**EP-A- 1 457 347 GB-A- 736 674
US-A- 674 919 US-A- 3 266 743
US-A- 4 669 646**

EP 1 574 348 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Field of the invention

[0001] The invention is related to a system for tensioning printing media (paper, textile,...) on a printer, in particular on a large inkjet printer.

State of the art

[0002] Irregular expansion of the media may occur due to:

- expansion/contraction caused by a humidity or temperature change of the media,
- expansion caused by ink load,
- expansion caused by tension differences due to the media production process,

[0003] The media loop between the printer and the media collecting system is put under a certain tension, caused by the pulling force of the media collecting system (take-up system).

[0004] When using real media that expands, irregular expansion may result in a longer loop length on the edges of the media. The loop length is the length of the media between the printing position and the media collecting system, measured in the moving direction of the media.

[0005] Such a loop length difference causes the tension force applied by the media collecting system to be concentrated in the place of the media where the loop length is shorter. This creates tension loss in the areas of the media where the loop length is longer. The loop length difference may further cause bubbles in the media at the printing area, resulting in:

- printing quality loss due to irregular distance between print head and media, and
- head strikes, when the printing head is striking media bubbles.

When using media that does not expand or expands very little, a problem may still occur due to the bending of the media collecting roll. This roll gets heavier throughout the printing process, as more and more media are loaded on it. This causes bending of the collecting roll, leading to irregular tension in the printing media along the contact zone.

Document US5649890 is related to a draw roll for the transport of a material web, particularly a paper web in a web-fed printing machine. The draw roll has a circumference which increases from the centre to the edges, either continually or in small steps. Document DE10135124 shows a similar system. These systems however have the drawback that the tension force on one area of the media cannot be applied independently of another area along the length of the roll, and that the roll cannot be adapted to a variable width of the media to be

printed.

Documents EP-A-1457347 and EP-A-0826480 show curved tension rolls used for stretching fabric materials which are to be printed. However, these documents do not mention the problem of compensating the bending of the media collecting roll.

Aims of the invention

[0006] The present invention aims to provide a tensioning system able to compensate irregular expansion or tension of media such that the media is kept flat at the printing position.

Summary of the invention

[0007] The present invention is defined by the appended claims.

[0008] The tensioning system according to the invention is particularly suitable for printing on extremely thin media, such as are presently used for example in the Digital Transfer Printing technique.

Short description of the drawings

[0009] Fig. 1 represents two views of a printing device comprising a tensioning system according to the present invention.

[0010] Fig. 2 represents a detailed view of the tensioning system.

[0011] Fig. 3 represents an embodiment with three rolls. Fig 3a shows three plane views. Fig. 3b shows a 3-D view.

Detailed description of the invention

[0012] Figure 1 shows two views of a printing device comprising a tensioning system 1 according to a first embodiment of the present invention. One can see the media 2 being guided from the print area 3 towards the media collecting system 4 which is basically a roll onto which the printed media is wound. Figure 2 shows a detail of the first embodiment. As can be seen in Fig.3, the tensioning system of the first embodiment comprises a number of tension rolls 5, which are mounted next to each other longitudinally. They are placed in the direction essentially perpendicular to the media travel direction defined by the arrows (fig. 2). Each tension roll is independently spring loaded on both ends. Springs 6 are mounted for this purpose at each end of each tension roll.

[0013] The case is shown, wherein three tension rolls are present. In the preferred case, each tension roll, except for the one in the middle, can be adjusted in the left-right direction (see fig. 3b, arrow 10). This adjustment can be used to fit the system to the width of the media used. Also in the case of more than three rolls, the system of the invention preferably has at least the outer rolls being movable in longitudinal direction.

[0014] Both the left and the right outside tension roll may have a higher spring load on the outsides. This is because the effect of irregular media expansion shows up mainly on the outside edges of the media.

[0015] The total system can be withdrawn backward for media loading. It can be adjusted in the front/rear direction (arrow 11) to adjust the offset spring force on the tension rolls.

[0016] The tension rolls can be fixed around their length axis, allowing the media to slide over, or they can be mounted on bearings, allowing them to roll with the media movement.

[0017] The tension rolls of the system of the invention each give additional, independent local tension on the media area covered by the width of the tension roll. This compensates for the differences in the loop length over the width of the media. By doing so, all irregular media expansion is absorbed at the invention system, thereby keeping the media in the print area flat.

[0018] In particular, the system of the invention allows to compensate for the bending of the media collecting roll, as described above.

[0019] The system of the invention is especially advantageous for printers used to print on extremely thin media, such as printers used for Digital Transfer Printing.

Claims

1. Tensioning system (1) for printers comprising means for applying a tension force to a printing media along a contact zone **characterised in that** said means comprises a plurality of tension rolls (5) placed longitudinally next to each other, each roll being independently spring loaded (6) on each end.
2. Tensioning system according to claim 1 comprising three rolls (5), wherein the middle roll is fixed in longitudinal direction, and the other two rolls are adjustable in longitudinal direction.
3. Tensioning system according to claim 1, wherein said rolls (5) are fixed around their length axis.
4. Tensioning system according to claim 1, wherein said rolls (5) can rotate around their length axis.

Patentansprüche

1. Spannsystem (1) für Drucker, das ein Mittel zum Anlegen einer Spannkraft an ein Druckmedium entlang einer Kontaktzone umfasst, **dadurch gekennzeichnet, dass** das Mittel mehrere Spannrollen (5) umfasst, die in Längsrichtung nebeneinander angeordnet sind, wobei jede Rolle unabhängig an jedem Ende federbelastet (6) ist.

2. Spannsystem nach Anspruch 1, das drei Rollen (5) umfasst, wobei die mittlere Rolle in Längsrichtung befestigt ist und die anderen beiden Rollen in der Längsrichtung verstellt werden können.

3. Spannsystem nach Anspruch 1, wobei die Rollen (5) um ihre Längsachse herum befestigt sind.

4. Spannsystem nach Anspruch 1, wobei sich die Rollen (5) um ihre Längsachse herum drehen können.

Revendications

1. Système de tension (1) pour imprimantes comprenant des moyens pour appliquer une force de tension à un support d'impression le long d'une zone de contact, **caractérisé en ce que** lesdits moyens comprennent une pluralité de rouleaux de tension (5) placés longitudinalement les uns à côté des autres, chaque rouleau étant chargé par ressort (6) de manière indépendante à chaque extrémité.
2. Système de tension selon la revendication 1 comprenant trois rouleaux (5), dans lequel le rouleau central est fixe dans la direction longitudinale, et les deux autres rouleaux sont ajustables dans la direction longitudinale.
3. Système de tension selon la revendication 1, dans lequel lesdits rouleaux (5) sont fixes autour de leur axe longitudinal.
4. Système de tension selon la revendication 1, dans lequel lesdits rouleaux (5) peuvent tourner autour de leur axe longitudinal.

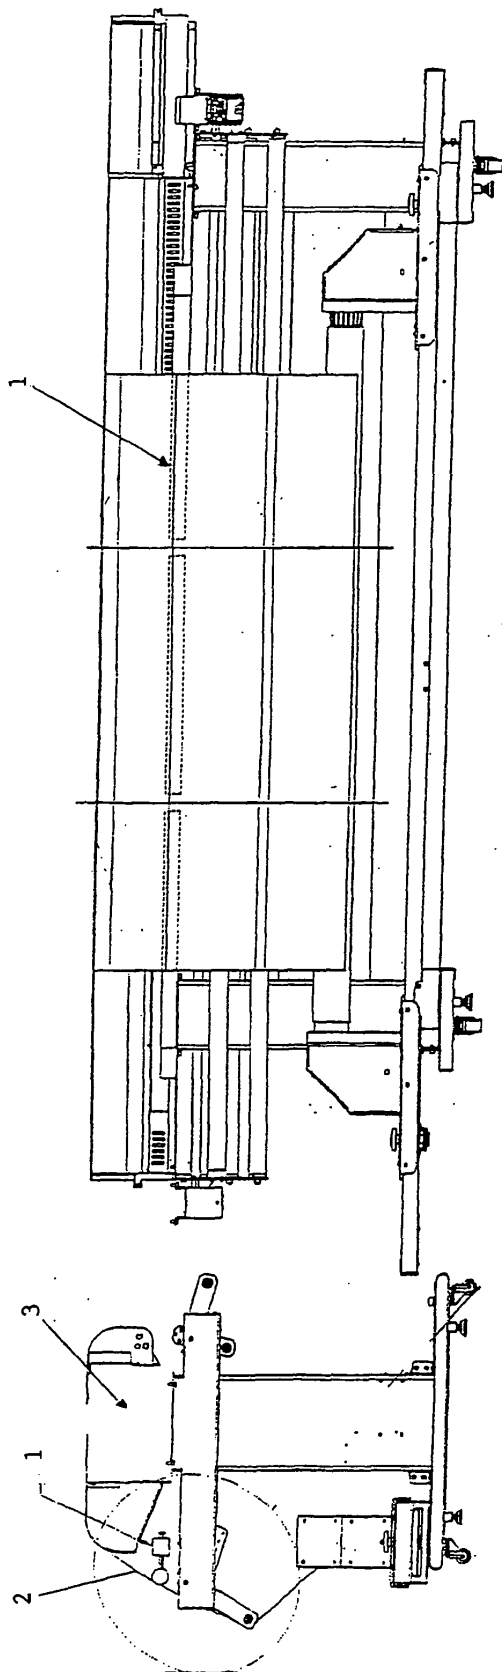


Fig. 1

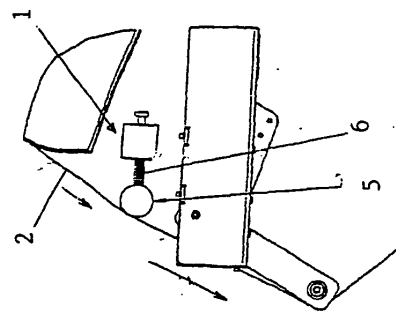


Fig. 2

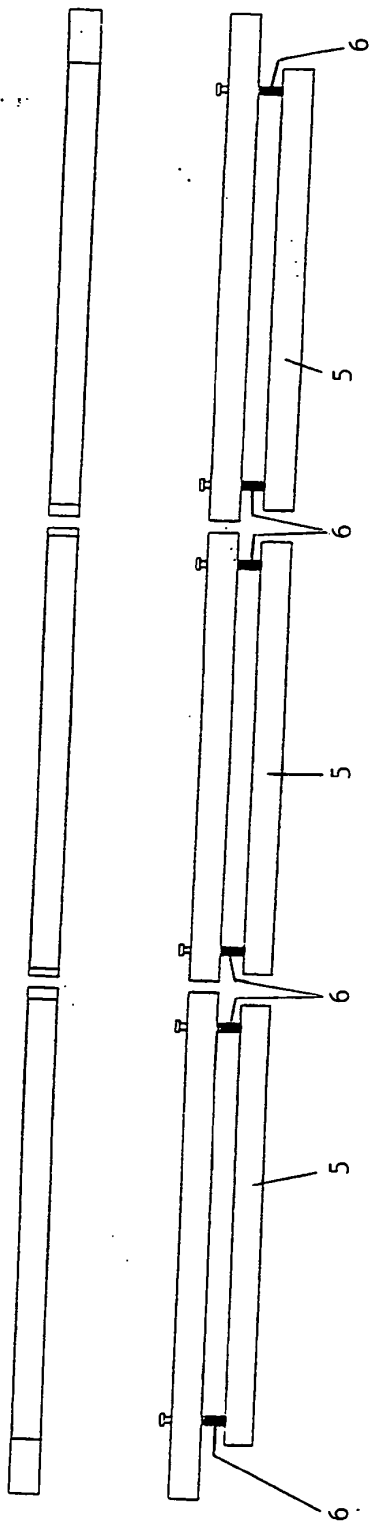



Fig. 3a

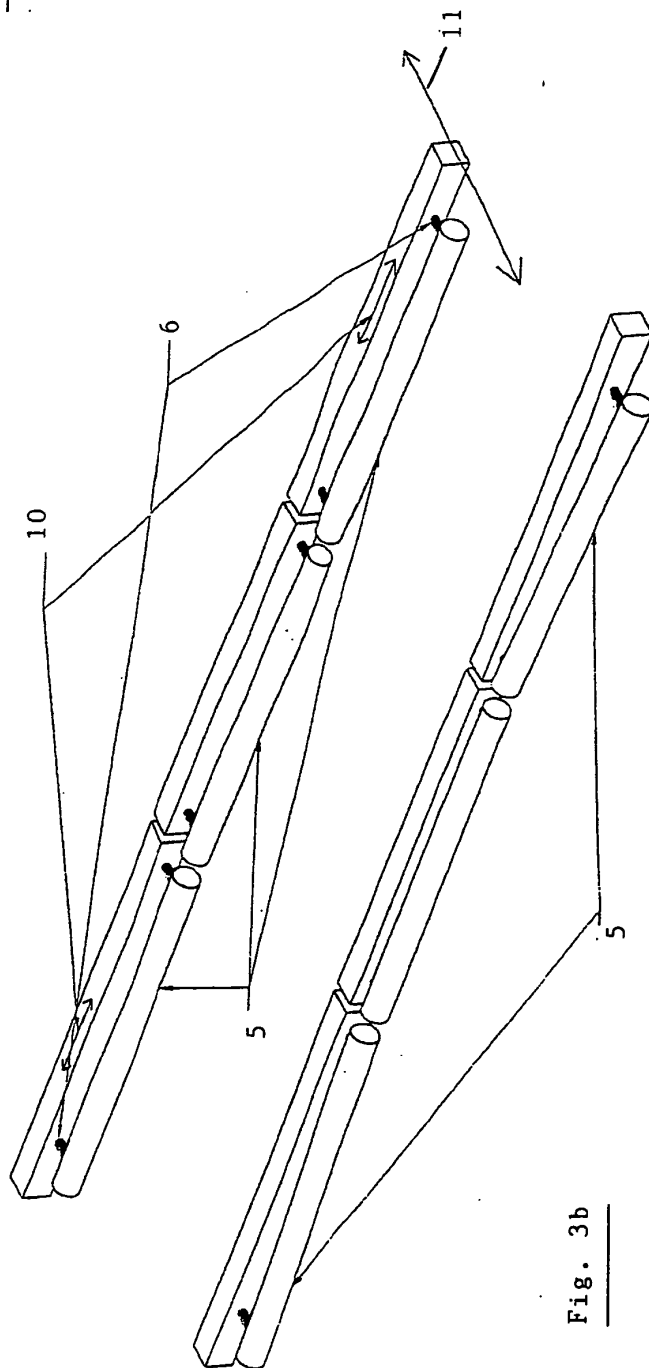


Fig. 3b

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5649890 A [0005]
- DE 10135124 [0005]
- EP 1457347 A [0005]
- EP 0826480 A [0005]