



(11) **EP 1 579 402 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

Note: Bibliography reflects the latest situation

(15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see
Claims EN

(51) Int Cl.:
G08B 29/18 (2006.01) G08B 29/14 (2006.01)

(86) International application number:
PCT/GB2004/000004

(48) Corrigendum issued on:
30.04.2008 Bulletin 2008/18

(87) International publication number:
WO 2004/061793 (22.07.2004 Gazette 2004/30)

(45) Date of publication and mention
of the grant of the patent:
04.07.2007 Bulletin 2007/27

(21) Application number: **04700136.7**

(22) Date of filing: **05.01.2004**

(54) **HAZARD DETECTOR**
GEFAHRENDERTEKTOR
DETECTEUR DE DANGER

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR

(30) Priority: **03.01.2003 GB 0300094**

(43) Date of publication of application:
28.09.2005 Bulletin 2005/39

(73) Proprietor: **APOLLO FIRE DETECTORS LIMITED**
Havant
Hampshire P09 1RJ (GB)

(72) Inventors:
• **BARRETT, Roger,**
Apollo Fire Detectors Ltd.
Havant,
Hampshire PO9 1JR (GB)

• **CUTLER, Jeffrey John,**
Apollo Fire Detectors Ltd.
Havant,
Hampshire P09 1JR (GB)

(74) Representative: **Moir, Michael Christopher et al**
Mathys & Squire
120 Holborn
London EC1N 2SQ (GB)

(56) References cited:
GB-A- 2 137 790 US-A- 5 716 725
US-A- 5 966 079

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 579 402 B9

Description

Background of the Invention

[0001] The present invention relates to a hazard detector, and more particularly, in one form to a fire-hazard detector that includes protection against incorrect installation, and/or for which in-situ testing is facilitated. In another form, the invention is applicable to a hazard detector the operation of which can be modified when it is in a test mode. The invention is applicable to detectors sensitive to other hazards, e.g. (without limitation) toxic gas, radiation or intruders. The term 'hazard detector' thus is to be construed accordingly.

[0002] Conventional fire detectors are normally used in simple two-wire circuits powered by a battery or other secure DC supply. When in a stand-by mode, such detectors present a high resistance between the two circuit wires and draw a negligible current from the battery, whereas in an alarm mode they introduce a low resistance across the two circuit wires. The high resistance presented during the stand-by mode normally makes it impossible during that mode to monitor the presence of such a detector on a two-wire circuit. Therefore, to ensure that such fire detectors will operate properly in the alarm mode, it becomes important to determine that they are correctly connected, and regular testing is required.

[0003] Some detectors are made insensitive to the polarity of the power supply so as to simplify their installation and avoid problems that occur when a polarity-sensitive device is installed improperly. One way to make a detector insensitive to power-supply polarity is to introduce a diode bridge; this is illustrated in Figure 1. The drawback with this arrangement is two-fold; it adds cost, and it increases the minimum operating voltage of the detector significantly due to the voltage drop across the diode bridge.

[0004] If a diode bridge or another circuit is not introduced to make the detector insensitive to power-supply polarity, then it becomes necessary to protect the electronic circuit in the detector against a reverse-polarity connection in some other way. This is normally achieved by adding to the detector a diode in parallel with the electronic circuit of the detector and in reverse polarity across the power supply when the detector is properly connected; this is illustrated in Figure 2. If the detector happens to be connected in a reverse fashion across the power supply, the diode will also be connected in the wrong direction, which will result in a short-circuit being presented to the control panel, indicating a wiring fault. While this arrangement may be acceptable for many control panels, there are some panels in which a momentary reversal of the power supply is used as part of a line-monitoring system; in such control panels, a short-circuit caused by polarity reversal is not acceptable.

[0005] An alternative method of protecting the electronic circuit of a detector against reverse polarity is the inclusion in the detector of a blocking diode in series with

the other electronic circuitry of the detector; one embodiment of this is illustrated in Figure 3. This method will operate on all known systems. However, it has the disadvantage that an inadvertent reverse connection will not result in a fault condition being shown at the control panel. To verify correct connection it is necessary to initiate an alarm condition in the detector, either by using smoke or other appropriate stimulus or by using a special test facility. This is inconvenient in that the alarm condition will be registered by the control panel, which may cause an audible alarm to sound or other action to be taken (such as an automatic call to a fire department).

[0006] Document GB 2137790 shows a detector according to the preamble of claim 1.

Summary of the Invention

[0007] It is an object of at least the preferred embodiments of the invention to provide a detector in which at least some of the foregoing disadvantages are alleviated.

[0008] In one aspect the invention provides a hazard detector that includes means for detecting a hazardous condition and for indicating an alarm upon such detection, and means for modifying the behaviour of the detector during a start-up or test-mode to facilitate commissioning or testing of the detector, the detector further comprising filtering means for filtering-out transient detections of the hazardous condition during a normal state of operation, said means for modifying the behaviour comprising means for disabling the filtering means during the start-up or test mode.

[0009] The hazardous condition may be a hazardous smoke level or a hazardous rate of rise in temperature. In the latter case, the hazardous rate of rise in temperature may be a rate of temperature rise that is equal to, or exceeds, approximately five degrees over a period of thirty seconds.

[0010] Preferably, the detector is for connection between positive and negative power lines, the detector having a positive terminal and a negative terminal and being adapted, upon application of power to the power lines, to emit a local indicator signal if the positive and negative terminals of the detector have a correct polarity orientation to the positive and negative lines. More preferably, the detector includes an electronic circuit serially-connected to a blocking diode, the blocking diode being connected to either the positive or negative terminal. The indicator signal may be a light signal, and more preferably, a flashing light signal with repetitive on/off cycle, and still more preferably, the period of the on/off cycle is approximately one second. The flashing light signal may be produced by a light-emitting diode (LED) that forms part of the electronic circuit, and may be red-coloured.

[0011] The detector may be in a test mode when it is emitting the local indicator signal.

Brief Description of the Drawings

[0012] Preferred features of the present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:-

Figure 1 is a schematic illustration of a hazard detector that uses a diode bridge for polarity protection; Figure 2 is a schematic illustration of a hazard detector that uses a shunt diode for polarity protection; Figure 3 is a schematic illustration of a hazard detector that uses a series diode for polarity protection; Figure 4 illustrates a sequence of output operations of a hazard detector in a first embodiment of the subject invention;

Figure 5 illustrates a sequence of output operations of a hazard detector in a second embodiment of the subject invention;

Figure 6 is a flowchart of the operation of the hazard detector in a first form of the second embodiment, the first form being a smoke detector that measures smoke level; and,

Figure 7 is a flowchart of the operation of the hazard detector in a second form of the second embodiment, the second form being a heat detector that measures a rate of temperature rise.

Detailed Description of Preferred Embodiments

[0013] The subject invention involves a hazard detector of the type which uses a series diode for polarity protection, as previously discussed with respect to Figure 3. However, the two embodiments that are described additionally include a light-emitting diode (LED) as well as a suitably-programmed ROM or EPROM to cause the LED to perform in a manner to be described.

[0014] In the first embodiment, when a hazard detector 10 of the subject invention is initially connected to a power supply, current only flows through a detector electronic circuit 12 (see Figure 3) if the detector 10 is connected to the power supply in a proper orientation (polarity); if the detector 10 is connected with reverse orientation, a series diode 14 prevents current from flowing through circuit 12. The series diode 14 is shown connected to the positive terminal of circuit 12, but it could instead be connected to the negative terminal. If the detector 10 is connected with proper orientation, the circuit 12 becomes powered-up (a "cold start" not involving additional external circuitry), and an internal program in a ROM or EPROM (not shown) of circuit 12 automatically begins execution of a start-up program. The start-up program causes a LED (not shown) connected to circuit 12 to flash on/off for about four minutes at a rate of approximately once per second. Both the rate and length of the flashing are adjustable and controlled by a processor or by a separate timing subcircuit of circuit 12. A person connecting the detector of the invention to the power supply is immediately able to tell, by observing if the LED is flashing,

whether the detector is connected with proper orientation. The LED operation following proper connection is illustrated in Figure 4.

[0015] After correct installation, the flashing ability of the detector may be utilized in a further way, namely, to assist with locating a power-supply wiring fault. If an open-circuit fault occurs at an unknown location on the power-supply wiring, the power supply is temporarily disconnected. After reconnection, only those detectors that are located between a control panel and the fault location will begin to flash. The location of the fault can thereby be detected without requiring any of the detectors to be removed or any special test meter to be connected; in effect, the detectors act together as a test meter.

[0016] A second embodiment, illustrated in Figures 5, 6 and 7, facilitates in-situ testing by removing transient filtering of input signals during a test mode. Figure 6 indicates a situation where a hazardous condition being measured relates to smoke level, and Figure 7 indicates a situation where a hazardous condition being measured relates to a rate of rise in temperature. In order to reduce the cost and inconvenience of false alarms, there has developed a trend towards more complex signal processing of the signals input to hazard detectors. One known technique is to include signal filtering to reject transient signals. An unfortunate side effect of such filtering is that it tends to cause a rejection of signals produced by normal testing tools, making in-situ testing of detectors very difficult.

[0017] The second embodiment includes the flashing LED test program for polarity orientation of the first embodiment, but adds an additional program to address the problem caused by the presence of the complex signal processing mentioned above. The additional program disables or bypasses those parts of operating algorithms that function as the filters for reducing false alarms; the basic sensitivity of the detector is not affected by such disabling of the filter. The test mode in the second embodiment is initiated by disconnecting the detector from the power supply. This can be performed from the control panel for all detectors of the system by using the panel's reset facility, or alternatively, each detector can be briefly individually disconnected from, and reconnected to, the power supply.

[0018] Most use for the test mode of the second embodiment would come with control panels that include what is termed in the field a special "walk test" mode. When set to the "walk test" mode, the controller allows an engineer to trigger an alarm on a detector by, for example, using artificial smoke or a rapid rise in temperature, and to then see from the permanently-lit alarm LED that the control panel has accepted the alarm. After the alarm has been activated, the control panel automatically resets the detector by briefly interrupting the power supply to the zone in which the alarm is situated. Each reset process simultaneously performs a cold start on all of the detectors in the zone, thereby maintaining them in the test state. At the completion of testing, the control panel

is returned to normal operation and after completing its start-up program, the internal processor in each detector operates that detector in its normal monitoring state, i.e. the LED no longer flashes, the transient filtering has been enabled, and the detector is alert to its selected hazard.

[0019] It will be appreciated that if preferred the detector can incorporate the filtering-disablement feature without the flashing LED. For example, the filtering could be disabled by a switch manually operated by a maintenance technician when in-situ testing is required.

[0020] Although it is known for some conventional detectors to utilize a LED on a flash cycle, those LEDs operate continuously as long as the power supply is connected; they are not used, as in the subject invention, to indicate that a detector has been connected with proper orientation to a power supply. At least in Germany, the type of detector LED that continues to display a flashing signal as long as power is connected must not be coloured red. However, use of red-coloured LEDs are allowed if their flashing corresponds to a "special mode of operation"; the temporary flashing during the start-up of the detector of this invention qualifies as such a special mode.

[0021] The detection of rate of rise of temperature, as illustrated in Figure 7, is an advance on the detection of a pre-set limit for temperature ('fixed temperature' detection). Measurement of the rate of rise of temperature may result in an alarm being signalled before a pre-set temperature has been reached, thus providing an earlier warning of a serious fire condition than fixed temperature detection. Fixed-temperature detectors are used in environments in which in which rapid changes in temperature are normal. Such applications include kitchens and boiler rooms. Fixed-temperature detectors often have pre-set alarm temperatures of 100°C or more. Such detectors can be very difficult to test because their sensing elements must be heated to above their alarm temperature before any response occurs. The energy input required for such testing is difficult to achieve with a portable in-situ tester.

[0022] In the arrangement illustrated in Figure 7 the detector runs a special test algorithm during the start-up period. This algorithm causes the detector to signal an alarm if an abnormal rate of temperature rise is sensed, regardless of the absolute temperature. For example, a rate of temperature rise that is equal to, or exceeds, approximately 5 degrees Centigrade over a period of 30 seconds might be used. Such a rate of temperature rise is unlikely to be caused by normal ambient variations occurring during the start-up period but can safely be used as an indication that the detector is operating correctly.

[0023] While the present invention has been described in its preferred embodiments, it is to be understood that the words which have been used are words of description rather than limitation, and that changes may be made to the invention without departing from its scope as defined by the appended claims.

[0024] The text of the abstract filed herewith is repeated here as part of the specification.

[0025] A hazard detector has an electronic circuit with a start-up program for causing emission of a local indicator signal, such as a flashing signal from a LED, if power and ground terminals of the detector are connected with proper orientation, i.e. polarity, to power and ground lines of a power supply. Through this means, a person installing the hazard detector can tell immediately after connection if the detector has been connected with proper orientation, and avoids the need for introducing a hazard such as heat or smoke to test the operation of the detector. A variation uses a more sophisticated program that disables, during a test mode, complex filtering algorithms that are used by detectors to block false alarm signals; if such filtering is not disabled, it impedes normal testing of the detectors.

Claims

1. A hazard detector comprising means for detecting a hazardous condition and for indicating an alarm upon such detection, and means for modifying the behaviour of the detector during a start-up or test-mode to facilitate commissioning or testing of the detector, **characterised in that** the detector further comprises filtering means for filtering-out transient detections of the hazardous condition during a normal state of operation, said means for modifying the behaviour comprising means for disabling the filtering means during the start-up or test mode.
2. The detector of claim 1, wherein the hazardous condition is a hazardous smoke level.
3. The detector of claim 1, wherein the hazardous condition is a hazardous rate of rise in temperature.
4. The detector of claim 3, wherein the hazardous rate of rise in temperature is a rate of temperature rise that is equal to, or exceeds, approximately five degrees over a period of thirty seconds.
5. The detector of any of claims 1 to 4, being for connection between positive and negative power lines, the detector having a positive terminal and a negative terminal and being adapted, upon application of power to the power lines, to emit a local indicator signal if the positive and negative terminals of the detector have a correct polarity orientation to the positive and negative lines.
6. The detector of claim 5, comprising an electronic circuit serially-connected to a blocking diode, the blocking diode being connected to either the positive or negative terminal.

7. The detector of claim 5 or 6, wherein the indicator signal is a light signal.
8. The detector of claim 7, wherein the indicator signal is a flashing light signal with repetitive on/off cycle. 5
9. The detector of claim 8, wherein the period of the on/off cycle is approximately one second.
10. The detector of claim 8 or 9, wherein the flashing light signal is produced by a light-emitting diode (LED) that forms part of the electronic circuit. 10
11. The detector of claim 10, wherein the LED is red-coloured. 15
12. The detector of any of claims 5 to 11, wherein the detector is in a test mode when it is emitting the local indicator signal. 20

Patentansprüche

1. Ein Gefahren-detektor, aufweisend Mittel zur Erkennung eines Gefahrenzustands und zur Anzeige eines Alarms bei einer derartigen Erkennung und Mittel zum Modifizieren des Verhaltens des Detektors während eines Hochfahr- oder Testmodus, um Inbetriebnahme oder Testen des Detektors zu erleichtern, **dadurch gekennzeichnet, dass** der Detektor weiterhin Filtermittel zum Herausfiltern von schwingenden Erkennungen des Gefahrenzustands während eines normalen Betriebszustands aufweist, wobei die Mittel zum Modifizieren des Verhaltens Mittel zum Sperren der Filtermittel während des Hochfahrens oder Testmodus aufweisen. 25
2. Der Detektor nach Anspruch 1, wobei der Gefahrenzustand eine gefährliche Rauchentwicklung ist. 30
3. Der Detektor nach Anspruch 1, wobei der Gefahrenzustand eine gefährliche Temperaturanstiegsrate ist. 35
4. Der Detektor nach Anspruch 3, wobei die gefährliche Temperaturanstiegsrate eine Temperaturanstiegsrate ist, die gleich oder mehr als annähernd fünf Grad in einer Zeitdauer von 30 Sekunden beträgt. 40
5. Der Detektor nach einem der Ansprüche 1 bis 4, für eine Verbindung zwischen positiven und negativen Versorgungsleitungen, wobei der Detektor einen positiven Anschluss und einen negativen Anschluss hat und bei Anlegen von Energie an die Versorgungsleitungen ein lokales Anzeigesignal auszugeben vermag, wenn die positiven und negativen Anschlüsse des Detektors eine korrekte Polaritätsausrichtung zu den positiven und negativen Leitungen 45

haben.

6. Der Detektor nach Anspruch 5, aufweisend einen elektronischen Schaltkreis, der in Serienv Verbindung zu einer Sperrdiode ist, wobei die Sperrdiode mit entweder dem positiven oder dem negativen Anschluss verbunden ist.
7. Der Detektor nach Anspruch 5 oder 6, wobei das Anzeigesignal ein Lichtsignal ist.
8. Der Detektor nach Anspruch 7, wobei das Anzeigesignal ein blinkendes Lichtsignal mit einem sich wiederholenden Ein-/Aus-Zyklus ist.
9. Der Detektor nach Anspruch 8, wobei die Dauer des Ein-/Aus-Zyklus annähernd eine Sekunde beträgt.
10. Der Detektor nach Anspruch 9, wobei das Blinklichtsignal durch eine lichtemittierende Diode (LED) erzeugt wird, die Teil des elektronischen Schaltkreises ist.

11. Der Detektor nach Anspruch 10, wobei die LED rot ist. 25
12. Der Detektor nach einem der Ansprüche 5 bis 11, wobei der Detektor in einem Testmodus ist, wenn er das lokale Anzeigesignal ausgibt. 30

Revendications

1. Détecteur de danger comprenant un moyen destiné à détecter une condition de danger et à indiquer une alarme dans le cas de ladite détection, et un moyen destiné à modifier le comportement du détecteur pendant un démarrage ou un mode de test pour faciliter la mise en service ou le test du détecteur, **caractérisé en ce que** le détecteur comprend également un moyen de filtrage destiné à filtrer les détections transitoires de la condition de danger pendant un état de fonctionnement normal, ledit moyen destiné à modifier le comportement comprenant un moyen destiné à désactiver le moyen de filtrage pendant le démarrage ou le mode de test. 35
2. Détecteur selon la revendication 1, dans lequel la condition de danger est un niveau de fumée dangereuse. 40
3. Détecteur selon la revendication 1, dans lequel la condition de danger est un taux dangereux de montée de la température. 45
4. Détecteur selon la revendication 3, dans lequel le taux dangereux de montée de la température est un taux d'augmentation de la température égal à, ou 50

supérieur à, environ cinq degrés sur une durée de trente secondes.

5. Détecteur selon l'une quelconque des revendications 1 à 4, destiné au raccordement entre des lignes électriques positive et négative, ledit détecteur comprenant une borne positive et une borne négative et étant adapté, à l'application de l'électricité dans les lignes électriques, pour émettre un signal d'indication local si les bornes positive et négative du détecteur ont une orientation de polarité correcte par rapport aux lignes positive et négative. 5
10
6. Détecteur selon la revendication 5, comprenant un circuit électronique raccordé en série à une diode de blocage, ladite diode de blocage étant raccordée à la borne positive ou à la borne négative. 15
7. Détecteur selon la revendication 5 ou 6, dans lequel le signal d'indication est un signal lumineux. 20
8. Détecteur selon la revendication 7, dans lequel le signal d'indication est un signal lumineux clignotant avec un cycle de marche/arrêt respectif. 25
9. Détecteur selon la revendication 8, dans lequel la durée du cycle de marche/arrêt est d'environ une seconde.
10. Détecteur selon la revendication 8 ou la revendication 9, dans lequel le signal lumineux clignotant est produit par une diode électroluminescente (LED) qui fait partie du circuit électronique. 30
11. Détecteur selon la revendication 10, dans lequel la LED est de couleur rouge. 35
12. Détecteur selon l'une quelconque des revendications 5 à 11, dans lequel le détecteur est dans un mode de test quand il émet le signal d'indication local. 40

45

50

55

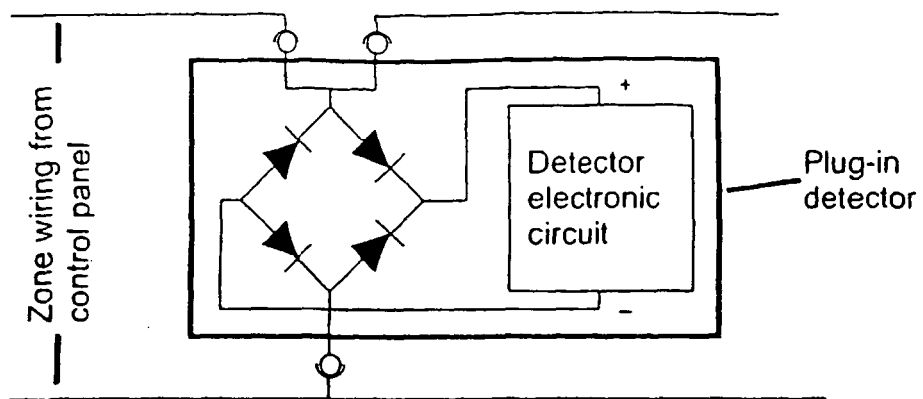


Fig 1 Polarity protection using diode bridge

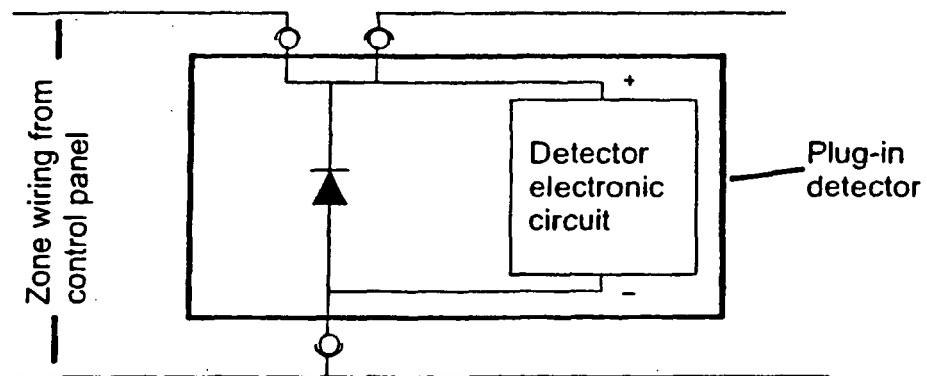


Fig 2 Polarity protection using shunt diode

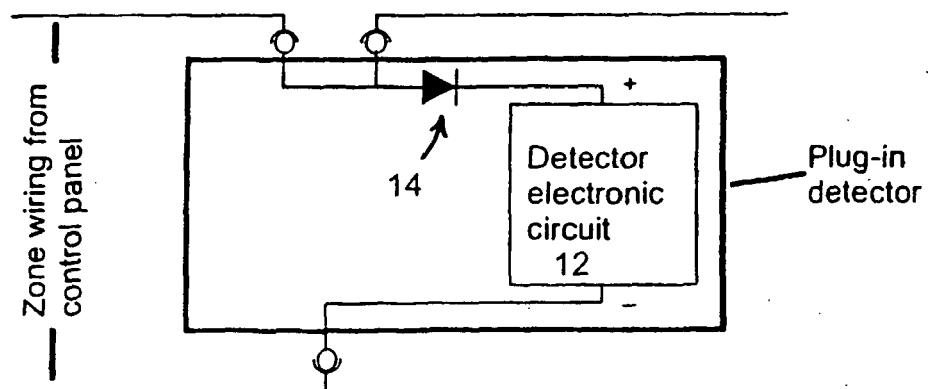


Fig 3 Polarity protection using series diode

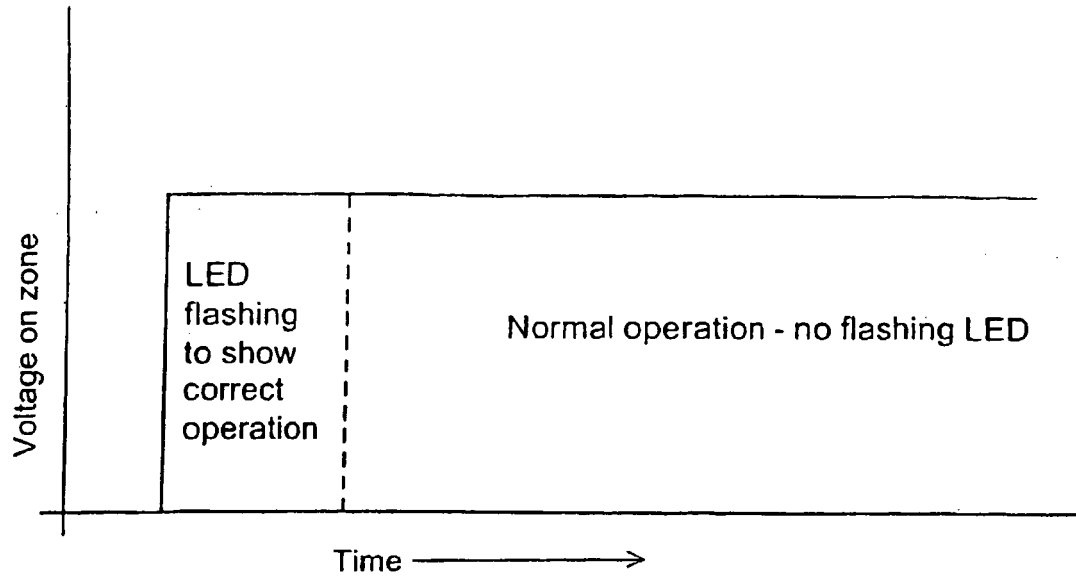


Fig 4 Flashing LED on power-up



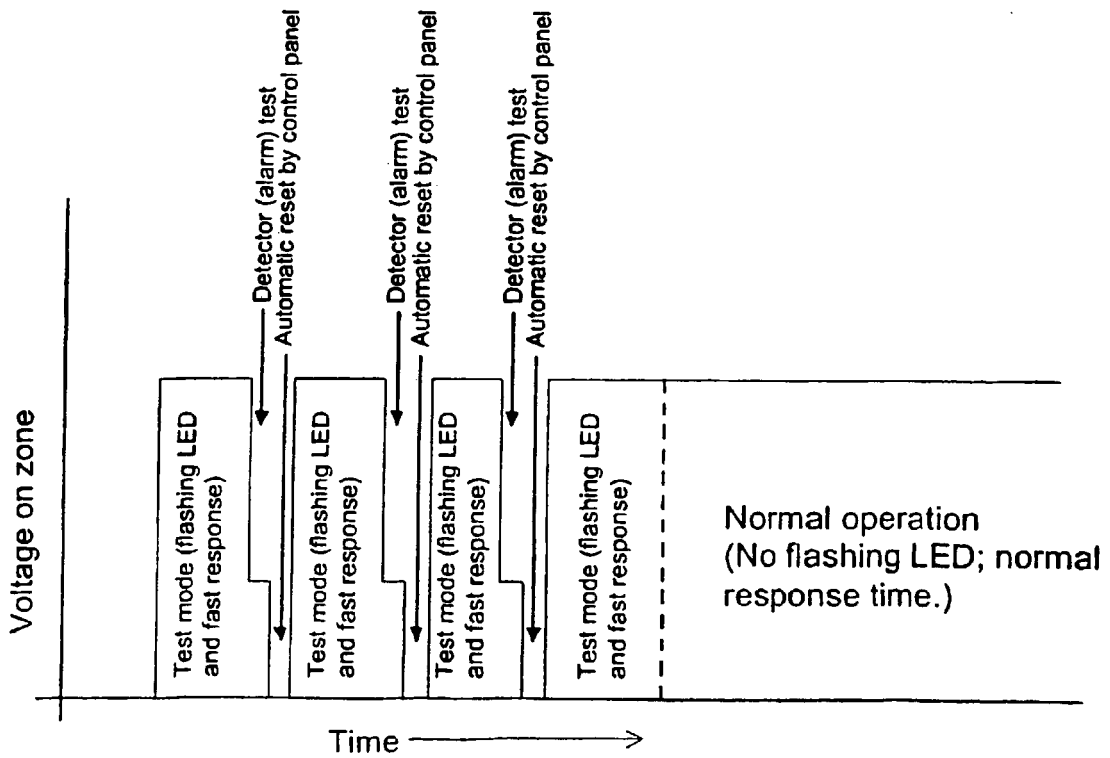


Fig 5 Special test mode on power-up

Fig 6

Flowchart of smoke detector operation from cold start or reset

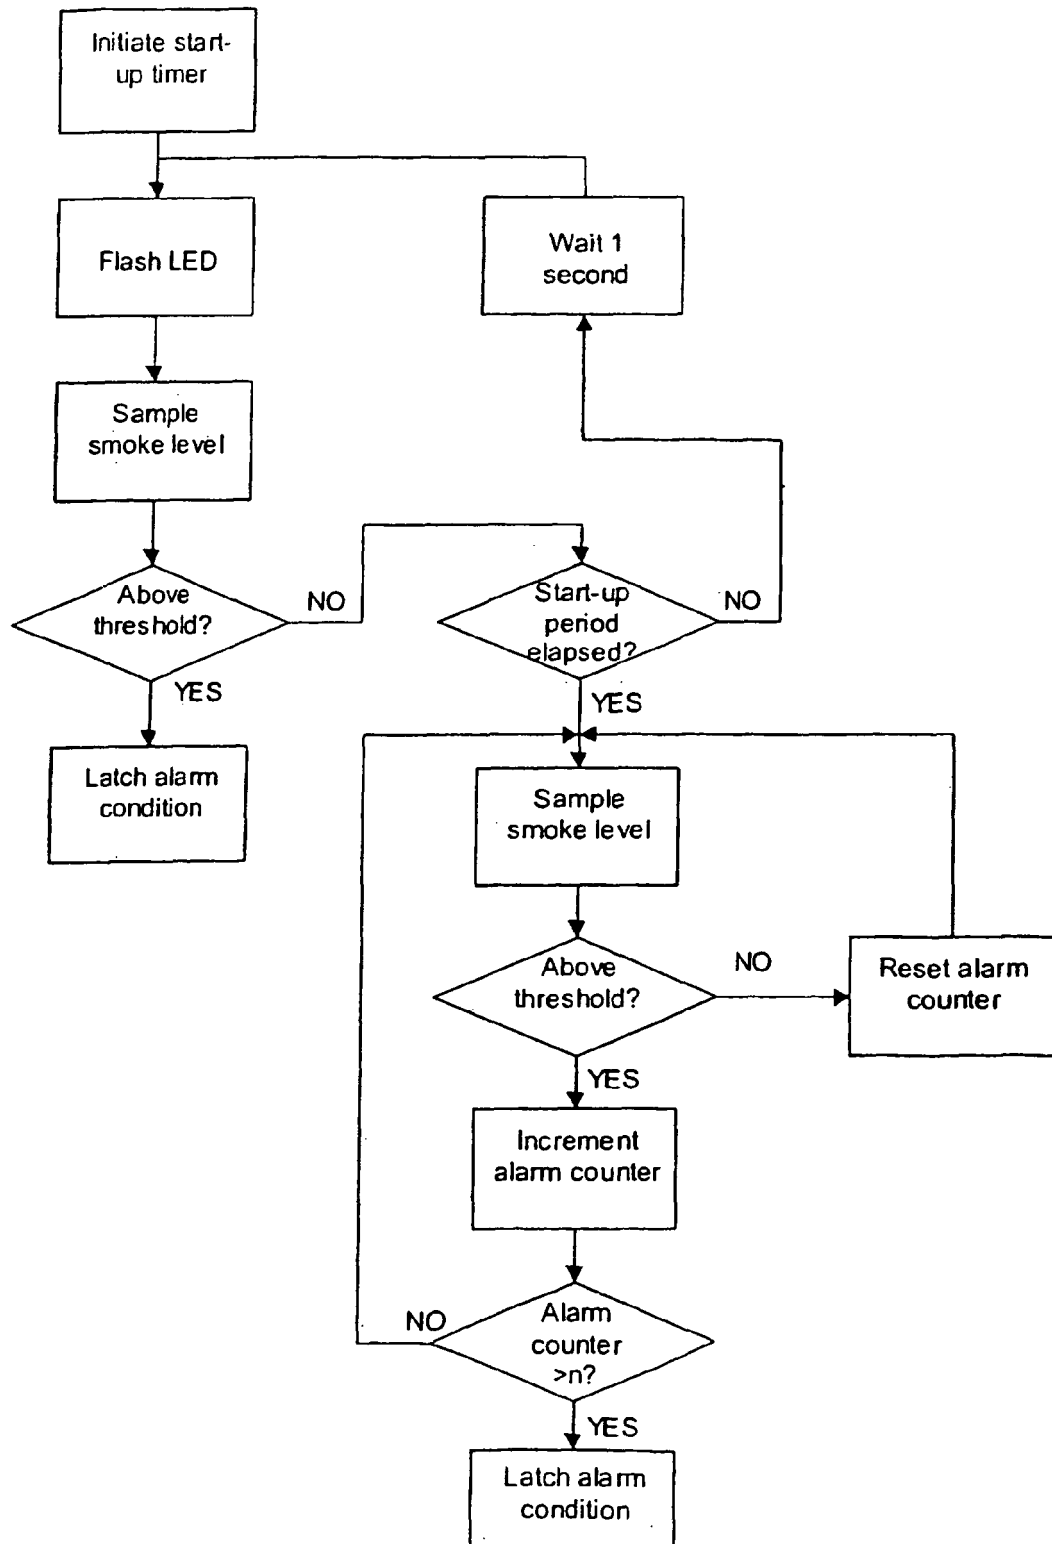

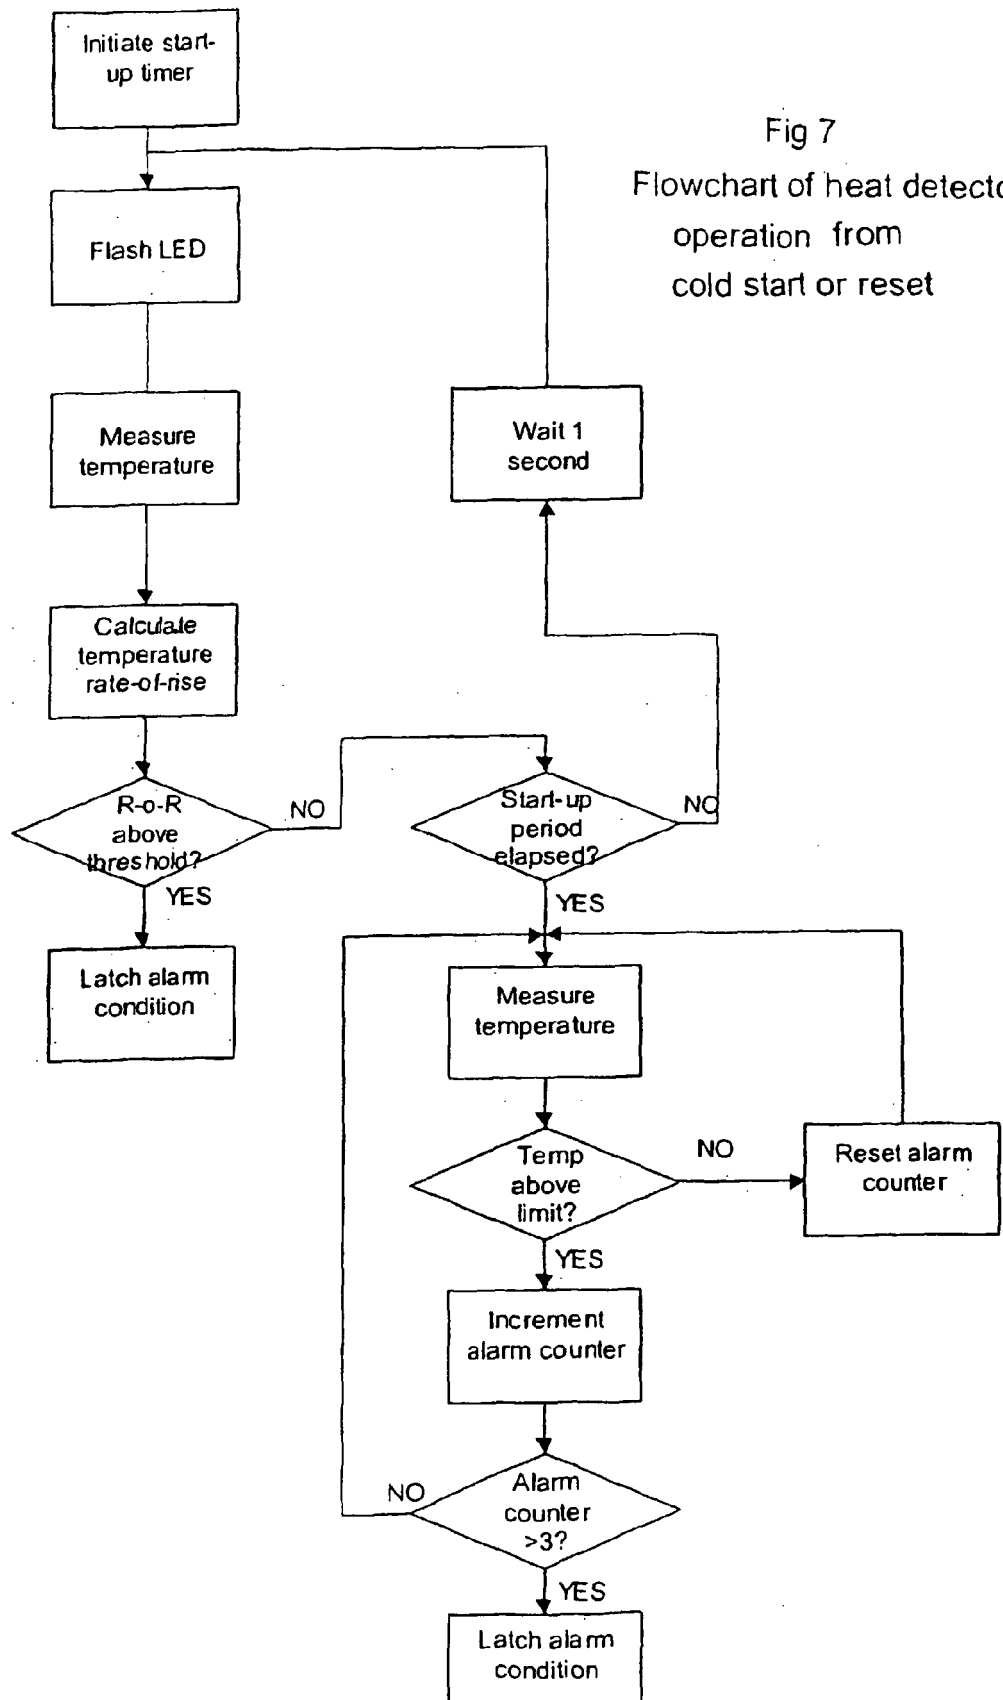

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- GB 2137790 A [0006]