

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 590 494 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
09.08.2006 Bulletin 2006/32

(21) Application number: **04708695.4**

(22) Date of filing: **06.02.2004**

(51) Int Cl.:
C22B 1/08 (2006.01) C22B 34/32 (2006.01)

(86) International application number:
PCT/CA2004/000165

(87) International publication number:
WO 2004/070066 (19.08.2004 Gazette 2004/34)

(54) **A METHOD FOR INCREASING THE CHROME TO IRON RATIO OF CHROMITES PRODUCTS**

VERFAHREN ZUR ERHÖHUNG DES CHROM/EISEN-VERHÄLTNISSES VON
CHROMITPRODUKTEN

PROCEDE PERMETTANT D'ACCROITRE LE RAPPORT CHROME-FER DES PRODUITS
CHROMITES

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**

(30) Priority: **06.02.2003 CA 2418546**
07.02.2003 US 445437 P

(43) Date of publication of application:
02.11.2005 Bulletin 2005/44

(73) Proprietor: **Ressources Minieres Pro-Or Inc.**
Montreal,
Quebec H2Y 1S1 (CA)

(72) Inventors:
• **BERGERON, Mario**
Cap Rouge, Quebec G1Y 2Y6 (CA)
• **RICHER-LAFLECHE, Marc**
Sainte-Foy, Quebec G1W 3Y8 (CA)

(74) Representative: **Teipel, Stephan et al**
Lederer & Keller
Patentanwälte
Prinzregentenstrasse 16
80538 München (DE)

(56) References cited:
WO-A-97/46724 US-A- 2 752 301
US-A- 4 047 934

• **KANARI N ET AL: "KINETICS OF
CARBOCHLORINATION OF CHROMIUM (III)
OXIDE" METALLURGICAL AND MATERIALS
TRANSACTIONS B: PROCESS METALLURGY &
MATERIALS PROCESSING SCIENCE, THE
MATERIALS INFORMATION SOCIETY, US, vol.
29B, no. 4, 1 August 1998 (1998-08-01), pages
729-737, XP000781856 ISSN: 1073-5623**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 590 494 B1

Description**FIELD OF THE INVENTION**

5 **[0001]** The present invention relates to a method for increasing the chrome to iron ratio of chromites products. More particularly, it relates to a chlorination method for increasing the chrome to iron ratio of chromites products.

BACKGROUND OF THE INVENTION



10 **[0002]** In the geological environment, the primary industrial source of chromium is the mineral chromite, which can be represented by the ideal formula $\text{FeO} \cdot \text{Cr}_2\text{O}_3$. In practice, FeO can be partially substituted by other elements such as MgO, CaO, MnO and Cr_2O_3 by Fe_2O_3 and Al_2O_3 . These substitutions are at the origin of different types of chromites distinguished, among other things, by their chrome to iron ratios. In the geological environment, the chrome to iron ratios of chromites vary from 1.3 to 4.0 in many stratiform or podiform deposits. Chromites possessing chrome to iron ratios
15 higher than 3, are rare in nature.

[0003] Chromites are employed in the production of ferrochromium, a master alloy in the stainless steel industry. The primary process for the production of ferrochromium from chromites is described by the general reaction: metal oxide + reductant + energy $\Rightarrow$ (ferro)metal + reductant oxide. The production of ferrochromium is an energy-intensive process and is generally conducted in an electrical furnace. Ferrochromiums can be divided in three classes based on their
20 carbon content: high carbon ferrochromium containing between 4 to 10 % carbon; medium carbon ferrochromium containing between 0.5 to 4 % carbon; low carbon ferrochromium containing less than 0.5 % carbon. The chrome to iron ratio of the chromite ore used as a feed to the furnace, controls the chromium content of the ferrochromium. The value of the ferrochromium is mainly based on its chromium and carbon contents. The highest prices are obtained for ferrochromium showing high concentration in chromium and low carbon content. Similarly, the chromites economic values
25 are set by their chrome to iron ratios: a chromite with a Cr/Fe ratio of 1.5 being worth less than a chromite with a Cr/Fe ratio of 4. The economic value of these chromium-enriched chromites is increased in their use as enriched product directly and as feed for ferrochromium production.


[0004] Hence, there is a need for a method for increasing the chrome to iron ratio of a chromite ore. Methods for achieving this goal have been described.

30 **[0005]** European Patent No. 0 096 241, by Robinson and Crosby, describes the chlorination of chromites mixed with coke by Cl_2 at a temperature ranging between 1000° and 1100° C. The chromites are completely transformed into chlorides and volatilized. The iron chlorides and chromium chlorides are separated according to their respective boiling points. This specific process leads to the formation of pure CrCl_3 .

35 **[0006]** South African Patent No. 96/4584 by Lalancette, Bergeron, Bossé, Clerk teaches the chlorination of chromites by Cl_2 in the presence of air, no reductant being used. The process is described by two reactions.



40 The combination of these two reactions results in:



45 According to this process, the iron is selectively chlorinated and transformed in gaseous FeCl_3 . While FeCl_3 is still in the reaction vessel, this product is rapidly transformed in Fe_2O_3 via reaction No. 2. This result in the production of a chromite showing an increase in its chrome to iron ratio with a simultaneous formation and precipitation of Fe_2O_3 as hematite in the chlorination reactor. After the chlorination step, the reactor is drained and the hematite is dissolved in concentrated HCl leaving a residue of enrich chromite.

50 **[0007]** U.K. Patent No. 1,567,841 by Sowden and Rigg teaches the chlorination of $\text{Cr}_2\text{O}_3 \cdot x\text{H}_2\text{O}$ by CCl_4 below 600°C. The resulting product is CrCl_3 . The reaction at the base of this process is:



55 Following the chlorination reaction CrCl_3 is dissolved in diluted HCl.

[0008] Thermodynamic and kinetic studies of the chlorination of chromites and associated oxides such as FeO, Fe_2O_3 , and Cr_2O_3 have also been published by Martirosyan (1978 a, b; Arm. Khim. Zh. 31, pp. 93-99; 100-106); and Kanari, Gaballah, and Alain (1998, Metallurgical and Materials Transactions B, 30B, pp. 577-587) for instance. These studies

were centered on thermodynamic and kinetic considerations and do not teach how to apply these principles to a workable and optimized method. They do not teach the use of a catalyst to increase the efficiency of the reactions.

[0009] Chlorination as a general metallurgical approach has also been described. Johnstone, Weingartner and Winsche (1942, J. Am. Chem. Soc., 64, pp. 241-244) observed the formation of a eutectic point when studying the binary system ferric chloride(FeCl_3)-sodium chloride. Cook, and Dunn (1961, J. Phys. Chem., 65, pp. 1505-1511) refined the phase diagram and presented evidence for the formation of $\text{NaCl} \cdot \text{FeCl}_3$. Bezukladnikov, Tarat and Baibakov (1974, Zr. Prikl. Khim. 47, pp. 1722-1725); and Zhao, Tian and Duan (1990, Metallurgical Transactions B, 21 B, 131-133) studied the solubility of chlorine in different molten salts. These authors concluded that the presence of FeCl_2 in molten salts increases by two orders of magnitude the speed of the chlorination reactions. They attributed this increase to the catalyst role played by FeCl_2 according to the reaction: $\text{FeCl}_2(\text{melt}) + 0.5\text{Cl}_2(\text{gas}) = \text{FeCl}_3(\text{melt})$. The actual partial pressure of chlorine at the reaction site decreases rapidly causing decomposition of FeCl_3 with the liberation of chlorine at the reaction sites. FeCl_2 reacted with external chlorine thus regenerating FeCl_3 . This system increases chlorine diffusion and acts as a transport procedure for chlorine at the reaction sites and accelerates the chlorination process.

[0010] It is apparent from the foregoing that known methods for chlorinating chromites result either in the production of CrCl_3 because of the temperatures used (i.e. 1000°C) or in the formation of secondary hematite (Fe_2O_3) that has to be leached by concentrated HCl in order to produce chromites showing high chrome to iron ratios. Furthermore, thermodynamic and kinetic studies on chlorination of iron have not incorporated the effect of the catalyst role played by FeCl_2 , FeCl_3 in the presence of molten salts and they do not integrate the required systems for the set up of a commercial process such as those taking account environmental requirements. Furthermore, these studies do not teach how to avoid potential problems related to the consumption of chlorine by others oxidic constituents occurring in the natural spinels structure of chromites and in other silicated phases associated with the ore.

[0011] Investigations on the chemical compositions of chromites from the Menarik Complex, Bay James, Québec, Canada, have showed that the oxidic components of the chromite ores are highly variable. Table 1 shows chemical analysis performed by an electron micro-probe of chromite grains extracted from Cr-3 chromite showing of the Menarik Complex. These results indicate important variations in the major oxides phases on a grain-to-grain basis. The average chemical composition of the Cr-3 mineralized zone is reported in the Table 2 with the heading Starting ore.

Table 1. Chemical analysis of chromite grains by electron micro-probe, Menarik Cr-3 chromite

Sample No.	MgO %	Al_2O_3 %	SiO_2 %	TiO_2 %	V_2O_5 %	Cr_2O_3 %	MnO %	FeO %	Cr/Fe N/A
Cr3-26	7.74	17.23	0.00	1.28	0.58	45.59	1.23	26.36	1.52
Cr3-27	3.98	17.59	0.00	0.50	0.35	41.81	1.82	33.95	1.08
Cr3-37	2.93	16.45	0.00	0.00	0.36	44.87	1.19	34.19	1.16
Cr3-35	2.58	17.41	0.79	1.02	0.95	40.81	1.97	32.14	1.12
Cr3-29	1.83	15.67	0.00	0.00	0.87	42.77	1.72	36.01	1.05
Cr3-28	1.75	3.10	0.98	0.00	0.00	44.72	1.27	48.17	0.82
Cr3-44	2.73	5.92	0.82	0.72	0.79	42.10	0.93	46.00	0.81
Cr3-43	1.48	5.23	0.49	0.00	1.25	41.06	2.68	47.81	0.76
N/A: not applicable.									

[0012] There thus remains a need to develop an effective method for the selective extraction of iron from heterogeneous natural chromites in such a way that other oxides such as CaO, MgO, MnO, SiO_2 , TiO_2 , Cr_2O_3 are left substantially unaffected by the method and through means that are secure for the environment. There also remains a need for a method able to extract the iron without the need to dissolve the hematite coatings on chromites with concentrated HCl, a complicated and expensive procedure. There also remains a need for a method including a catalyst component to accelerate the chlorination process and efficient environmental and recycling systems.

[0013] It is an object of the present invention to provide an improved method of increasing the chromium/iron ratio of chromites:

[0014] Other objects and further scope of applicability of the present invention will become apparent from the detailed description given hereinafter. It should be understood, however, that this detailed description, while indicating preferred embodiments of the invention, is given by way of illustration only, since various changes and modifications within the scope of the invention will become apparent to those skilled in the art.

SUMMARY OF THE INVENTION

[0015] The present invention generally provides a novel approach for the extraction of iron from chromites.

[0016] In a specific embodiment, it also provides a method for extracting iron from chromites without substantially affecting other major chemical components in chromites.

[0017] The present invention is applicable to chromites products such as chromite ores and different types of chromite concentrates including alluvial chromites. If concentrates are used as feed to the invention, the concentrates can be obtained, after grinding of the ore, by the use of standard mineral processing technologies such as jigs, spirals, flotation units, and multi-gravity separator.

[0018] The size of the chromite product used depends on the degree of freedom of the chromite grain-size in the matrix from which it is extracted.

[0019] According to a further embodiment, the present invention may comprise procedures allowing secure disposal of the iron extracted from the chromites. The method may then further comprises any of the steps of washing the FeCl_3 condensate with an aqueous solution to yield an aqueous solution rich in FeCl_3 ; reacting gaseous Cl_2 with metallic iron to yield an aqueous solution of FeCl_3 ; neutralizing the aqueous solution rich in FeCl_3 with NaOH by the reaction $\text{FeCl}_3(\text{aq}) + 3\text{NaOH}(\text{aq}) \Rightarrow \text{Fe}(\text{OH})_3(\text{s}) + 3\text{NaCl}(\text{aq})$ to yield an aqueous solution containing NaCl and an iron hydroxides precipitate; separating the aqueous NaCl solution from the iron hydroxides precipitate to yield a clearer aqueous NaCl solution and a iron hydroxides cake filter, the iron oxide cake being disposable in a regulated tailing pond;

[0020] According to a further embodiment, the present invention comprises procedures allowing recycling of other principal chemical reactants employed in the process. The method then comprises burning CO with air to yield gaseous CO_2 ; electrolyzing the NaCl solution to yield Cl_2 , NaOH and H_2 ; recycling at least one of Cl_2 and NaOH as reactants for the chlorination and neutralization reactions; recycling H_2 as additional combustible for the chlorination furnace; and recovering the solid material from which the iron has been extracted by the chlorination reaction. In a specific embodiment, the chlorination is performed in a furnace built with material resistant to chlorine, to yield a FeCl_3 gaseous stream and a solid material from which the iron has been extracted and whereby residual chlorine may exit the furnace.

[0021] According to a further embodiment, the present invention comprises means to minimize the production of $\text{Cr}+6$, a known carcinogen contaminant that may be produced in methods using HCl . In a specific embodiment, the means include using a reducing atmosphere during the gas solid interactions.

[0022] As used herein, the terminology "temperature sufficient to induce the formation of a thin film of a melt around the chromite product" refers to a temperature that is sufficient to promote the formation of a FeCl_3 - NaCl system that is liquid. This temperature is at least 157°C and preferably at least 250°C .

[0023] As used herein, the terminology "temperature able to promote the selective chlorination of iron" refers to a temperature that is not sufficiently high to enable the chlorination of other oxides in the chromites. Hence, it is known that at a temperature of 1000°C and higher, all oxides contained in the chromites are chlorinated. In a specific embodiment, the temperature used for this purpose is not higher than 750°C . In a more specific embodiment, this temperature is not higher than 720°C .

[0024] According to an embodiment of the present invention, there is provided a method for increasing the chrome to iron ratio of a chromite product selected from the group consisting of ore and ore concentrate comprising the steps of mixing the chromite product with at least one salt so as to produce a mixture, whereby the concentration of salt in the mixture is selected to induce the selective chlorination of iron; and chlorinating the mixture in the presence of CO at a temperature sufficient to induce the formation of a thin film of a melt around the chromite product and at a temperature able to promote the selective chlorination of iron, whereby an iron impoverished chromite product is yielded having an increased chromite to iron ratio as compared to that of the chromite product.

[0025] In specific embodiments, the temperature is between about 157° and about 750°C . In further embodiments, the temperature may be between about 250° and about 720°C . In more specific embodiments, the temperature is between about 670° and about 720°C . In other specific embodiments, the at least one salt is selected from the group consisting of NaCl , KCl and MgCl_2 and a combination thereof. In a more specific embodiment, the salt is NaCl and forms about 5% to about 10% w/w of the mixture. In more specific embodiments, the salt forms about 5% w/w of the mixture. In other specific embodiments, the Cl_2/CO ratio is between about 0.5 and about 1.5. In other specific embodiments, the mixture is dried before chlorination. In other embodiments, N_2 is used as a carrier gas during chlorination. In other embodiments, the duration of the chlorination is about 30 minutes to about 2 hours. In other embodiments, the duration of the chlorination is about 2 hours.

[0026] According to an other embodiment of the present invention, there is provided a method for increasing the chrome to iron ratio of a chromite product selected from the group consisting of ore and ore concentrate comprising the steps of mixing the chromite product with NaCl so that a mixture is produced having about 5% to about 10% NaCl w/w; and chlorinating the mixture in the presence of CO at a temperature sufficient to induce the formation of a thin film of a melt around the chromite product and at a temperature able to promote the selective chlorination of iron, whereby an iron impoverished chromite product is yielded having an increased chromite to iron ratio as compared to that of the

chromite product.

[0027] In more specific embodiments, the temperature is between about 157° and about 750°C. In further embodiments, it may be between about 250° and about 720°C or between about 670° and about 720°C. In other specific embodiments, the salt forms about 5% w/w of the mixture. In other specific embodiments, the Cl_2/CO ratio is between about 0.5 and about 1.5. In other specific embodiments, the mixture is dried before chlorination. In other embodiments, N_2 is used as a carrier gas during chlorination. In other embodiments, the duration of the chlorination is about 30 minutes to about 2 hours. In other embodiments, the duration of the chlorination is about 2 hours.

[0028] According to an other embodiment of the present invention, there is provided a method for extracting iron from a chromite product selected from the group consisting of ore and ore concentrate comprising the steps of mixing the chromite product with at least one salt; and chlorinating the mixture in the presence of CO at a temperature sufficient to induce the formation of a thin film of a melt around the chromite product so as to promote the chlorination of iron, whereby an iron impoverished chromite product is yielded.

[0029] According to specific embodiments, it may be desired to promote a selective chlorination of iron (i.e. use chlorination conditions where only or almost only iron is chlorinated). This is desired when the method seeks to produce an upgraded chromite product having a higher Cr/Fe ratio. In these embodiments, if the salt used is NaCl, it is optimally between 5% and 10% w/w in the mixture and the temperature is below 1000°C and preferably not more than 750°C. In other embodiments, the method may simply seek to extract as much iron as possible and not preserve a high chrome content in the chromite or avoid chlorination of other oxides. Then the chlorination temperature used and the salt concentration used do not have to be selective and is desirably higher than 1000°C and 10% w/w, respectively.

IN THE DRAWING

[0030]

Figure 1 illustrates a flow diagram according to a specific embodiment of the present invention;
 Figure 2 graphically illustrates a phase diagram of a system $\text{FeCl}_3\text{-NaCl}$, adapted from Cook and Dunn (1961);
 Figure 3 graphically illustrates the carbochlorination of chromites, ΔGoT versus T;
 Figure 4 graphically illustrates variations of the chrome to iron ratios with T° C during preliminary experiments;
 Figure 5 graphically illustrates variations of chrome to iron ratios with time. The temperature used was 600°C and the NaCl concentration was 4.8 % (w/w);
 Figure 6 graphically illustrates variations of the chrome to iron ratios with reaction time. Triangle: T = 550°C ; square: T = 600°C ; circle: T = 673°C; and
 Figure 7 graphically illustrates variations of the chrome to iron ratios with reaction time at a temperature of 720°C.

DESCRIPTION OF THE PREFERRED EMBODIMENT

[0031] Referring to Figure 1, the feed (1) used can be ore or an ore concentrate obtained from an appropriate mineral processing technology. In Examples presented below, on the feed used is from a massive chromite layer obtained from the Menarik deposit (James Bay, Quebec). The average mineralogy of 29 massive chromite layers of the Menarik Complex is: chromite 45 %, chlorite 32 %, serpentine 13 %, magnetite 3 %, talc 1 %, hornblende 4 %, and traces of sulfides. The sample was hand picked from the chromite mineralized zone Cr-3 and subsequently ground to 125 μm . The chemical composition of this starting material, identified as feed (1) in Figure 1, is reported in Table 2 as starting ore for Examples 1 and 2, and in Table 3 as starting ore for Examples 3 to 6.

MIXING (2)

[0032] NaCl (3) was added to the ground ore as a solution in order to obtain a concentration (w/w) of salt in the feed varying between .8% and 15% according to Examples 1 to 6 below. The NaCl salt addition provides one of the components for the formation of an eutectic point which the FeCl_3 produces via the carbochlorination of the chromite feed (reactions are reported under the carbochlorination heading below). The phase diagram for the system $\text{FeCl}_3\text{-NaCl}$ is illustrated at Figure 2.

[0033] For temperatures over the first eutectic temperature, 157°C, liquid NaFeCl_4 is formed from the reaction of FeCl_3 with NaCl. In Examples presented below, the chlorination temperature varies from 250° to 720° C. According to the phase diagram of Figure 2, NaFeCl_4 is present as a liquid phase in the feed at all chlorination temperatures used. In the present invention, the salt addition is performed in order to produce a thin film of a melt around each grain of the feed. This interstitial melt contains the chlorination agent in a chemical form such as NaFeCl_4 . The thin film acts as a chlorination solvent increasing chlorine diffusion in the chromite. The chlorine gaseous atmosphere enclosed in the reactor regenerates the effective chlorination agent contained in the melt. It is understood from the person of ordinary skill in the art

that other types of salts such as KCl and MgCl_2 can be used to produce a catalytic system for the carbochlorination of chromites.


DRYING AND PRE-HEATING (4)

[0034] The drying step ensures a complete removal of water resulting from the salt addition and can be carried out at different temperatures and time periods. In Examples presented below, the mixture was dried at 180 °C for 30 minutes. After cooling, the charge was transferred in the chlorination reactor and pre-heated at the selected reaction temperature.

CARBOCHLORINATION

Theory

[0035] The chemical reaction occurring during carbochlorination is the following:



[0036] The ΔG°_T versus temperature of this reaction was calculated using the HSC™ software of Outokumpu. They are presented at Figure 3. For the range of temperatures considered, the ΔG°_T values were inferior to -150 Kjoules. This demonstrates the thermodynamic feasibility of the reaction. According to reaction 4, the iron contained in the chromite reacts with Cl_2 to form FeCl_3 . At the temperature range described Examples presented below, 250° to 673° C, FeCl_3 is in a vapour state. Because of the continuous flow of gas passing through the reactor, FeCl_3 is carried outside the reactor, where it is condensed. An acceptor such as $\text{CO}(\text{g})$ for the oxygen liberated during the chlorination reaction may be added to maintain reducing conditions.. The addition of $\text{CO}(\text{g})$ limits the probability that the reaction $2\text{FeCl}_3 + 3/2\text{O}_2 = \text{Fe}_2\text{O}_3 + 3\text{Cl}_2$ will occur. Thereby, no detectable precipitation of unwanted solid hematite takes place in the reactor.

[0037] Another significant reaction occurring according to the process of the present invention is the formation of ferrous chloride FeCl_2 during the carbochlorination phase. Ferrous chloride (FeCl_2) having a high melting point of 670° C, hence a temperature higher than that used during the carbochlorination according to certain embodiments of the present invention, a rapid chlorination of FeCl_2 into ferric chloride (FeCl_3) according to the reaction $2\text{FeCl}_2 + \text{Cl}_2 \Rightarrow 2\text{FeCl}_3(\text{g})$ may be desirable in these specific embodiments in order to avoid the production of a diffusion barrier by the formed solid ferrous chloride. This barrier may decrease the chlorine access to the reaction sites. Rhee and Shon (1990, Metallurgical Transactions B, 21 B, pp. 321-330) reported data on the carbochlorination of ilmenite ($\text{FeO} \cdot \text{TiO}_2$), a product presenting similarities to chromites when chlorinated. They showed that the kinetics follow a pore-blocking rate law. Zhao, Tian and Duan (1990, Metallurgical Transactions B, 21 B, 131-133) studied the equilibrium between ferrous and ferric chloride in molten chloride salts. They concluded on the catalytic effect of the combination of salt and iron chloride and also on the volatilization of iron from the salt melt. Their data indicated that volatilization of iron as FeCl_3 is maximized when the NaCl content is high. None of these conditions were tested before on chromites.

[0038] Hence, in the present invention, carbochlorination is performed with a salt such as NaCl, KCl and MgCl_2 to produce a catalytic melt when NaCl combines with FeCl_2 and/or FeCl_3 so as to increase the volatilization (the removal) of iron as gaseous FeCl_3 from the carbochlorination reactor.

Method

[0039] When the carbochlorination temperature was reached in the chlorination reactor (5) a mixture of Cl_2 and CO and, in specific embodiments, N_2 (not shown) was introduced in the reactor so as to induce carbochlorination. After a few minutes, $\text{FeCl}_3(\text{g})$ (5) was expelled from the reactor. According to specific embodiments described Examples below, the temperature was varied from 250° to 720°C. However because of thermodynamics rules, it is expected that this temperature may be increased at least up to 750°C without losing the selectivity of the chlorination towards iron. In specific embodiments, chlorine and carbon monoxide were used on a 1/1 basis. The flow rate was maintained at 1 ml per second. In other embodiments, a mixture of Cl_2 , CO, and N_2 was employed, N_2 acting as a carrier gas. N_2 is not believe to play a role in any reaction involved in the method and may accordingly be dispensed of. In cases where Cl_2 , CO, and N_2 were used, the flow rates of the different gases were varied as well as the weight % of salt additives. Results (not shown) have shown that the optimal Cl_2/CO flow rate ratio is between about 0.5 and about 1.5. Interesting results are nevertheless obtained outside this range but the Cr/Fe obtained progressively decreases with ratios below 0.5 or above 1.5 (results not shown).

[0040] The chlorination reactions were conducted in a simple horizontal static furnace. Usually, at industrial scale, chlorination is realized in fluidized bed reactors constructed of acid resistant bricks enclosed in a metal shell. Since the salt addition results in the formation of a thin liquid film layer around the chromite grains, which increases their adherence

properties, it may be desirable to avoid fluidized reactor in order to avoid problems associated with grains agglomeration and bed sedimentation. Alternatives to fluidized bed reactor include a vertical static reactor and a horizontal rotating reactor.

[0041] Other embodiments of the present invention may include the use of solid reducing agents like coal or coke instead of CO which may be onerous for industrial scale methods. When coal and coke are used, they react with oxygen to form CO so that the end result is similar to that obtained when CO is directly introduced in the chlorination reactor. Pelletizing-sintering procedures, similar to the ones employed in the ferrochromium industry, can be performed before the chlorination step.

[0042] After the chlorination reaction, the solid upgraded chromites minerals (6) contained in the reactor were dumped. Depending on the duration of the reaction, the gas flow rate, the salt additives, the Cl_2/CO ratio, the chlorinated solid residue showed an increase in its chrome to iron ratios. The ratios varied from 1.5 in the starting ore before chlorination up to 17 after chlorination. These results are presented in Tables 2-5 below.

CONDENSER (8)


[0043] Gaseous FeCl_3 (10) exits continuously the reactor during the reaction and the abrupt temperature drop outside the reactor causes its fast condensation in the top section of the condenser. The condenser is placed at an adequate distance from the furnace so as to keep its temperature below 50°C so as to ensure FeCl_3 's condensation. FeCl_3 is highly soluble in water. A small volume of water is added to the condenser apparatus to wash the solid FeCl_3 . The FeCl_3 rich aqueous solution accumulates at the base of the condenser and is directed into a reservoir for subsequent neutralization. The other gases leaving the reactor are essentially Cl_2 , CO, CO_2 (12) and N_2 (not shown). These gases are apparently not affected by the presence of the condenser (8) and flow through it without experiencing any detectable change in their compositions or states and exit the condenser.

WASHING TOWER (14) AND GAS TREATMENT

[0044] Cl_2 , CO, CO_2 and N_2 exiting the chlorination reactor (5) are routed toward a washing tower (14). Scraps of metallic iron (16) in the millimetre range are placed in the tower (14) and sprayed with a small quantity of water (18) in order to keep wet the iron metallic surfaces. This arrangement favors the reaction $\text{Fe(s)} + 3/2\text{Cl}_2 \Rightarrow \text{FeCl}_3(\text{aq})$ which consume the unreacted Cl_2 . After the reaction, FeCl_3 is present as a solute (20) in H_2O . CO and CO_2 (22) percolate up and exit the washing tower near the top. CO is burned as CO_2 (24) in an after burner (26) unit. If necessary, by environmental regulations, the scrubbing of CO_2 can be achieved by an existing complementary technology (not shown). The aqueous FeCl_3 solution flows out at the base of the washing tower to be routed toward the neutralization reservoir.

NEUTRALIZATION


[0045] The aqueous FeCl_3 solutions (10) and (20) coming from the condenser (8) and the washing tower are pumped in a neutralization reservoir (28). A solution of NaOH (not shown) is added to the reservoir. The ferric chloride reacts with NaOH to produce Fe(OH)_3 (30) according to the reaction:



[0046] After completion of the reaction, the solid amorphous iron oxides are isolated from the liquid phase by an appropriate solid-liquid separation such as centrifugation or press filtration (31). The filtration cake is discharged to the tailings. The aqueous NaCl solution (32) is directed to an electrolysis cell (34).

ELECTROLYSIS

[0047] The NaCl solution (32), obtained from the neutralization step of the process, is electrolyzed by a chlor-alkali membrane cell process. The reaction involved is:



[0048] The gaseous Cl_2 and aqueous NaOH generated by the reaction are recycled in the process. The Cl_2 is returned (36) to the carbochlorination reactor (5) and the aqueous NaOH is directed (31) in the neutralization reservoir (28). The $\text{H}_2(\text{g})$ produced (not shown) by this reaction can be employed as the main energy source or an additional energy source for the carbochlorination reactor (5). External supplies of NaCl can be used if needed.

[0049] Any means for routing, transporting and transferring solid, gas, liquid and pulp are within the scope of these

inventions. The present invention is described in further details by the following non-limiting examples.

EXAMPLES

[0050] The implementation and results of Examples provided herein are summarized in Tables 2- 5. Table 2 presents results according to the first set of experiments for which the Cl_2/CO ratio flow rates, reaction time, and type and quantity of salt addition were kept constant during the experiments, while the temperature was varied. Examples 1 and 2 are derived from this first set of experiences. Tables 3 and 4 contain data for the second set of embodiments for which, temperature, reaction time and quantity of salt addition were varied. This second set of experiments is represented in Examples 3 to 6.

[0051] The carbochlorination experiments were carried out in a 65 cm long horizontal cylindrical furnace equipped with a type K pyrometer linked to a thermostat controller. Usually, a 10 grams sample was placed in a ceramic beaker and inserted in a silica fused tube. The beaker-tube assembly was then introduced in the furnace.

[0052] The major and trace elements were analyzed by inductively couple plasma atomic emission spectroscopy, ICP-AES, after a fusion procedure specifically applicable to chromite. Sulfur was determined with a CNS analyzer.

Table 2. Results for experiments conducted with temperature variations

SAMPLE	GAS	T	Cr/Fe	SiO_2	Cr_2O_3	TiO_2	Al_2O_3	$\text{Fe}_2\text{O}_3\text{T}$	MnO	MgO	CaO	Na_2O	K_2O	P_2O_5	LOI	S	Total
		(°C)		%	%	%	%	%	%	%	%	%	%	%	%	%	%
Starting ore	NA	NA	1.76	4.72	45.33	0.35	13.26	25.31	1.01	12.11	0.15	0.21	<0.028	<0.021	0.35	0.06	103.2
Test-01	Cl-CO	250	1.87	4.00	47.11	0.37	13.12	24.69	0.96	10.82	0.20	0.26	<0.038	<0.019	0.44	0.07	102.4
Test-02	Cl-CO	350	2.15	3.96	49.29	0.38	13.48	22.46	0.82	10.43	0.20	0.26	<0.044	<0.022	1.59	0.08	103.3
Test-03	Cl-CO	450	2.27	3.36	51.56	0.39	13.17	22.21	0.71	10.65	0.25	0.32	<0.062	<0.031	1.06	0.09	104.1
Test-04	Cl-CO	550	2.98	2.33	52.07	0.37	14.15	17.12	0.81	12.73	0.11	0.14	<0.026	<0.013	0.69	0.04	100.9

$\text{Cl}_2/\text{CO} = 1$; 5 % NaCl (w/w) addition; LOI: lost on ignition; $\text{Fe}_2\text{O}_3\text{T}$: (T) stand for total iron; Time =1 hour

Table 3. Reaction conditions and results for the second set of experiments.

SAMPLE	T	NaCl	Time	$\text{F}(\text{Cl}_2)$	$\text{F}(\text{CO})$	$\text{F}(\text{N}_2)$	Weight loss	Fe_2O_3	Cr_2O_3	Cr/Fe
	°C	%	(h)	ml/min	ml/min	ml/min	%	%	%	
Starting ore	21	0	0	0	0	0	0	25.50	47.82	1.88
T-2-1	600	0	2	220	220	110	11.01	15.60	49.23	3.16
T-2-2	600	0.8	2	220	220	110	12.29			
T-2-3	600	4.8	2	220	220	110	17.75	13.80	50.11	3.63
T-2-4	600	10.3	2	220	220	110	17.84	12.20	46.43	3.81
T-2-5	600	15.0	2	220	220	110	19.06	9.66	43.64	4.52
T-2-6	600	4.8	1.5	220	220	110	16.69	14.30	50.29	3.52
T-2-7	600	4.8	1	220	220	110	14.11	15.40	50.37	3.27
T-2-8	600	4.8	0.5	220	220	110	12.08	16.60	49.81	3.00
T-2-9	673	4.8	2.0	220	220	110	33.96	5.24	52.83	10.08
T-2-10	673	4.8	1.0	220	220	110	27.58	8.73	52.44	6.00
T-2-11	673	4.8	0.75	220	220	110	24.50	10.10	52.58	5.21
T-2-12	673	4.8	0.5	220	220	110	18.79	13.6	51.66	3.80
T-2-13	673	0	0	0	0	0	0	24.50	46.18	1.88

F: flow rate

Table 4. Major elements analyses for the second set of experiments

	SiO %	Cr ₂ O ₃ %	TiO %	Al ₂ O ₃ %	Fe ₂ O ₃ T %	MnO %	MgO %	CaO %	Na ₂ O %	K ₂ O %	P ₂ O ₅ %	LOI %	S %	Total %
Starting	2.60	47.82	.352	13.0	25.5	1.05	11.1	.173	.0260	< 0.042	< 0.21	#N/A	< 0.042	102.1
T-2-1	2.45	49.23	.358	15.0	15.6	.948	12.0	.190	< 0.034	< 0.069	< 0.34	1.25	< 0.069	97.5
T-2-3	2.69	50.11	.346	15.7	13.8	1.07	12.7	.116	.593	< 0.06	< 0.3	1.45	< 0.06	99.0
T-2-4	2.41	46.43	.314	14.5	12.2	1.03	11.8	.0960	2.96	< 0.069	< 0.35	7.35	< 0.069	99.5
T-2-5	2.94	43.64	.275	13.2	9.40	.994	11.2	< 0.019	6.62	< 0.063	< 0.31	12.14	< 0.063	101.0
T-2-6	3.67	50.29	.343	14.8	14.3	1.08	12.5	< 0.017	.322	< 0.057	< 0.28	1.27	< 0.057	99.0
T-2-7	3.02	50.37	.399	14.6	15.4	1.06	12.2	< 0.016	.447	< 0.054	< 0.27	2.57	< 0.054	100.5
T-2-8	3.44	49.81	.345	14.2	16.6	1.05	11.9	< 0.017	.783	< 0.058	< 0.29	1.67	< 0.058	100.2
T-2-9	3.53	52.83	.330	20.0	5.24	.453	16.1	< 0.017	.0330	< 0.057	< 0.29	0.94	< 0.057	99.7
T-2-10	3.48	52.44	.336	18.2	8.73	.812	14.8	.0220	.0410	< 0.053	< 0.27	0.88	< 0.053	100.0
T-2-11	3.32	52.58	.339	17.5	10.1	.977	14.3	.0150	.0660	< 0.049	< 0.24	0.65	< 0.049	100.1
T-2-12	3.46	51.66	.348	15.8	13.6	1.08	13.1	.0310	.161	< 0.047	< 0.23	0.54	< 0.047	100.2
T-2-13	3.07	46.18	.347	13.0	24.5	1.01	10.7	.0220	.205	< 0.057	< 0.28	1.27	< 0.057	101.3

Table 5. Cr/Fe ratios variations at a temperature of 720°C for time periods varying between 1 and 2 hours

Sample	T °C	NaCl %	Time (h)	FeCl ₂ ml/ml	FeO ml/ml	FeN ₂ ml/ml	Fe ₂ O ₃ %	Cr ₂ O ₃ %	Cr/F
Starting	21	0	0	0	0	0	25.5	47.8	1.88
T12	720	5	1	220	220	110	8.44	53.1	6.29
T11	720	5	1.5	220	220	110	6.03	53.2	8.82
T11	720	5	2	220	220	110	3.23	54.6	16.9

EXAMPLE 1**Selectivity of the carbochlorination for the removal of iron versus chromium**

[0053] This example comprises a set of 4 experiments. The results are presented in Table 2. This Example demonstrates the selectivity of the iron removal by carbochlorination versus chromium according to the method of the present invention. The other major elements are reported in Table 2 for indicative purposes only. The range of temperature tested varied from 250 to 550°C. The chlorinated sample were mixed with a NaCl brine and dried at 180°C for 30 minutes. The salt content of the chlorinated samples was 5 % (w/w). A 10 g sample of chromite ore was placed in a 10 ml porcelain beaker. The beaker was positioned in the center of 60 cm in length silica tube, with an internal diameter of 6 cm. The assembly beaker-silica tube was placed in the furnace and the temperature was raised at the chosen carbochlorination temperature. When the temperature was reached and stable, a Cl₂, CO gas mixture was introduced in the furnace on a one to one ratio basis. The carbochlorination step was conducted for 60 minutes. A red brown chlorine vapor formed five minutes after the beginning of introducing the gases in the furnace. This vapor was expelled outside the reactor through the gases flow, where it condensed on the inside wall of the silica tube. At the end of the experiment, the furnace-heating device and the gases flow were stopped. After a cooling period, the solid residue left in the porcelain beaker was analyzed for major and selected trace elements.

[0054] The results presented in Table 2 show that the concentration of Fe₂O₃T increased and that of Cr₂O₃ decreased in Tests-01-04. These results clearly show the selective removal of iron. The original content of iron decreased gradually with corresponding increases of the carbochlorination temperature from 25.31 % in the starting ore to 17.12 % in the Test-04 run at 550 °C. The chromium content of the samples tested increased from 45.33 % in the starting ore to 52.07 % in the test-04 sample performed at 550 °C. This chrome enrichment was correlated with the weights losses of the samples and therefore reflected the removal of iron from the samples. As expected, the chrome to iron ratios show a positive correlation with the temperature (Figure 4). The chrome to iron ratio increases from 1.76 in the starting ore up to 2.98 in the Test-04 sample.

EXAMPLE 2**Identification of the condensate as FeCl₃**

[0055] The red brown condensate formed on the inside wall of the silica tube (in experiment described in Example 1) was washed out from the tube with water, in which this compound dissolved readily. This solution was analyzed by ICP-

AES for major elements and by UV spectroscopy for the oxidation state of iron. Analysis of the solution established the presence of iron as the only major element. Other elements were present at the trace level. Iron oxidation state was determined as Fe^{+3} by UV. These observations further demonstrated that iron was removed as gaseous FeCl_3 during the carbochlorination of the chromite ore.

EXAMPLE 3

Effect of the salt addition on the selective removal of iron versus chromium

[0056] The effect of the NaCl salt addition on the carbochlorination was tested by adding incremental quantity of NaCl to samples T-2-1 to T-2-5. The experimental conditions for these five samples are summarized in Table 3. Carbochlorination temperature was set at 600°C , the reaction time at 2 hours, and the quantity of NaCl salt addition varied from 0 to 15.0 % (w/w). Results presented in Table 3 show a direct increase in the chrome to iron ratio in relation with the quantity of salt added to the feed. In sample T-2-1, with no salt addition, the chrome to iron ratio reached a value of 3.16 after the chlorination step, an increase of 1.75 compared to the original ore. In sample T-2-5 to which was added 15 % NaCl (w/w), the chrome to iron ratio was 4.52 at the end of the chlorination experiment. This corresponds to a 47 % increase in the Cr/Fe when compared to sample T-2-1. This strong increase of the carbochlorination efficiency is attributed to the catalyst effect of the mixture NaCl and FeCl_3 as explained before.

EXAMPLE 4

Effect of increasing the reaction time on the selective removal of iron versus chromium

[0057] The effect of increasing the reaction time on the selective removal of iron was tested by 0.5 hour time increments. Total reaction time varied from 0.5 hour to 2.0 hours. Samples were tested as follows, 0.5 hour for T-2-8, 1.0 hour for T-2-7, 1.5 hours for T-2-6 and 2.0 hours for T-2-3. Experimental conditions used for these samples are reported in Table 3. The chrome to iron ratios increased from 1.88 for the starting ore, to 3.63 for T-2-3 after a reaction time of 2 hours. The chrome to iron ratios increase is positively correlated to the reaction time (Figure 5).

EXAMPLE 5

Effect of using a temperature higher than the melting point of FeCl_2 on the selective removal of iron versus chromium

[0058] The temperature of 673°C was selected as slightly superior to the melting point of FeCl_2 (670°C). The total reaction time varied from 0.5 hour to 2.0 hours with a time increment of a half hour for each of samples were T-2-9 to T-2-12 as in Example 4. The experimental conditions and the results for these experiments are reported in Table 3. It is postulated that FeCl_2 is formed at some point during the chlorination and subsequently transformed in FeCl_3 according to the reaction $\text{FeCl}_2 + 1/2\text{Cl}_2 \Rightarrow \text{FeCl}_3(\text{g})$. At temperature below the melting point of FeCl_2 , the presence of this compound as a solid can act as a blocking agent between the chlorination agent and the chromites reaction sites. When melted, FeCl_2 can actively promote Fe extraction in the chlorination catalytic system earlier described herein. The results presented in Table 2 indicated that bringing the chlorination temperature to 673°C has a very decisive impact on the selective removal of iron versus chromium, with the production of a chrome to iron ratio up to 10 for a two hours chlorination time. The relation between the chrome to iron ratio versus chlorination time is presented in Figure 6.

[0059] A comparison between results for $T = 550^\circ\text{C}$ and $T = 600^\circ\text{C}$ with results for $T = 673^\circ\text{C}$ is also presented in Figure 6. Carbochlorinations conducted at 673°C showed a significant increase in the chrome to iron ratios when compared to those conducted at lower temperatures. Moreover, the chrome to iron ratios between experiments conducted at 550°C and 600°C show a relatively small increase, namely from 2.98 to 3.27 for a temperature difference of 50°C while that obtained for experiments conducted at 673°C is much larger for a temperature difference of 73°C , namely 2.98 to 6.00. Without being limited to such hypothesis, it is proposed that the important increase in the chrome to iron ratios for the experiments conducted at 673°C are attributed to the melting of FeCl_2 and volatilization of FeCl_3 . This melting allowed FeCl_2 to play a role in the catalytic system comprising NaCl, FeCl_2 and FeCl_3 .

EXAMPLE 6**Effect of the carbochlorination for selectively removing iron without altering the major chemical components of the chromite**

[0060] In the second set of experiments, the major elements concentrations and the weight losses were measured and presented at Tables 3 and 4. When correcting for the weight losses due to the losses of iron (under the heading "weight losses" in Table 3), no apparent removal of other major elements was noticed by comparison to the starting composition. Although, the Cr_2O_3 contents of samples T-2-4 and T-2-5 show small losses, they are attributed to a dilution effect caused by NaCl. In these two samples, the concentration of salt was especially high, 10 and 15 %, respectively. MnO and CaO also showed slight decreases in their concentrations. These two components are however generally present at concentrations lower than 1% in chromites and their partial removal is not detrimental to the present invention.

EXAMPLE 7**Chromium to iron ratio increase versus temperature and duration of the reaction**

[0061] Experiments were conducted at 720°C to further investigate the chromium to iron ratio increase at higher temperatures. The experimental conditions were the following: NaCl addition 5 %, Cl_2 and CO flow rate = 220 ml/min, N_2 flow rate = 110 ml/min, the reaction time was varied from 0 to 2 hours. The results are presented in Table 5 above and Figure 7. An increase of the time of reaction correlated with an increase of chromium to iron ratios. After two hours, the Cr/Fe reaches 16.9 for a starting value of 1.8 in the feed. The Cr_2O_3 content of the material showed no sign of chromium removal during the experiment and increased from 4 to 55 %, as shown in above Table 5.

[0062] Although the invention has been described above with respect to a few representative examples and drawings, it will be evident in the person skilled in the art that it may be modified and refined in various ways. It is therefore wished to have it understood that the present invention should not be limited in scope, except by the terms of the following claims:

Claims

1. A method for increasing the chrome to iron ratio of a chromite product selected from the group consisting of ore and ore concentrate comprising the steps of
 - a. mixing the chromite product with at least one salt so as to produce a mixture, whereby the concentration of salt in the mixture is selected to induce the selective chlorination of iron; and
 - b. chlorinating the mixture in the presence of CO at a temperature sufficient to induce the formation of a thin film of a melt around the chromite product and at a temperature able to promote the selective chlorination of iron,
 whereby an iron impoverished chromite product is yielded having an increased chromite to iron ratio as compared to that of the chromite product.
2. A method as recited in claim 1, wherein said temperature is between about 157° and about 750°C.
3. A method as recited in claim 1, wherein the at least one salt is selected from the group consisting of NaCl, KCl and MgCl_2 and a combination thereof.
4. A method as recited in any one of claims 1 and 2, wherein the salt is NaCl and forms about 5% to about 10% w/w of the mixture.
5. A method as recited in any one of claims 1 and 2, wherein the salt is NaCl and forms about 5% w/w of the mixture.
6. A method as recited in any one of claims 1 to 3, wherein the temperature is between about 250° and about 720°C.
7. A method as recited in any one of claims 1 to 4, wherein the temperature is between about 670° and about 720°C.
8. A method as recited in any one of claims 1 to 7, wherein the Cl_2/CO ratio is between about 0.5 and about 1.5.
9. A method as recited in any one of claims 1 to 8, wherein the mixture is dried before chlorination.

10. A method as recited in any one of claims 1 to 9, wherein N_2 is used as a carrier gaz during chlorination.
11. A method as recited in any one of claims 1 to 10, wherein the duration of the chlorination is about 30 minutes to about 2 hours.
12. A method as recited in any one of claims 1 to 10, wherein the duration of the chlorination is about 2 hours.
13. A method for increasing the chrome to iron ratio of a chromite product selected from the group consisting of ore and ore concentrate comprising the steps of
 - a. mixing the chromite product with NaCl so that a mixture is produced having about 5% to about 10% NaCl w/w; and
 - b. chlorinating the mixture in the presence of CO at a temperature sufficient to induce the formation of a thin film of a melt around the chromite product and at a temperature able to promote the selective chlorination of iron,whereby an iron impoverished chromite product is yielded having an increased chromite to iron ratio as compared to that of the chromite product.
14. A method as recited in claim 13, wherein said temperature is between about 157° and about 750°C.
15. A method as recited in any one of claims 13 and 14, wherein the salt is NaCl and forms about 5% w/w of the mixture.
16. A method as recited in any one of claims 13 to 15, wherein the temperature is between about 670° and about 720°C.
17. A method as recited in any one of claims 13 to 16, wherein the Cl_2/CO ratio is about 0.5 and about 1.5.
18. A method as recited in any one of claims 13 to 17, wherein the mixture is dried before chlorination.
19. A method as recited in any one of claims 13 to 18, wherein N_2 is used as a carrier gaz during chlorination.
20. A method as recited in any one of claims 13 to 19, wherein the duration of the chlorination is about 30 minutes to about 2 hours.
21. A method as recited in any one of claims 13 to 20, wherein the duration of the chlorination is about 2 hours.
22. A method for extracting iron from a chromite product selected from the group consisting of ore and ore concentrate comprising the steps of
 - a. mixing the chromite product with at least one salt; and
 - b. chlorinating the mixture in the presence of CO at a temperature sufficient to induce the formation of a thin film of a melt around the chromite product so as to promote the chlorination of iron,whereby an iron impoverished chromite product is yielded.

Patentansprüche

1. Verfahren zur Erhöhung des Verhältnisses von Chrom zu Eisen in einem Chromitprodukt, ausgewählt aus der Gruppe bestehend aus Erz und Erzkonzentrat, das die Stufen aufweist, dass
 - a) das Chromitprodukt mit mindestens einem Salz vermischt wird, um eine Mischung herzustellen, wobei die Konzentration des Salzes in der Mischung so ausgewählt wird, dass die selektive Chlorierung von Eisen induziert wird und
 - b) die Mischung in Gegenwart von CO bei einer Temperatur, die ausreicht, um die Bildung eines dünnen Films einer Schmelze rund um das Chromitprodukt zu induzieren und bei einer Temperatur, die die selektive Chlorierung von Eisen fördern kann, chloriert wird,wodurch ein an Eisen abgereichertes Chromitprodukt mit einem im Vergleich zu dem Chromitprodukt erhöhten

Verhältnis von Chromit zu Eisen geliefert wird.

2. Verfahren nach Anspruch 1, wobei die Temperatur zwischen etwa 157° und etwa 750°C liegt.

3. Verfahren nach Anspruch 1, wobei das mindestens eine Salz ausgewählt ist aus der Gruppe bestehend aus NaCl, KCl und MgCl₂ und einer Kombination davon.

4. Verfahren nach einem der Ansprüche 1 und 2, wobei das Salz NaCl ist und etwa 5 bis etwa 10% G/G der Mischung bildet.

5. Verfahren nach einem der Ansprüche 1 oder 2, wobei das Salz NaCl ist und etwa 5% G/G der Mischung bildet.

6. Verfahren nach einem der Ansprüche 1 bis 3, wobei die Temperatur zwischen etwa 250 und etwa 720°C liegt.

7. Verfahren nach einem der Ansprüche 1 bis 4, wobei die Temperatur zwischen etwa 670 und etwa 720°C liegt.

8. Verfahren nach einem der Ansprüche 1 bis 7, wobei das Cl₂/CO-Verhältnis zwischen etwa 0,5 und etwa 1,5 liegt.

9. Verfahren nach einem der Ansprüche 1 bis 8, wobei die Mischung vor der Chlorierung getrocknet wird.

10. Verfahren nach einem der Ansprüche 1 bis 9, wobei N₂ als Trägergas während der Chlorierung verwendet wird.

11. Verfahren nach einem der Ansprüche 1 bis 10, wobei die Chlorierung etwa 30 Minuten bis etwa 2 Stunden dauert.

12. Verfahren nach einem der Ansprüche 1 bis 10, wobei die Chlorierung etwa 2 Stunden dauert.

13. Verfahren zur Erhöhung des Verhältnisses von Chrom zu Eisen in einem Chromitprodukt ausgewählt aus der Gruppe bestehend aus Erz und Erzkonzentrat, das die Stufen aufweist, dass

a) das Chromitprodukt mit NaCl vermischt wird, so dass eine Mischung erzeugt wird mit etwa 5 bis etwa 10% NaCl G/G und

b) die Mischung in Gegenwart von CO bei einer Temperatur, die ausreicht, um die Bildung eines dünnen Films einer Schmelze rund um das Chromitprodukt zu induzieren und bei einer Temperatur, die die selektive Chlorierung von Eisen fördern kann, chloriert wird,

wodurch ein an Eisen abgereichertes Chromitprodukt mit einem im Vergleich zu dem Chromitprodukt erhöhten Verhältnis von Chromit zu Eisen geliefert wird.

14. Verfahren nach Anspruch 13, wobei die Temperatur zwischen etwa 157° und etwa 750°C liegt.

15. Verfahren nach einem der Ansprüche 13 oder 14, wobei das Salz NaCl ist und etwa 5% G/G der Mischung bildet.

16. Verfahren nach einem der Ansprüche 13 bis 15, wobei die Temperatur zwischen etwa 670 und etwa 720°C liegt.

17. Verfahren nach einem der Ansprüche 13 bis 16, wobei das Cl₂/CO-Verhältnis zwischen etwa 0,5 und etwa 1,5 liegt.

18. Verfahren nach einem der Ansprüche 13 bis 17, wobei die Mischung vor der Chlorierung getrocknet wird.

19. Verfahren nach einem der Ansprüche 13 bis 18, wobei N₂ als Trägergas während der Chlorierung verwendet wird.

20. Verfahren nach einem der Ansprüche 13 bis 19, wobei die Chlorierung etwa 30 Minuten bis etwa 2 Stunden dauert.

21. Verfahren nach einem der Ansprüche 13 bis 20, wobei die Chlorierung etwa 2 Stunden dauert.

22. Verfahren zur Extraktion von Eisen aus einem Chromitprodukt ausgewählt aus der Gruppe bestehend aus einem Erz und einem Erzkonzentrat, das die Stufen aufweist, dass

a) das Chromitprodukt mit mindestens einem Salz gemischt wird und

b) die Mischung in Gegenwart von CO bei einer Temperatur chloriert wird, die ausreicht, um die Bildung eines dünnen Films einer Schmelze rund um das Chromitprodukt zu induzieren, um die Chlorierung von Eisen zu fördern,

5 wodurch ein an Eisen abgereichertes Chromitprodukt geliefert wird.

Revendications

- 10 1. Procédé pour augmenter le rapport chrome/fer d'un produit de chromite choisi dans le groupe constitué de minerais et de concentré de minerais, comprenant les étapes de :
 - a. mélange du produit de chromite avec au moins un sel afin de produire un mélange, dans lequel la concentration en sel dans le mélange est choisie pour induire la chloration sélective du fer ; et
 - 15 b. chloration du mélange en présence de CO à une température suffisante pour induire la formation d'un film mince d'un bain autour du produit de chromite et à une température capable de promouvoir la chloration sélective du fer,

de sorte qu'un produit de chromite appauvri en fer soit obtenu en ayant un rapport chromite/fer augmenté par rapport à celui du produit chromite.
- 20 2. Procédé selon la revendication 1 dans lequel ladite température est comprise entre environ 157 et environ 750°C.
3. Procédé selon la revendication 1 dans lequel le au moins un sel est choisi dans le groupe constitué de NaCl, KCl, MgCl₂ et une combinaison de ces sels.
- 25 4. Procédé selon l'une de quelconque revendications 1 et 2 dans lequel le sel est le NaCl et forme environ 5 % à environ 10 % en poids/poids du mélange.
- 30 5. Procédé selon l'une de quelconque revendications 1 et 2 dans lequel le sel est le NaCl et forme environ 5 % en poids/poids du mélange.
6. Procédé selon l'une quelconque des revendications 1 à 3 dans lequel la température est comprise entre environ 250 et environ 720°C.
- 35 7. Procédé selon l'une quelconque des revendications 1 à 4 dans lequel la température est comprise entre environ 670 et environ 720°C.
8. Procédé selon l'une quelconque des revendications 1 à 7 dans lequel le rapport Cl₂/CO est compris entre environ 0,5 et environ 1,5.
- 40 9. Procédé selon l'une quelconque des revendications 1 à 8 dans lequel le mélange est séché avant chloration.
10. Procédé selon l'une quelconque des revendications 1 à 9 dans lequel on utilise le N₂ comme gaz vecteur pendant le chloration.
- 45 11. Procédé selon l'une quelconque des revendications 1 à 10 dans lequel la durée de chloration est d'environ 30 minutes à environ 2 heures.
- 50 12. Procédé selon l'une quelconque des revendications 1 à 10 dans lequel la durée de chloration est d'environ 2 heures.
13. Procédé pour augmenter le rapport chrome/fer d'un produit de chromite choisi dans le groupe constitué de minerais et de concentré de minerais, comprenant les étapes de :
 - a. mélange du produit de chromite avec du NaCl de façon à produire un mélange ayant environ 5 % à environ 10 % en poids/poids de NaCl, et
 - b. chloration du mélange en présence de CO à une température suffisante pour induire la formation d'un film mince d'un bain autour du produit de chromite et à une température capable de promouvoir la chloration sélective
- 55

du fer,

de sorte qu'un produit de chromite appauvri en fer soit obtenu ayant un rapport chromite/fer augmenté par rapport à celui du produit chromite.

5 14. Procédé selon la revendication 13 dans lequel ladite température est comprise entre environ 157 et environ 750°C.

15 15. Procédé selon l'une quelconque des revendications 13 et 14 dans lequel le sel est le NaCl et forme environ 5 % en poids/poids du mélange.

10 16. Procédé selon l'une quelconque des revendications 13 à 15 dans lequel la température est comprise entre environ 670 et environ 720°C.

15 17. Procédé selon l'une quelconque des revendications 13 à 16 dans lequel le rapport Cl_2/CO est compris entre environ 0,5 et environ 1,5.

18. Procédé selon l'une quelconque des revendications 13 à 17 dans lequel le mélange est séché avant chloration.

20 19. Procédé selon l'une quelconque des revendications 13 à 18 dans lequel on utilise le N_2 comme gaz vecteur pendant la chloration.

20. Procédé selon l'une quelconque des revendications 13 à 19 dans lequel la durée de chloration est d'environ 30 minutes à environ 2 heures.


25 21. Procédé selon l'une quelconque des revendications 13 à 20 dans lequel la durée de chloration est d'environ 2 heures.

22. Procédé d'extraction du fer d'un produit de chromite choisi dans le groupe constitué de minerais et de concentré de minerais, comprenant les étapes de :

30 a. mélange du produit de chromite avec au moins un sel, et

b. chloration du mélange en présence de CO à une température suffisante pour induire la formation d'un film mince d'un bain autour du produit de chromite pour promouvoir la chloration du fer,

35 de sorte qu'un produit de chromite appauvri en fer soit obtenu.

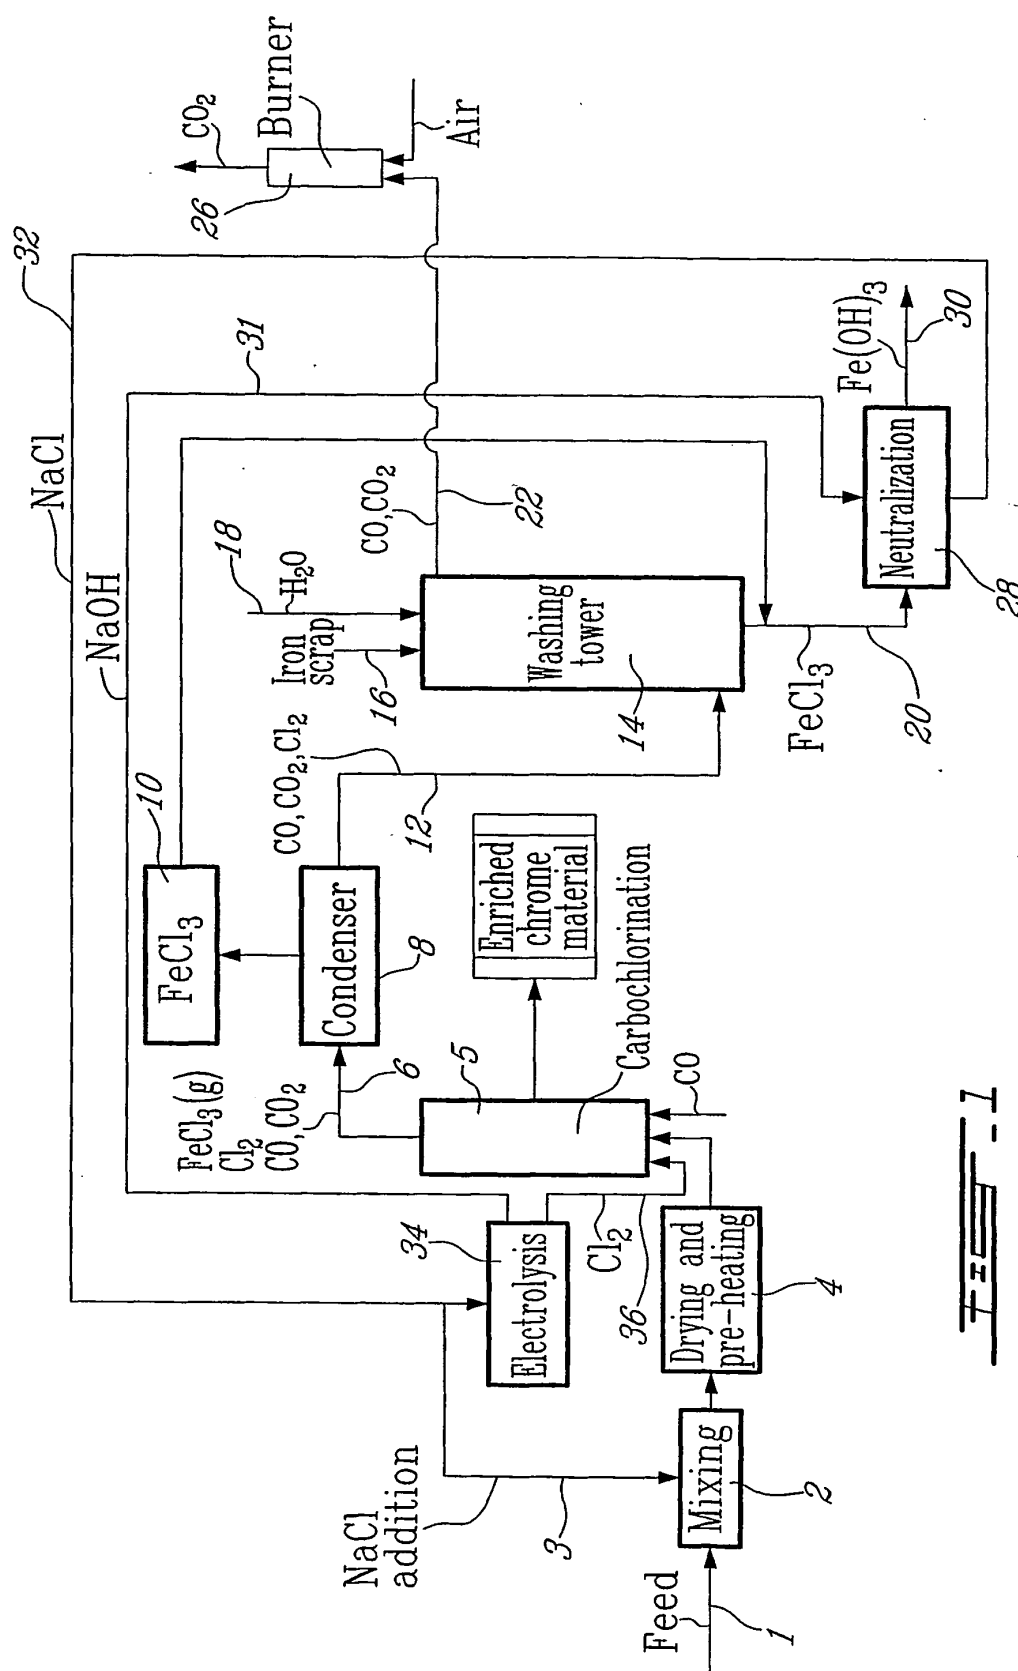

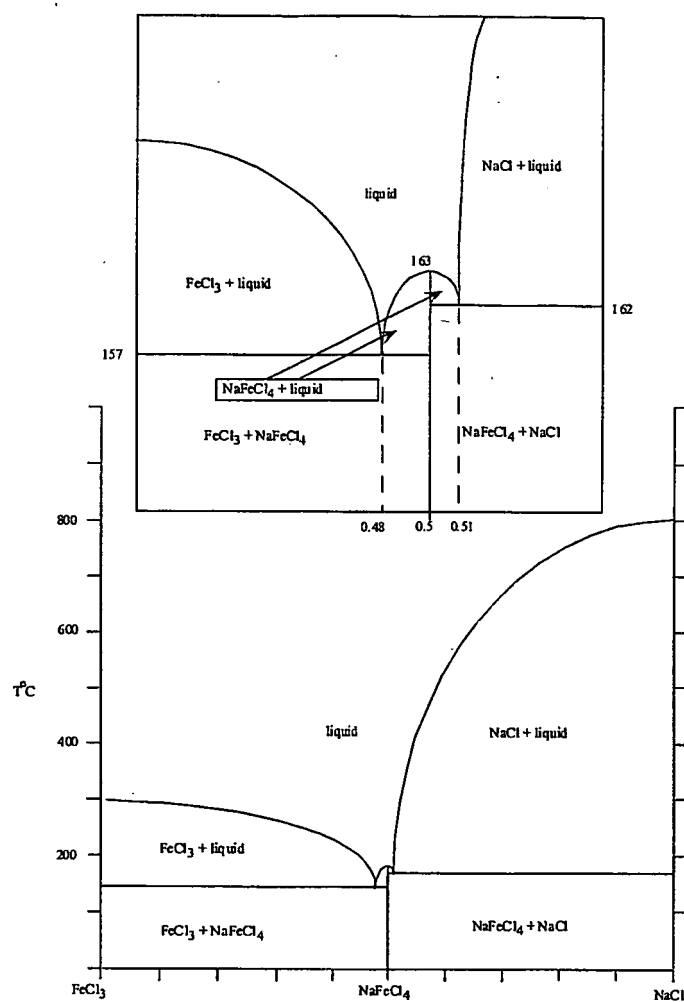


Figure 2

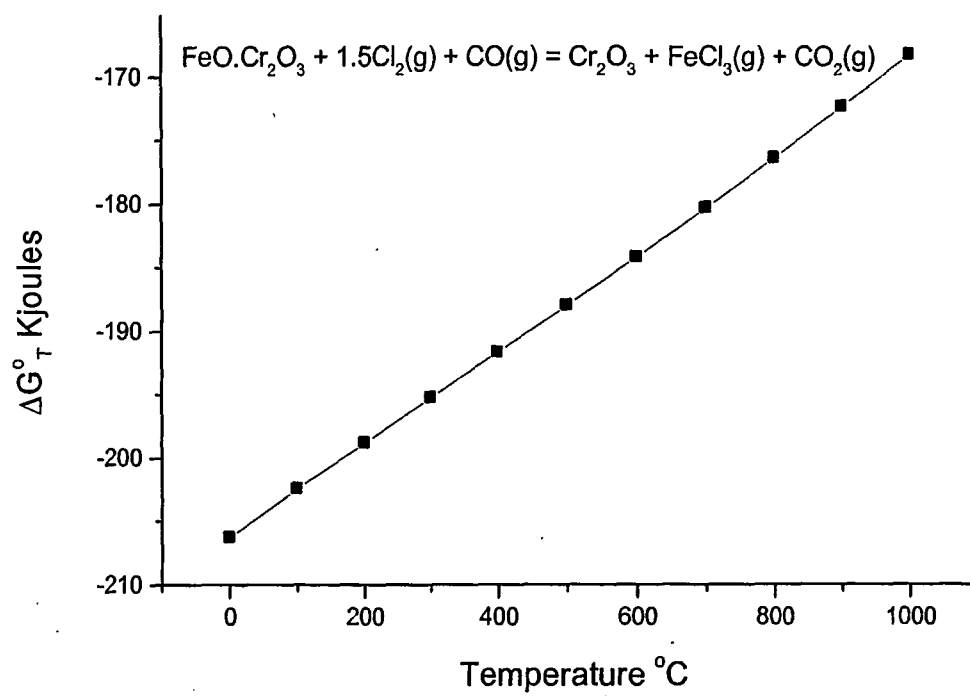


Figure 3

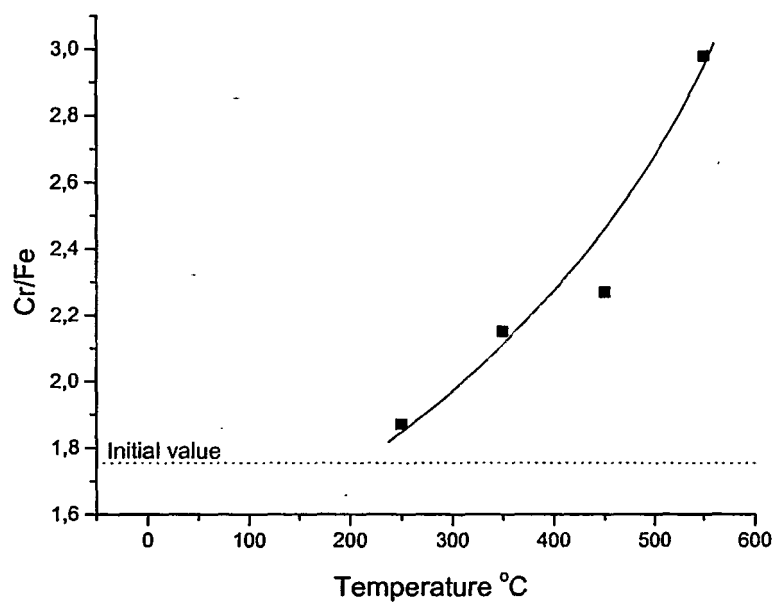


Figure 4

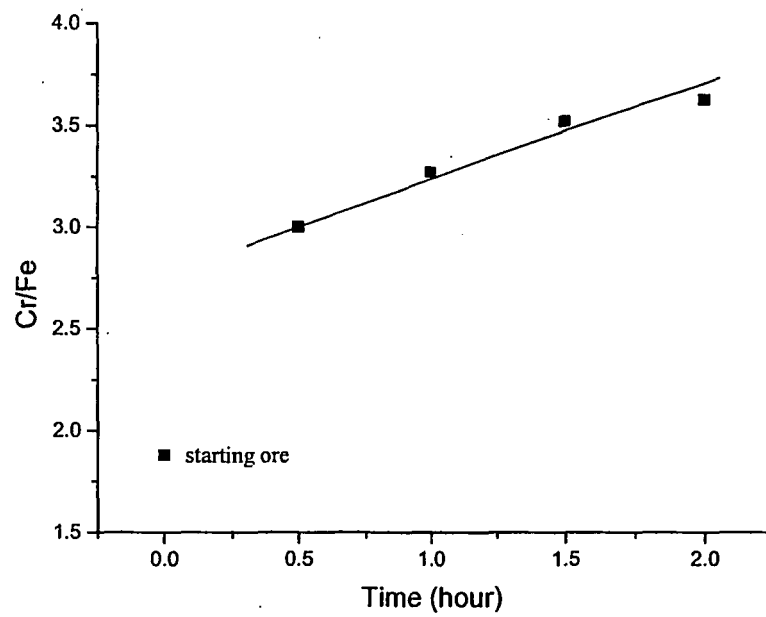


Figure 5

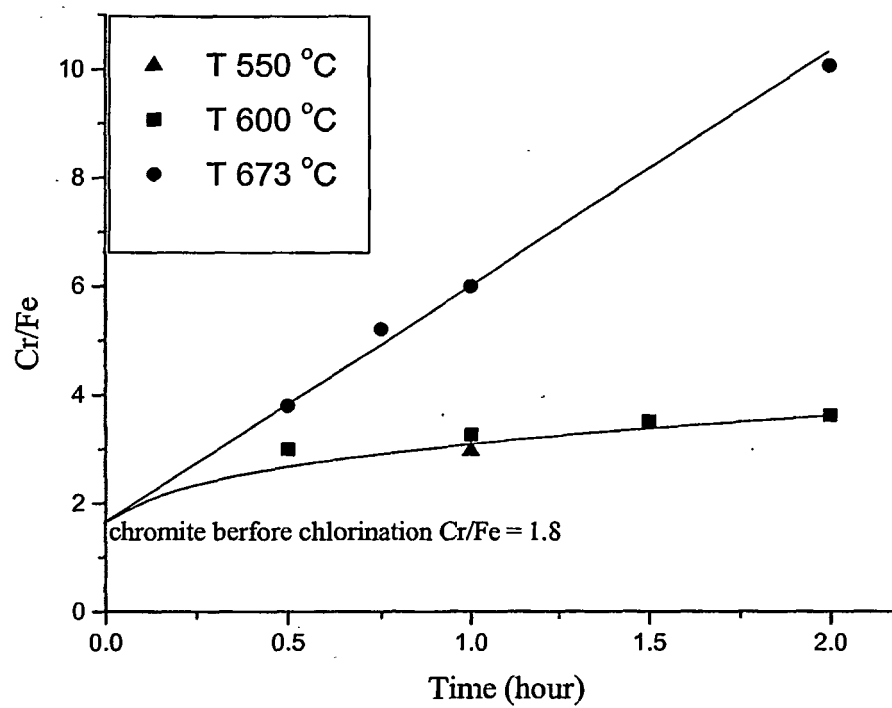


Figure 6

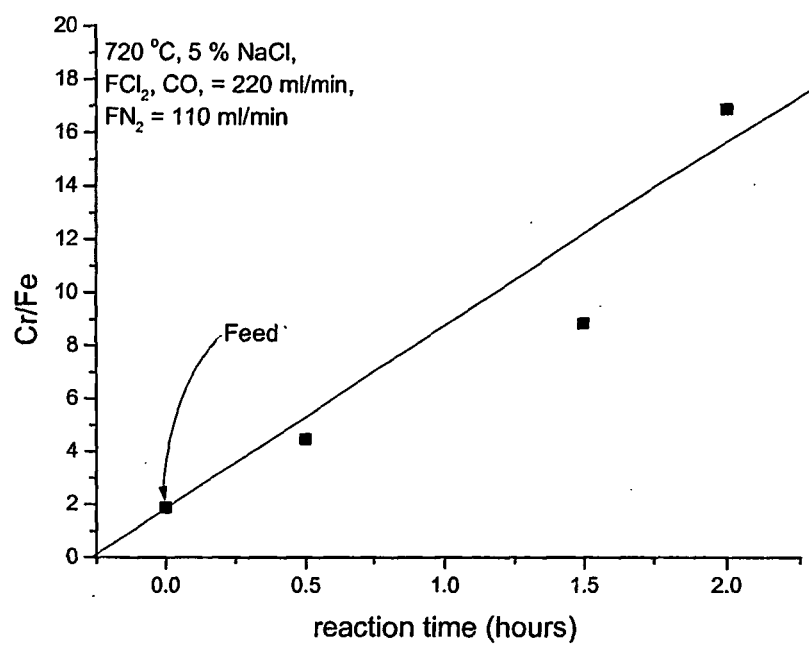


Figure 7