

(19)



(11)

EP 1 595 799 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
25.06.2014 Bulletin 2014/26

(51) Int Cl.:
B65D 1/24 (2006.01)

(21) Application number: **04076418.5**

(22) Date of filing: **13.05.2004**

(54) **A container provided with markings**

Behälter mit Markierungen

Conteneur avec inscriptions

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR**

(43) Date of publication of application:
16.11.2005 Bulletin 2005/46

(73) Proprietor: **D W Plastics N.V.**
3740 Bilzen (BE)

(72) Inventor: **Isenborghs, Francis**
1350 Jauche (BE)

(74) Representative: **Benech, Frédéric et al**
146-150, Avenue des Champs-Élysées
75008 Paris (FR)

(56) References cited:
EP-A- 0 490 165 EP-A- 0 743 166
EP-A- 1 000 865 US-A- 2 586 978

EP 1 595 799 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a container, such as a bottle crate, provided with markings. More in particular, the present invention relates to a container for storing and/or transporting objects, which container comprises a container body made of a plastic material and comprising a base and at least two side walls extending from the base, wherein at least one of the side walls is provided with a marking element showing markings.

[0002] It is well known to provide markings, such as a brand name or product name, on the side walls of a container. British Patent GB 868,638 (The Richardson Company), for example, discloses a moulded plastic bottle carrying case, the side walls of which are provided with raised advertising indicia which may be painted to enhance their visibility. As said British Patent already acknowledges, paint is susceptible to abrasion and as a result, the markings will gradually become less visible and hence less effective. A protective rim is therefore provided on the side walls in an attempt to protect the raised indicia from abrasion. So-called in-moulded labels as disclosed in, for example, WO 00/42591 (D W Plastics), suffer from the same drawback.

[0003] European Patent Application EP 0 490 165 (Peguform-Werke) discloses a bottle crate in which indicia are provided by means of an in-moulded insert which is embedded in a handle section of the crate body. The insert is provided with spacer elements (in German: "Abstandsnoppen") for positioning the insert in the mould during the moulding of the crate body. The spacer elements, which have different cross-sectional shapes such as a square, a cross or a circle, are visible from outside the moulded crate and form an identification which may represent certain information, such as the name of the manufacturer or the date of manufacture. It is noted that the indicia disclosed in EP 0 490 165 are symbols, not letters.

[0004] The markings provided by such an insert are highly resistant to abrasion. However, it has been found that providing an insert in the crate body limits the flexibility of the production process, as the insert and hence the markings cannot be changed once the crate body is moulded. In addition, providing an insert in the crate body slows down the production process of the crate body.

[0005] It is an object of the present invention to overcome these and other problems of the Prior Art and to provide a container provided with markings which offers a greater flexibility, allowing different markings to be applied without altering its body.

[0006] Accordingly, the present invention provides a container for storing and/or transporting objects, according to claim 1.

[0007] By embedding the marking element in a layer which is moulded on the container body, instead of embedding the marking element in the container body itself, the container body is made independent of the markings. In other words, a generic container body may be pro-

duced that is later fitted with a selected marking element. This allows a single container body design to be made in much larger quantities. In addition, the production process is made much more flexible as the generic container body may be fitted with a selected marking element so as to produce an individually marked container.

[0008] It is noted that the word "embedded" as used here is not intended to mean "surrounded completely". Instead, a partial embedding of the marking element in the layer is envisaged, such that part of the embedded marking element is still visible from outside the layer so as to show the markings.

[0009] In certain embodiments, the moulded layer and the container body are made of the same plastic material, for example HDPE (High Density PolyEthylene) or any other suitable material. In these embodiments, the layer may have the same colour as the crate body, thus being inconspicuous while still providing the advantages of a flexible production. However, the layer may also have a different colour, even when the same material is applied.

[0010] In a preferred embodiment, however, the moulded layer and the container body are made of different materials. This allows a wide range of materials to be used for the embedding layer, virtually independently of the material of the container body. In particular, this allows the moulded layer to be made of a relatively soft material. Such a material, which may be a thermoplastic material having a Shore A hardness of 40 to 70, may be used to form a soft gripping layer. Containers provided with such relatively soft gripping layers and further details on suitable materials are disclosed in European Patent Applications EP 1 000 865 and EP 1 410 998 (D W Plastics).

[0011] Although the markings could show a design or symbol, it is preferred that the at least one marking element indicates a brand, type and/or number. If the container is a bottle crate for carrying beer bottles, for example, the markings could indicate the name of the brewer, the type of beer and/or the number and size of the bottles (for example "24 x 0.5"). Of course several marking elements could be provided in a single container, each marking element showing a brand, type and/or number.

[0012] In a particularly preferred embodiment, the at least one marking element is arranged at a handle section. This allows the markings to be present in highly visible parts of the container. In addition, the marking elements may be used to reinforce the handle sections, thus obtaining an additional benefit.

[0013] Prior to moulding the embedding layer, the marking element may be glued to the container body or held by suitable tools. The area where a marking element is to be applied is provided with holding means for holding the marking element. Such holding means may comprise grooves, ridges, pins or other suitable mechanical means for holding the marking element in its designated position prior to and during the moulding of the embedding layer. The marking element itself may also be provided with holding means, which then cooperate with holding means

provided on the crate body. However, it is preferred that the holding means are constituted by a recess in the container body, shaped in such a way that the marking element may be snap-fitted in the recess.

[0014] In a particularly advantageous embodiment, the area where the marking element is to be applied is provided with channels for passing the material of the layer. Such channels allow the layer material, when liquid during the moulding process, to flow to the other side of the marking element. In this way, a more complete embedding of the marking element may be achieved. The channels are advantageously defined by undulations of the area where the marking element is to be applied. However, the channels may also be constituted by grooves in the area surface.

[0015] The container according to the present invention is advantageously a bottle crate. Such a crate may be provided with dividers for separating any bottles. Other types of containers may also be envisaged, such as trays and pallets.

[0016] The present invention further provides a method of providing a container with markings according to claim 11.

[0017] The present invention will further be explained below with reference to exemplary embodiments illustrated in the accompanying drawings, in which:

Fig. 1 schematically shows, in side view, a container according to the present invention.

Fig. 2 schematically shows, in side view, part of the container of Fig. 1 in more detail.

Fig. 3 schematically shows, in cross-sectional view, part of the container of Fig. 1 in more detail.

Fig. 4 schematically shows, in cross-sectional view, part of the container of Fig. 1 in more detail.

[0018] The crate 1 shown merely by way of non-limiting example in Fig. 1 comprises a crate body that consists of a base 2 and side walls 3 extending from the base 2. The crate 1 may have four side walls 3 enclosing an inner space in which bottles may be accommodated. The inner space (not shown) may be provided with dividers for forming bottle compartments.

[0019] An opening 5 in one of the side walls 3 defines a handle section 6. This handle section 6, which extends between the opening 5 and the upper rim 4, is in the example shown covered by a layer 7 showing markings 11. In accordance with the present invention, the markings 11 are provided by an insert (marking element) embedded in the layer 7.

[0020] In the embodiment shown, the layer 7 is a relatively soft gripping layer made of a material having, for example, a Shore A hardness of 40 to 70, more preferably ranging from 50 to 60. Suitable materials are thermoplastic elastomers, for example SEBS (Styrene Ethylene Butadiene Styrene), which has the advantage of an excellent bonding to HDPE (High Density PolyEthylene) which is a suitable material for the crate body. Further

details of such a relatively soft "gripping" layer are disclosed in European Patent Application EP 1 410 998 (D W Plastics).

[0021] A handle section 6 prior to the application of the layer 7 is shown (enlarged) in Fig. 2. The handle section 6 is shown to have a surface area 9 on which the layer 7 (Fig. 1) is to be applied. The markings 11 are shown to be part of a marking element 10 that is placed on the handle section 6. The marking element 10 is preferably an elongated, relatively flat member from which one or more letters or other marks protrude. Instead of a single marking element 10, however, a string of smaller marking elements could be used, each smaller marking element showing an individual letter or mark.

[0022] The (enlarged) cross-sectional view of Fig. 3, taken along the line A - A in Fig. 2 after the layer 7 has been applied, shows how the marking element 10 is embedded in the layer 7. A marking 11 of the marking element 10 extends through the layer 7 and is visible from outside the handle element 6. The layer 7 therefore (partially) embeds the marking element 10, leaving at least the outer surfaces of the markings 11 uncovered.

[0023] The layer 7 may be applied on the handle section 6 by means of a well-known so-called over-moulding process, in which relatively small moulds are placed over the handle section(s) 6 and are injected with the layer material. The marking element 10 is placed on the crate body (in the present example: the handle section) before this over-moulding takes place, preferably before the moulds are placed over the handle section(s). Alternatively, the marking element(s) 10 could be placed in a mould used for over-moulding.

[0024] As can be seen from Fig. 3, the marking element 10 is placed in a recess 12 in the area 9. This recess 12 (which is shown slightly enlarged for the sake of clarity of the illustration) is advantageously shaped so as to clamp the marking element 10. This allows the marking element 10 to be held in its designated position when the over-moulding takes place and removes the need for any positioning tools or adhesive. Instead of, or in addition to, the recess 12 other holding means for holding the marking element in place can be envisaged, such as grooves, pins and sockets, and other mutually engaging parts.

[0025] In the example of Fig. 3, the marking 11 is shown to be substantially flush with the outer surface of the handle section 6. This is, however, not essential and embodiments can be envisaged in which the markings 11 protrude from the outer surface of the crate 1.

[0026] The (enlarged) cross-sectional view of Fig. 4, taken along the line B - B in Fig. 2 after the layer 7 has been applied, also shows how the marking element 10 is embedded in the layer 7. In the embodiment of Fig. 4, the surface (9 in Fig. 2) of the container body on which the marking element 10 is applied is provided with undulations so as to form channels 13 underneath the marking element 10. These channels 13, which may be approximately 0.5 to 3 cm apart, allow the material of the layer

7 to flow around the marking element 10 during the over-moulding process. It is noted that material is typically injected in one side of a mould only. The channels 13 allow the layer material to fully embed the element 10 while leaving the markings 11 uncovered. It will be understood that in the embodiment shown the depth of the channels 13 is defined by the depth of the recess 12 (Fig. 3).

[0027] The present invention offers the significant advantage of providing lasting markings that can be applied relatively late in the production process, as the crate body (consisting of the base, walls and, optionally, any dividers) need not have any markings. A generic crate body can be produced on which a selected marking element can then be mounted, if desired. Alternatively, the layer 7 can be applied without a marking element. Embodiments of a generic crate body can be envisaged which are also suitable for use without a layer 7, thus providing three alternatives: (a) a crate with a layer and markings, (b) a crate with a layer but without markings, and (c) a crate without a layer or markings. It will be clear that the present invention provides a significantly improved freedom of design.

[0028] In addition to a greater freedom of design, the present invention also reduces the cycle time (per unit production time) of the container body as the step of inserting an insert in the container body mould can be omitted. Also, there is no need for (typically retractable) insert holding tools in the container body mould. As a result, a standard moulds can be used, which further reduces the production cost.

[0029] Although the markings have been shown to be located at handle sections of the crate 1, it will be understood that this is not essential and that markings according to the present invention may be located at virtually any part of the crate. The layer 7 is preferably made of a relatively soft material but this is not essential, the layer 7 may also be made of the same material as the crate body (base 2 and walls 3), for example HDPE or polypropylene. Irrespective of the choice of material, the colour of the layer 7 may be identical to or different from the colour of the crate body. Accordingly, the present invention provides a large freedom of design.

[0030] The present invention may be applied to various containers including (bottle) crates, pallets and trays. Although such containers are preferably made of plastic, this is not essential.

[0031] The present invention is based upon the insight that an element showing markings may advantageously be embedded in a container to provide markings that are resistant to abrasion, and that a much greater design freedom is achieved when the element is embedded in a layer applied on the container body, instead of in the container body itself.

[0032] It will be understood by those skilled in the art that the present invention is not limited to the embodiments illustrated above and that many modifications and additions may be made without departing from the scope

of the invention as defined in the appending claims.

Claims

1. A bottle crate (1) comprising a container body of a plastic material having a base (2) and side walls (3) extending from the base, wherein at least one of the side walls (3) comprises an area (9) provided with a layer (7) moulded onto said area, **characterized in that** said layer comprises at least one insert element shaped to form marking positioned on said area and partially embedded into said layer and **in that** the area is provided with holding means for holding the insert element.
2. A crate according to claim 1, **characterized in that** the holding means comprise a recess in the area shaped so as to clamp the insert element.
3. A crate according to any of the preceding claims, **characterized in that** the holding means comprise grooves, pins or sockets forming mutually engaging parts between the area and the insert element.
4. A crate according to any one of the preceding claims, **characterised in that** the insert element is fixed by gluing on the area.
5. A crate according to any one of the preceding claims, **characterised in that** the insert element external surface is substantially flush with the outer surface of the layer so as it forms an uncovered marking.
6. A crate according to any one of the preceding claims 1 to 4, **characterised in that** the insert protrudes from the outer surface of the container (1).
7. A crate according to any one of the preceding claims, **characterised in that** the layer is applied by over-moulding process.
8. A crate according to any one of the preceding claims, **characterised in that** the area is an handle section of the crate.
9. A crate according to any one of the preceding claims, **characterised in that** the area (9) is provided with channels (13) for passing the material of the layer (7).
10. A crate according to any one of the preceding claims, **characterised in that** the moulded layer is made of a different material, softer than the container body.
11. A method of providing a bottle crate (1) with marking, the method comprising the steps of :
 - providing a container body comprising a base

- (2) and side walls (3),
 - providing an insert element (10) shaped to form marking (11),
 - positioning said insert element by holding means on a corresponding area (9) of the external surface of at least one side wall,
 - over-moulding a layer (7) onto said area (9) so as to embed partially said insert (10) while exposing the markings (11).
12. A method according to claim 11, **characterised in that** the element is fixed on the area by snap-fitting in a corresponding recess of the area.
13. A method according to any of claims 11 and 12, **characterised in that** the element is fixed on the area by gluing.
14. A method according to any of claims 11 to 13, **characterised in that** the layer is applied through channels in the container body for passing the material of the layer.
- Patentansprüche**
1. Flaschenkasten (1) umfassend einen Kastenkörper aus einem Kunststoffmaterial mit einer Basis (2) und Seitenwänden (3), die sich von der Basis aus erstrecken, wobei wenigstens eine der Seitenwände (3) einen Bereich (9) aufweist, der mit einer Schicht (7) versehen ist, die an diesen Bereich geformt ist, **dadurch gekennzeichnet, dass** die Schicht wenigstens ein Einsteckelement aufweist, das derart gestaltet ist, dass es eine Markierung bildet, die sich in diesem Bereich befindet und teilweise in die Schicht eingebettet ist, und dass der Bereich mit Haltemittel zum Halten des Einsteckelements versehen ist.
2. Kasten nach Anspruch 1, **dadurch gekennzeichnet, dass** die Haltemittel eine Ausnehmung in dem Bereich umfassen, die so ausgebildet ist, dass sie das Einsteckelement einklemmt.
3. Kasten nach einem der vorgehenden Ansprüche, **dadurch gekennzeichnet, dass** die Haltemittel Rillen, Stifte oder Buchsen umfassen, die ineinandergreifende Teile zwischen dem Bereich und dem Einsteckelement bilden.
4. Kasten nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** das Einsteckelement durch Kleben auf dem Bereich fixiert ist.
5. Kasten nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass**, die nach außen weisende Oberfläche des Einsteckelements im Wesentlichen mit der äußeren Oberfläche der Schicht fluchtet, so dass eine Markierung gebildet wird, die nicht verdeckt ist.
6. Kasten nach einem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass** das Einsteckelement über die äußere Oberfläche des Kastens (1) hinaus ragt.
7. Kasten nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** die Schicht mittels eines Zweistufen-Spritzgießverfahrens angebracht ist.
8. Kasten nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** der Bereich ein Griffbereich des Kastens ist.
9. Kasten nach einem der vorgehenden Ansprüche, **dadurch gekennzeichnet, dass** der Bereich (9) mit Kanälen (13) für das Durchleiten des Materials für die Schicht (7) versehen ist.
10. Kasten nach einem der vorgehenden Ansprüche, **dadurch gekennzeichnet, dass** die geformte Schicht aus einem anderen Material hergestellt ist, das weicher als der Kastenkörper ist.
11. Verfahren zum Vorsehen einer Markierung an einem Flaschenkasten (1), wobei das Verfahren folgende Schritte umfasst:
- Bereitstellen eines Kastenkörpers mit einer Basis (2) und Seitenwänden (3)
 - Vorsehen eines Einsteckelements (10), das so gestaltet ist, dass es eine Markierung (11) bildet,
 - Positionierung des Einsteckelements mittels Haltemittel an einem entsprechenden Bereich (9) der Außenseite von wenigstens einer Seitenwand,
 - Aufformen einer Schicht (7) auf diesen Bereich (9), so dass das Einsteckelement (10) teilweise eingebettet wird, die Markierungen (11) jedoch unbedeckt bleiben.
12. Verfahren nach Anspruch 11, **dadurch gekennzeichnet, dass** das Element an dem Bereich mittels eines Schnappverschlusses in einer entsprechenden Ausnehmung des Bereichs befestigt wird.
13. Verfahren nach Anspruch 11 und 12, **dadurch gekennzeichnet, dass** das Element an dem Bereich mittels Kleben befestigt wird.
14. Verfahren nach einem der Ansprüche 11 bis 13, **da-**

durch gekennzeichnet, dass die Schicht mit Hilfe von Kanälen in dem Kastenkörper für das Durchleiten des Materials für die Schicht aufgebracht wird.

Revendications

1. Caisse à claire-voie pour bouteilles (1) comprenant un corps de contenant d'une matière plastique comportant une base (2) et des parois latérales (3) s'étendant à partir de la base, dans laquelle au moins une des parois latérales (3) comprend une zone (9) pourvue d'une couche (7) moulée sur ladite zone, **caractérisée en ce que** ladite couche comprend au moins un élément rapporté formé pour former un marquage positionné sur ladite zone et partiellement encastré dans ladite couche et **en ce que** la zone est pourvue de moyens de retenue pour retenir l'élément rapporté.
2. Caisse à claire-voie selon la revendication 1, **caractérisée en ce que** les moyens de retenue comprennent un évidement dans la zone, formé afin de serrer l'élément rapporté.
3. Caisse à claire-voie selon une quelconque des revendications précédentes, **caractérisée en ce que** les moyens de retenue comprennent des rainures, des goupilles ou des douilles formant des parties entrant mutuellement en prise entre la zone et l'élément rapporté.
4. Caisse à claire-voie selon une quelconque des revendications précédentes, **caractérisée en ce que** l'élément rapporté est fixé par collage sur la zone.
5. Caisse à claire-voie selon une quelconque des revendications précédentes, **caractérisée en ce que** la surface externe de l'élément rapporté est sensiblement alignée avec la surface extérieure de la couche afin qu'elle forme un marquage non couvert.
6. Caisse à claire-voie selon une quelconque des revendications précédentes 1 à 4, **caractérisée en ce que** ledit élément rapporté fait saillie à partir de la surface extérieure du contenant (1).
7. Caisse à claire-voie selon une quelconque des revendications précédentes, **caractérisée en ce que** la couche est appliquée par un procédé de surmoulage.
8. Caisse à claire-voie selon une quelconque des revendications précédentes, **caractérisée en ce que** la zone est une section à poignée de la caisse à claire-voie.
9. Caisse à claire-voie selon une quelconque des re-

vendications précédentes, **caractérisée en ce que** la zone (9) est pourvue de canaux (13) pour faire passer la matière de la couche (7).

- 5 10. Caisse à claire-voie selon une quelconque des revendications précédentes, **caractérisée en ce que** la couche moulée est faite d'une matière différente, plus souple que le corps de contenant.
- 10 11. Procédé pour doter une caisse à claire-voie pour bouteilles (1) d'un marquage, le procédé comprenant les étapes de :
 - 15 - fourniture d'un corps de contenant comprenant une base (2) et des parois latérales (3),
 - fourniture d'un élément rapporté (10) formé pour former un marquage (11),
 - positionnement dudit élément rapporté par des moyens de retenue sur une zone correspondante (9) de la surface externe d'au moins une paroi latérale,
 - 20 - surmoulage d'une couche (7) sur ladite zone (9) afin d'encastrement partiellement ledit élément rapporté (10) tout en exposant les marquages (11).
 - 25
- 30 12. Procédé selon la revendication 11, **caractérisé en ce que** l'élément est fixé sur la zone par ajustement à encliquetage dans un évidement correspondant de la zone.
- 35 13. Procédé selon une quelconque des revendications 11 et 12, **caractérisé en ce que** l'élément est fixé sur la zone par collage.
- 40 14. Procédé selon une quelconque des revendications 11 à 13, **caractérisé en ce que** la couche est appliquée à travers des canaux dans le corps de contenant pour faire passer la matière de la couche.
- 45
- 50
- 55

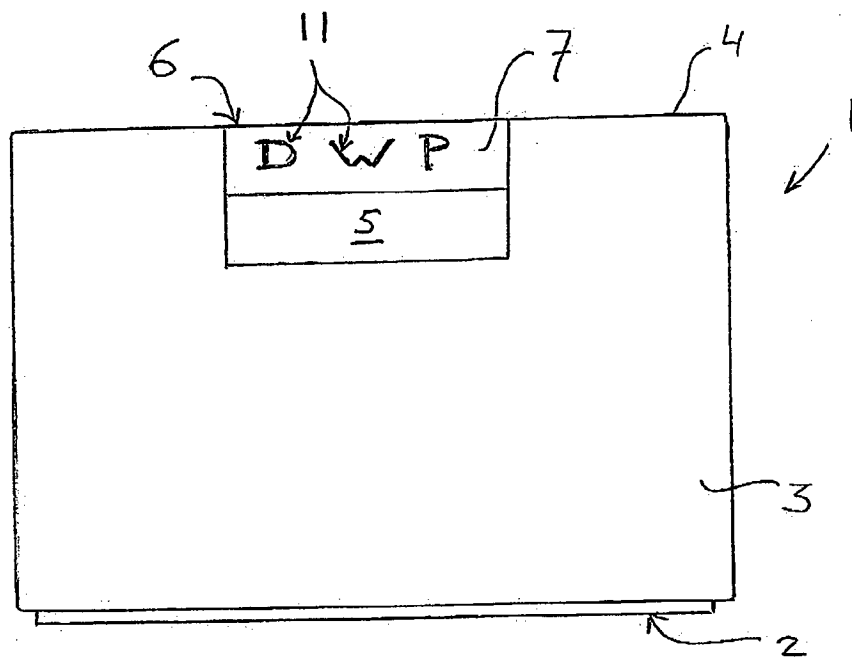


Fig. 1

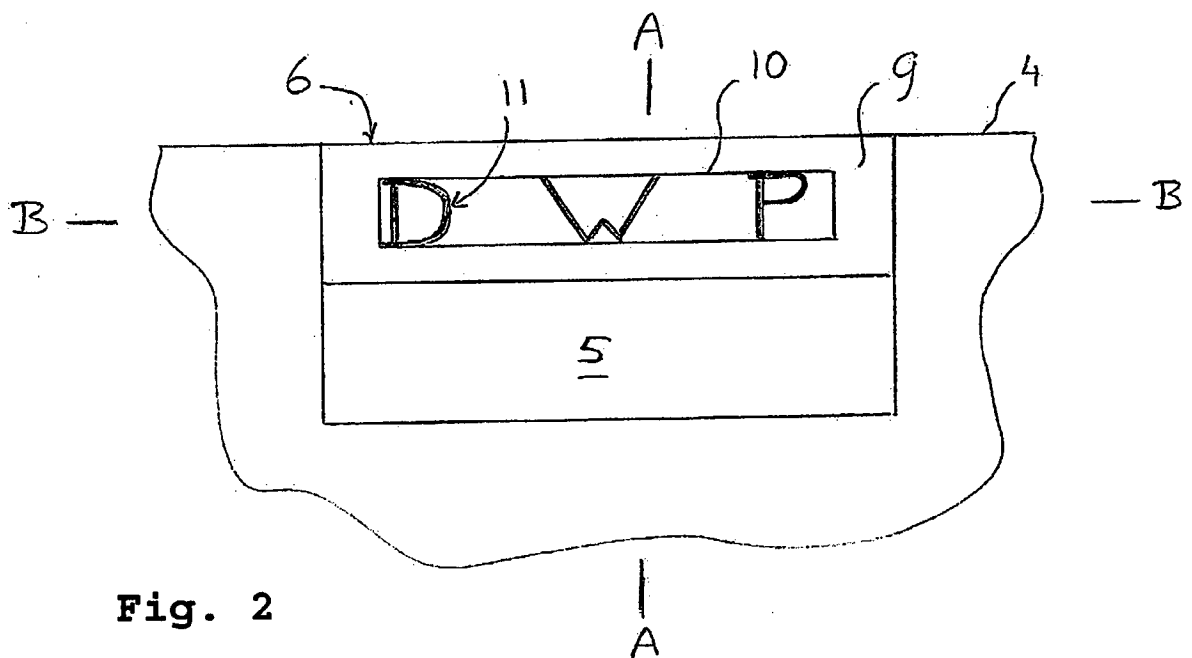


Fig. 2

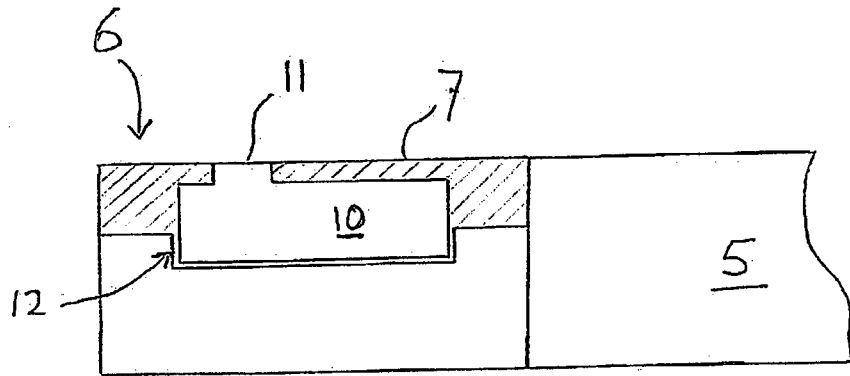


Fig. 3

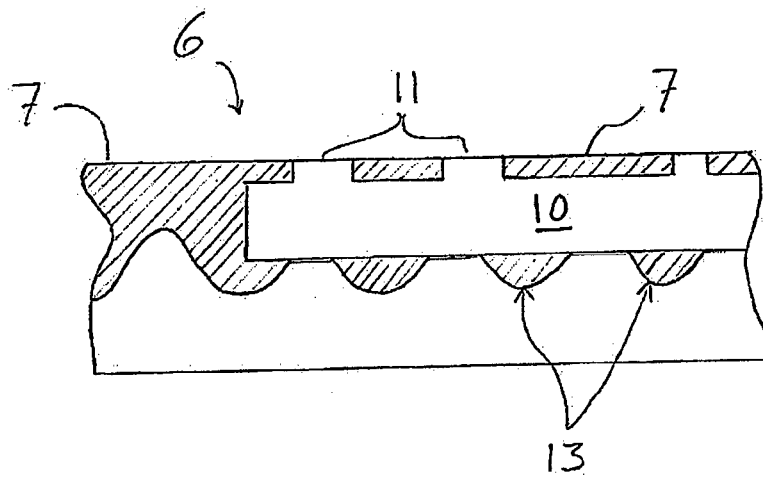


Fig. 4

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- GB 868638 A [0002]
- WO 0042591 A [0002]
- EP 0490165 A [0003]
- EP 1000865 A [0010]
- EP 1410998 A [0010] [0020]