



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 598 207 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**23.11.2005 Bulletin 2005/47**

(51) Int Cl.7: **B41M 5/30, G03C 1/498**

(21) Application number: **05102620.1**

(22) Date of filing: **04.04.2005**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR**  
Designated Extension States:  
**AL BA HR LV MK YU**


(71) Applicant: **AGFA-GEVAERT**  
**2640 Mortsel (BE)**

(72) Inventors:  
• **Louwet, Frank**  
**2640, Mortsel (BE)**  
• **Loccufier, Johan**  
**2640, Mortsel (BE)**

(30) Priority: **17.05.2004 EP 04102147**

(54) **Stabilizers for use in substantially light-insensitive thermographic recording materials.**

(57) A substantially light-insensitive black and white monosheet thermographic recording material comprising a support and a thermosensitive element, said thermosensitive element containing a substantially light-insensitive organic silver salt, an organic reducing agent therefor in thermal working relationship therewith, at least one binder and at least one stabilizer represented by formula (I):



(I)

wherein R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup> and R<sup>4</sup> are independently selected from the group consisting of a hydrogen atom, halogen atoms and aliphatic, alkoxy, nitro, acyl, sulfonyl, nitrile, alkaryl, aryl, amino, thioalkyl, aldehyde, urea, -O-(C=O)-alkyl, -O-(C=O)-aryl, -O-(C=O)-O-alkyl, -O-(C=O)-O-aryl, -NH-(C=O)-alkyl, -NH-(C=O)-aryl, -(C=O)-NH-alkyl,

-(C=O)-NH-aryl, -NH-(SO<sub>2</sub>)-alkyl, -NH-(SO<sub>2</sub>)-aryl, -(SO<sub>2</sub>)-NH-alkyl, -(SO<sub>2</sub>)-NH-aryl groups; X is represented by -A(-M)<sub>n</sub> or is selected from the group consisting of substituted aliphatic groups, unsubstituted aliphatic groups, substituted cycloaliphatic groups, unsubstituted cycloaliphatic groups, substituted aromatic groups and unsubstituted aromatic groups where in each of said groups one or more of the chain or ring carbon atoms may be substituted by one of more atoms selected from the group consisting of S, O, Si, N and P atoms; n is 2, 3 or 4; A is selected from the group consisting of substituted aliphatic groups, unsubstituted aliphatic groups, substituted cycloaliphatic groups, unsubstituted cycloaliphatic groups, substituted aromatic groups and unsubstituted aromatic groups where in each of said groups one or more of the chain or ring carbon atoms may be substituted by one of more atoms selected from the group consisting of S, O, Si, N and P atoms; each (-M) is independently a substituted or unsubstituted group selected from the group consisting of -(2-S-imidazole) groups and -(2-S-imidazole) groups annelated with an aromatic ring system, the optional substituents for -M being selected from the group consisting of halogen atoms and aliphatic, alkoxy, nitro, acyl, sulfonyl, nitrile, alkaryl and aryl groups.

EP 1 598 207 A1

## Description

## FIELD OF THE INVENTION




5 **[0001]** The present invention concerns stabilizers for use in substantially light-insensitive thermographic recording materials.

## BACKGROUND OF THE INVENTION

10 **[0002]** Thermography is an image-forming process including a heating step and hence includes photothermography in which the image-forming process includes image-wise exposure and direct thermal processes in which the image-forming process includes an image-wise heating step. In direct thermal printing a visible image pattern is produced by image-wise heating of a recording material.

15 **[0003]** EP-A 0 901 040 discloses a substantially light-insensitive monosheet recording material comprising a support and a thermosensitive element containing a substantially light-insensitive organic silver salt, an organic reducing agent therefor in thermal working relationship therewith and a binder, characterized in that said thermosensitive element further contains an unsaturated carbocyclic or heterocyclic stabilizer compound substituted with a -SA group where A is hydrogen, a counterion to compensate the negative charge of the thiolate group or a group forming a symmetrical or an asymmetrical disulfide and said recording material is capable of producing prints with a numerical gradation value defined as the quotient of the fraction  $(2.5 - 0.1)/(E_{2.5} - E_{0.1})$  greater than 2.3, where  $E_{2.5}$  is the energy in Joule applied in a dot area of  $87 \mu\text{m} \times 87 \mu\text{m}$  of the imaging layer that produces an optical density value of 2.5, and  $E_{0.1}$  is the energy in Joule applied in a dot area of the imaging layer material that produces an optical density value of 0.1.


20 **[0004]** EP-A 0 897 130 discloses a thermographic recording element having at least one image forming layer, said element comprising an organic silver salt, a reducing agent, and at least one of the substituted alkene derivatives of the general formulae (1) through (14):

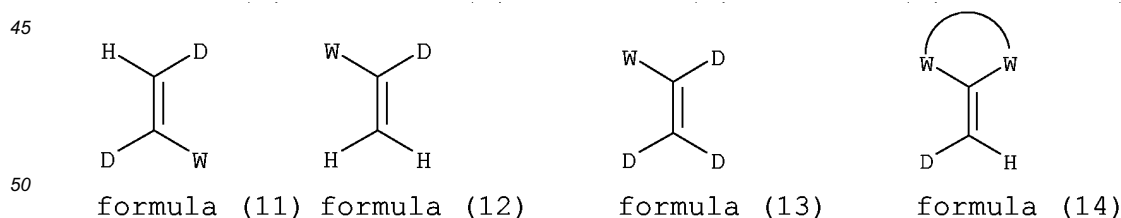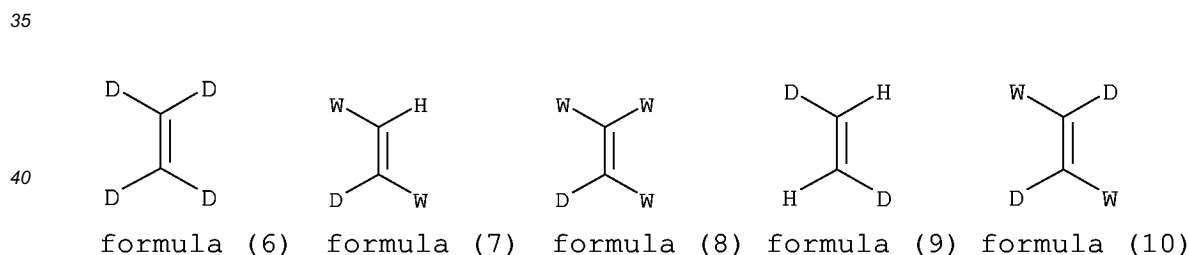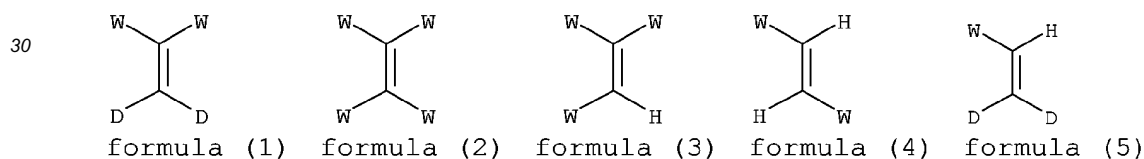

55 wherein W is an electron attractive group, D is an electron donative group, H is hydrogen, the groups represented by W or D attached to the same carbon atom, taken together, may form a cyclic structure, the compound may assume either a trans or cis structure when both trans and cis structures are possible with respect to W or D, and two W groups in formula (14) form a cyclic structure.

**[0005]** US 3,839,041 discloses a photothermographic element comprising a support having thereon photosensitive

silver halide in association with an oxidation-reduction image-forming combination comprising (i) a heavy metal salt oxidizing agent with (ii) a reducing agent, a binder, and a stabilizer precursor which is a compound of the formula:



Wherein R<sup>3</sup> is acetyl, propionyl, butyryl, pentanoyl, carboxy, cyano, aroyl containing up to 13 carbon atoms, or furyl; R<sup>5</sup> is alkyl containing one to five carbon atoms, carboxy, aryl containing six to 12 carbon atoms, or hydrogen; R<sup>4</sup> is alkyl containing one to five carbon atoms, carboxy, or hydrogen; n is 0 or 2.

Differences between substantially light-insensitive thermographic recording materials and photothermographic recording materials

**[0006]** The technology of substantially light-insensitive thermographic materials in which image formation is based on the reduction of organic silver salts is significantly different from that of photothermographic recording materials, despite the fact that in both cases the image results from the reduction of organic silver salts. However, this superficial similarity masking the fact that the realization of the species which catalyze this reduction is completely different, being image-wise exposure of photosensitive silver halide-containing photo-addressable thermally developable elements in the case of photothermographic recording materials and image-wise heating of thermosensitive elements which do not contain photosensitive silver halide in the case of thermographic recording materials. This difference in technology is further underlined by the nature of the ingredients used in the two types of materials, the most significant difference being the absence of photosensitive silver halide and spectral sensitizing agents in substantially light-insensitive thermographic recording materials, but also reflected in the different reducing agents used, stronger reducing agents being used in substantially light-insensitive thermographic recording materials, the different stabilizers, the different toning agents etc. Furthermore, the thermal development processes themselves are significantly different in that the whole material is heated at temperatures of less than 150°C for periods of seconds (e.g. 10s) in the case of photothermographic recording materials, whereas in the case of substantially light-insensitive thermographic recording materials the materials are image-wise heated at much higher temperatures for periods of ms (e.g. 10-20 ms). Realization of a neutral image tone is a major problem in the case of substantially light-insensitive thermographic recording materials due to the very short heating times, whereas it is much less of a problem in photothermographic recording materials due to the much longer heating times.

Problem to be solved

**[0007]** Substantially light-insensitive thermographic recording materials contain the imaging-forming components both before and after image formation and unwanted image-forming must be hindered both during storage prior to printing and in prints exposed to light on light-boxes e.g. during examination by radiologists. Furthermore, such stabilization must take place without adverse effects upon the image quality particularly the image tone. There is therefore a need for stabilizers which fulfil these requirements.

ASPECTS OF THE INVENTION


**[0008]** It is therefore an aspect of the present invention to provide stabilizers which endow substantially light-insensitive thermographic recording materials with improved image tone stability of the image background upon exposure to light, particularly in respect of b\* CIELAB values.

**[0009]** It is therefore a further aspect of the present invention to provide stabilizers which endow substantially light-insensitive thermographic recording materials suitable with improved image tone stability of the image background after storage, particularly in respect of b\* CIELAB values.

**[0010]** Further aspects and advantages of the invention will become apparent from the description hereinafter.

SUMMARY OF THE INVENTION


**[0011]** It has been surprisingly found that the incorporation of at least one stabilizer represented by formula (I):



(I)

wherein R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup> and R<sup>4</sup> are independently selected from the group consisting of a hydrogen atom, halogen atoms and aliphatic, alkoxy, nitro, acyl, sulfonyl, nitrile, alkaryl, aryl, amino, thioalkyl, aldehyde, urea, -O-(C=O)-alkyl, -O-(C=O)-aryl, -O-(C=O)-O-alkyl, -O-(C=O)-O-aryl, -NH-(C=O)-alkyl, -NH-(C=O)-aryl, -(C=O)-NH-alkyl, -(C=O)-NH-aryl, -NH-(SO<sub>2</sub>)-alkyl, -NH-(SO<sub>2</sub>)-aryl, -(SO<sub>2</sub>)-NH-alkyl, -(SO<sub>2</sub>)-NH-aryl groups; X is represented by -A(-M)<sub>n</sub> or is selected from the group consisting of substituted aliphatic groups, unsubstituted aliphatic groups, substituted cycloaliphatic groups, unsubstituted cycloaliphatic groups, substituted aromatic groups and unsubstituted aromatic groups where in each of said groups one or more of the chain or ring carbon atoms may be substituted by one of more atoms selected from the group consisting of S, O, Si, N and P atoms; n is 2, 3 or 4; A is selected from the group consisting of substituted aliphatic groups, unsubstituted aliphatic groups, substituted cycloaliphatic groups, unsubstituted cycloaliphatic groups, substituted aromatic groups and unsubstituted aromatic groups where in each of said groups one or more of the chain or ring carbon atoms may be substituted by one of more atoms selected from the group consisting of S, O, Si, N and P atoms; each (-M) is independently a substituted or unsubstituted group selected from the group consisting of -(2-S-imidazole) groups and -(2-S-imidazole) groups annelated with an aromatic ring system, the optional substituents for -M being selected from the group consisting of halogen atoms and aliphatic, alkoxy, nitro, acyl, sulfonyl, nitrile, alkaryl and aryl groups, into thermosensitive elements of substantially light-insensitive thermographic recording materials results in a substantial improvement in image tone stability upon exposure to visible light as characterized by CIELAB a\* and b\* values. The L\*, a\* and b\* CIELAB-values were determined by spectrophotometric measurements according to ASTM Norm E179-90 in a R(45/0) geometry with evaluation according to ASTM Norm E308-90.

**[0012]** Aspects of the present invention are realized with a substantially light-insensitive black and white monosheet thermographic recording material comprising a support and a thermosensitive element, said thermosensitive element containing a substantially light-insensitive organic silver salt, an organic reducing agent therefor in thermal working relationship therewith, at least one binder and at least one stabilizer represented by formula (I):



(I)

wherein R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup> and R<sup>4</sup> are independently selected from the group consisting of a hydrogen atom, halogen atoms and aliphatic, alkoxy, nitro, acyl, sulfonyl, nitrile, alkaryl, aryl, amino, thioalkyl, aldehyde, urea, -O-(C=O)-alkyl, -O-(C=O)-aryl, -O-(C=O)-O-alkyl, -O-(C=O)-O-aryl, -NH-(C=O)-alkyl, -NH-(C=O)-aryl, -(C=O)-NH-alkyl, -(C=O)-NH-aryl, -NH-(SO<sub>2</sub>)-alkyl, -NH-(SO<sub>2</sub>)-aryl, -(SO<sub>2</sub>)-NH-alkyl, -(SO<sub>2</sub>)-NH-aryl groups; X is represented by -A(-M)<sub>n</sub> or is selected from the group consisting of substituted aliphatic groups, unsubstituted aliphatic groups, substituted cycloaliphatic groups, unsubstituted cycloaliphatic groups, substituted aromatic groups and unsubstituted aromatic groups where in each of said groups one or more of the chain or ring carbon atoms may be substituted by one of more atoms selected from the group consisting of S, O, Si, N and P atoms; n is 2, 3 or 4; A is selected from the group consisting of substituted aliphatic groups, unsubstituted aliphatic groups, substituted cycloaliphatic groups, unsubstituted cycloaliphatic groups, substituted aromatic groups and unsubstituted aromatic groups where in each of said groups one or more of the chain or ring carbon atoms may be substituted by one of more atoms selected from the group consisting of S, O, Si, N and P atoms; each (-M) is independently a substituted or unsubstituted group selected from the group consisting of -(2-S-imidazole) groups and -(2-S-imidazole) groups annelated with an aromatic ring system, the optional substituents for -M being selected from the group consisting of halogen atoms and aliphatic, alkoxy, nitro, acyl, sulfonyl, nitrile, alkaryl

and aryl groups.

[0013] Preferred embodiments of the present invention are disclosed in the detailed description of the invention.

DETAILED DESCRIPTION OF THE INVENTION

Definitions

[0014] The term alkyl means all variants possible for each number of carbon atoms in the alkyl group i.e. for three carbon atoms: n-propyl and isopropyl; for four carbon atoms: n-butyl, isobutyl and tertiary-butyl; for five carbon atoms: n-pentyl, 1,1-dimethylpropyl, 2,2-dimethylpropyl and 2-methyl-butyl etc.

[0015] The term acyl group as used in disclosing the present invention means -(C=O)-aryl and -(C=O)-alkyl groups.

[0016] The term disulfide as used in disclosing the present invention means one of a group or organosulfur compounds RSSR' that may be symmetrical (R = R') or unsymmetrical (R and R', different).




[0017] The L\*, a\* and b\* CIELAB-values are defined in ASTM Norm E179-90 in a R(45/0) geometry with evaluation according to ASTM Norm E308-90.

[0018] Substantially light-insensitive means not intentionally light sensitive.

Thermosensitive element

[0019] The term thermosensitive element as used herein is that element which contains all the ingredients which contribute to image formation. According to the present invention, the thermosensitive element contains one or more substantially light-insensitive organic silver salts, one or more reducing agents therefor in thermal working relationship therewith and at least one binder. The element may comprise a layer system in which the above-mentioned ingredients may be dispersed in different layers, with the proviso that the substantially light-insensitive organic silver salts are in reactive association with the reducing agents i.e. during the thermal development process the reducing agent must be present in such a way that it is able to diffuse to the particles of substantially light-insensitive organic silver salt so that reduction to silver can occur.

[0020] The thermosensitive element of the substantially light-insensitive black and white monosheet thermographic recording material, according to the present invention, preferably excludes at least one of the substituted alkene derivatives of the general formulae (1) through (14):

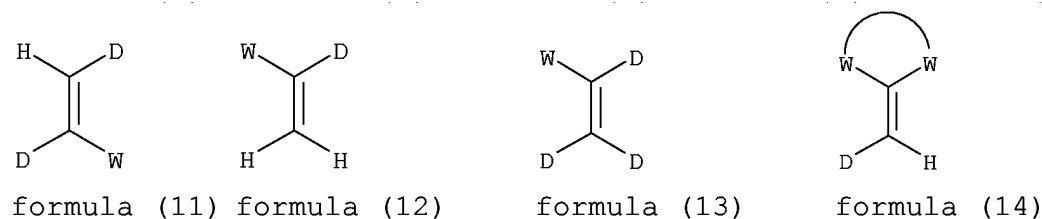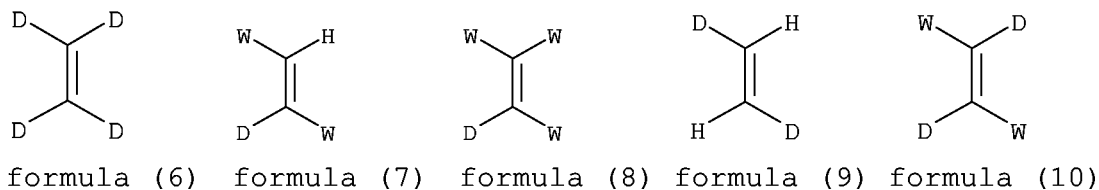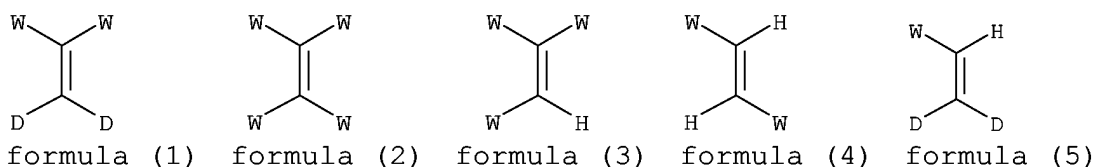


wherein W is an electron attractive group, D is an electron donative group, H is hydrogen, the groups represented by W or D attached to the same carbon atom, taken together, may form a cyclic structure, the compound may assume

either a trans or cis structure when both trans and cis structures are possible with respect to W or D, and two W groups in formula (14) form a cyclic structure.

**[0021]** The substantially light-insensitive black and white monosheet thermographic recording material, according to the present invention, includes the possibility of one or more substantially light-insensitive organic silver salts and/or one of more organic reducing agents therefor being encapsulated in heat-responsive microcapsules, such as disclosed in EP-A 0 736 799 herein incorporated by reference.

Compounds according to formula (I)

**[0022]** Aspects of the present invention are realized with a substantially light-insensitive black and white monosheet thermographic recording material comprising a support and a thermosensitive element, said thermosensitive element containing a substantially light-insensitive organic silver salt, an organic reducing agent therefor in thermal working relationship therewith, at least one binder and at least one stabilizer represented by formula (I):

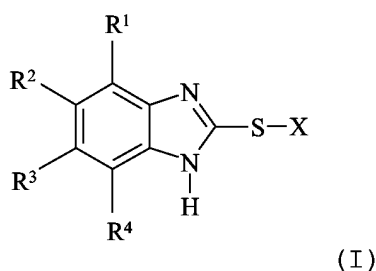

wherein  $R^1$ ,  $R^2$ ,  $R^3$  and  $R^4$  are independently selected from the group consisting of a hydrogen atom, halogen atoms and aliphatic, alkoxy, nitro, acyl, sulfonyl, nitrile, alkaryl, aryl, amino, thioalkyl, aldehyde, urea,  $-O-(C=O)$ -alkyl,  $-O-(C=O)$ -aryl,  $-O-(C=O)-O$ -alkyl,  $-O-(C=O)-O$ -aryl,  $-NH-(C=O)$ -alkyl,  $-NH-(C=O)$ -aryl,  $-(C=O)-NH$ -alkyl,  $-(C=O)-NH$ -aryl,  $-NH-(SO_2)$ -alkyl,  $-NH-(SO_2)$ -aryl,  $-(SO_2)-NH$ -alkyl,  $-(SO_2)-NH$ -aryl groups; X is represented by  $-A(-M)_n$  or is selected from the group consisting of substituted aliphatic groups, unsubstituted aliphatic groups, substituted cycloaliphatic groups, unsubstituted cycloaliphatic groups, substituted aromatic groups and unsubstituted aromatic groups where in each of said groups one or more of the chain or ring carbon atoms may be substituted by one of more atoms selected from the group consisting of S, O, Si, N and P atoms; n is 2, 3 or 4; A is selected from the group consisting of substituted aliphatic groups, unsubstituted aliphatic groups, substituted cycloaliphatic groups, unsubstituted cycloaliphatic groups, substituted aromatic groups and unsubstituted aromatic groups where in each of said groups one or more of the chain or ring carbon atoms may be substituted by one of more atoms selected from the group consisting of S, O, Si, N and P atoms; each (-M) is independently a substituted or unsubstituted group selected from the group consisting of  $-(2-S$ -imidazole) groups and  $-(2-S$ -imidazole) groups annelated with an aromatic ring system, the optional substituents for -M being selected from the group consisting of halogen atoms and aliphatic, alkoxy, nitro, acyl, sulfonyl, nitrile, alkaryl and aryl groups. X, according to formula (I), cannot be hydrogen, a counterion to compensate the negative charge of the thiolate group or a group forming a symmetrical or an asymmetrical disulfide.

**[0023]** According to a first embodiment of the substantially light-insensitive black and white monosheet thermographic recording material, according to the present invention, in the at least one stabilizer represented by formula (I) n is at least 1.

**[0024]** According to a second embodiment of the substantially light-insensitive black and white monosheet thermographic recording material, according to the present invention, in the at least one stabilizer represented by formula (I) A is selected from the group consisting of an optionally substituted alkyl groups, optionally substituted alkenyl groups, optionally substituted alkynyl groups, optionally substituted alkaryl groups, optionally substituted alkyl-heterocyclic groups, optionally substituted alkyl-heteroaromatic groups, optionally substituted alkyl groups in which at least one of the non-terminal main chain carbon atoms is substituted with an oxygen or a sulfur atom, optionally substituted aryl groups, optionally substituted alkyl-aryl-alkyl groups, optionally substituted alkyl-heteroaryl-alkyl groups, optionally substituted alkyl-COO-alkyl-OOC-alkyl groups, optionally substituted alkyl-O-COO-alkyl groups, optionally substituted alkyl-CONH-alkyl groups, and optionally substituted alkyl-COO-aryl-OOC-alkyl groups. Preferred substituents for the alkyl, aryl and heteroaryl groups include alkyl, alkoxy,  $-S$ -alkyl, hydroxy and mercapto groups.


**[0025]** According to a third embodiment of the substantially light-insensitive black and white monosheet thermographic recording material, according to the present invention, in the at least one stabilizer represented by formula (I) X is  $-A-M$  and -M is a  $-(2-S$ -imidazole) group or a  $-(2-S$ -imidazole) group annelated with an aromatic ring system.

**[0026]** According to a fourth embodiment of the substantially light-insensitive black and white monosheet thermo-

graphic recording material, according to the present invention, in the at least one stabilizer represented by formula (I) X is  $-A-(CH_2)_m-M$ , wherein m is 2 to 20 and -M is a  $-(2-S-imidazole)$  group or a  $-(2-S-imidazole)$  group annelated with an aromatic ring system.

5 [0027] According to a fifth embodiment of the substantially light-insensitive black and white monosheet thermographic recording material, according to the present invention, in the at least one stabilizer represented by formula (I) X is  $-A-(CH_2)_m-M$ , wherein m is 4 to 9 and -M is a  $-(2-S-imidazole)$  group or a  $-(2-S-imidazole)$  group annelated with an aromatic ring system.

10 [0028] According to a sixth embodiment of the substantially light-insensitive black and white monosheet thermographic recording material, according to the present invention, the at least one stabilizer represented by formula (I) is selected from the group consisting of:

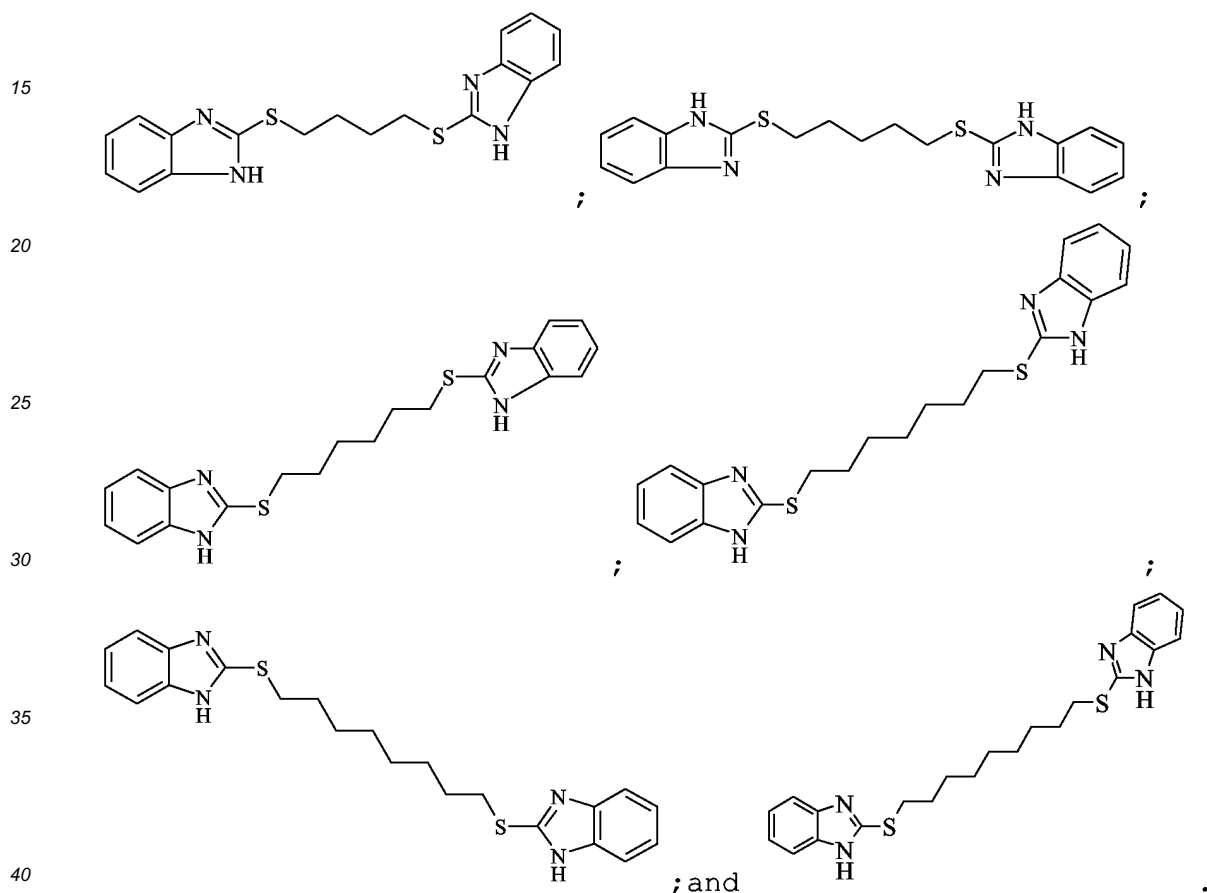

45 [0029] According to a seventh embodiment of the substantially light-insensitive black and white monosheet thermographic recording material, according to the present invention, the at least one stabilizer represented by formula (I) is selected from the group consisting of:


50

55

5

10

15

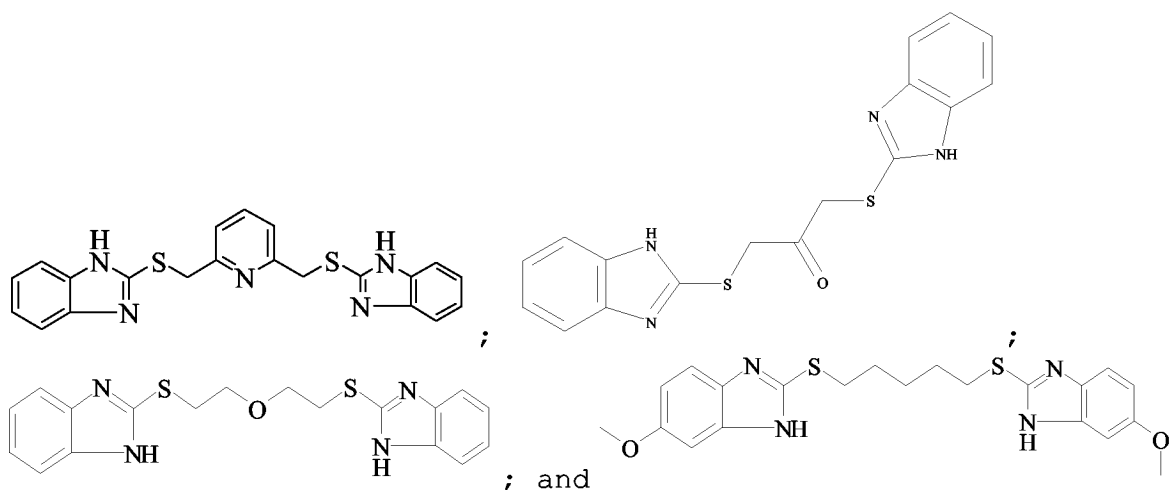

20

**[0030]** Compounds represented by formula (I), according to the present invention, can be prepared from readily available starting materials using standard organic chemistry techniques known to one skilled in the art and available in such reference books as Houben-Weyl.

**[0031]** Suitable compounds represented by formula (I), according to the present invention, include:

25

30

35








40













45

50

55

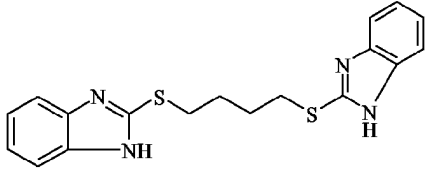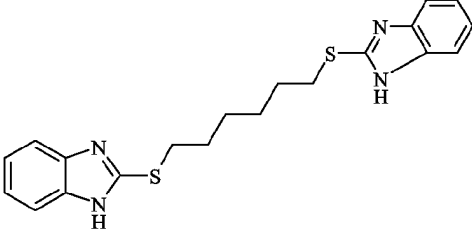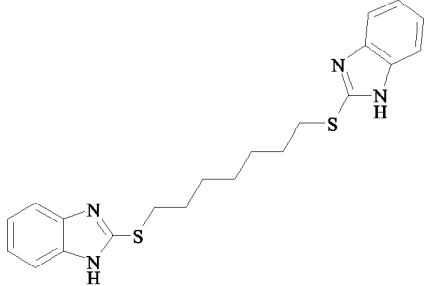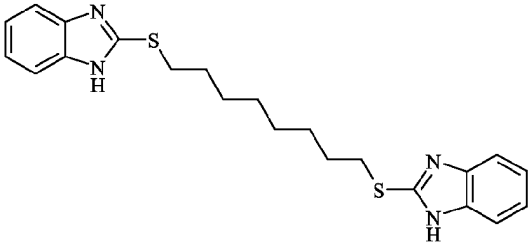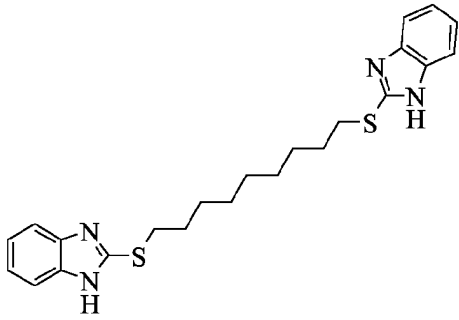

	Structure
5 MBIZ-1	
10 MBIZ-2	
15 MBIZ-3	
20 MBIZ-4	
25 MBIZ-5	
30 MBIZ-6	
35 MBIZ-7	

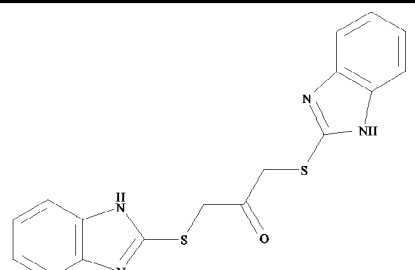5 10	MBIZ-8 
15	MBIZ-9 
20	MBIZ-10 
25	MBIZ-11 
30	MBIZ-12 
35	MBIZ-13 
40	MMIZ-1 
45	MMIZ-2 
50	MMIZ-3 
55	MMIZ-4 
	MMIZ-5 
	MMIZ-6 

## Organic silver salt

**[0032]** According to an eighth embodiment of the substantially light-insensitive black and white monosheet thermographic recording material, according to the present invention, the organic silver salts are not double organic salts containing a silver cation associated with a second cation e.g. magnesium or iron ions.

**[0033]** According to a ninth embodiment of the substantially light-insensitive black and white monosheet thermographic recording material of the present invention, at least one of the organic silver salts is a substantially light-insensitive silver salt of an organic carboxylic acid.

**[0034]** According to a tenth embodiment of the substantially light-insensitive black and white monosheet thermographic recording material of the present invention, at least one of the organic silver salts is a substantially light-insensitive silver salt of an aliphatic carboxylic acids known as a fatty acid, wherein the aliphatic carbon chain has preferably at least 12 C-atoms, e.g. silver laurate, silver palmitate, silver stearate, silver hydroxystearate, silver oleate and silver behenate, which silver salts are also called "silver soaps". Other silver salts of an organic carboxylic acid as described in GB-P 1,439,478, e.g. silver benzoate, may likewise be used to produce a thermally developable silver image. Combinations of different silver salt of an organic carboxylic acids may also be used in the present invention, as disclosed in EP-A 964 300.

**[0035]** Organic silver salts may be dispersed by standard dispersion techniques. Ball mills, bead mills, microfluidizers, ultrasonic apparatuses, rotor stator mixers etc. have been found to be useful in this regard. Mixtures of organic silver salt dispersions produced by different techniques may also be used to obtain the desired thermographic properties e.g. of coarser and more finely ground dispersions of organic silver salts.

## Reducing agents

**[0036]** According to an eleventh embodiment of the black and white thermographic recording material, according to the present invention, the reducing agent is an organic compound containing at least one active hydrogen atom linked to O, N or C, such as is the case with, aromatic di- and tri-hydroxy compounds. 1,2-dihydroxybenzene derivatives, such as catechol, 3-(3,4-dihydroxyphenyl) propionic acid, 1,2-dihydroxybenzoic acid, gallic acid and esters e.g. methyl gallate, ethyl gallate, propyl gallate, tannic acid, and 3,4-dihydroxy-benzoic acid esters are preferred, with those described in EP-A 0 692 733 and EP-A 0 903 625 being particularly preferred.

**[0037]** Combinations of reducing agents may also be used that on heating become reactive partners in the reduction of the one or more substantially light-insensitive organic silver salt. For example, combinations of sterically hindered phenols with sulfonyl hydrazide reducing agents such as disclosed in US 5,464,738; trityl hydrazides and formyl-phenyl-hydrazides such as disclosed in US 5,496,695; trityl hydrazides and formyl-phenyl-hydrazides with diverse auxiliary reducing agents as disclosed in US 5,545,505, US 5,545,507 and US 5,558,983; acrylonitrile compounds as disclosed in US 5,545,515 and US 5,635,339; and 2-substituted malonodialdehyde compounds as disclosed in US 5,654,130.

## Binder of the thermosensitive element

**[0038]** The film-forming binder of the thermosensitive element may be all kinds of natural, modified natural or synthetic resins or mixtures of such resins, in which the at least one organic silver salt can be dispersed homogeneously either in aqueous or solvent media: e.g. cellulose derivatives, starch ethers, galactomannan, polymers derived from  $\alpha,\beta$ -ethylenically unsaturated compounds such as polyvinyl chloride, after-chlorinated polyvinyl chloride, copolymers of vinyl chloride and vinylidene chloride, copolymers of vinyl chloride and vinyl acetate, polyvinyl acetate and partially hydrolyzed polyvinyl acetate, polyvinyl alcohol, polyvinyl acetals that are made from polyvinyl alcohol as starting material in which only a part of the repeating vinyl alcohol units may have reacted with an aldehyde, preferably polyvinyl butyral, copolymers of acrylonitrile and acrylamide, polyacrylates, polymethacrylates, polystyrene and polyethylene or mixtures thereof.

**[0039]** According to an eleventh embodiment of the black and white thermographic recording material, according to the present invention, the at least one binder comprises at least one first polymer consisting of vinyl aceto-acetal monomer units and monomer units selected from the group consisting of vinyl butyral, vinyl alcohol, vinyl acetate and itaconic acid monomer units, wherein the weight ratio of the at least one binder to said light-insensitive silver salt(s) of a carboxylic acid in said thermosensitive element is greater than 1.5; and the at least one binder optionally contains less than 40% by weight of a second polymer consisting of vinyl butyral monomer units and optionally vinyl alcohol and/or vinyl acetate monomer units.

**[0040]** Suitable water-soluble film-forming binders for use in thermographic recording materials according to the present invention are: polyvinyl alcohol, polyacrylamide, polymethacrylamide, polyacrylic acid, polymethacrylic acid, polyvinylpyrrolidone, polyethyleneglycol, proteinaceous binders, polysaccharides and water-soluble cellulose derivatives. A preferred water-soluble binder for use in the thermographic recording materials of the present invention is

gelatine.

**[0041]** The binder to organic silver salt weight ratio is preferably in the range of 0.2 to 7, and the thickness of the thermosensitive element is preferably in the range of 5 to 50  $\mu\text{m}$ . Binders are preferred which do not contain additives, such as certain antioxidants (e.g. 2,6-di-tert-butyl-4-methylphenol), or impurities which adversely affect the thermographic properties of the thermographic recording materials in which they are used.

Toning agent

**[0042]** According to a twelfth embodiment of the black and white monosheet thermographic recording material, according to the present invention, the thermosensitive element contains a toning agent, which enables a neutral black image tone to be obtained in the higher densities and neutral grey in the lower densities.

**[0043]** According to a thirteenth embodiment of the black and white monosheet thermographic recording material, according to the present invention, the thermosensitive element further contains a toning agent selected from the group consisting of phthalimides, phthalazinones, benzoxazine diones and naphthoxazine diones e.g. phthalimides and phthalazinones within the scope of the general formulae described in US 4,082,901; the toning agents described in US 3,074,809, 3,446,648 and 3,844,797; and the heterocyclic toner compounds of the benzoxazine dione or naphthoxazine dione type as disclosed in GB 1,439,478, US 3,951,660 and US 5,599,647, herein incorporated by reference.

**[0044]** According to a fourteenth embodiment of the substantially light-insensitive black and white monosheet thermographic recording material, according to the present invention, the substantially light-insensitive thermographic recording material contains a thermosensitive element, the thermosensitive element containing one or more toning agents selected from the group consisting of phthalazinone, benzo[e][1,3]oxazine-2,4-dione, 7-methyl-benzo[e][1,3]oxazine-2,4-dione, 7-methoxy-benzo[e][1,3]oxazine-2,4-dione and 7-(ethylcarbonato)-benzo[e][1,3]oxazine-2,4-dione.

Auxiliary antifoggants

**[0045]** According to a fifteenth embodiment of the black and white monosheet thermographic recording material, according to the present invention, the thermographic recording material further contains an auxiliary antifoggant to obtain improved shelf-life and reduced fogging.

**[0046]** According to a sixteenth embodiment of the black and white monosheet thermographic recording material, according to the present invention, the thermographic recording material further contains an antifoggant selected from the group consisting of benzotriazole, substituted benzotriazoles and aromatic polycarboxylic acid such as ortho-phthalic acid, 3-nitro-phthalic acid, tetrachlorophthalic acid, mellitic acid, pyromellitic acid and trimellitic acid and anhydrides thereof.

**[0047]** According to a seventeenth embodiment of the black and white monosheet thermographic recording material, according to the present invention, the thermosensitive element further contains an optionally substituted benzotriazole.

Polycarboxylic acids and anhydrides thereof

**[0048]** According to an eighteenth embodiment of the black and white monosheet thermographic recording material, according to the present invention, the thermosensitive element further contains at least one polycarboxylic acid and/or anhydride thereof in a molar percentage of at least 15 with respect to all the organic silver salt(s) present and in thermal working relationship therewith. The polycarboxylic acid may be aliphatic (saturated as well as unsaturated aliphatic and also cycloaliphatic) or an aromatic polycarboxylic acid, may be substituted and may be used in anhydride form or partially esterified on the condition that at least two free carboxylic acids remain or are available in the heat recording step.

Surfactants and dispersants

**[0049]** Surfactants and dispersants aid the dispersion of ingredients which are insoluble in the particular dispersion medium. The substantially light-insensitive thermographic material used in the present invention may contain one or more surfactants, which may be anionic, non-ionic or cationic surfactants and/or one or more dispersants. Suitable dispersants are natural polymeric substances, synthetic polymeric substances and finely divided powders, e.g. finely divided non-metallic inorganic powders such as silica.

Support

**[0050]** According to a nineteenth embodiment of the substantially light-insensitive black and white monosheet thermographic recording material, according to the present invention, the support is transparent or translucent. It is pref-

erably a thin flexible carrier made transparent resin film, e.g. made of a cellulose ester, e.g. cellulose triacetate, polypropylene, polycarbonate or polyester, e.g. polyethylene terephthalate. The support may be in sheet, ribbon or web form and subbed if needs be to improve the adherence to the thereon coated thermosensitive element. The support may be dyed or pigmented to provide a transparent coloured background for the image.

5

#### Protective layer

**[0051]** According to a twentieth embodiment of the substantially light-insensitive black and white monosheet thermographic recording material, according to the present invention, the thermosensitive element is provided with a protective layer. In general this protects the thermosensitive element from atmospheric humidity and from surface damage by scratching etc. and prevents direct contact of printheads or heat sources with the recording layers. Protective layers for thermosensitive elements which come into contact with and have to be transported past a heat source under pressure, have to exhibit resistance to local deformation and good slipping characteristics during transport past the heat source during heating. A slipping layer, being the outermost layer, may comprise a dissolved lubricating material and/or particulate material, e.g. talc particles, optionally protruding from the outermost layer. Examples of suitable lubricating materials are a surface active agent, a liquid lubricant, a solid lubricant or mixtures thereof, with or without a polymeric binder.

20

#### Coating techniques

**[0052]** The coating of any layer of the substantially light-insensitive thermographic material used in the present invention may proceed by any coating technique e.g. such as described in Modern Coating and Drying Technology, edited by Edward D. Cohen and Edgar B. Gutoff, (1992) VCH Publishers Inc., 220 East 23rd Street, Suite 909 New York, NY 10010, USA. Coating may proceed from aqueous or solvent media with overcoating of dried, partially dried or undried layers.

25

#### Thermographic processing

**[0053]** Thermographic imaging is carried out by the image-wise application of heat either in analogue fashion by direct exposure through an image or by reflection from an image, or in digital fashion pixel by pixel either by using an infra-red heat source, for example with a Nd-YAG laser or other infra-red laser, with a substantially light-insensitive thermographic recording material preferably containing an infra-red absorbing compound, or by direct thermal imaging with a thermal head.

30

**[0054]** In thermal printing image signals are converted into electric pulses and then through a driver circuit selectively transferred to a thermal printhead. The thermal printhead consists of microscopic heat resistor elements, which convert the electrical energy into heat via Joule effect. The operating temperature of common thermal printheads is in the range of 300 to 400°C and the heating time per picture element (pixel) may be less than 1.0ms, the pressure contact of the thermal printhead with the recording material being e.g. 200-1000g/linear cm, i.e. with a contact zone (nip) of 200 to 300 µm a pressure of 5000 to 50,000 g/cm<sup>2</sup>, to ensure a good transfer of heat.

35

**[0055]** In order to avoid direct contact of the thermal printing heads with the outermost layer on the same side of the support as the thermosensitive element when this outermost layer is not a protective layer, the image-wise heating of the recording material with the thermal printing heads may proceed through a contacting but removable resin sheet or web wherefrom during the heating no transfer of recording material can take place.

40

**[0056]** Activation of the heating elements can be power-modulated or pulse-length modulated at constant power. EP-A 654 355 discloses a method for making an image by image-wise heating by means of a thermal head having energizable heating elements, wherein the activation of the heating elements is executed duty cycled pulsewise. EP-A 622 217 discloses a method for making an image using a direct thermal imaging element producing improvements in continuous tone reproduction.

45

**[0057]** Image-wise heating of the recording material can also be carried out using an electrically resistive ribbon incorporated into the material. Image- or pattern-wise heating of the recording material may also proceed by means of pixel-wise modulated ultrasound.

50

#### Industrial application

**[0058]** Thermographic imaging can be used for the production of reflection type prints and transparencies, in particular for use in the medical diagnostic field in which black-imaged transparencies are widely used in inspection techniques operating with a light box.

55

**[0059]** The invention is illustrated hereinafter by way of comparative examples and invention examples. The per-

## EP 1 598 207 A1

centages and ratios given in these examples are by weight unless otherwise indicated.

Subbing layer Nr. 01 on the emulsion side of the support:

5 **[0060]**

copolymer of 88% vinylidene chloride, 10% methyl acrylate and 2% itaconic acid	79.1 mg/m <sup>2</sup>
Kieselcol® 100F, a colloidal silica from BAYER	18.6 mg/m <sup>2</sup>
Mersolat® H, a surfactant from BAYER	0.4 mg/m <sup>2</sup>
Ultravon® W, a surfactant from CIBA-GEIGY	1.9 mg/m <sup>2</sup>

Ingredients in the thermosensitive element in addition to the above-mentioned ingredients:

15 **[0061]**

BL5HP = S-LEC BL5HP, a polyvinyl butyral from SEKISUI;

POLY 01 = copolymer of 44% vinyl aceto-acetal, 38% vinyl butyral, 17% vinyl alcohol and 2% vinyl acetate (determined by <sup>13</sup>C NMR) with M<sub>w</sub> = 130,000, M<sub>n</sub> = 44,000 and T<sub>g</sub> = 89°C

20

Oil = BAYSILON, a silicone oil from BAYER;

VL = DESMODUR VL, a 4,4'-diisocyanatodiphenylmethane from BAYER;

Reducing agents:

25

**[0062]**

R01 = 3,4-dihydroxybenzonnitrile;

R02 = 3,4-dihydroxybenzophenone;

30

Toning agent:

**[0063]**

35

T01 = 7-(ethylcarbonato)-benzo[e][1,3]oxazine-2,4-dione;

T02 = 7-methyl-benzo[e][1,3]oxazine-2,4-dione;

Stabilizers:

40

**[0064]**

S01 = glutaric acid

S02 = tetrachlorophthalic acid anhydride


S03 = benzotriazole

45



Additive:

**[0065]**

50



55

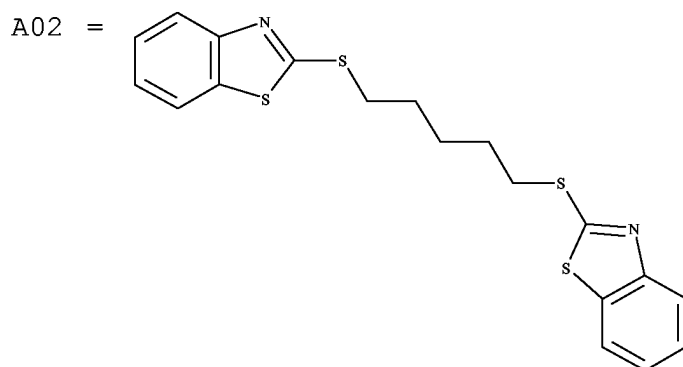

Ingredients in the protective layer:

**[0066]**

- ERCOL™ 48 20 = a polyvinylalcohol from ACETEX EUROPE;
- LEVASIL™ VP AC 4055 = 15% aqueous dispersion of colloidal silica with acid groups predominantly neutralized with Na<sup>+</sup> and a specific surface area of 500 m<sup>2</sup>/g, from BAYER AG has been converted into ammonium salt;
- ULTRAVON™ W = 75-85% concentrate of a sodium arylsulfonate from Ciba Geigy converted into acid form by passing through an ion exchange column;
- SYLOID™ 72 = a silica from Grace;
- SERVOXYL™ VPDZ 3/100 = a mono[isotridecyl polyglycoether (3 EO)] phosphate, from SERVO DELDEN B.V.;
- SERVOXYL™ VPAZ 100 = a mixture of monolauryl and dilauryl phosphate, from SERVO DELDEN B.V.;
- MICROACE TALC P3 = an Indian talc from NIPPON TALC;
- RILANIT™ GMS = a glycerine monotallow acid ester, from HENKEL
- TMOS = tetramethylorthosilicate hydrolyzed in the presence of methanesulfonic acid.

INVENTION EXAMPLES 1 to 16 and COMPARATIVE EXAMPLES 1 to 4

**[0067]** The substantially light-insensitive thermographic recording materials of INVENTION EXAMPLES 1 to 16 and COMPARATIVE EXAMPLES 1 to 4 were prepared by coating a dispersion with the following ingredients in 2-butanone onto a 175µm thick blue-pigmented polyethylene terephthalate support with CIELAB a\* and b\* values of -9.5 and -17.9 respectively subbed on the emulsion-coated side with subbing layer 01 giving layers after drying at 50°C for 1h in a drying cupboard with the compositions given in Table 1.

Table 1:

Comparative example nr.	stabilizer		AgBeh coverage [g/m <sup>2</sup> ]	BL5HP [g/m <sup>2</sup> ]	R01 mol% vs AgB	R02 mol% vs AgB	T02 mol% vs AgB	S01 mol% vs AgB	S02 mol% vs AgB	VL [g /m <sup>2</sup> ]	Oil [g/ m <sup>2</sup> ]
	type	conc. mol% vs AgB									
1	-	-	4.15	16.6	35	45	15	26	4.91	0.17	0.035
2	A01	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035
3	A02	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035
4	A03	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035
Invention example nr.											
1	MBIZ-1	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035
2	MBIZ-2	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035
3	MBIZ-3	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035
4	MBIZ-4	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035
5	MBIZ-5	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035
6	MBIZ-6	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035
7	MBIZ-7	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035
8	MBIZ-8	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035
9	MBIZ-9	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035
10	MBIZ-10	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035
11	MBIZ-11	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035
12	MMIZ-1	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035
13	MMIZ-2	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035
14	MMIZ-4	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035
15	MMIZ-5	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035



55 50 45 40 35 30 25 20 15 10 5

Table 1: (continued)

Comparative example nr.	stabilizer		AgBeh coverage [g/m <sup>2</sup> ]	BL5HP [g/m <sup>2</sup> ]	R01 mol% vs AgB	R02 mol% vs AgB	T02 mol% vs AgB	S01 mol% vs AgB	S02 mol% vs AgB	VL [g/m <sup>2</sup> ]	Oil [g/m <sup>2</sup> ]
Invention example nr.											
16	MMIZ-6	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035

## EP 1 598 207 A1

**[0068]** The thermosensitive elements were then coated with an aqueous composition with the following ingredients, which was adjusted to a pH of 3.8 with 1N nitric acid, to a wet layer thickness of 85  $\mu\text{m}$  and then dried at 50°C for 15 minutes to produce a protective layer with the composition:

5	ERCOL™ 48 20 =	2.1g/m <sup>2</sup>	
	LEVASIL™ VP AC 4055 =	1.05g/m <sup>2</sup>	
	ULTRAVON™ W =	0.075g/m <sup>2</sup>	
			SYLOID™ 72 = 0.09 g/m <sup>2</sup>
	SERVOXYL™ VPDZ 3/100 =	0.075g/m <sup>2</sup>	
10	SERVOXYL™ VPAZ 100 =	0.075g/m <sup>2</sup>	
	MICROACE TALC P3 =	0.045g/m <sup>2</sup>	
	RILANIT™ GMS =	0.15g/m <sup>2</sup>	
	TMOS =	0.87g/m <sup>2</sup>	(assuming that the TMOS was completely converted to SiO <sub>2</sub> )

15 After coating the protective layer was hardened by heating the substantially light-insensitive thermographic recording material at 45°C for 7 days at a relative humidity of 70%.

### Thermographic printing

20 **[0069]** The substantially light-insensitive thermographic recording materials of INVENTION EXAMPLES 1 to 16 and COMPARATIVE EXAMPLES 1 to 4 were printed using a DRYSTAR™ 4500 printer from AGFA-GEVAERT with a resolution of 508 dpi which had been modified to operate at a printing speed of 14 mm/s and a line-time of 3.5 ms instead of 7.1 ms and in which the 75  $\mu\text{m}$  long (in the transport direction) and 50  $\mu\text{m}$  wide thermal head resistors were power-modulated to produce different image densities.

25 **[0070]** The maximum densities of the images ( $D_{\text{max}}$ ) were measured through a visible filter with a MACBETH™ TR924 densitometer.

### Evaluation of thermographic properties

30 **[0071]** The image tone of fresh prints made with the substantially light-insensitive thermographic recording materials of INVENTION EXAMPLES 1 to 16 and COMPARATIVE EXAMPLES 1 to 4 was assessed on the basis of the L\*, a\* and b\* CIELAB-values at optical densities, D, of 1.0 and 2.0 and the results given in Table 2.

35 **[0072]** Light-box tests were performed by exposing the substantially light-insensitive thermographic materials of INVENTION EXAMPLES 1 to 16 and COMPARATIVE EXAMPLES 1 to 4 for 3 days on top of the white PVC window of a specially constructed light-box placed in a Votsch conditioning cupboard set at 30°C and a relative humidity of 85%. Only a central area of the window 550mm long by 500mm wide was used for mounting the test materials to ensure uniform exposure.

40 **[0073]** The stainless steel light-box used was 650mm long, 600mm wide and 120mm high with an opening 610mm long and 560mm wide with a rim 10mm wide and 5mm deep round the opening, thereby forming a platform for a 5mm thick plate of white PVC 630mm long and 580mm wide, making the white PVC-plate flush with the top of the light-box and preventing light loss from the light-box other than through the white PVC-plate. This light-box was fitted with 9 Planilux™ TLD 36W/54 fluorescent lamps 27mm in diameter mounted length-wise equidistantly from the two sides, with the lamps positioned equidistantly to one another and the sides over the whole width of the light-box and with the tops of the fluorescent tubes 30mm below the bottom of the white PVC plate and 35mm below the materials being tested. The shifts in CIELAB a\*- and b\*-values at an optical density, D, of 1.0 and the shift in the CIELAB b\*-value were determined for INVENTION EXAMPLES 1 to 16 and COMPARATIVE EXAMPLES 1 to 4 and the results are given in Table 2.

Table 2:

	Comparative Example nr.	stabilizer type	Dmax	CIELAB-values of prints with fresh film					Shift in b* CIELABvalues of prints after 3d/30°C/ 85%RH light-box exposure		
				Dmin	D = 1.0		D = 2.0				
					b*	a*	b*	a*	b*	D = 1.0	D = 2.0
55	1	-	4.21	-16.72	-2.92	-6.38	-0.56	-3.64	+13.20	+5.82	+13.67

EP 1 598 207 A1

Table 2: (continued)

Comparative Example nr.	stabilizer type	Dmax	CIELAB-values of prints with fresh film					Shift in b* CIELABvalues of prints after 3d/30°C/85%RH light-box exposure		
			Dmin	D = 1.0		D = 2.0		D = 1.0	D = 2.0	Dmin
			b*	a*	b*	a*	b*	D = 1.0	D = 2.0	Dmin
2	A01	4.44	-16.47	-1.37	-1.82	-0.10	+0.50	+2.38	+0.93	+9.45
3	A02	4.24	+17.07	-3.55	-7.30	-1.26	-4.81	+7.59	+3.11	+14.98
4	A03	3.56	-16.77	-2.68	-9.21	+0.24	-7.00	+2.22	+0.62	+11.03
Invention Example nr										
1	MBIZ-1	3.65	-16.92	-2.91	-9.38	-0.76	-7.59	+3.58	+1.06	+5.60
2	MBIZ-2	3.32	-17.3	-3.56	-7.42	-0.79	-6.42	+1.40	+0.93	+4.47
3	MBIZ-3	3.79	-16.12	-2.66	-8.06	-0.08	-6.80	+0.95	+0.08	+3.67
4	MBIZ-4	3.49	-16.02	-1.90	-8.99	+1.21	-7.16	+2.90	+1.99	+4.02
5	MBIZ-5	3.86	-16.16	-2.36	-8.75	-0.11	-7.27	+2.42	+0.80	+6.04
6	MBIZ-6	3.63	-16.02	-2.47	-8.91	+0.16	-7.18	+2.10	+1.24	+4.24
7	MBIZ-7	2.92	-18.05	-1.43	-9.43	-0.49	-6.42	+2.57	+1.54	+1.60
8	MBIZ-8	3.17	-13.7	-2.25	-6.74	0.84	-5.54	+3.06	+1.82	+2.11
9	MBIZ-9	3.66	-17.36	-2.51	-8.61	0.84	-5.89	+3.47	+2.41	+4.31
10	MBIZ-10	3.62	-16.99	-1.47	-8.66	+1.17	-6.52	+1.23	+0.63	+2.95
11	MBIZ-11	3.63	-17.50	-2.20	-8.67	+0.94	-6.34	+1.87	+1.40	+3.05
12	MMIZ-1	3.58	-17.23	-1.55	-9.39	+1.76	-6.31	+3.87	+1.78	+6.47
13	MMIZ-2	3.77	-17.12	-1.51	-9.24	+1.13	-6.74	+5.44	+2.59	+7.98
14	MMIZ-4	3.67	-17.43	-2.82	-10.68	+0.08	-7.39	+5.79	+2.53	+6.85
15	MMIZ-5	3.58	-16.96	-1.93	-10.37	+0.65	-7.59	+5.46	+2.72	+6.66
16	MMIZ-6	3.22	-16.94	+1.80	-9.39	+5.02	-5.22	+4.48	+2.75	+3.61

**[0074]** The substantially light-insensitive thermographic recording materials of INVENTION EXAMPLES 1 to 16 in which the thermosensitive elements contain a compound according to formula (I) exhibit substantially improved stability of the b\* CIELAB values of the image background to light exposure compared with the substantially light-insensitive thermographic recording material of COMPARATIVE EXAMPLE 1 which is identical to the substantially light-insensitive thermographic recording materials of INVENTION EXAMPLES 1 to 16 except for the absence of a compound according to formula (I) in the thermosensitive element and also compared with the substantially light-insensitive thermographic recording materials of COMPARATIVE EXAMPLES 2 to 4, in which the compounds A01, A02 and A03 are present instead of a stabilizer according to formula (I). These comparative examples show that the stabilizing effect of the stabilizer according to formula (I) is dependent upon the >NH group of the 2-imazolyl group or 2-imazolyl group annelated with an aromatic ring system not being substituted, at least one (M-) group being a 2-imazolyl group annelated with an aromatic ring system and does not tolerate substitution of the >NH group in the 2-imidazolyl group by a -S- group.

INVENTION EXAMPLES 17 to 22

**[0075]** The substantially light-insensitive thermographic recording materials of INVENTION EXAMPLE 19 was prepared as described for INVENTION EXAMPLE 3 and INVENTION EXAMPLES 17 and 18 as for INVENTION EXAMPLE 3 except that concentrations of MBIZ-3 of 5 and 8 mol% were used instead of 10 mol% with respect to silver behenate. The substantially light-insensitive thermographic recording materials of INVENTION EXAMPLE 22 was prepared as

## EP 1 598 207 A1

described for INVENTION EXAMPLE 4 and INVENTION EXAMPLES 20 and 21 as for INVENTION EXAMPLE 4 except that concentrations of MBIZ-4 of 5 and 8 mol% were used instead of 10 mol% with respect to silver behenate.

**[0076]** The compositions of the thermosensitive elements of the substantially light-insensitive thermographic recording materials of INVENTION EXAMPLES 17 to 22 together with those for INVENTION EXAMPLES 3 and 4 and COMPARATIVE EXAMPLE 1 in which no additional stabilizer is present in the thermosensitive element are summarized in Table 3 below.

5

10

15

20

25

30

35

40

45

50

55

Table 3:

Comparative example nr.	stabilizer		AgBeh coverage [g/m <sup>2</sup> ]	BL5HP [g/m <sup>2</sup> ]	R01 mol% vs AgB	R02 mol% vs AgB	T02 mol% vs AgB	S01 mol% vs AgB	S02 mol% vs AgB	VL [g /m <sup>2</sup> ]	Oil [g/ m <sup>2</sup> ]
	type	conc. mol% vs AgB									
1	-	-	4.15	16.6	35	45	15	26	4.91	0.17	0.035
Invention example nr.											
17	MBIZ-3	5	4.15	16.6	35	45	15	26	4.91	0.17	0.035
18	MBIZ-3	8	4.15	16.6	35	45	15	26	4.91	0.17	0.035
19	MBIZ-3	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035
3	MBIZ-3	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035
20	MBIZ-4	5	4.15	16.6	35	45	15	26	4.91	0.17	0.035
21	MBIZ-4	8	4.15	16.6	35	45	15	26	4.91	0.17	0.035
22	MBIZ-4	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035
4	MBIZ-4	10	4.15	16.6	35	45	15	26	4.91	0.17	0.035

**[0077]** Thermographic evaluation of the substantially light-insensitive thermographic recording materials of INVENTION EXAMPLES 17 to 22 was carried out as described for the substantially light-insensitive thermographic recording materials of INVENTION EXAMPLES 1 to 16 and COMPARATIVE EXAMPLE 1.

**[0078]** The Dmax values, a\* and b\* CIELAB-values at densities of 1.0 and 2.0 together with the results of light box experiments are given in Table 4 below together with the results for the substantially light-insensitive thermographic recording materials of INVENTION EXAMPLES 3 and 4 and COMPARATIVE EXAMPLE 1.

Table 4:

Comparative Example nr.	stabilizer		Dmax	CIELAB-values of prints with fresh film				$\Delta b^*$ CIELAB-value of prints after 3d/30°C/85%RH light-box expos.	
	type	conc. vs AgBeh [mol%]		D = 1.0		D = 2.0			
				a*	b*	a*	b*		
1	-	0	4.21	-2.92	-6.38	-0.56	-3.64	+13.20	+13.67
Invention Example nr									
17	MBIZ-3	5	3.82	-2.95	-8.56	-0.03	-6.71	+2.35	+3.90
18	MBIZ-3	8	3.77	-2.83	-8.37	-0.15	-6.75	+1.64	+3.99
19	MBIZ-3	10	3.56	-2.82	-8.43	+0.12	-6.59	+1.78	+2.81
3	MBIZ-3	10	3.79	-2.66	-8.06	-0.08	-6.80	+0.95	+3.67
20	MBIZ-4	5	3.76	-2.99	-8.83	-0.06	-6.74	+2.32	+4.19
21	MBIZ-4	8	3.57	-2.82	-8.66	+0.05	-6.49	+2.33	+4.69
22	MBIZ-4	10	3.44	-2.80	-7.90	-0.29	-6.38	+2.17	+4.58
4	MBIZ-4	10	3.49	-1.90	-8.99	+1.21	-7.16	+2.90	+4.02

**[0079]** No significant difference was established for MBIZ-3 and MBIZ-4 in the concentration range of 5 to 10 mol% with respect to silver behenate in respect of the effect on the image tone of fresh images and their light-box stabilizing effect.

COMPARATIVE EXAMPLES 5 to 8 and INVENTION EXAMPLES 23 to 34

**[0080]** The substantially light-insensitive thermographic recording materials of COMPARATIVE EXAMPLES 5 to 8 and INVENTION EXAMPLES 23 to 34 were prepared by coating a dispersion with the following ingredients in 2-butanone onto a 175 $\mu$ m thick blue-pigmented polyethylene terephthalate support with CIELAB a\*- and b\*- values of -9.5 and -17.9 respectively subbed on the emulsion-coated side with subbing layer 01 giving layers after drying at 50°C for 1h in a drying cupboard with the compositions given in Table 5 below.

**[0081]** The thermosensitive elements were then coated with a protective layer as described for substantially light-insensitive thermographic recording materials of COMPARATIVE EXAMPLES 1 to 4 and INVENTION EXAMPLES 1 to 16.

Table 5:

Comparative example nr.	stabilizer		AgBeh coverage [g/m <sup>2</sup> ]	POLY 01 [g/m <sup>2</sup> ]	R01 mol% vs AgB	R02 mol% vs AgB	T01 mol% vs AgB	T02 mol% vs AgB	S01 mol% vs AgB	S02 mol% vs AgB	S03 mol% vs AgB	VL [g/m <sup>2</sup> ]	Oil [g/m <sup>2</sup> ]
	type	conc. mol% vs AgB											
5	-	-	3.48	12.52	50	45	3	15	26	6.0	5.0	0.184	0.037
6	A01	5	3.40	12.23	50	45	3	15	26	6.0	5.0	0.180	0.036
7	A02	5	3.42	12.33	50	45	3	15	26	6.0	5.0	0.182	0.036
8	A03	5	3.37	12.14	50	45	3	15	26	6.0	5.0	0.179	0.036
Invention example nr													
23	MBIZ-1	5	3.35	12.04	50	45	3	15	26	6.0	5.0	0.177	0.035
24	MBIZ-2	5	3.37	12.14	50	45	3	15	26	6.0	5.0	0.179	0.036
25	MBIZ-3	5	3.37	12.14	50	45	3	15	26	6.0	5.0	0.179	0.036
26	MBIZ-4	5	3.40	12.23	50	45	3	15	26	6.0	5.0	0.180	0.036
27	MBIZ-5	5	3.45	12.42	50	45	3	15	26	6.0	5.0	0.183	0.037
28	MBIZ-6	5	3.50	12.61	50	45	3	15	26	6.0	5.0	0.186	0.035
29	MBIZ-7	5	3.42	12.33	50	45	3	15	26	6.0	5.0	0.182	0.036
30	MBIZ-8	5	3.40	12.23	50	45	3	15	26	6.0	5.0	0.180	0.036
31	MBIZ-9	5	3.40	12.23	50	45	3	15	26	6.0	5.0	0.180	0.036
32	MBIZ-10	5	3.45	12.42	50	45	3	15	26	6.0	5.0	0.183	0.037
33	MBIZ-11	5	3.37	12.14	50	45	3	15	26	6.0	5.0	0.179	0.036
34	MMIZ-4	5	3.35	12.04	50	45	3	15	26	6.0	5.0	0.177	0.035

**EP 1 598 207 A1**

**[0082]** Thermographic evaluation of the substantially light-insensitive thermographic recording materials of COMPARATIVE EXAMPLES 5 to 8 and INVENTION EXAMPLES 23 to 34 was carried out as described for the substantially light-insensitive thermographic recording materials of INVENTION EXAMPLES 1 to 16 and COMPARATIVE EXAMPLES 1 to 4.

5 **[0083]** The Dmax values, a\* and b\* CIELAB-values at densities of 1.0 and 2.0 together with the results of light box experiments are given in Table 6 below. Also included in Table 6 are the results of shelf-life experiments in which the difference in the CIELAB b\*-values at D = 1.0 for prints produced with fresh materials and prints produced with materials which were subjected for 4 days to a temperature of 45°C and a relative humidity of 70%.

10

15

20

25

30

35

40

45

50

55



Table 6:

Comparative Example nr.	stabilizer type	Dmax	CIELAB-values of prints with fresh film				Δb* CIELAB-value of		
			D = 1.0		D = 2.0		prints after 3d/30°C/85%RH light-box		fresh print due to storage at 4d/45°C/70%RH
			a*	b*	a*	b*	D=1.0	Dmin	D = 1.0
5	-	3.63	-1.27	-7.60	+2.12	-5.97	+2.42	+3.66	+1.43
6	A01	3.87	-1.02	<b>-2.88</b>	+1.56	<b>-0.74</b>	+1.89	+4.06	+2.96
7	A02	3.83	-1.09	-4.95	+0.79	-4.65	+1.36	+4.75	-0.14
8	A03	3.37	<b>-0.77</b>	-6.24	<b>+3.29</b>	-5.17	+3.17	+6.69	-0.64
Invention Example nr									
23	MBIZ-1	3.44	-1.83	-6.46	+1.53	-5.86	+3.08	+4.08	+0.62
24	MBIZ-2	3.45	-1.98	-6.00	+1.97	-4.91	+1.89	+4.23	-0.30
25	MBIZ-3	3.32	-2.00	-6.42	+1.56	-5.69	+1.86	+3.51	+0.36
26	MBIZ-4	3.32	-1.17	-6.73	+2.99	-5.56	+2.13	+3.57	+0.21
27	MBIZ-5	3.32	-1.93	-5.94	+1.07	-5.33	+2.44	+4.81	+0.09
28	MBIZ-6	3.33	-1.65	-6.35	+1.89	-5.51	+1.85	+4.10	+0.36
29	MBIZ-7	3.40	-1.22	-7.25	+2.13	-6.01	+0.75	+2.53	+0.25
30	MBIZ-8	3.31	-1.24	-5.18	+2.79	-3.67	+4.54	+2.99	+0.15
31	MBIZ-9	3.29	-1.29	-6.76	+2.57	-5.26	+3.82	+3.64	+0.30
32	MBIZ-10	3.40	-0.95	-6.95	+2.56	-5.51	+2.15	+3.72	+0.36
33	MBIZ-11	3.37	-0.67	-7.25	+2.17	-3.49	+3.39	+3.57	+0.40
34	MMIZ-4	3.62	-1.26	-6.21	+3.07	-4.91	+3.82	+5.34	-0.42

5 [0084] The thermosensitive elements of the substantially light-insensitive thermographic materials of COMPARATIVE EXAMPLES 5 to 8 and INVENTION EXAMPLES 23 to 34 are significantly different from those of the substantially light-insensitive thermographic materials of COMPARATIVE EXAMPLES 1 to 4 and INVENTION EXAMPLES 1 to 22 in two important respects: they contain benzotriazole (S03) as a further stabilizer and they contain as binder POLY 01, a copolymer of vinyl aceto-acetal, vinyl butyral, vinyl alcohol and vinyl acetate instead of BL5HP, a polyvinyl butyral. Benzotriazole is widely used as a stabilizer in substantially light-insensitive thermographic materials and has excellent stabilizing properties except in respect of shelf-life stability with a strong increase in the b\* CIELAB value at density of 1.0.

10 [0085] The substantially light-insensitive thermographic materials of INVENTION EXAMPLES 23 to 34 all exhibit substantially higher shelf-life stability i.e. a lower increase in b\* CIELAB value at a density of 1.0, than the substantially light-insensitive thermographic material of COMPARATIVE EXAMPLE 5 in which no further stabilizer is present. Therefore, stabilizers according to formula (I) are surprisingly capable of at least ameliorating the poor shelf-life stability of thermographic materials with benzotriazole.

15 [0086] Furthermore, the substantially light-insensitive thermographic recording materials of INVENTION EXAMPLES 23 to 34 in which the thermosensitive elements contained a compound according to formula (I) and the binder used was POLY 01 exhibited a better image tone and image tone stability profile than the substantially light-insensitive thermographic materials of COMPARATIVE EXAMPLES 6 to 8 in which the thermosensitive elements contain one of compounds A01, A02 or A03 in the same molar concentration in respect to silver behenate: higher b\* values in prints with fresh film and very poor shelf-life stability in the presence of A01; higher b\* values in prints with fresh film and a strong increase in the b\* value for Dmin in light box experiments in the presence of A02; and higher a\* values in prints with fresh film and a very strong increase in the b\* value for Dmin in light box experiments in the presence of A03.

COMPARATIVE EXAMPLES 9 and 10 and INVENTION EXAMPLES 35 to 42

25 [0087] The substantially light-insensitive thermographic materials of COMPARATIVE EXAMPLES 9 and 10 and INVENTION EXAMPLES 35 to 42 was prepared as described for COMPARATIVE EXAMPLES 5 to 8 and INVENTION EXAMPLES 23 to 34 except as indicated in the thermosensitive element compositions given in Table 7 below.

Table 7:

Comparative example nr.	stabilizer		AgBeh coverage [g/m <sup>2</sup> ]	POLY 01 [g/ m <sup>2</sup> ]	R01 mol% vs AgB	R02 mol% vs AgB	T01 mol% vs AgB	T02 mol% vs AgB	S01 mol% vs AgB	S02 mol% vs AgB	S03 mol% vs AgB	VL [g /m <sup>2</sup> ]	Oil [g/ m <sup>2</sup> ]
	type	conc. mol% vs AgB											
9	-	-	3.30	11.88	50	45	3	15	26	6.0	5.0	0.175	0.035
10	-	-	3.37	12.14	50	45	3	15	26	6.0	-	0.179	0.036
Invention example nr													
35	MBIZ-3	5	3.35	12.04	50	45	3	15	26	6.0	-	0.177	0.035
36	MBIZ-3	4	3.35	12.04	50	45	3	15	26	6.0	5.0	0.177	0.035
37	MBIZ-3	2	3.37	12.14	50	45	3	15	26	6.0	5.0	0.179	0.036
38	MBIZ-7	2	3.35	12.04	50	45	3	15	26	6.0	5.0	0.177	0.035
39	MBIZ-10	5	3.30	11.88	50	45	3	15	26	6.0	-	0.175	0.035
40	MBIZ-10	2	3.27	11.76	50	45	3	15	26	6.0	5.0	0.173	0.035
41	MBIZ-11	5	3.24	11.66	50	45	3	15	26	6.0	-	0.172	0.034
42	MBIZ-11	2	3.32	11.95	50	45	3	15	26	6.0	5.0	0.176	0.035
43	MBIZ-13	5	3.50	12.61	50	45	3	15	26	6.0	-	0.186	0.037
44	MBIZ-13	4	3.37	12.14	50	45	3	15	26	6.0	5.0	0.179	0.036
45	MBIZ-13	2	3.42	12.33	50	45	3	15	26	6.0	5.0	0.182	0.037

**EP 1 598 207 A1**

**[0088]** Thermographic evaluation of the substantially light-insensitive thermographic recording materials of COMPARATIVE EXAMPLES 9 and 10 and INVENTION EXAMPLES 35 to 42 was carried out as described for the substantially light-insensitive thermographic recording materials of COMPARATIVE EXAMPLES 5 to 8 and INVENTION EXAMPLES 23 to 34.

5 **[0089]** The Dmax values, a\* and b\* CIELAB-values at densities of 1.0 and 2.0 together with the results of light box experiments and shelf-life experiments are given together with the results for COMPARATIVE EXAMPLE 5 and INVENTION EXAMPLES 25, 29, 32 and 33 in Table 8 below.

10

15

20

25

30

35

40

45

50

55

Table 8:

Comparative Example nr.	stabilizer type		Dmax	CIELAB-values of prints with fresh film				Δb* CIELAB-value of		
				D = 1.0		D = 2.0		prints after 3d/30°C/85% RH light-box		fresh print after 4d/45°C/70%RH storage
				a*	b*	a*	b*	D =1.0	Dmin	D = 1.0
9	-	S03	3.61	-1.46	-7.73	+2.61	-5.13	+2.96	+3.49	<b>+1.13</b>
10	-	-	3.71	-1.79	-5.59	+2.46	-3.22	+8.66	+6.29	<b>+0.61</b>
Invention Example nr										
35	MBIZ-3	-	3.44	-1.83	-6.66	+2.25	-4.97	+3.60	+4.52	+0.48
25	MBIZ-3	S03	3.32	-2.00	-6.42	+1.56	-5.69	+1.86	+3.51	+0.36
36	MBIZ-3	S03	3.33	-1.84	-7.94	+1.68	-6.13	+1.16	+2.13	+0.86
37	MBIZ-3	S03	3.38	-1.21	-7.24	+2.57	-5.42	+1.65	+3.25	+0.35
COMP 9	-	S03	3.61	-1.46	-7.73	+2.61	-5.13	+2.96	+3.49	<b>+1.13</b>
COMP 5	-	S03	3.63	-1.27	-7.60	+2.12	-5.97	+2.42	+3.66	<b>+1.43</b>
29	MBIZ-7	S03	3.40	-1.22	-7.25	+2.13	-6.01	+0.75	+2.53	+0.25

Table 8: (continued)

Comparative Example nr.	stabilizer type		Dmax	CIELAB-values of prints with fresh film				Δb* CIELAB-value of		
Invention Example nr										
38 COMP 9	MBIZ-7 -	S03 S03	3.46 3.61	-1.49 -1.46	-8.50 -7.73	+1.91 +2.61	-6.12 -5.13	+1.48 +2.96	+2.52 +3.49	+0.98 <b>+1.13</b>
COMP 5	-	S03	3.63	-1.27	-7.60	+2.12	-5.97	+2.42	+3.66	<b>+1.43</b>
39	MBIZ-10	-	3.40	-1.32	-7.76	+2.69	-5.54	+2.70	+3.95	+1.32
32	MBIZ-10	S03	3.40	-0.95	-6.95	+2.56	-5.51	+2.15	+3.72	+0.36
40	MBIZ-10	S03	3.34	-1.55	-8.34	+2.09	-6.11	+2.25	+2.82	+0.80
COMP 9	-	S03	3.61	-1.46	-7.73	+2.61	-5.13	+2.96	+3.49	<b>+1.13</b>
COMP 5	-	S03	3.63	-1.27	-7.60	+2.12	-5.97	+2.42	+3.66	<b>+1.43</b>
41	MBIZ-11	-	3.32	-1.47	-8.03	+2.83	-5.54	+5.52	+3.78	+1.10
33	MBIZ-11	S03	3.37	-0.67	-7.25	+2.17	-3.49	+3.39	+3.57	+0.40
42	MBIZ-11	S03	3.40	-1.63	-7.90	+2.32	-5.23	+2.07	+2.81	+0.89
COMP 9	-	S03	3.61	-1.46	-7.73	+2.61	-5.13	+2.96	+3.49	<b>+1.13</b>
COMP 5	-	S03	3.63	-1.27	-7.60	+2.12	-5.97	+2.42	+3.66	<b>+1.43</b>
43	MBIZ-13	-	3.30	-1.60	-8.90	+2.10	-6.55	+1.87	+2.55	+0.39
44	MBIZ-13	S03	3.13	-1.29	-9.19	+1.80	-6.68	+1.20	+2.39	+0.26
45	MBIZ-13	S03	3.19	-1.16	-8.99	+1.97	-6.84	+1.23	+2.59	+0.21
COMP 9	-	S03	3.61	-1.46	-7.73	+2.61	-5.13	+2.96	+3.49	<b>+1.13</b>
COMP 5	-	S03	3.63	-1.27	-7.60	+2.12	-5.97	+2.42	+3.66	<b>+1.43</b>

[0090] The results in Table 8 cast further light upon the surprising ameliorating effect of the stabilizers according to formula (I) upon the effect of benzotriazole stabilization on the shelf-life stability of substantially light-insensitive thermographic recording materials. The results for COMPARATIVE EXAMPLE 10 show that the base composition without benzotriazole and stabilizers according to formula (I) exhibits a fairly good shelf-life stability as can be seen from the  $\Delta b^*$  CIELAB value at a density of 1.0 of +0.61. The presence of 5 mol% benzotriazole in respect of silver behenate clearly worsens the shelf-life stability as can be seen from the increase in  $\Delta b^*$  CIELAB value at a density of 1.0 from +0.61 to +1.13 or +1.43.


[0091] The presence of 5 mol% MBIZ-3 or MBIZ-13 with respect to silver behenate slightly improves the shelf-life stability as can be seen from the slight decrease in  $\Delta b^*$  CIELAB value at a density of 1.0 from +0.61 to +0.48 and +0.39 respectively, but the presence of 5 mol% MBIZ-10 or MBIZ-11 with respect to silver behenate worsens the shelf-life stability as can be seen from the increase in  $\Delta b^*$  CIELAB at a density of 1.0 from +0.61 to +1.32 and +1.10 respectively.

[0092] However, the results in Table 8 show that when benzotriazole and the stabilizers according to formula (I) are simultaneously incorporated into the base composition a synergetic improvement in shelf-life stability occurred in the case of MBIZ-3, MBIZ-7, MBIZ-10, MBIZ-11 and MBIZ-13 i.e. the shelf-life stability obtained is better than that obtained with either benzotriazole or any one of MBIZ-3, MBIZ-7, MBIZ-10, MBIZ-11 and MBIZ-13 separately. This is so consistent that the results with INVENTION EXAMPLE 36 can be disregarded as being anomalous. The optimum mix of benzotriazole and the stabilizer according to formula (I) appears to depend upon the choice of stabilizer according to formula (I), being 5 mol% benzotriazole/2 mol% MBIZ-3 in the case of MBIZ-3, being 5 mol% benzotriazole/5 mol% stabilizer according to formula (I) in the case of MBIZ-7, MBIZ-10 and MBIZ-11 and being 5 mol% benzotriazole/2-4 mol% MBIZ-13 in the case of MBIZ-13.

[0093] The present invention may include any feature or combination of features disclosed herein either implicitly or explicitly or any generalisation thereof irrespective of whether it relates to the presently claimed invention. In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention.

## Claims

1. A substantially light-insensitive black and white monosheet thermographic recording material comprising a support and a thermosensitive element, said thermosensitive element containing a substantially light-insensitive organic silver salt, an organic reducing agent therefor in thermal working relationship therewith, at least one binder and at least one stabilizer represented by formula (I):




(I)

wherein R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup> and R<sup>4</sup> are independently selected from the group consisting of a hydrogen atom, halogen atoms and aliphatic, alkoxy, nitro, acyl, sulfonyl, nitrile, alkaryl, aryl, amino, thioalkyl, aldehyde, urea, -O-(C=O)-alkyl, -O-(C=O)-aryl, -O-(C=O)-O-alkyl, -O-(C=O)-O-aryl, -NH-(C=O)-alkyl, -NH-(C=O)-aryl, -(C=O)-NH-alkyl, -(C=O)-NH-aryl, -NH-(SO<sub>2</sub>)-alkyl, -NH-(SO<sub>2</sub>)-aryl, -(SO<sub>2</sub>)-NH-alkyl, -(SO<sub>2</sub>)-NH-aryl groups; X is represented by -A (-M)<sub>n</sub> or is selected from the group consisting of substituted aliphatic groups, unsubstituted aliphatic groups, substituted cycloaliphatic groups, unsubstituted cycloaliphatic groups, substituted aromatic groups and unsubstituted aromatic groups where in each of said groups one or more of the chain or ring carbon atoms may be substituted by one of more atoms selected from the group consisting of S, O, Si, N and P atoms; n is 2, 3 or 4; A is selected from the group consisting of substituted aliphatic groups, unsubstituted aliphatic groups, substituted cycloaliphatic groups, unsubstituted cycloaliphatic groups, substituted aromatic groups and unsubstituted aromatic groups where in each of said groups one or more of the chain or ring carbon atoms may be substituted by one of more atoms selected from the group consisting of S, O, Si, N and P atoms; each (-M) is independently a substituted or unsubstituted group selected from the group consisting of -(2-S-imidazole) groups and -(2-S-imidazole) groups annelated with an aromatic ring system, the optional substituents for -M being selected from the group consisting of halogen

atoms and aliphatic, alkoxy, nitro, acyl, sulfonyl, nitrile, alkaryl and aryl groups.


2. Substantially light-insensitive black and white monosheet thermographic recording material according to claim 1, A is selected from the group consisting of an optionally substituted alkyl groups, optionally substituted alkenyl groups, optionally substituted alkynyl groups, optionally substituted alkaryl groups, optionally substituted alkyl-heterocyclic groups, optionally substituted alkyl-heteroaromatic groups, optionally substituted alkyl groups in which at least one of the non-terminal main chain carbon atoms is substituted with an oxygen or a sulfur atom, optionally substituted aryl groups, optionally substituted alkyl-aryl-alkyl groups, optionally substituted alkyl-heteroaryl-alkyl groups, optionally substituted alkyl-COO-alkyl-OOC-alkyl groups, optionally substituted alkyl-O-COO-alkyl groups, optionally substituted alkyl-CONH-alkyl groups, and optionally substituted alkyl-COO-aryl-OOC-alkyl groups.
3. Substantially light-insensitive black and white monosheet thermographic recording material according to claim 1 or 2, wherein in said at least one stabilizer according to formula (I) X is -A-M and -M is a -(2-S-imidazole) group or a -(2-S-imidazole) group annelated with an aromatic ring system.
4. Substantially light-insensitive black and white monosheet thermographic recording material according to any of the preceding claims, wherein in said at least one stabilizer according to formula (I) X is -A-(CH<sub>2</sub>)<sub>m</sub>-M, wherein m is 2 to 20 and -M is a -(2-S-imidazole) group or a -(2-S-imidazole) group annelated with an aromatic ring system.
5. Substantially light-insensitive black and white monosheet thermographic recording material according to any of the preceding claims, wherein in said at least one stabilizer according to formula (I) X is -A-(CH<sub>2</sub>)<sub>m</sub>-M, wherein m is 4 to 9 and -M is a -(2-S-imidazole) group or a -(2-S-imidazole) group annelated with an aromatic ring system.
6. Substantially light-insensitive black and white monosheet thermographic recording material according to any of the preceding claims, wherein said at least one stabilizer is selected from the group consisting of:

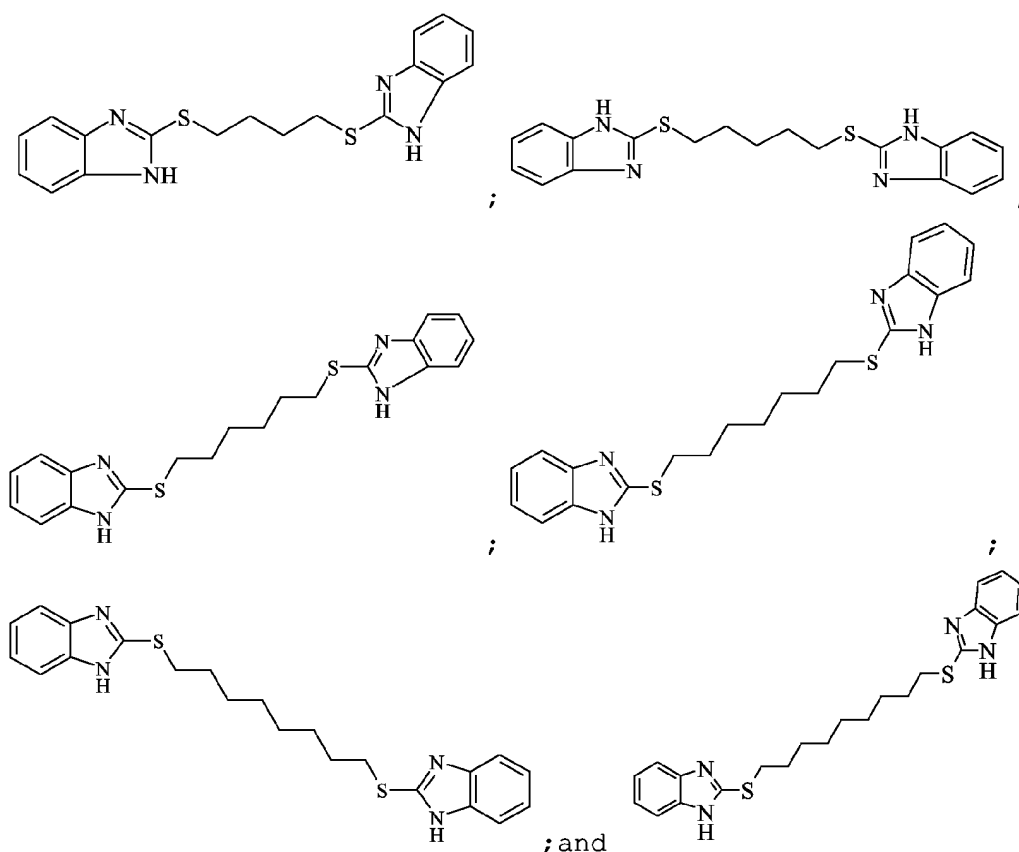

7. Substantially light-insensitive black and white monosheet thermographic recording material according to claim 1, wherein said at least one stabilizer is selected from the group consisting of:



5  
10  
15  
20  
25  
30  
35  
40  
45  
50  
55

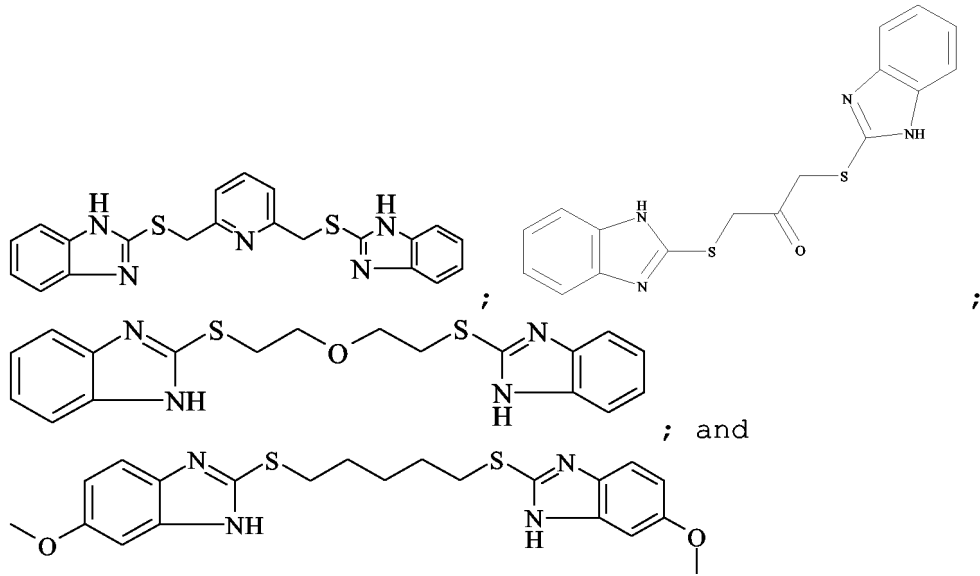

8. Substantially light-insensitive black and white monosheet thermographic recording material according to any of the preceding claims, wherein said at least one binder comprises at least one first polymer consisting of vinyl acetoacetal monomer units and monomer units selected from the group consisting of vinyl butyral, vinyl alcohol, vinyl acetate and itaconic acid monomer units, wherein the weight ratio of said at least one binder to said light-insensitive silver salt(s) of a carboxylic acid in said thermosensitive element is greater than 1.5; and said at least one binder optionally contains less than 40% by weight of a second polymer consisting of vinyl butyral monomer units and optionally vinyl alcohol and/or vinyl acetate monomer units.
9. Substantially light-insensitive black and white monosheet thermographic recording material according to any of the preceding claims, wherein said thermosensitive element further contains an optionally substituted benzotriazole.



European Patent  
Office

EUROPEAN SEARCH REPORT

Application Number  
EP 05 10 2620

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 901 040 A (AGFA-GEVAERT) 10 March 1999 (1999-03-10) * page 5; example SXI *	1	B41M5/30 G03C1/498
A	* page 13, line 24 - line 29; claims 1-3 *	2-9	
Y	EP 0 897 130 A (FUJI) 17 February 1999 (1999-02-17) * abstract * * page 58; example C1 * * claims 1,3 *	1,8,9	
Y	EP 0 353 724 A (FUJI) 7 February 1990 (1990-02-07) * page 3, line 4 - line 6 * * page 13; example I25 * * page 28, line 2 - line 5 * * page 28, line 42 - line 52 * * page 29, line 15 - line 26 * * page 32, line 37 *	1,9	
Y	JP 62 161144 A (FUJI) 17 July 1987 (1987-07-17) * page 5; examples 1-9 * * page 6; example 12 * * page 19, right-hand column, line 18 - line 20 * * page 19, left-hand column, line 21 - line 36 * * page 24; table 1 *	1,9	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7) G03C
Place of search The Hague		Date of completion of the search 26 April 2005	Examiner Magrizos, S
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

1  
EPO FORM 1503 03 82 (P/04C01)



DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	US 5 084 376 A (SUDA ET AL.) 28 January 1992 (1992-01-28) * column 2, line 9 - line 14 * * column 13; examples IV1-IV3 * * column 15; examples IV7-IV15,IV17 * * column 17; examples IV19,IV20,IV27-IV31 * * column 22, line 35 - column 23, line 34 * * column 32; table 1 * * column 36, line 46 - column 37, line 47 *	1,9	
Y	DE 25 58 951 A (CANON) 8 July 1976 (1976-07-08) * page 12, line 4 * * page 13, line 1 - line 2 * * page 13, line 5 * * page 38; table * * claim 1 *	1	
Y	US 4 728 600 A (HARA ET AL.) 1 March 1988 (1988-03-01) * column 2, line 16 - line 21 * * column 6; example 11 * * claim 1 *	1	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Y	EP 1 143 292 A (KONICA) 10 October 2001 (2001-10-10) * page 16; table 1 * * page 18; table 3 *	8	
Y	EP 1 241 520 A (KONICA) 18 September 2002 (2002-09-18) * page 24; table 1 *	8	
	----- -/--		
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 26 April 2005	Examiner Magrizos, S
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03/82 (P04/C01)



DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	EP 1 278 101 A (KONICA) 22 January 2003 (2003-01-22) * page 45, line 39 - page 46, line 6 *	8	
Y	JP 2001 013618 A (KONICA) 19 January 2001 (2001-01-19) * page 17; table 1 * * claims 1-3 *	8	
P,X	EP 1 484 641 A (AGFA-GEVAERT) 8 December 2004 (2004-12-08) * page 17, line 58 - page 18, line 2 * * page 19, line 42 - line 46 * * page 21, line 7; claim 1 *	1,8,9	
P,X	EP 1 484 642 A (AGFA-GEVAERT) 8 December 2004 (2004-12-08) * page 16, line 25 - line 27 * * page 18, line 22 - line 26 * * page 19, line 45; claim 1 *	1,8,9	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Place of search	Date of completion of the search	Examiner	
The Hague	26 April 2005	Magrizos, S	
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

1  
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 05 10 2620

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-04-2005

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0901040	A	10-03-1999	EP 0901040 A1	10-03-1999
			DE 69804556 D1	08-05-2002
			DE 69804556 T2	21-11-2002
			US 6348308 B1	19-02-2002
-----				
EP 0897130	A	17-02-1999	JP 11119372 A	30-04-1999
			EP 0897130 A1	17-02-1999
			JP 2003075959 A	12-03-2003
			JP 2004046183 A	12-02-2004
			US 6586170 B1	01-07-2003
			US 2004002027 A1	01-01-2004
-----				
EP 0353724	A	07-02-1990	JP 2044336 A	14-02-1990
			JP 2089461 C	02-09-1996
			JP 7119951 B	20-12-1995
			DE 68923410 D1	17-08-1995
			DE 68923410 T2	14-12-1995
			EP 0353724 A1	07-02-1990
			US 5082763 A	21-01-1992
-----				
JP 62161144	A	17-07-1987	JP 1890694 C	07-12-1994
			JP 6019568 B	16-03-1994
-----				
US 5084376	A	28-01-1992	JP 3067256 A	22-03-1991
-----				
DE 2558951	A	08-07-1976	JP 51078319 A	07-07-1976
			JP 54042617 B	15-12-1979
			JP 980783 C	18-12-1979
			JP 51081124 A	15-07-1976
			JP 54015490 B	15-06-1979
			DE 2558951 A1	08-07-1976
			US 4245033 A	13-01-1981
-----				
US 4728600	A	01-03-1988	JP 61267754 A	27-11-1986
-----				
EP 1143292	A	10-10-2001	JP 2001290241 A	19-10-2001
			EP 1143292 A2	10-10-2001
			US 2001038980 A1	08-11-2001
-----				
EP 1241520	A	18-09-2002	EP 1241520 A2	18-09-2002
			JP 2002341483 A	27-11-2002
			US 2003039927 A1	27-02-2003
-----				
EP 1278101	A	22-01-2003	JP 2003075953 A	12-03-2003
			JP 2003302723 A	24-10-2003
			CN 1397838 A	19-02-2003

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 05 10 2620

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-04-2005

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 1278101	A	EP 1278101 A2	22-01-2003
		US 2003194658 A1	16-10-2003
-----			
JP 2001013618	A	19-01-2001	NONE
-----			
EP 1484641	A	08-12-2004	EP 1484641 A1
			08-12-2004
			EP 1484642 A1
			08-12-2004
			JP 2004358970 A
			24-12-2004
			JP 2004358972 A
			24-12-2004
			US 2005003298 A1
			06-01-2005
			US 2005003315 A1
			06-01-2005
-----			
EP 1484642	A	08-12-2004	EP 1484642 A1
			08-12-2004
			EP 1484641 A1
			08-12-2004
			JP 2004358970 A
			24-12-2004
			JP 2004358972 A
			24-12-2004
			US 2005003298 A1
			06-01-2005
			US 2005003315 A1
			06-01-2005
-----			