

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 599 069 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
23.11.2005 Bulletin 2005/47

(51) Int Cl. 7: H04R 25/00

(21) Application number: 05015735.3

(22) Date of filing: 20.07.2005

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR
Designated Extension States:
AL BA HR MK YU

(71) Applicant: PHONAK AG
8712 Stäfa (CH)

(72) Inventors:
• Vonlanthen, Andi
5453 Remetschwil (CH)
• Niccolai, Richard
8610 Uster (CH)
• Züger, Urs
8627 Grüningen (CH)


(74) Representative: Troesch Scheidegger Werner AG
Schwäntenmos 14
8126 Zumikon (CH)

(54) Hearing device with battery door

(57) The hearing device comprises a housing (2) with electronic components and a battery compartment (6) with an opening (5) in the housing (2). The battery compartment (6) comprises means for removably engaging a battery door (3). The hearing device further

comprises a set of battery doors (3;8), each comprising mechanical means for detachably receiving a battery, the shells of each battery door of the set of battery doors (3;8) having different shapes and sizes, each adapted to the size of the assigned specific battery type.

Fig. 2

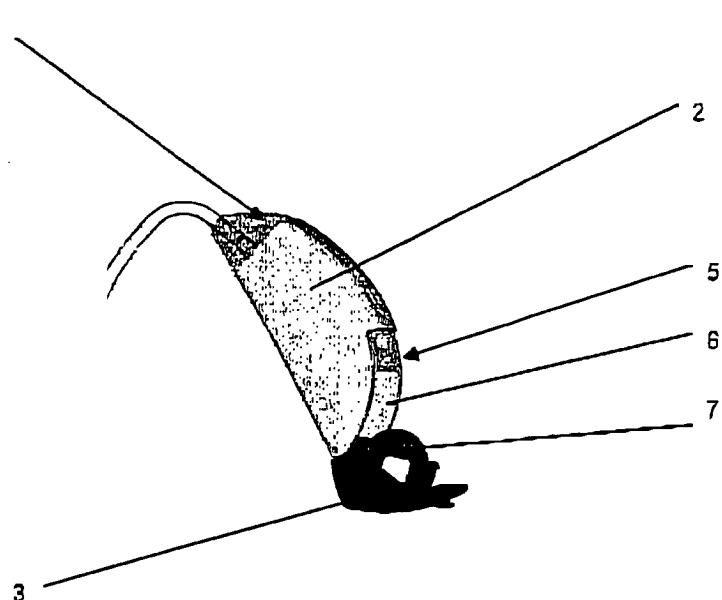

Description

[0001] The present invention relates to a hearing device according the generic portion of claim 1.

[0002] Hearing devices such as in-the-ear hearing aids, behind-the-ear hearing aids, hearing instruments or miniaturized active earphones usually have a battery compartment for carrying one or more batteries for supplying the electronic or electric components of the device with electricity. As the battery will have to be removed or exchanged from time to time, this battery compartment is closed by a battery door to be opened on demand and to firmly close the battery compartment for regular use of the hearing device.

[0003] The electronic or electric components of the hearing device are usually designed to be supplied by a specific battery type and thus the battery compartment, especially the geometric dimensions of such a compartment, are defined by the geometric dimensions of the specific battery type.

[0004] In US 4,890,330 a removeably attached battery compartment is shown. The standard battery compartment, comprising the battery, may be exchanged by an alternative battery compartment comprising the battery and additional audio connecting means. This alternative battery compartment is geometrically bigger than the standard battery compartment, thus providing space for incorporating additional audio connecting means beside the unique battery type.

[0005] The capacity of a battery increases with its geometrical volume. Thus the bigger the geometrical volume of the battery is, the longer its lifetime and thus the time period between the changing of the batteries will increase as well. Such long-life batteries require a greater amount of space in the battery compartment which results in an increase of the overall size of the hearing device. It depends on the individual demands if the need for a small housing or the need for a long battery lifetime prevails.

[0006] It is an object of the present invention to provide a hearing device being easily adaptable to individual needs of end users with respect to the battery lifetime.

[0007] This object will be solved by the characterizing features of a hearing device according to claim 1. Further embodiments of the present invention result from the features of the claims 2 to 4.

[0008] The present invention provides a hearing device comprising a housing with electronic components and a battery compartment with an opening in the housing, the battery compartment comprising means for removeably engaging a battery door, a set of battery doors, each comprising mechanical means for detachably receiving a battery, the shells of each battery door of the set of battery doors having different shapes and sizes, each adapted to the size of the assigned specific battery type.

[0009] According to the individual needs of the user

of the hearing device the battery door for the battery matching those individual needs may be chosen from the set of battery doors and engaged with the housing of the hearing device. By choosing a small battery type

5 with a reduced lifetime, the respective battery door will have a reduced size as well, and the overall size of the hearing device will be reduced. By choosing a bigger battery type, the lifetime of the battery will be higher and thus the replacement cycle will be longer. By using the appropriate battery door out of the set of battery doors, the overall size of the hearing device will increase.

[0010] By providing the set of battery doors with different sizes, the user of the hearing device may decide according to the circumstances to change the battery

15 door for either having a smaller overall size of the hearing device or to benefit of a longer lifetime of the battery as well as easier handling when replacing the battery.

[0011] In one embodiment, the hearing device further

20 comprises electrical means for electrically contacting the battery and contact elements to establish a connection to the electronic components of the housing. It is thus possible to already have connected the electronic components with the battery even if the battery door is open.

[0012] Alternatively, the contact elements may be ar-

5 arranged within the battery compartment itself to connect the electronic components with the battery only in the closed position of the battery door.

[0013] In another embodiment, the hearing device

30 comprises a pin, bar or screw located in the opening of the battery compartment of the housing for receiving one of said battery doors. The battery door may be connected to this pin, bar or screw and be pivoted around this pin, bar or screw for opening or closing the battery

35 compartment.

[0014] In another embodiment, the battery doors

40 comprise resilient snap-in tongues to detachably connect a battery door with the pin, bar or screw. A replacement of the battery doors may therefore easily be per-

45 formed even by the user of the hearing device, without the need of any special tool.

[0015] For the purpose of facilitating and understand-

50 ing of the invention, there is illustrated in the accompa-

55 nying drawings a preferred embodiment thereof to be

considered in connection with the following description.

Thus the invention may be readily understood and ap-

preciated.

Fig. 1 is a side view of a hearing device according

50 to the present invention with closed battery door;

Fig. 2 is the side view of the hearing device of figure

55 1 with opened battery door;

Fig. 3 is a side view of the same hearing device as

55 shown in figure 1 equipped with a further battery door of the set of battery doors according to the present invention;

Fig. 4 is the side view of the hearing device of figure 3 with opened battery door.

[0016] Referring to figure 1, a hearing device 1 serving as a behind-the-ear hearing aid with a housing 2 and a battery door 3 in its closed position is shown. At one end of the housing 2, a hook or tube 4 is provided for transmitting the acoustical signal emitted from the loudspeaker (often also referred to as "receiver") of the hearing device 1 to the ear canal of the user of the hearing device 1.

[0017] The electronic components of the hearing device 1 are conventionally arranged inside of the housing 2.

[0018] In figure 2, the battery door 3 is shown in its opened position, showing the opening 5 of the battery compartment 6 of the housing 2. The battery door 3 comprises a support 7 for receiving a battery (not shown), i.e. a button-type battery commonly used in miniaturized electrical or electronic devices.

[0019] The size of the battery door 3 is adapted to just receive a battery of a certain geometrical dimension. As the diameter or dimension of the battery assigned to this battery door 3 is bigger than the space available within the battery compartment 6 of the housing 2, the shell of the battery door 3 is formed as a box to receive a part of the battery within this box volume. The overall size of the hearing device 1 thus exceeds the shape of the housing 2, thus increasing the overall size of the hearing device 1 by providing a high lifetime of the battery. The replacement interval for the battery therefore increases with respect of the use of a smaller battery.

[0020] In figure 3, the hearing device 1 is again shown with a further battery door 8 from the set of battery doors assigned to the hearing device 1 or the housing 2 respectively. This battery door 8 fits the shape of the housing 2 of the hearing device in its closed position, thus does not influence the overall size of the hearing aid 1.

[0021] In figure 4 the battery door 3 is shown in its opened position. The support 7' for another type of battery, e.g. a small button-type battery, is formed as an open tube to receive and hold in place the respective battery. As this type of small battery may be entered entirely into the battery compartment 6, the shell of the battery door 8 is just formed as a curved cap according to the outer shape of the housing 2 of the hearing device 1.

[0022] The battery doors 3 and 8 are pivotably attached to the housing 2 over an axis or pin 9 arranged at one end of the opening 5 of the battery compartment 6. The battery doors 3 or 8 may be detachably snapped on to this pin 9 for an easy exchange of the battery door 3 or 8.

5 with an opening (5) in the housing (2), the battery compartment (6) comprising means for removably engaging a battery door (3), characterized by a set of battery doors (3;8), each comprising mechanical means for detachably receiving a battery, the shells of each battery door (3;8) of the set of battery doors (3;8) having different shapes and sizes, each adapted to the size of the assigned specific battery type.

10 2. Hearing device according to claim 1, comprising electrical means for electrically contacting the battery and contact elements to establish a connection to the electronic components of the housing.

15 3. Hearing device according to claim 1 or 2, comprising a pin, bar or screw (9) located in the opening (5) of the battery compartment (6) of the housing (2) for receiving one of said battery doors (3;8).

20 4. Hearing device according to one of claims 1 to 3, whereby the battery doors (3;8) comprise resilient snap-in tongues to detachably connect a battery door (3;8) with the pin, bar or screw (9).

25

30

35

40

45

50

55

Claims

1. Hearing device comprising a housing (2) with electronic components and a battery compartment (6)

Fig. 1

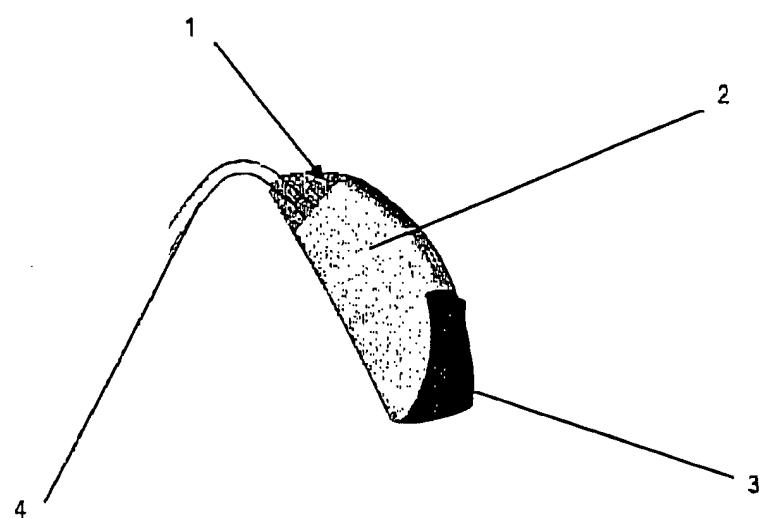


Fig. 2

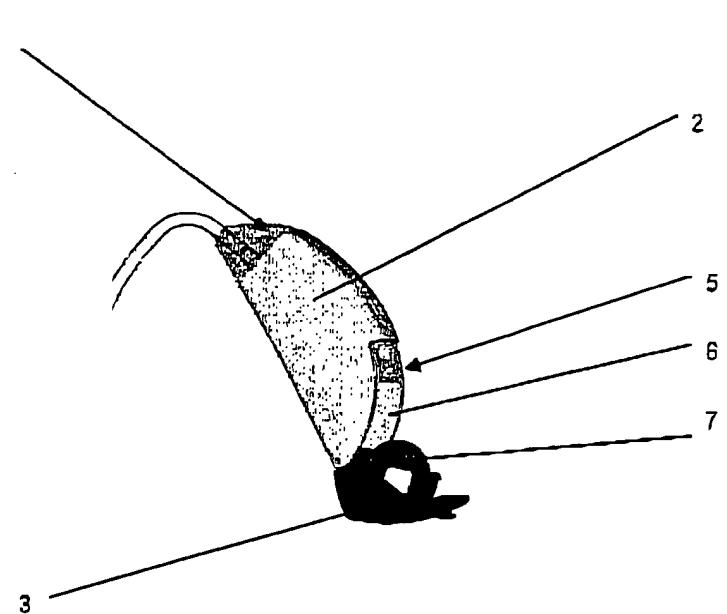


Fig. 3


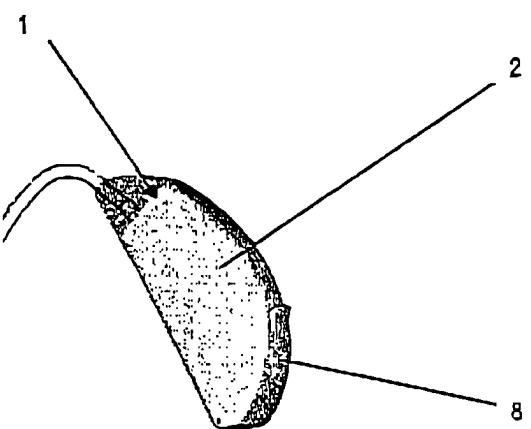


Fig. 4



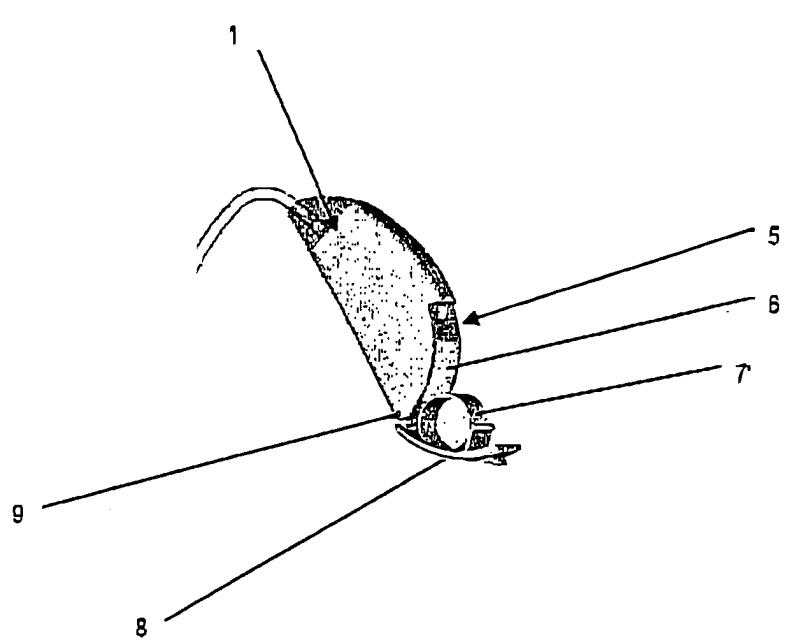

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int.Cl.7)						
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim							
D, Y	US 4 890 330 A (MEYER ET AL) 26 December 1989 (1989-12-26) * the whole document * -----	1-4	H04R25/00						
Y	DE 37 23 809 A1 (ROBERT BOSCH GMBH) 26 January 1989 (1989-01-26) * abstract * * column 2, line 43 - column 3, line 10; figures 1,2 * -----	1-4							
A	US 6 119 864 A (KESSLER ET AL) 19 September 2000 (2000-09-19) * abstract * * column 5, line 27 - column 6, line 30; figures 6A,6B,6C,6D,7B * -----	1,2							
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)						
			H04R H04M H01M						
<p>2 The present search report has been drawn up for all claims</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%;">Place of search</td> <td style="width: 33%;">Date of completion of the search</td> <td style="width: 34%;">Examiner</td> </tr> <tr> <td>Munich</td> <td>20 September 2005</td> <td>Gerken, S</td> </tr> </table>				Place of search	Date of completion of the search	Examiner	Munich	20 September 2005	Gerken, S
Place of search	Date of completion of the search	Examiner							
Munich	20 September 2005	Gerken, S							
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document							
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document									

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 05 01 5735

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on. The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-09-2005

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 4890330	A	26-12-1989	CH EP	673919 A5 0303143 A2		12-04-1990 15-02-1989
DE 3723809	A1	26-01-1989		NONE		
US 6119864	A	19-09-2000		NONE		