



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
30.11.2005 Bulletin 2005/48

(51) Int Cl.7: **B65D 63/10**

(21) Application number: **04022225.9**

(22) Date of filing: **17.09.2004**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR
 Designated Extension States:
AL HR LT LV MK

(72) Inventor: **Okamoto, Isao**
Moriguchi-shi, Osaka 570-0002 (JP)

(74) Representative: **Hofer, Dorothea et al**
Prüfer & Partner GbR
Patentanwälte
Harthäuser Strasse 25 d
81545 München (DE)

(30) Priority: **25.05.2004 JP 2004154157**


(71) Applicant: **Nichido Kogyo Kabushiki Kaisha**
Moriguchi-shi, Osaka 570-0002 (JP)

(54) **Binding band**

(57) A binding band comprises a band part (11), a pendant hook part (17) provided at one end of the band part (11), and an enclosed-wall part (20) provided at the other end of the band part (11) and having a passage

(35) through which the band part (11) is vertically passed. The enclosed-wall part (20) has a slit (33) through which the band part (11) is inserted into the passage (35) from the side.

FIG. 1

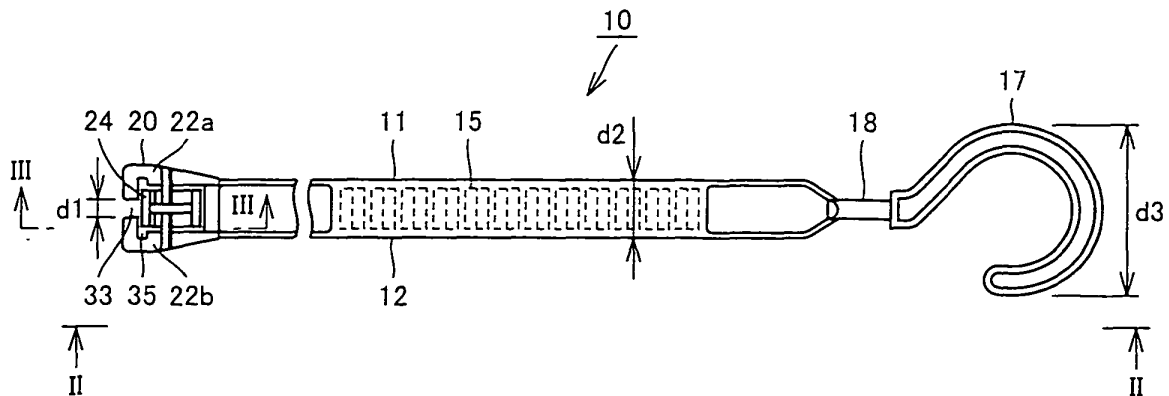

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates to a binding band and more particularly, it relates to a binding band which can be hooked on a wall or a column.

Description of the Background Art

[0002] The conventional binding band is disclosed in Japanese Unexamined Patent Publication No. 2003-237823, for example.

[0003] The binding band comprises a band part having a plurality of long and thin teeth continuously provided in the longitudinal direction, and a framed buckle having a hole at one end of the band part, to which the band part is inserted and a locking tooth which engages with the tooth, at a part of the hole.

[0004] The above document discloses a binding band in which a band part does not easily come off but can be pulled out by a simple operation.

[0005] The conventional binding band was constituted as described above. Although the band part of the binding band was devised in many ways, treatment after binding was not considered.

SUMMARY OF THE INVENTION

[0006] The present invention was made in view of the above problems and it is an object of the present invention to provide a binding band in which treatment after an object is bound by the binding band is considered.

[0007] A binding band according to the present invention comprises a band part, a pendant hook part provided at one end of the band part and an enclosed-wall part provided at the other end of the band part and having a passage through which the band part is vertically passed, in which the enclosed-wall part has a slit through which the band part is inserted into the passage from the side.

[0008] The band part can be inserted in the enclosed-wall part through the slit and the binding band can be hooked at any external position with a pendant hook part provided at one end of the band part.

[0009] As a result, there can be provided the binding band in which treatment after an object is bound with the binding band is considered.

[0010] Preferably, the slit has a first opening dimension, the band part comprises a neck part having a width dimension smaller than the first opening dimension and a band body having a third width dimension larger than the first opening dimension, and the passage has a width dimension larger than the third width dimension.

[0011] Further preferably, the pendant hook part has a fourth width dimension larger than the third width di-

mension.

[0012] Still further preferably, a plurality of continuous teeth are provided in the band body and the enclosed-wall part comprises a locking part which engages with the tooth.

[0013] Still further preferably, the neck part is provided at one end of the band part and between the band body and the pendant hook part.

[0014] Besides, the pendant hook part may be rotated with respect to the band part or may be detachable with respect to the band part.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015]

Fig. 1 is a plan view showing a binding band according to the present invention;

Fig. 2 is a side view showing the binding band according to the present invention;

Fig. 3 is a view showing a detail of an enclosed-wall part;

Fig. 4 is a view showing a state in which the binding band is used;

Fig. 5 is a view showing a procedure for passing a band part through the enclosed-wall part;

Fig. 6 is a view showing a procedure for passing the band part through the enclosed-wall part;

Fig. 7 is a view showing another embodiment of a pendant hook part;

Fig. 8 is a view showing another embodiment in which the pendant hook part engages with a neck part; and

Fig. 9 is a view taken from a part shown by arrows IX-IX in Fig. 8.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0016] Hereinafter, an embodiment of the present invention is described with reference to the drawings. Fig. 1 is a plan view showing a binding band according to one embodiment of the present invention, Fig. 2 is a sectional view taken from a part shown by arrows II-II in Fig. 1, Fig. 3 is a sectional view taken from a part shown by arrows III-III in Fig. 1. In addition, a part (shown by A) is enlarged so as to be easily understood in Fig. 2.

[0017] Referring to Figs. 1 to 3, a binding band 10 comprises a band part 11, an enclosed-wall part 20 provided at one end of the band part 11, and a hook part 17 provided at the other end of the band part 11. The band part 11 comprises a band body 12 and a neck part 18 provided on the side of the hook part 17 of the band part 11. The neck part 18 has a cylindrical shape and the band part 11 has a flat shape.

[0018] The band part 11 has a predetermined width d2 and a plurality of teeth 15 continuously provided in the longitudinal direction in the flat band body 12 as

shown in Fig. 1. Referring to the part shown by A in Fig. 2, the tooth 15 has a vertical surface 15a perpendicular to the surface of the band body 12 and a slanted surface 15b which is gradually decreased in thickness toward the neck part 18.

[0019] The enclosed-wall part 20 has a passage 35 inside, through which the band part 11 is passed. A thickness dimension of the passage 35 is almost the same as that of the band part 11 or slightly larger than that. A slit 33 having a width dimension d1 smaller than the width d2 of the band part 11 is formed at a tip end of the passage 35 in the enclosed-wall part 20. In order to form the passage 35 and the slit 33, the enclosed-wall part 20 comprises a pair of portal wall parts 22a and 22b which are oppositely provided at an interval. A space is provided between the pair of wall parts 22a and 22b and a locking part 24 is provided at the space.

[0020] The locking part 24 is elastically supported on the pair of wall parts 22a and 22b by a support part 31 in a state in which a space part is opened around. In addition, the locking part 24 is arranged so as to intersect with the passage 35.

[0021] Here, the width d1 of the slit 33 is larger than that of the neck part 18. Therefore, the neck part 18 and the subsequent band body 12 of the binding band 10 are passed through the passage 35 of the enclosed-wall part 20 as will be described below with reference to Figs. 4 to 6.

[0022] The locking part 24 has a locking tooth 26 which abuts on the vertical surface 15a of the tooth 15 provided in the band part 11. A rib 27 (refer to Fig. 3) is provided at the locking part 24 so as to retain the locking tooth 26 at a predetermined position with respect to the support part 31.

[0023] As described above, the tooth 15 provided in the band body 12 has the slanted surface 15b which is gradually increased in thickness from the neck part 18 and the vertical surface 15a succeeding to the slanted surface. When the band body 12 is passed through the passage 35, since it engages with the locking part 24 in the increasing order of thickness, an object can be easily bound by pulling the pendant hook 17 which was passed through the passage 35. In addition, once the object is bound and the tooth 15 engages with the locking tooth 26, it is difficult to release the engagement in the reverse direction.

[0024] Next, a description is made of how to use the binding band. Fig. 4 is a view showing a state in which the binding band 10 binds the object and the locking tooth 26 of the locking part 24 engages with the tooth 15 of the band part 11. As shown by an arrow in Fig. 4, the hook part 17 and the neck part 18 are brought close to the enclosed-wall part 20, and the neck part 18 is passed through the slit 33 and then the band body 12 is passed through the passage 35.

[0025] A concrete inserting method is described with reference to Figs. 5 and 6. Fig. 5 is a view showing a state in which the neck part 18 of the binding band 10

is brought close to the slit 33 and Fig. 6 is a view showing a state in which the neck part 18 of the binding band 10 is passed through the slit 33.

[0026] Referring to Figs. 5 and 6, the neck part 18 of the binding band 10 is put in the slit 33 of the enclosed-wall part 20 and then the band part 11 is put through the passage 35. Then, the pendant hook 17 is pulled. As a result, as shown in Fig. 4, the band part 11 is integrated with the enclosed-wall part 20. The object bound by the band part 11 is not shown.

[0027] Referring to Fig. 4, since the binding band 10 has the pendant hook part 17, the pendant hook part 17 can be hooked on any projection after the object is bound.

[0028] Next, the pendant hook part 17 is described. As shown in Fig. 1, the pendant hook part 17 is in the shape of a hook. Since the hook part 17 of the binding band 10 is hook-shaped, the binding band 10 can be hooked on any external convex part.

[0029] In addition, instead of the hook-shaped pendant hook part 17, a ring-shaped pendant hook 51 may be used as shown in Fig. 7. In the case of the ring-shaped hook part 51, the binding band 10 can be easily hooked on a projected nail, bar and the like and it is not liable to get unhooked even when it is shaken in some degree.

[0030] Although the pendant hook part 17 is in the shape of a hook on a flat surface of the band part 11 in Fig. 1, the present invention is not limited to this and the hook of the pendant hook part 17 may be faced in any direction with respect to the flat surface of the band part 11.

[0031] Next, another embodiment of the present invention is described. Figs. 8 and 9 show views of another embodiment of the present invention. Fig. 8 is a sectional view showing a vicinity of a hook part 41 and a neck part 18 according to another embodiment, and Fig. 9 is a view taken from a part shown by arrows IX-IX in Fig. 8.

[0032] Referring to Figs. 8 and 9, the pendant hook part 41 can be rotated in any direction with respect to the neck part 18 and can be dismounted from the neck part 18 in this embodiment.

[0033] Referring to Figs. 8 and 9, the neck part 18 has a cylindrical neck supporting part 48 whose diameter is larger than that of the neck part 18, at its tip end. Meanwhile, the pendant hook part 41 has a hook part fixing part 42 at a part in which the fixing part 42 engages with the neck part 18.

[0034] As shown in Fig. 9, the hook part fixing part 42 has a neck part supporting part 44 for rotatably retaining the cylindrical neck supporting part 48 at the end on the side of the neck part 18. The neck part supporting part 44 is U-shaped so that the neck part 18 can be dismounted from one direction in its circumferential direction. In addition, a stopper 45 is provided at the hook part fixing part 42 so that the U-shaped configuration may not be rotated in the circumferential direction.

[0035] Since the neck part 18 and the pendant hook

part 17 have such configurations, the pendant hook part 17 can be faced in any direction with respect to the direction of the flat part of the band part 11. Furthermore, the pendant hook part 17 may be mounted on the neck part 18 after the object is bound with the binding band and the bound object may be retained at any position.

[0036] Although the description was made of the example in which the pendant hook part is in the shape of a hook or a ring in the above embodiments, the present invention is not limited to the above shapes and any configuration may be employed provided that it can be retained at the outside.

[0037] Furthermore, the description was made of the case in which the neck part is cylindrical in the above embodiments, the present invention is not limited to this and it may be flat or have configuration changed from a flat shape to a cylindrical shape.

[0038] Still further, although the description was made of the case in which the locking tooth is locked after engagement with the tooth in the above embodiments, the present invention is not limited to this and it may be constituted so as to be unlocked and released.

[0039] Although the embodiments of the present invention were made with reference to the drawings, the present invention may not be limited to the illustrated embodiments. Various kinds of modifications or variations can be added to the above embodiments in the same scope or the equivalent scope of the present invention.

[0040] The present invention can be advantageously used as a binding band which can be hanged on a wall or a column.

Claims

1. A binding band (10) comprising:

a band part (11);
a pendant hook part (17) provided at one end of said band part (11); and
an enclosed-wall part (20) provided at the other end of said band part (11) and having a passage (35) through which said band part (11) is vertically passed.

wherein said enclosed-wall part (20) has a slit (33) through which said band part (11) is inserted into said passage (35) from the side.

2. The binding band (10) according to claim 1, wherein said slit (33) has a first opening dimension, said band part (11) comprises a neck part (18) having a width dimension smaller than said first opening dimension and a band body (12) having a third width dimension larger than the first opening dimension, and

said passage (35) has a width dimension larg-

er than the third width dimension.

3. The binding band (10) according to claim 2, wherein said pendant hook part (17) has a fourth width dimension larger than said third width dimension.

4. The binding band according to claim 2 or 3, wherein a plurality of continuous teeth (15) are provided in said band body (12), and said enclosed-wall part (20) comprises a locking part (24) which engages with said tooth (15).

5. The binding band according to any one of claims 2 to 4, wherein said neck part (18) is provided at one end of said band part (11) and between said band body (12) and said pendant hook part (17).

6. The binding band (10) according to any one of claims 1 to 5, wherein said pendant hook part (17) can be rotated with respect to said band part (11).

7. The binding band (10) according to any one of claims 1 to 6, wherein said pendant hook part (17) is detachable with respect to said band part (11).

FIG. 1

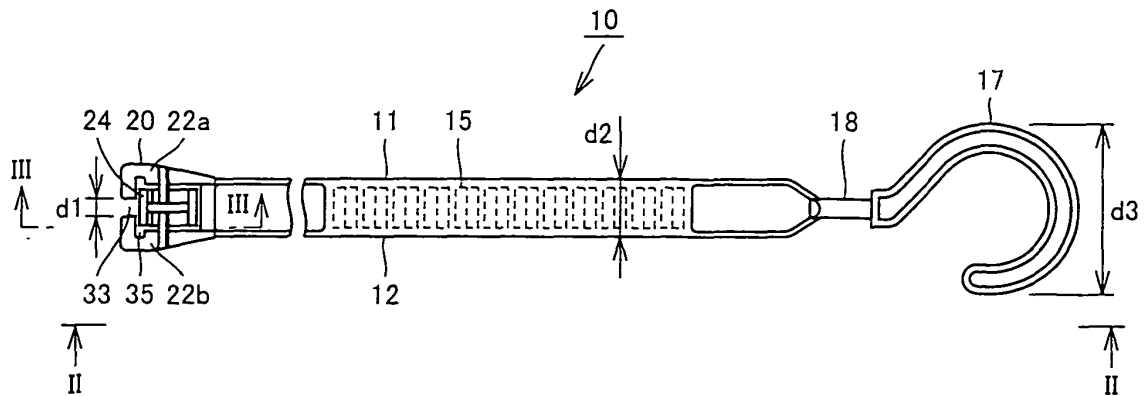


FIG. 2

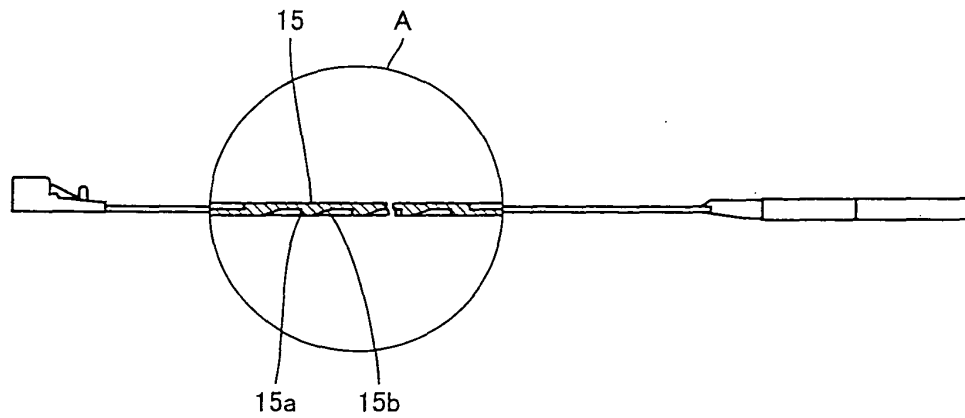


FIG. 3

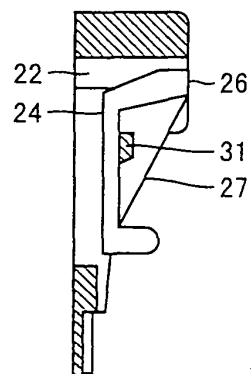


FIG. 4

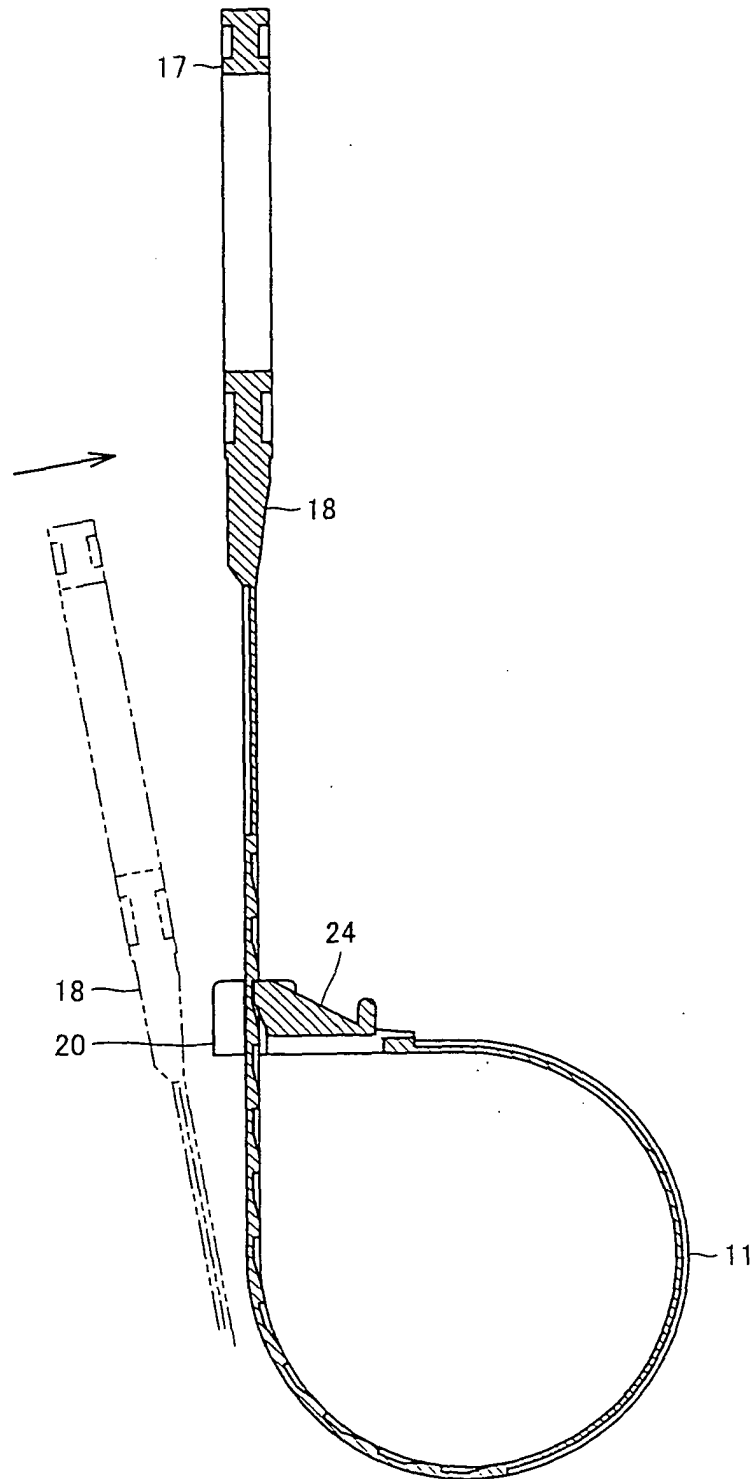


FIG. 5

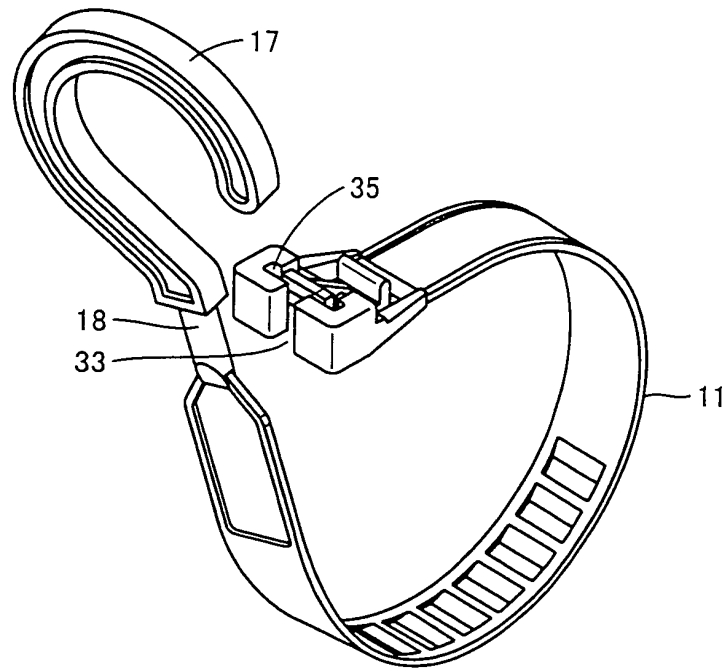


FIG. 6

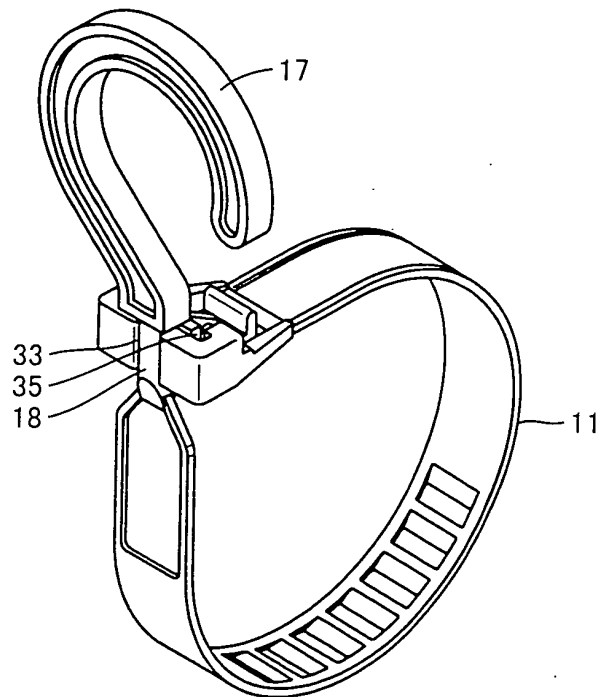


FIG. 7




FIG. 8


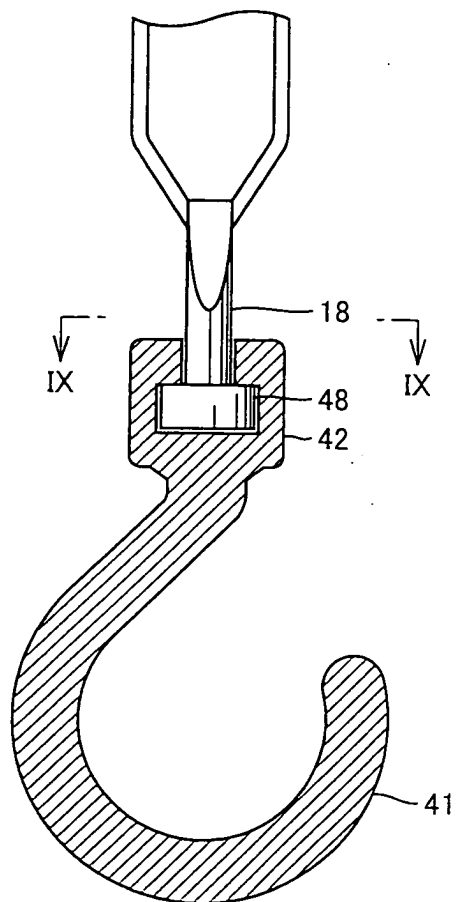


FIG. 9



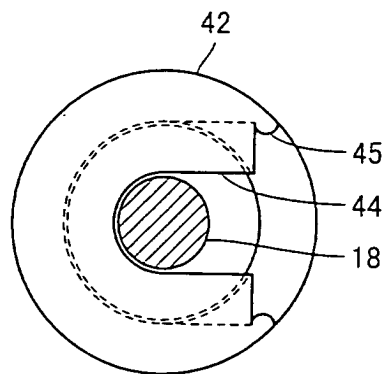

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 02 2225

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	DE 12 35 220 B (SCHUMM ERICH) 23 February 1967 (1967-02-23) * figure 1 *	1	B65D63/10
Y	----- DE 12 31 614 B (SCHUMM ERICH) 29 December 1966 (1966-12-29) * figure 1 *	2-7	
X	----- FR 2 393 512 A (AKZO NV) 29 December 1978 (1978-12-29) * page 1 *	1	
Y	----- US 4 951 362 A (DENEMARK PHILIP W ET AL) 28 August 1990 (1990-08-28) * column 4, lines 59-63 *	2-5	
Y	----- US 3 147 522 A (ERICH SCHUMM) 8 September 1964 (1964-09-08) * column 3, lines 30-39 *	2-5	
Y	----- GB J21911A (MOOTZ CHARLES) 17 March 1910 (1910-03-17) * column 4, lines 13-17 *	6	
A	----- GB 691 679 A (HEINZ WILHELMI) 20 May 1953 (1953-05-20) * page 1, lines 20-25 *	6	B65D
Y	----- US 6 325 577 B1 (ANDERSON WAYNE) 4 December 2001 (2001-12-04) * column 6, lines 18-38 *	7	
A,D	----- PATENT ABSTRACTS OF JAPAN vol. 2003, no. 12, 5 December 2003 (2003-12-05) & JP 2003 237823 A (HAMAKOU URETHANE KK), 27 August 2003 (2003-08-27) * abstract *	1-7	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 10 November 2004	Examiner Jervelund, N
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 02 2225

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-11-2004

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 1235220	B	23-02-1967	DE 1269567 B 30-05-1968
			DE 1176561 B 20-08-1964
			DE 1189447 B 18-03-1965
			AT 244838 B 25-01-1966
			BE 642885 A 15-05-1964
			CH 423613 A 31-10-1966
			DK 106315 C 16-01-1967
			FI 46352 B 30-11-1972
			GB 994620 A 10-06-1965
			NL 6400477 A ,B 25-03-1966
			NO 116361 B 10-03-1969
			US 3206814 A 21-09-1965
			BE 604420 A
			CH 385724 A 15-12-1964
			CH 421809 A 30-09-1966
			FI 40696 B 31-12-1968
			GB 943433 A 04-12-1963
			DK 111805 B 07-10-1968
			FI 43554 B 31-12-1970
			GB 948900 A 05-02-1964
			US 3206813 A 21-09-1965
DE 1231614	B	29-12-1966	NONE
FR 2393512	A	29-12-1978	NL 7609530 A 01-03-1978
			BE 858124 A1 16-12-1977
			DE 7724913 U1 01-12-1977
			DK 378977 A 28-02-1978
			FR 2393512 A7 29-12-1978
US 4951362	A	28-08-1990	NONE
US 3147522	A	08-09-1964	NONE
GB 190921911	A	17-03-1910	FR 11313 E
GB 691679	A		NONE
US 6325577	B1	04-12-2001	US 6033163 A 07-03-2000
JP 2003237823	A	27-08-2003	NONE